

Specifications

FAUCET DESCRIPTION

- Metal construction with chrome plated finish
- 1/2" IPS connections
- · Supplied with vandal resistant screws
- Includes hose and spray

OPERATION

- Lever style handles with hot and cold color indicators
- Rotate the hot side handle 1/4 turn counterclock wise to open (clockwise to close) and rotate the cold side handle 1/4 turn clockwise to open (counterclockwise) to close

FLÒW

2.2 MAX. gpm (8.3 L/min) aerator

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

 Third party certified by CSA to meet CSA B-125 and ASME A112.18.1M and all applicable specifications referenced therein and complies with the requirements of ANSI A117.1, NSF 61/9, and CaliforniaProposition 65.

WARRANTY


 Warranted for five years against material or manufacturing defects



Two-Handle High Arc Kitchen Faucet with Side Spray

Model: 8792

NOTE: Designed to be installed through 4 holes - 1" min. dia. and on 4" on center

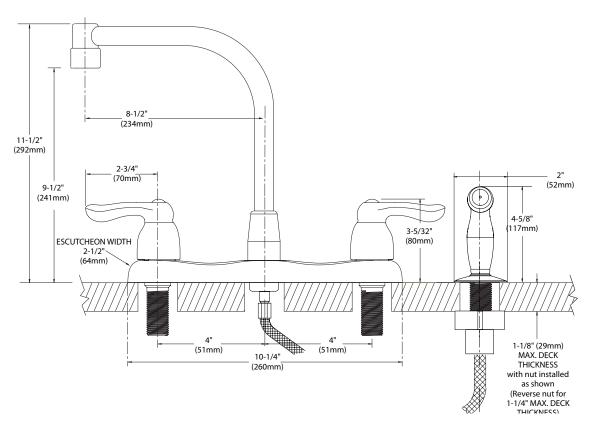

CRITICAL DIMENSIONS

(DO NOT SCALE)