

## Socket, Rod Threaded Fig. 110R



### Description

**Size Range**  
1/4" through 7/8"

**Material**  
Malleable iron

**Finish**  
Plain

**Service**  
For attaching hanger rod to various types of building attachments.

**Maximum Temperature**  
450° F

**Approvals**  
Complies with Federal Specification A-A-1192A (Type 16).

WW-H-171-E (Type 16), ANSI/MSS SP-69 and MSS SP-58 (Type 16).

UL Listed (Sizes 3/8" - 7/8") and FM Approved (Sizes 3/8" and 1/2").

### Installation

Normally used with the split pipe ring Fig. 108, see page 30.


### Ordering

Specify rod tapping size, figure number and name.



PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	

## Socket, Rod Threaded Fig. 110R

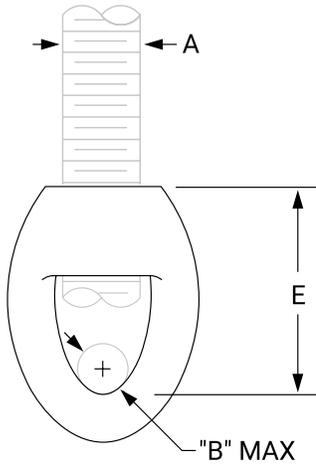

### Dimensions (In) • Loads (Lbs) • Weights (Lbs)

Rod Size A	Max Load	Weight	B	E
1/4	650	0.05		1 1/8
3/8	800	0.07	1/4	1 11/32
1/2	1,000	0.13		1 17/32
5/8	1,400	0.19	3/8	1 19/16
3/4	2,200	0.31		2 5/32
7/8	2,300	0.44	1/2	2 11/32



asc-es.com

Building connections that last™