

Rod Coupling

Fig. 136: Straight

Fig. 136R: Reducing

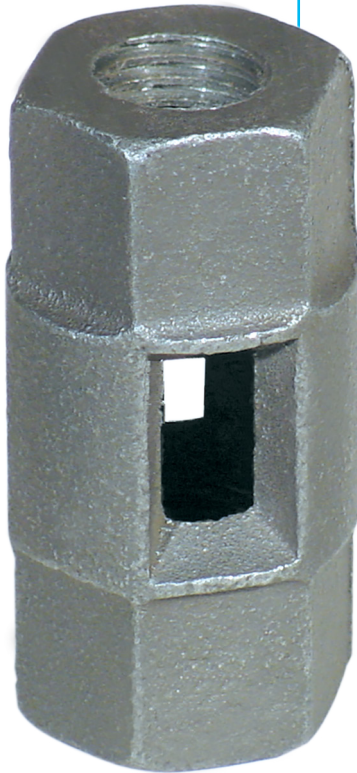


Fig. 136
Straight



Fig. 136R
Reduced



Description

Size Range

1/4" through 1"

Material

Malleable iron

Finish

Plain or

Zinc Plated

Service

For connecting rod lengths within limitation.

Approvals

Fig. 136: UL, ULC Listed (3/8" - 7/8" rod size) and FM Approved (3/8" and 1/2" rod size).

Fig. 136R: UL Listed (1/2" and 3/8" rod size).

Ordering

Specify rod tapping size, figure number and name. Furnished with right-hand UNC threads only.

Features

- Available in reducing sizes
- Provides visual inspection of thread engagement
- Uniform strength; good appearance




PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	

Rod Coupling

Fig. 136: Straight

Fig. 136R: Reducing

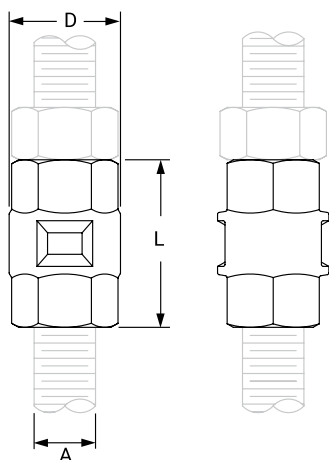

Dimensions (In) • Loads (Lbs) • Weights (Lbs)

Rod Size A	Max Load	Weight	L	D
Straight: Fig. 136				
1/4	230	0.06	1 3/8	5/8
3/8	730	0.10	1 5/8	1 1/16
1/2	1,350	0.20	2 1/8	1 5/16
5/8	2,160	0.33	2 1/2	1 1/8
3/4	3,230	0.44	2 5/8	1 1/4
7/8	4,480	0.96	3 3/16	1 5/8
1	5,900	0.94	2 3/4	1 13/16
Reducing: Fig. 136R				
1/2 X 3/8	730	0.21	2 1/8	2 1/8



asc-es.com

Building connections that last™