

## PCOR<sub>30</sub>



## Over the Range Convection Microwave Oven

## PLANNING GUIDE

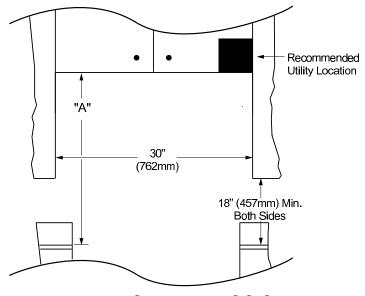


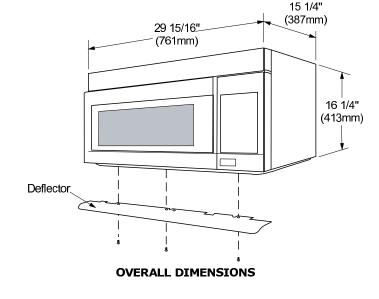

UPPER CABINET DIMENSIONS

(Upper Cabinets 13" (330mm) Maximum Depth)

| "A" - From Top of PCOR30 to Finished Countertop  |  |
|--|--|
| 34" (864mm) Minimum <b>with</b> deflector for a maximum cooktop surface BTU rating of 44,000 BTU's.    |  |
| 36" (914mm) Minimum <b>without</b> deflector for a maximum cooktop surface BTU rating of 44,000 BTU's. |  |
| 36" (914mm) Minimum <b>with</b> deflector for a maximum cooktop surface BTU rating of 60,000 BTU's.    |  |



**EXHAUST LOCATION** 

## NOTES:

1. 30" electric cooktops or ranges can be installed at 34" (864mm) with deflector or 36" (914mm) without deflector for a maximum cooktop surface rating of 10,000 watts.

| Model No. | Dedicated Circuit Required     | Total Connected Load | Approximate<br>Shipping Weight |
|-----------|--------------------------------|----------------------|--------------------------------|
| PCOR30    | 120VAC, 60Hz, 15A<br>(Breaker) | 1.56kW (13A)         | 84 lbs.                        |

**12.4** L65343 rev B