

**CENTERSET LAVATORY FAUCET
K-15199**

Features


- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- 4-1/4" (10.8 cm) spout reach
- Stationary spout
- Metal throat plate
- For 4" (10.2 cm) centers
- Available with flexible connections or ground joints
- Less drain
- 1.5 gallons (5.7 liters) per minute maximum flow rate



Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- All applicable US Federal and State material regulations
- EPA WaterSense®

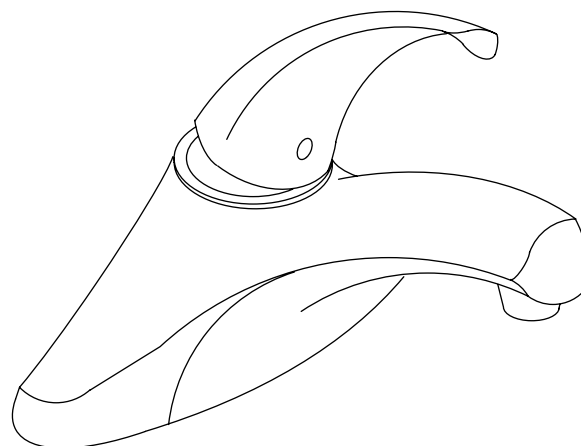

Colors/Finishes

- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes
K-15199-F	Centerset lavatory faucet – flexible connections	<input type="checkbox"/> CP
K-15199-P	Centerset lavatory faucet – ground joints	<input type="checkbox"/> CP

Optional Accessories		
1160594	Large Spray 0.35 gpm (1.32 lpm) – Insert only	<input type="checkbox"/> NA
_____	Additional flow options are available (refer to the Price Book)	<input type="checkbox"/> NA

Product Specification


The single-control centerset lavatory faucet shall be of metal construction. Product shall have a maximum flow rate of 1.5 gallons (5.7 L) per minute. Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting, and a high-temperature limit stop for added safety. Product shall have a 4-1/4" (10.8 cm) spout reach, stationary spout, metal throat plate. Product shall be for 4" (10.2 cm) centers. Product shall be available with flexible connections or ground joints. Product shall be less drain. Faucet shall be Kohler Model K-15199-____-CP.

CORALAIS®

Installation Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

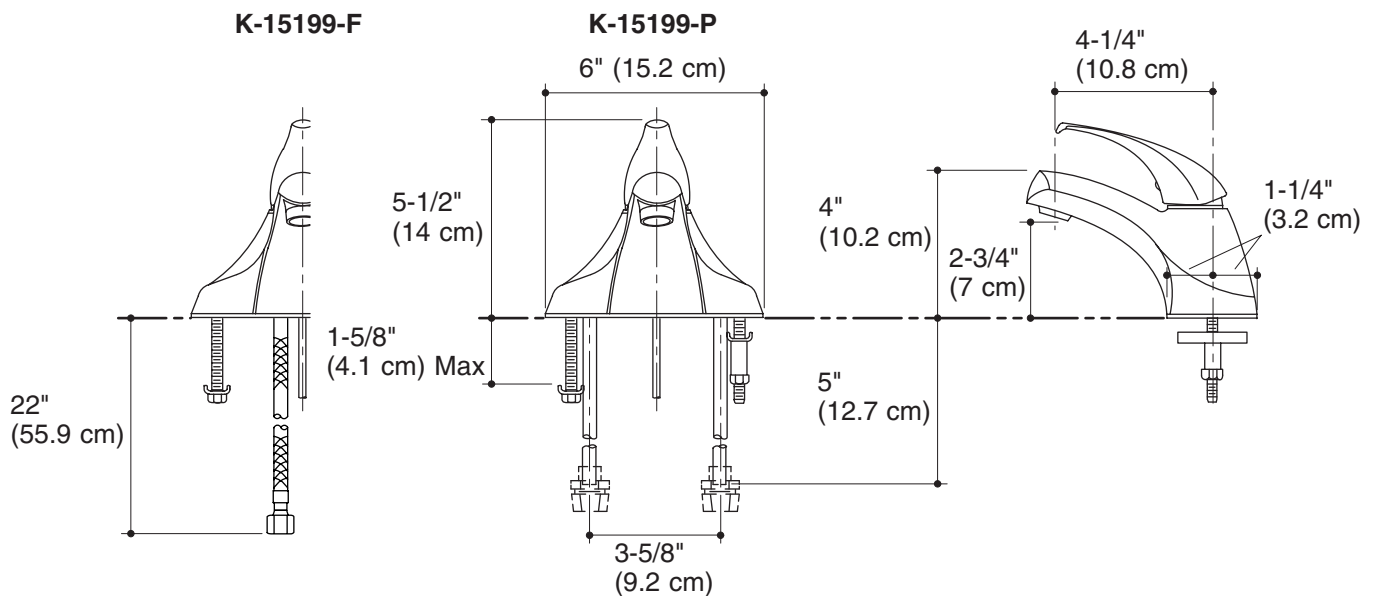

Product Diagram