




Copper Female Sweat x PEX Barb Elbow- QQFCEA__ Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

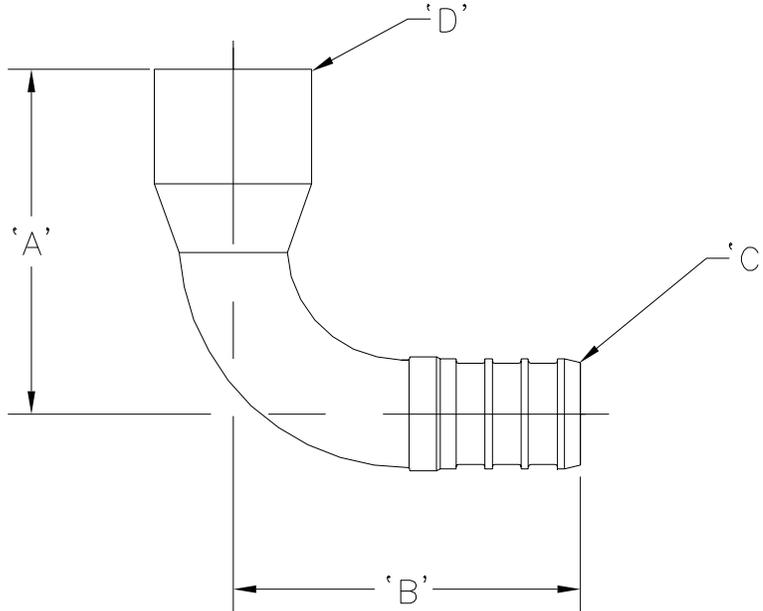

Part Number	Description	'A'	'B'	'C'	'D'
QQFCEA23	1-5/8" Copper Elbow-3/8" Barb x 1/2" Female Sweat	1.50" [38.1]	1.50" [38.1]	3/8" PEX Barb	1/2" Female Sweat
QQFCEA33	1-5/8" Copper Elbow-1/2" Barb x 1/2" Female Sweat	1.50" [38.1]	1.50" [38.1]	1/2" PEX Barb	1/2" Female Sweat
QQFCEA44	2" Copper Elbow-3/4" Barb x 3/4" Female Sweat	2.00" [50.8]	2.00" [50.8]	3/4" PEX Barb	3/4" Female Sweat

Engineering Specification: Zurn PEX® Copper Female Sweat x PEX Barb Elbow. QQFCEA__ is used to transition ZurnPEX® to copper via a female sweat connection. These fittings as a system with Zurn PEX® tube, are pressure rated a 160 PSI at 73°F, 100 PSI at 180°F and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 61, ASTM F877 and ASTM F1807.

Accessories

— QCLP3X	1/2" QuickClamp™ Crimp Ring
— QCLP4X	3/4" QuickClamp™ Crimp Ring
— QCR3X	1/2" Copper Crimp Ring
— QCR4X	3/4" Copper Crimp Ring

Rev.	Date: 07/06/09	C.N. No. 120160
Dwg. No. 84256	Prod. No. QQFCEA__	