

## Mechanical Joint Gasket Product Specifications

## IMJTG/IMJGA

### Product Features

- Material - SBR
- Standard - ANSI/AWWA C111/A21.11
- 4" through 12" gaskets are pressure rated for 350 psi
- ASTM test methods
  - Hardness - D2240-91
  - Tensile strength & elongation - D412-92
  - Minimum aging - D572-88
  - Maximum compression - D395-89
  - NSF/ANSI standard 61 compliant


### Specifications

#### Transition

Part #	Size
<b>IMJTG3</b>	3"
<b>IMJTG4</b>	4"
<b>IMJTG6</b>	6"
<b>IMJTG8</b>	8"
<b>IMJTG10</b>	10"
<b>IMJTG12</b>	12"

#### Gasket

Part #	Size
<b>IMJGAM</b>	3"
<b>IMJGAP</b>	4"
<b>IMJGAU</b>	6"
<b>IMJGAX</b>	8"
<b>IMJGA10</b>	10"
<b>IMJGA12</b>	12"
<b>IMJGA14</b>	14"
<b>IMJGA16</b>	16"

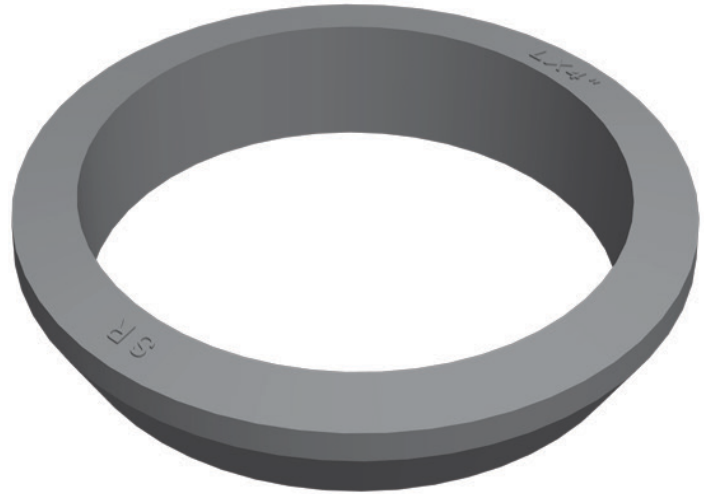

PROSELECT Glands, Gasket, T-head Bolts and Mechanical Joint Accessory Packs are sold exclusively through Ferguson Enterprises and its affiliates.

Ferguson Enterprises guarantees the quality and compliance to the listed specifications.

PROSELECT is a registered trademark of Ferguson Enterprises.

### Warranty

This PROSELECT product carries a 1-year limited warranty.



Certified to  
ANSI/NSF 61