


Pneumatic Cleanout Plugs

The Pneumatic Cleanout Test Plug is designed for the testing of plumbing pipelines above the cleanout tee. Each size is designed for one specific pipe size. The design of this plug will allow for passing of the test water or air by deflating the plug. After deflation the plug can be unscrewed from the test tee. Manufactured from a durable natural rubber compound these plugs are flexible yet rugged. Each size comes with a molded in inflation valve.

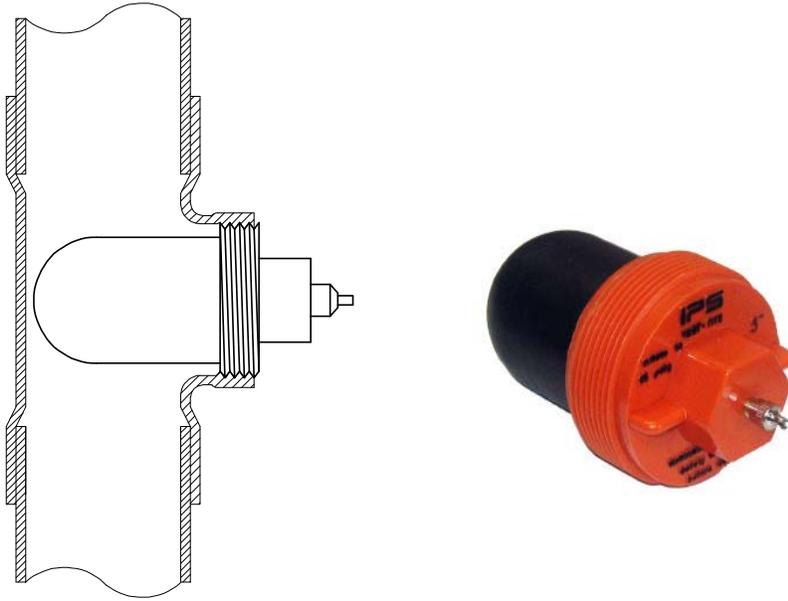

Boxed		Pipe Use Range		Cleanout Size (inches)	Inflation Pressure (psig)	Maximum Back Pressure		Units / Case	Shipping Weight (pounds)
Nominal Size (inches)	Product Code	Minimum Pipe Diameter (inches)	Maximum Pipe Diameter (inches)			Water Head (feet)	Air (psig)		
1 1/2	83651	1.38	1.63	1 1/2	35	30	13	6	2.20
2	83652	1.75	2.25	2	35	30	13	6	2.60
3	83653	2.75	3.25	3	35	30	13	6	5.40
4	83654	3.75	4.25	4	35	30	13	6	9.80

Bulk		Pipe Use Range		Cleanout Size (inches)	Inflation Pressure (psig)	Maximum Back Pressure		Units / Case	Shipping Weight (pounds)
Nominal Size (inches)	Product Code	Minimum Pipe Diameter (inches)	Maximum Pipe Diameter (inches)			Water Head (feet)	Air (psig)		
1 1/2	83661	1.38	1.63	1 1/2	35	30	13	12	3.40
2	83662	1.75	2.25	2	35	30	13	12	4.70
3	83663	2.75	3.25	3	35	30	13	12	9.80
4	83664	3.75	4.25	4	35	30	13	12	17.00