



# SUBMITTAL DATA SHEET

## Iron Body Gas Plug Valves with Lockwing -560B Series

FNPT x FNPT



SIZE	A	B	C	D	E	F	G	H
1/2	3.14	3.34	1.66	.59	1.60	1.62	1/2	1/2
1/2 X 3/4	3.14	3.34	1.66	.59	1.60	1.62	1/2	3/4
3/4	3.14	3.34	1.66	.59	1.60	1.62	3/4	3/4
3/4 X 1	3.36	3.67	1.86	.59	1.67	1.94	3/4	1
1	3.36	3.67	1.86	.59	1.67	1.94	1	1
1 1/4	3.88	4.69	2.37	.65	1.94	2.31	1 1/4	1 1/4
1 1/2	4.66	5.43	2.65	.62	2.31	2.62	1 1/2	1 1/2
2	5.60	5.82	2.96	.47	2.53	3.00	2	2

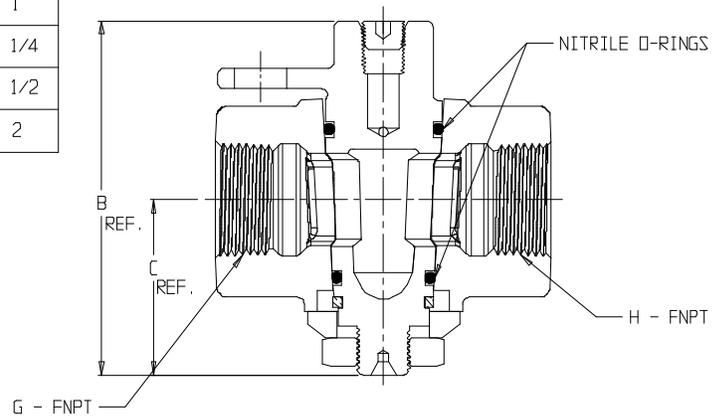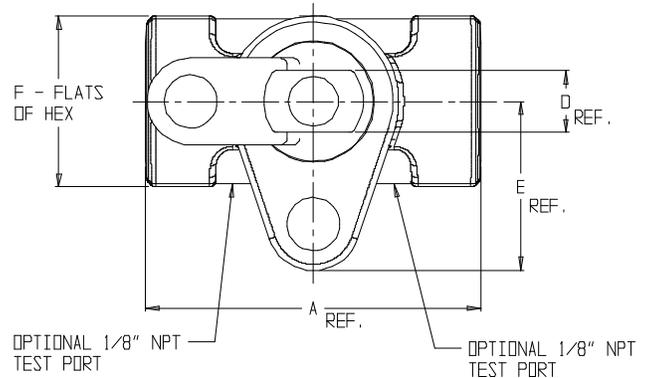

### SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/ASME B16.33 (latest revision)
- Brass castings conform to ASTM B584, UNS C83600 or C84400 (latest revision)
- Iron castings conform to ASTM A126 Class B Iron
- Optional Armorgalv ® coating per ASTM A1059 (latest revision)
- Rated for 175 PSIG natural, manufactured, or LP gas pressure
- Valve can be re-lubricated while in service and under pressure
- Plug rotates 360°
- Tamper-resistant design prevents disassembly with normal household tools
- Port opening sized to accommodate the best-known stop changers
- Lockwing design accommodates standard barrel locks



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
[sales@aymcdonald.com](mailto:sales@aymcdonald.com)  
[aymcdonald.com](http://aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: