

For Commercial and Residential Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

Series CWM-S

Flexible Braided Stainless Steel Water Supply Connectors for Washing Machines

Sizes: 3/4" (20mm)

Series CWM-S Flexible Braided Stainless Steel Water Supply Connectors for Washing Machines are used in residential and commercial applications, specifically for washing machine hook-ups. These connectors provide full flow capacity and protection from vibration and bursting under pressure surges caused by washing machine solenoid valves. Series CWM-S Connectors consist of PVC tubing jacketed with braided stainless steel, and permanently attached brass, compression end fittings. Various end connections are available.

Features

- Available in lengths: 48", 60", and 72"
(900, 1500, or 1800mm)
- Tubing
 - PVC body
 - Braided stainless steel jacket
- Brass compression end fittings and barbs

Standards



UPC Listed

Pressure-Temperature

Maximum Working Pressure: 125psi (8.6 bar)

Maximum Temperature: 180°F (82°C)

Materials

Tubing

Body: PVC

Jacket: Stainless steel

Fittings: Brass




CWM-S-HH

Models

CWM-S-HH - Supplied with standard brass female hose bib fittings at each end of the flexible connector.

CWM-S-HL - Supplied with standard brass female hose bib fittings at each end of the flexible connector. One end fitting is supplied with a 90° elbow between the fitting and flexible connector.

Dimensions

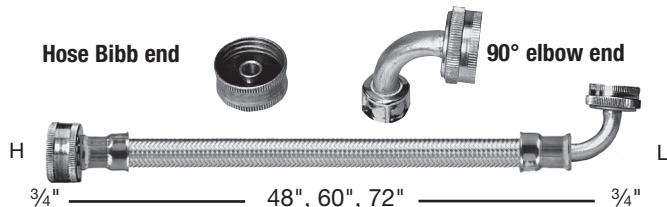

PRODUCT NO.	SIZE	INDIVIDUAL WGT. (LBS.)
CWM-S-HH	3/4" x 3/4" x 48"	0.5
CWM-S-HH	3/4" x 3/4" x 60"	0.8
CWM-S-HH	3/4" x 3/4" x 72"	1.1
CWM-S-HL	3/4" x 3/4" x 48"	0.5
CWM-S-HL	3/4" x 3/4" x 60"	0.8
CWM-S-HL	3/4" x 3/4" x 72"	1.1

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

Water Safety & Flow Control Products