



www.mifab.com

*MIFAB

MPB-2014-CAN

Go to www.mifab.com for the most current product specification sheets.

Engineered Plumbing and Drainage Products Price Guide

LIT-066

MIFAB, Inc. Toll Free 1-800-387-3880, Fax 1-773-341-3049 www.mifab.com sales@mifab.com



TERMS AND WARRANTIES

WHOLESALE DISCOUNT:

Contact MIFAB or your local representative for your applicable discount structure.

FREIGHT ALLOWANCE: Ex Works, MIFAB'S Chicago, Illinois Distribution Center or Manufacturer Representative's warehouse with full motor freight allowed on shipments of \$3500 Net or more, within Canada. MIFAB reserves the right to choose the carrier and route of shipment. There is no allowance for United Parcel Service, Federal Express or Shipment by air service. Full motor freight is allowed on shipments of \$3500 Net or more, within the continental U.S.A. and Canada for any combination of BEECO, Counterline, No Hub Coupling, Trench Drain, Access Door and Trap Seal Primer products. Shipping dates are estimates and time of delivery is not the essence of the sale of the contract. Therefore, under no circumstances will MIFAB have any responsibility on account of any delays in manufacture, transportation, or otherwise. Additional freight services such as construction site delivery, lift gate delivery service, reconsigned freight or notification charges, are not included in full freight allowance terms, and will result in additional freight charges.

QUOTATION TERMS: List Price and discount protected for 45 days from bid and due date. Orders received within this period must be released for shipment within 90 days from date of purchase order, otherwise, prices will be those that are in effect at the time of shipment.

PAYMENT TERMS: Terms of payment are Net 30 days from the date of invoice. All pricing in Canadian dollars. The Buyer shall pay all sales, consumers, and / or any other applicable taxes. Past due accounts will be subject to a 2% per month service charge from the date of the invoice. If any proceedings be instructed by or against Buyer under any bankruptcy or insolvency law, or if Buyer shall fail to make timely payment on this or any other order, or if, in MIFAB's judgment, Buyer's financial situation justifies such action. MIFAB may, at its election, require payment in advance or cancel the order as to any unshipped item and require payment of its reasonable cancellation charges. If Buyer delays completion of manufacture, MIFAB may elect to require payment according to percentage of completion. Equipment held for Buyer shall be at Buyer's risk and expense. In all cases, regardless of partial payment, title to the Product shall remain with MIFAB until payment for the Products (including any notes given therefore) has been made in full. Should legal action be necessary to enforce payment of an unpaid invoice, the Buyer will assume full responsibility for any court costs and reasonable attorney fees. All orders subject to credit check and approval prior to shipment. Confirmed irrevocable letter of credit or cash in advance of shipment is required for accounts without an established line of credit. Minimum invoice amount is \$100.00. MIFAB reserves the right to apply a minimum order change to equal \$100.00. MIFAB's Accounting Department must be notified of potential pricing errors within 30 days of the invoice date. Any terms and conditions state on Buyer's orders which are inconsistent with MIFAB's quotation and Terms and Warranties shall be of no effect.

RETURNED GOODS RESTOCKING CHARGE: Standard product may be returned within a one year period only with written permission of Seller. All products in catalog are not considered Standard. Standard product to be determined by Seller. Returned goods are subject to 25% restocking charge, plus cost of reconditioning, if necessary, to make material saleable. Material must be returned to MIFAB freight prepaid only after written permission from MIFAB to accept the returned material. Buyer must provide copy of the original invoice on which the material was charged. The original outgoing freight cost to ship the order will be deducted from the credit. Credit allowance will be in the form of merchandise credit only-not cash credit which must be used within 12 months of the date of issue. The value of a return must total \$100.00 to qualify for credit allowance. Galvanized and acid resistant epoxy coated material will be credited to value of cast iron, and chrome plated at value of nickel bronze. No credit will allowed for auxiliary tappings, discontinued, or made to order items. Products designated non stock and / or that have been specially made (require a sign off drawing by MIFAB) are not subject to return or cancellation.

LIMITED WARRANTY: MIFAB warrants each product against defects in material and workmanship for a period of one year from the date of original shipment. In event of such defects within the warranty period, MIFAB will, at its option, replace or recondition the product without charge. This shall constitute the exclusive remedy for breach of warranty, and MIFAB shall not be responsible for any incidental or consequential damages including, without limitation, damages or other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemicals, or any other circumstances over which MIFAB has no control. This warranty shall be invalidated by any abuse, misuse, misapplication or improper installation of the product.

MIFAB MAKES NO OTHER WARRANTIES EXPRESSED OR IMPLIED AS PROVIDED IN THIS LIMITED WARRANTY.

ILLUSTRATIONS OR TYPICAL INSTALLATIONS: The typical installations for various products in each product found in each section are intended to illustrate the products and their options. Under no circumstances are they to be construed as recommended installation procedures. Consult local codes and project specifications for proper installation instructions.

NOTE: Prices and terms are subject to change without notice and supersede all previous quotations. The right is reserved to change or modify product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to product previously or subsequently sold. Contact MIFAB for any clarification.

All sales subject to MIFAB's Terms and Warranties.

CONTENTS © MIFAB INC. 2014

DESIGN AND DIMENSIONS ARE SUBJECT TO MODIFICATION. PRICES DO NOT INCLUDE APPLICABLE TAXES.



ORDER OF PRODUCTS IN PRICEBOOK

www.mifab.com

Trap Seal













Closet &





Backwater





Page 274

Page 32

Page 97

Page 120

Page 156

Page 187

Page 212

Page 247

Page 257

Page 268

PRODUCT BY CATEGORY

Parts-I	Parts-Pages 276-291			Cross reference-Pages 292-319			
PRODUCT CATEGORY	MODEL NUMBER	PAGE	PRODUCT CATEGORY	MODEL NUMBER	PAGE		
Access Doors	UA, etc	176	Interceptors	MI-G to MI-G-RL	187-204		
Backwater Valves	BV1000 to BV1300	257-260	Miscellaneous Products	TS-1000 to MI-750	260-263, 271		
Cleanouts & Access Covers	C1000-R to UA	156-176	No Hub Couplings	MI-HUB, MI-XHUB	107		
Fixture Carriers	MC-10 to MC-70	212-239	Parts	All Products	276-291		
Floor and Area Drains	F1000 to F1890	32-78	Roof Drains	R1100 to R1960	120-152		
Floor Sinks	FS1520 to FS1940-FL	97-106	Trap Seal Primers	MR-500, etc	268-271		
Hydrants	MHY-10 to MHY-95	247-256	Trench Drains	T1000 to T2000	81-92		
,			Water Hammer Arrestors	MWH to WHS	274, 275		

Balcony 144-145

OTHER MANUFACTURERS TO MIFAB PRODUCT CROSS REFERENCE292-315

ALPHABETICAL PRODUCT LISTING BY FUNCTION / APPLICATION

Access Covers, floor 16	165
Wall 16	6-173, 176
Access Doors	
Access Housing	166
AdaptersAir Gap Fitting, Cast Iron and copp	263
Air Gap Fitting, Cast Iron and copp	oer 262
Backwater Valves	
Carriers, Closet	212-231
Auxiliary Inlet Extension	210, 210
Long Barrel	
Prison Fixture	225
Residential	
Vertical, Adj	218-221
Vertical, Fixed	222 223
Cooler	
Lavatory	227-236
Residential, Closet	224
Sink	227-236
Urinal	226, 227
Cleanouts, Carpet Marker	157
Covers	165,166
Deck	175
Deep Seal Trap	175
Ferrule	163
Floor	
Isolation Floor	162
Line	
Stack Tile and Terrazzo	150 160
Urinal	
Utility	
Wall	
Cross Reference Guides	292-315
JR Smith to MIFAB	
Wade to MIFAB	
Watts to MIFAB	
Zurn to MIFAB	
Deep Seal Traps Downspout Boots	1.06-1.47
Downspout Nozzles	150-157
Drains, Area	52-73
Diaiis, Alca	32-13

Body Assemblies.	67, 27	6, 277
Strainers, Adjusta	ble46, 47, 27	9, 280
Catch Basin		70
Deep Sump	58, 60,	64-66
	ssemblies	
Funnel		35
	sh	
Heavy Duty		70-71
Hopper		78
Indirect Waste	34-36,	75, 78
Integral Trap	48, 4	9, 261
Open Sight, Drip .		78
Overflow	4	2, 124
Parking Area	68, 69, 122, 12	9, 135
Pit		258
Prison Cell		49
	122, 123, 12	
	12	
Round Area		52-60
Rectangular		39, 75
Scupper	14	12, 143
Shower	32-34,	39, 51
	44, 48-50, 12	
Square Area		61-66
Eccentric Reducer B		
Elbow Adapter		
Expansion Joints		
Fresh Air Inlet		
Hydrants, Boxes		
Ground		

Mode Narro Non F Parts Post . Roof . Intercept Bolt C Cover Draw Electr Greas Fish S Hair . Oil Oil w/ Parts Sand Sedin No Hub Parapet Parts an P-Traps Replace Sanitary Waste D Stainless	rate www Freez tors, Dn E r Shn oonic se Fort F J Off Coul Scale A Coul H Coul Scul A Coul H Coul Scul B Coul Coul Coul Coul Coul Coul Coul Coul	Automatic Recovery Automatic Recovery Automatic Recovery Automatic Recovery Automatic Recovery Automatic Recovery 187-19 a, Oil, Solids 192-194, 193 gral hold. Tank Dlings Doper Sleeve cessories at Grates and Covers or Area and Indirect s (Floor Sinks) seel Cleanouts seel Floor Drains	248, 250
Electr P-Tra Tailpid Universa Vandal F Vent Cal Waste F Water Ha Bellows,	nuou p ece al Me Proof o, Ro unne amm Pist	imers Is Flow, Pressure Drop.	269 271 148 280 149 75
		MI-HUB	

MR-500 (TRAP SEAL PRIMER)

(see page 268)



MWH-A (WATER HAMMER ARRESTOR)

(see page 274)



UA (ACCESS DOORS)

(see page 176)



(NO HUB **COUPLINGS**) (see page 107)



MIFAB's pressure drop activated Trap Seal Primers, Access Doors, No Hub Couplings and residential Water Hammer Arrestors are priced in their own product price guides.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB MODEL NUMBER INDEX

BACKWATER VALVES
MODEL PAGE BV1000 pg. 257 BV1200-R pg. 257 BV1210 pg. 258 BV1250 pg. 258 BV1260 pg. 258 BV1280 pg. 259 BV1290 pg. 259 BV1300 pg. 260
CLEANOUTS
C1000-R

C1000-R pg. 156 C1100-RC pg. 156 C1100-RC pg. 157 C1100-RC pg. 157 C1100-RC pg. 157 C1100-S pg. 158 C1100-GS pg. 158 C1100-T pg. 158 C1100-TS pg. 159 C1100-UR pg. 159 C1100-UR pg. 160 C1100-XR pg. 160 C1100-XS pg. 161 C1200-C-R pg. 161 C1200-C pg. 162 C1230 pg. 163 C1300-R pg. 165 C1300-R pg. 165 C1300-WR pg. 165 C1300-UR pg. 165 C1300-UR pg. 165 C1300-UR pg. 165 C1300-WR pg. 166 C1400-R pg. 167 C1430-RD pg. 167 C1430-	C1100-R pg. 156 C1100-RC pg. 157 C1100-RFC pg. 157 C1100-S pg. 158 C1100-GS pg. 158 C1100-T pg. 158 C1100-TS pg. 159 C1100-UR pg. 159 C1100-US pg. 160 C1100-XR pg. 160 C1100-XS pg. 161 C1200-C-R pg. 161 C1200-C pg. 162 C1220 pg. 163 C1230 pg. 164 C1300-WF pg. 165 C1300-S pg. 165 C1300-UR pg. 165 C1300-US pg. 165 C1300-WF pg. 166 C1400-R pg. 167 C1430-R pg. 166 C1440-R pg. 168 C1440-R <th>C1100-R pg. 156 C1100-RC pg. 157 C1100-RFC pg. 157 C1100-S pg. 158 C1100-GS pg. 158 C1100-T pg. 158 C1100-TS pg. 159 C1100-UR pg. 159 C1100-US pg. 160 C1100-XR pg. 160 C1100-XS pg. 161 C1200-C-R pg. 161 C1200-C pg. 162 C1220 pg. 163 C1230 pg. 164 C1300-WF pg. 165 C1300-S pg. 165 C1300-UR pg. 165 C1300-US pg. 165 C1300-WF pg. 166 C1400-R pg. 167 C1430-R pg. 166 C1440-R pg. 168 C1440-R<th>C1100-R pg. 156 C1100-RC pg. 157 C1100-RFC pg. 157 C1100-S pg. 158 C1100-GS pg. 158 C1100-T pg. 158 C1100-TS pg. 159 C1100-UR pg. 159 C1100-US pg. 160 C1100-XR pg. 160 C1100-XS pg. 161 C1200-C-R pg. 161 C1200-C pg. 162 C1220 pg. 163 C1230 pg. 164 C1300-WF pg. 165 C1300-S pg. 165 C1300-UR pg. 165 C1300-US pg. 165 C1300-WF pg. 166 C1400-R pg. 167 C1430-R pg. 166 C1440-R pg. 168 C1440-R<th>OLLANOOTO</th><th></th></th></th>	C1100-R pg. 156 C1100-RC pg. 157 C1100-RFC pg. 157 C1100-S pg. 158 C1100-GS pg. 158 C1100-T pg. 158 C1100-TS pg. 159 C1100-UR pg. 159 C1100-US pg. 160 C1100-XR pg. 160 C1100-XS pg. 161 C1200-C-R pg. 161 C1200-C pg. 162 C1220 pg. 163 C1230 pg. 164 C1300-WF pg. 165 C1300-S pg. 165 C1300-UR pg. 165 C1300-US pg. 165 C1300-WF pg. 166 C1400-R pg. 167 C1430-R pg. 166 C1440-R pg. 168 C1440-R <th>C1100-R pg. 156 C1100-RC pg. 157 C1100-RFC pg. 157 C1100-S pg. 158 C1100-GS pg. 158 C1100-T pg. 158 C1100-TS pg. 159 C1100-UR pg. 159 C1100-US pg. 160 C1100-XR pg. 160 C1100-XS pg. 161 C1200-C-R pg. 161 C1200-C pg. 162 C1220 pg. 163 C1230 pg. 164 C1300-WF pg. 165 C1300-S pg. 165 C1300-UR pg. 165 C1300-US pg. 165 C1300-WF pg. 166 C1400-R pg. 167 C1430-R pg. 166 C1440-R pg. 168 C1440-R<th>OLLANOOTO</th><th></th></th>	C1100-R pg. 156 C1100-RC pg. 157 C1100-RFC pg. 157 C1100-S pg. 158 C1100-GS pg. 158 C1100-T pg. 158 C1100-TS pg. 159 C1100-UR pg. 159 C1100-US pg. 160 C1100-XR pg. 160 C1100-XS pg. 161 C1200-C-R pg. 161 C1200-C pg. 162 C1220 pg. 163 C1230 pg. 164 C1300-WF pg. 165 C1300-S pg. 165 C1300-UR pg. 165 C1300-US pg. 165 C1300-WF pg. 166 C1400-R pg. 167 C1430-R pg. 166 C1440-R pg. 168 C1440-R <th>OLLANOOTO</th> <th></th>	OLLANOOTO	
C1474X pg. 174	61474A pg. 174	C1500 ng 175	C1500 pg. 175	C1100-R C1100-RC C1100-RC C1100-RC C1100-RC C1100-S C1100-S C1100-T C120 C1230 C1230-T C1300-T C1400-T C1400-T C1400-T C1400-T C1440-T C1440-T C1440-T C1440-T C1450-T C1450-T C1450-T C1450-T C1450-T C1450-T C1450-T C1450-T C1450-T C1460-T C	pg. 156 pg. 157 pg. 157 pg. 158 pg. 158 pg. 158 pg. 159 pg. 160 pg. 160 pg. 161 pg. 162 pg. 163 pg. 164 pg. 165 pg. 165 pg. 165 pg. 165 pg. 166 pg. 167 pg. 167 pg. 168 pg. 169 pg. 170 pg. 171 pg. 171 pg. 172 pg. 173 pg. 173 pg. 173 pg. 173

MI-940 ... pg. 261 MI-950 ... pg. 261 MI-950-F ... pg. 261 TS1000 ... pg. 260

DEEP SEAL TRAPS

FIXTURE CARRIERS

MC-10	pg. 212
MC-10-HD-750	pg. 212
MC-10-HDX	pg. 213
MC-10-EXT	pg. 214
MC-10-27	pg. 215
MC-10-27-37	pg. 216
MC-12	pg. 218
MC-12-HS	pg. 219
MC-13	pg. 220

MC-1	3-HS				pg.	221
MC-1					pg.	222
MC-1	5				pg.	223
MC-2					pg.	224
MC-2				 	pg.	224
MC-2					pg.	224
MC-2					pg.	224
MC-2	_				pg.	225
MC-2					pg.	225
MC-2				 		225
MC-3				 	pg.	226
MC-3				 	pg.	226
MC-3					pg.	227
MC-3					pg.	227
MC-3	+ 5				pg.	228
MC-3	_				pg.	228
MC-3	•			 	pg.	228
				 	pg.	
MC-3					pg.	228
MC-3	_				pg.	228 230
MC-4					pg.	230
MC-4					pg.	231
MC-4					pg.	229
MC-4					1 3	231
					1 3	232
MC-4					pg.	
MC-4: MC-4:				 ••••	pg.	232
NIC 4	2-K			 ••••	pg.	233
MC-4	2U	•••••	•••••	 ••••		233 234
MC-4					pg.	
					pg.	234
MC-5						235
MC-5					pg.	235
MC-5	_				pg.	235
MC-5					pg.	235
				 	pg.	236
MC-6				 	pg.	236
MC-6				 	pg.	236
MC-6					pg.	236
MC-7	U			 	pg.	237

FLOOR DRAINS

F1100-C-VD F1100-W(D) F1100-C-W(D) F1100-C-W(D) F1100-C-X F1100-C-X F1100-C-X F1100-C-Z F1100-C-Z F1100-C-Z F1100-C-Z F1100-C-S F1100-C-S F1100-C-S F1100-C-90 F1120 F1120-C F1130C F1140C F1154-SD F1160-C F1170 F1170-C-SD F1170-C-SD F1170-C-SD F11210C F1220	pg. 42 pg. 42 pg. 42 pg. 42 pg. 43 pg. 43 pg. 43 pg. 43 pg. 44 pg. 44 pg. 44 pg. 44 pg. 48 pg. 48 pg. 48 pg. 48 pg. 49 pg. 50 pg. 50 pg. 50 pg. 50 pg. 51 pg. 51
F1240	
F1240	py. 52
F1300	py. 52
F1300-C	
F1320	na 53

F1300pg. 52
F1300-Cpg. 52
F1320pg. 53
F1320-Cpg. 53
F1320-TFB pg. 53
F1320-C-TFB pg. 53
F1330C pg. 54
F1340pg. 54
F1340-Cpg. 54
F1340-TFBpg. 55
F1340-C-TFB pg. 55
F1340-Y-Qpg. 56
F1350pg. 58
F1350-Cpg. 58
F1350-Y-36pg. 58
F1350-Y-36-Cpg. 58
F1360 pg. 59
F1360-Cpg. 59
F1360-TFB
F1360-C-TFB
F1270 ng 60
F1370pg. 60
F1370-Cpg. 60
F1420 pg. 61
F1420-Cpg. 61
F1430Cpg. 61
F1440pg. 62
F1440-Cpg. 62
F1440-Y-Q pg. 63
F1450pg. 64
F1450-Cpg. 64
F1460pg. 65
F1460-Cpg. 65
F1470 pg. 65
F1470-C pg. 65
1 147 0-0 μy. 00 E1 400 μα εε
F1480pg. 66
F1480-FLpg. 66
F1490 pg. 66
F1/100_F1 ng 66

F1490-FL pg. 66 F1510 pg. 68

F1530pg. 68

F1570pg. 70

F1620	pg.	72
F1620-C	pg.	72
F1640	pg.	73
F1640-L		
F1650		
F1650-G		
F1660		
F1670		
F1720		
F1760-FL		
F1780		
F1790		
F1810		
F1820		
F1830-P		
F1830-PL	pg.	77
F1840		
F1860		
F1870		
F1880		
F1890	pg.	78
FLOOR SINKS		

FS1520 FS1520-FL FS1530 FS1530-FL FS1720	pg. 97 pg. 98 pg. 98 pg. 98
FS1720-FL	
FS1730 FS1730-FL	
FS1740	pg. 101
FS1740-FL FS1750	
FS1750 FS1750-FL	
FS1760	
FS1760-FL FS1770	
FS1770 FS1770-FL	
FS1790	

	HYDRANTS		
	FS1790pg. FS1920-FLpg. FS1930-FLpg. FS1940-FLpg.	106 106	
-	FS1770 pg. FS1770 pg.	104	
	FS1760-FLpg.		

INTERCEPTORS

MI-CS	pg. 191
MI-CSD	pg. 191
MI-E-G	pg. 201
MI-E-0	pg. 202
MI-E-0-HU	pg. 203

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB MODEL NUMBER INDEX

INTERCEPTORS CONT.		
MI-FISH pg. 198 MI-G pg. 187 MI-G-AD pg. 200 MI-G-BO pg. 204 MI-G-L pg. 187 MI-G-RL pg. 187 MI-G-SD pg. 189 MI-G-SDH pg. 190 MI-G-SS pg. 189 MI-HAIR pg. 194 MI-HEL pg. 197 MI-LINT pg. 198 MI-O pg. 192 MI-O-BO pg. 204 MI-O-BO pg. 204 MI-O-BO pg. 192 MI-OS pg. 194 MI-SOLID-SD pg. 194 MI-SOLID-SD pg. 194 MI-SOLID-LB pg. 197 MI-SOLID-SA pg. 194 MI-SOLID-SA pg. 194 MI-SOLID-SA pg. 194 MI-SOLID-LB pg. 197 MI-SOLID-SA pg. 194 MI-SOLID-LB pg. 197 MI-SOLID-SA pg. 194 MI-SOLID-LB pg. 195 MI-SOLID-SA pg. 195 MI-SOLID-SA pg. 195 MI-SOLID-TA pg. 195 MI-SOLID-G-BO pg. 204		
MISCELLANEOUS		
MI-800 pg. 263 MI-830 pg. 263		

MISCELLANEOUS	
VII-800 pg. 263 VII-830 pg. 263 VII-850 pg. 263 VII-850 pg. 263 VII-940 pg. 261 VII-950 pg. 261 VII-950-F pg. 261 VII-CAG pg. 262 VII-GAP pg. 262 VII-GRILL pg. 262 VISGRILL pg. 262 VISGRILL pg. 262 VISGRILL pg. 262	3

ROOF DRAINS	
MI-HUB MI-XHUB	

NO HUB COUPLINGS

ROOF DRAINS	
R1100 - EU	pg. 120 pg. 121 pg. 121 pg. 122 pg. 123 pg. 122 pg. 122 pg. 122 pg. 124 pg. 125 pg. 124 pg. 126 pg. 126 pg. 127 pg. 127 pg. 128 pg. 129 pg. 129 pg. 129 pg. 129 pg. 129 pg. 130 pg. 140 pg. 131 pg. 131 pg. 141

TRAP SEAL PRIMERS

MI-200 MI-300 MI-600 MI-600- MI-700 MI-730 MI-750 M-500	-50	pg. 269 pg. 269 pg. 270 pg. 270 pg. 271 pg. 271 pg. 271 pg. 268
M-500 . MI-DU .		pg. 268 pg. 268

TRENCH DRAINS

 T1000	pg. pg. pg. pg. pg. pg. pg.	81 81 81 81 81 82
11200-F 11320-FL 11350-FL 11400	pg. pg. pg.	82 82 84

WATER HAMMER ARRESTORS

MIFAB'S PRODUCTS COMPLY WITH THE **FOLLOWING ANSI/ASME AND ASSE STANDARDS:**

10		
A112.1.2-2012	Air Gaps in Plumbing Systems (for Plumbing Fixtures and Water-Connected Receptors)	MI-CAG Series, MI-GAP (pg.262)
A112.1.3-2000	Air Gap Fittings For Use With Plumbing Fixtures, Appliances, and Appurtenances	MI-CAG Series, MI-GAP (pg.262)
A112.14.1-2003	Backwater Valves	BV Series (pg.257-58)
A112.36.2M-1991	Cleanouts	C Series(pg.156-75)
A112.6.1M-1997	Floor-Affixed Supports for Off-The-Floor Plumbing Fixtures for Public Use	MC Series (pg. 212-39)
A112.6.3-2001	Floor and Trench Drains	F and T Series(pg.32-92)
A112.6.7-2010	Floor Sinks (Sanitary)	FS Series(pg.97-106)
PDI G-101, A112.14.3-2000	Grease Interceptors	MI-G Series(pg.187)
A112.14.4-2001	Grease Removal Devices	MI-G-AD Series (pg.200)
A112.6.4-2003	Roof, Deck, and Balcony Drains	R Series (pg.120-152)
A112.6.9-2005	Roof Drains, Siphonic	R1200-SR Series (pg.138-41)
ASTM C1277-12	Shielded Couplings Joining Hubless Cast Iron Soil Pipe and Fittings	MI-HUB Series (pg.107)
ASTM C1540-11	Shielded Couplings (Heavy Duty) Joining Hubless Cast Iron Soil Pipe and Fittings	MI-XHUB Series (pg.107)
ASTM C564-09a	Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fitings	MI-HUB and MI-XHUB Series (pg.107)
A112.3.1-2007	Stainless Steel Drainage Systems for Sanitary, DWV, Storm and Vacuum Applications, Above and Below Ground	ProFormer Series
ASSE 1018	Trap Seal Primer Valves, Water Supply Fed	MI-TSP, MR-500, M1-500, M2-500 (pg.268-69)
ASSE 1044	Trap Seal Primer Devices - Drainage Types and Electronic Design Types	MI-100, 200 and 300 Series (pg.269)
ASSE 1011	Vacuum Breakers (Hose Connection)	MHY-30, 50, 90 Series (pg.248,50,55,59)
ASSE 1019	Vacuum Breaker Wall Hydrants, Freeze Resistant, Automatic Draining Type	MHY 10, 20, 40 Series (pg.247,49)
ASSE 1010	Water Hammer Arrestors	MWH Series (pg.274)
PDI-WH 201	Water Hammer Arrestors	WHB Series (pg.274)
<u> </u>		•



HEAVY DUTY SS FOOR PRAIN. FOOR PRAISE FOOR PRAIN. FOOR PRAIN. FOOR PRAISE FOOR PRAIN. FOOR PRAISE FOOR PRAIN. FOOR PRAISE FOOR PRAIN. FOOR PRAISE	FICTORIAL	INDEX					
### PAGE 43 ### PAGE 44 ### PAGE 45 ### PAGE 46 & 47 ### PAGE 48 ### PAGE 49 ### PAGE 49 ### PAGE 40 ### PAGE 45 ### PAGE 46 & 47 ### PAGE 48 ### PAGE 49 ### PAGE 49 ### PAGE 50 ### PAGE 51 ### PAGE	HEAVY DUTY SS	SQUARE SS	NB	F1100-C-AS	F1100-C-DD	F1100-C-EF	F1100-C-EG
### PAGE 43 ### PAGE 44 ### PAGE 45 ### PAGE 46 & 47 ### PAGE 48 ### PAGE 49 ### PAGE 49 ### PAGE 40 ### PAGE 45 ### PAGE 46 & 47 ### PAGE 48 ### PAGE 49 ### PAGE 49 ### PAGE 50 ### PAGE 51 ### PAGE							
PAGE 36 PAGE 36 PAGE 37 PAGE 37 PAGE 38 PAGE 39 PAGE 39 PAGE 39 PAGE 39 PAGE 39 PAGE 39 PAGE 40 PAGE 41 PAGE 41 PAGE 42 PAGE 43 PAGE 43 PAGE 44 PAGE 45 PAGE 46 & 47 PAGE 48 PAGE 49 PAGE 49 PAGE 50 PAGE 50 PAGE 51 P	PAGE 32	PAGE 32	PAGE 33	PAGE 34	PAGE 34	PAGE 35	PAGE 35
F1100-C-S F1100-C-SD F1100-C-SHG F1100-C-T F1100-C-VD F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-W(D	F1100-C-ER	F1100-C-FC	F1100-C-FT	F1100-C-HG	F1100-C-K	F1100-C-N	F1100-C-RS
F1100-C-S F1100-C-SD F1100-C-SHG F1100-C-T F1100-C-VD F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-X F1100-C-W(D) F1100-C-W(D							
PAGE 49 PAGE 49 PAGE 41 PAGE 41 PAGE 41 PAGE 42 PAGE 43 PAGE 43 PAGE 43 PAGE 43 PAGE 43 PAGE 44 PAGE 45 PAGE 46 & 47 PAGE 48 PAGE 48 PAGE 48 PAGE 49 PAGE 49 PAGE 50 PAGE 51	PAGE 36	PAGE 36	PAGE 37	PAGE 37	PAGE 38	PAGE 38	PAGE 39
F1100-C-XS F1100-C-ZS F1100-C-ZS F1100-C-SS F1100-	F1100-C-S	F1100-C-SD	F1100-C-SHG	F1100-C-T	F1100-C-VD	F1100-C-W(D)	F1100-C-X
F1100-C-XS F1100-C-ZS F1100-C-ZS F1100-C-SS F1100-							
PAGE 43 PAGE 43 PAGE 43 PAGE 44 PAGE 44 PAGE 45 PAGE 46 & 47 PAGE 48 PAGE 46 PAGE 48 PAGE 49 PAGE 49 PAGE 49 PAGE 40 PAGE 50 PAGE 51	PAGE 39	PAGE 40	PAGE 40	PAGE 41	PAGE 41	PAGE 42	PAGE 42
F1130C F1140C F1160-C F1170-C F1170-C-SD F1210C F1220 PAGE 48 PAGE 49 PAGE 49 PAGE 50 PAGE 51 PAGE 51 F1230-WF F1240 F1300-C F1320-C F1320-C-TFB F1330C F1340	F1100-C-XS	F1100-C-Z	F1100-C-ZS	F1100-C-90			F1120-C
F1130C F1140C F1160-C F1170-C F1170-C-SD F1210C F1220 PAGE 48 PAGE 49 PAGE 49 PAGE 50 PAGE 51 PAGE 51 F1230-WF F1240 F1300-C F1320-C F1320-C-TFB F1330C F1340					0	(Caraco	
PAGE 48 PAGE 49 PAGE 49 PAGE 50 PAGE 51 PAGE 51 F1230 F1230-WF F1240 F1300-C F1320-C F1320-C-TFB F1330C F1340	PAGE 43	PAGE 43	PAGE 44	PAGE 44	PAGE 45	PAGE 46 & 47	PAGE 48
PAGE 48 PAGE 49 PAGE 49 PAGE 50 PAGE 51 PAGE 51 F1230 F1230-WF F1240 F1300-C F1320-C F1320-C-TFB F1330C F1340	F1130C	F1140C	F1160-C	F1170-C	F1170-C-SD	F1210C	F1220
F1230 WF F1240 F1300-C F1320-C F1320-C-TFB F1330C F1340							MT AB
F1230-WF	PAGE 48	PAGE 49	PAGE 49	PAGE 50	PAGE 50	PAGE 51	PAGE 51
	F1230 F1230-WF	F1240	F1300-C	F1320-C	F1320-C-TFB	F1330C	F1340
PAGE 51 PAGE 52 PAGE 52 PAGE 53 PAGE 54 PAGE 54							
	PAGE 51	PAGE 52	PAGE 52	PAGE 53	PAGE 53	PAGE 54	PAGE 54



PICTORIAL	INDEX					
F1340-TFB	F1340-Y-Q	F1350	F1350-Y-36	F1360	F1360-TFB	F1370
PAGE 55	PAGE 56	PAGE 58	PAGE 58	PAGE 59	PAGE 59	PAGE 60
F1420-C	F1430C	F1440	F1440-Y-Q	F1450	F1460	F1470
PAGE 61	PAGE 61	PAGE 62	PAGE 63	PAGE 64	PAGE 65	PAGE 65
F1480(-FL)	F1490(-FL)	MIFAB BODY DIMENSIONS	F1510	F1530	F1540	F1550
PAGE 66	PAGE 66	PAGE 67	PAGE 68	PAGE 68	PAGE 69	PAGE 69
F1560	F1570	F1580	F1590	F1590-90	F1600-C	F1620-C
6						
PAGE 70	PAGE 70	PAGE 71	PAGE 71	PAGE 71	PAGE 72	PAGE 72
F1640/-L	F1650 F1650-G	F1660	F1670	F1720	F1760-FL	F1780
PAGE 73	PAGE 74	PAGE 74	PAGE 74	PAGE 75	PAGE 75	PAGE 75
F1790	F1810	F1820	F1830-P F1830-PL	F1840	F1860	F1870
PAGE 75	PAGE 16	PAGE 10				PAGE 70
PAGE 75	PAGE 76	PAGE 76	PAGE 77	PAGE 78	PAGE 78	PAGE 78



F1880 F1890 T100-4 T150-F T1320-FL T1350-FL T1400 T2000 PAGE 78 PAGE 81 PAGE 81 PAGE 82 PAGE 82 PAGES 84-88 PAGES 89-92 FS1520(-FL) FS1530(-FL) FS1720(-FL) FS1730(-FL) FS1740(-FL) FS1750(-FL) FS1760(-FL) PAGE 97 PAGE 98 PAGE 99 PAGE 100 PAGE 101 PAGE 102 PAGE 103
FS1520(-FL) FS1530(-FL) FS1720(-FL) FS1730(-FL) FS1740(-FL) FS1750(-FL) FS1760(-FL)
FS1520(-FL) FS1530(-FL) FS1720(-FL) FS1730(-FL) FS1740(-FL) FS1750(-FL) FS1760(-FL)
PAGE 97 PAGE 98 PAGE 99 PAGE 100 PAGE 101 PAGE 102 PAGE 103
PAGE 97 PAGE 98 PAGE 99 PAGE 100 PAGE 101 PAGE 102 PAGE 103
FS1770 FS1770-FL FS1790 FS1920-FL FS1930-FL FS1940-FL MI-HUB MI-XHUB
PAGE 104 PAGE 105 PAGE 106 PAGE 106 PAGE 107
R1100 R1100-EU R1100-F R1100-G R1100-JC R1100-PR R1100-PJ
PAGE 120 PAGE 121 PAGE 121 PAGE 122 PAGE 122 PAGE 123
R1100-RS R1100-90 R1150 R1200 R1200-BUV R1200-EU R1200-F
PAGE 123 PAGE 124 PAGE 125 PAGE 126 PAGE 127
R1200-G R1200-HC R1200-JC R1200-PR R1200-PR15 R1200-R R1200-RS
PAGE 127 PAGE 128 PAGE 129 PAGE 129 PAGE 130 PAGE 130



	IIIDEX					
R1200-SO	R1200-W	R1200-Z	R1200-90	R1200-SR	R1200-R-SR	R1270-SR
PAGE 131	PAGE 132	PAGE 132	PAGE 133	PAGE 140	PAGE 140	PAGE 141
R1220	R1220-EU	R1220-G	R1220-JC	R1220-PR	R1220-R	R1220-RS
PAGE 134	PAGE 134	PAGE 134	PAGE 135	PAGE 135	PAGE 135	PAGE 135
R1250	R1260	R1270	R1300	R1310	R1320	R1330
		80				
PAGE 136	PAGE 136	PAGE 137	PAGE 142	PAGE 142	PAGE 143	PAGE 143
R1400	R1410	R1420	R1510	R1520	R1530	R1640
PAGE 144	PAGE 145	PAGE 145	PAGE 146	PAGE 146	PAGE 147	PAGE 147
R1810	R1850	R1900	R1930	R1940	R1940-SJ	R1960
PAGE 148	PAGE 148	PAGE 149	PAGE 149	PAGE 150	PAGE 151	PAGE 152
R1960-F	C1000-R	C1100-R	C1100-RC	C1100-RFC	C1100-S	C1100-T
PAGE 152	PAGE 156	PAGE 156	PAGE 157	PAGE 157	PAGE 158	PAGE 158




	INDLX					
C1100-TS	C1100-UR	C1100-US	C1100-XR	C1100-XS	C1200-C-R	C1222,3,4
The state of the s						
PAGE 159	PAGE 159	PAGE 160	PAGE 160	PAGE 161	PAGES 161-162	PAGE 163
C1226,8	C1230 C1230-WF	C1300-R C1300-S	C1300-UR C1300-US	C1310	C1300-MF	C1400
				8		
PAGE 163	PAGE 164	PAGE 165	PAGE 165	PAGE 165	PAGE 166	PAGE 166
C1400-RD	C1430 C1430-RD	C1440, R, RD, S	C1450, R, RD, S	C1460,R, RD, S	C1474X C1476X	C1500
PAGE 167	PAGE 167	PAGE 168-169	PAGE 170-171	PAGE 172-173	PAGE 174	PAGE 175
C1600	ACCESS DOORS	MI-G	MI-G-L	XL-MI-G	MI-G-SD	MI-G-SDH MI-G-L-SDH
	8		9			
PAGE 175	PAGE 176	PAGE 187	PAGE 187	PAGE 188	PAGE 189	PAGE 190
MI-CS	MI-CSD	MI-O	MI-O-HU	MI-OS	MI-HAIR	MI-SOLID
		C				
PAGE 191	PAGE 191	PAGE 192	PAGE 193	PAGE 194	PAGE 194	PAGE 194
MI-SOLID-SA	MI-SOLID-TA	MI-SAND	MI-SD	MI-HEL	MI-SAND/OIL	MI-FISH
PAGE 195	PAGE 195	PAGE 196	PAGE 196	PAGE 197	PAGE 197	PAGE 198

Design and dimensions are subject to modification. Prices do not include applicable taxes.



PICTORIAL	INDLA					
MI-LINT	MI-RICE	MI-G-AD	MI-E-G	MI-E-O	MI-E-O-HU	MI-G-BO
PAGE 198	PAGE 199	PAGE 200	PAGE 201	PAGE 202	PAGE 203	PAGE 204
XL-MI-O-BO	MI-O-BO	MI-G-RL	MC-10 MC-10D	MC-10-HDX	MC-10-EXT MC-10D-EXT	MC-10-27 MC-10D-27
		8				
PAGE 204	PAGE 204	PAGE 204	PAGE 212	PAGE 213	PAGE 214	PAGE 215
MC-10D-27-37	MC-12	MC-12-HS	MC-13 MC-13D	MC-13-HS	MC-14	MC-15
					MIFAB	MIFAB
PAGE 216	PAGE 218	PAGE 219	PAGE 220	PAGE 221	PAGE 222	PAGE 223
MC-21	MC-24	MC-25	MC-26	MC-27	MC-28	MC-31
PAGE 224	PAGE 224	PAGE 224	PAGE 225	PAGE 225	PAGE 225	PAGE 226
MC-32	MC-33	MC-34	MC-35	MC-36 TO	MC-41-TR	MC-40
				MC-39D	The second second	
PAGE 226	PAGE 227	PAGE 227	PAGE 228	PAGE 228	PAGE 229	PAGE 230
MC-41	MC-41D	MC-41-R	MC-41D-R	MC-42	MC-42D	MC-42-R
M	7	1	7	1	1	1
PAGE 230	PAGE 231	PAGE 231	PAGE 232	PAGE 232	PAGE 233	PAGE 233

*MIFAB

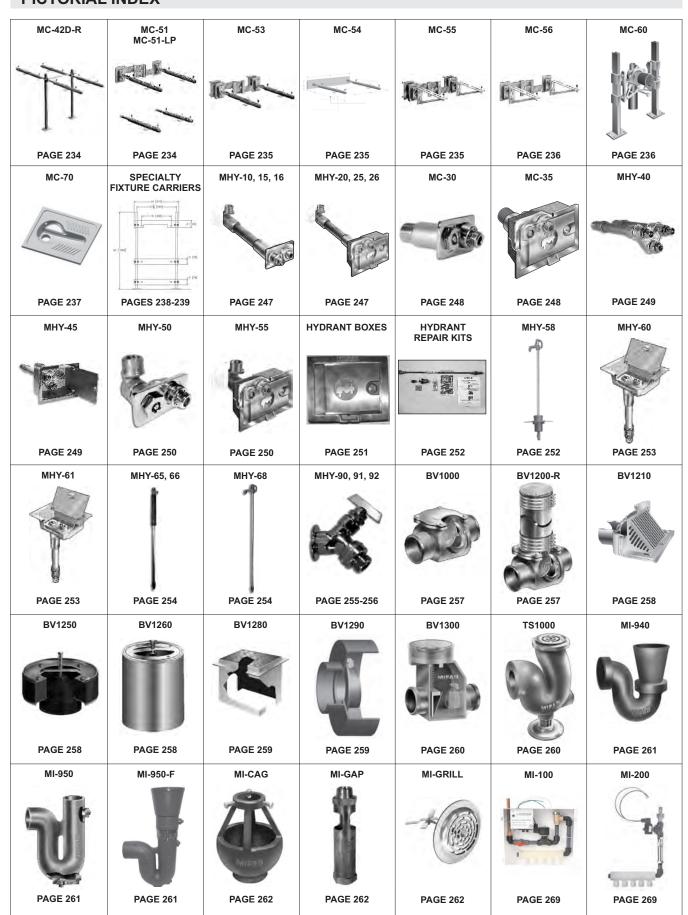

Design and dimensions are subject to modification. Prices do not include applicable taxes.



PICTORIAL	IIID LA					
MI-300	M-500	MI-DU	MI-TSP	MI-600	MI-600-50	MI-700
	MEAST STATE OF THE PARTY OF THE	ANIFAI To be for the control of the	Transie A			
PAGE 269	PAGE 268	PAGE 268	PAGE 268	PAGE 270	PAGE 270	PAGE 271
MI-730	MI-750	MI-800	MI-830	MI-850	MI-860	MWH
Vo						D.
PAGE 270	PAGE 271	PAGE 263	PAGE 263	PAGE 263	PAGE 263	PAGE 274
WHB	WHS	A1 BODY A2 BODY A3 BODY	PARTS, CLAMPS	CLAMPS, HARDWARE, PARTS	PARTS, HARDWARE, SPACERS	F 4" ROUND FUNNEL STRAINER
			0			
PAGE 274	PAGE 275	PAGE 276	PAGE 277	PAGE 278	PAGE 279	PAGE 280
TOP ASSEMBLIES	FLOOR SINK GRATES	FLOOR SINK PARTS	ROOF DRAIN PARTS	CLEANOUT PARTS	INTERCEPTOR PARTS	CARRIER PARTS
					Co view	
PAGE 281	PAGE 282	PAGE 283	PAGE 284	PAGES 285-286	PAGE 287	PAGE 288
CROSS REFERENCE J.R. SMITH	CROSS REFERENCE WADE	CROSS REFERENCE WATTS	CROSS REFERENCE ZURN			
J. R. SMITH	WADE	WATTS	ZURN			
MIFAB	MIFAB	MIFAB	MIFAB			
PAGE 292	PAGE 298	PAGE 300	PAGE 307			



OUR REPUTATION IS STAINLESS

KEY FEATURES AND BENEFITS:

- Modular system with fewer parts, reduced confusion on job site, and fewer returns.
- Standard A1 body serves as a floor drain, cleanout and roof drain. This reduces inventory.
- Cast 304 stainless steel grates and cleanout covers for same price as nickel bronze. Prevents dishing, corrosion and discoloration.
- 4" NPSM threads at top of A1 body allows drain to be installed without membrane clamp for nonwaterproof slab on grade floors.
- A1 body with no hub connection is only 3" deep for compact rough-in.
- A1 body always shipped tapped and plugged for trap seal primer connection.
- All area drain grates are adjustable and made of ductile iron with a load rating of over 10,000 lbs. for maximum on site adjustment and load bearing.
- Closet and lavatory carriers designed and packaged with features to save installation time and handling cost.

NOW YOU CAN SPECIFY STAINLESS STEEL AT THE SAME PRICE AS NICKEL BRONZE. SPECIFY MIFAB STAINLESS FOR A LASTING IMPRESSION



AREA DRAIN FEATURES



MIFAB AREA DRAIN STANDARD BENEFITS

- Ductile iron grate offers greater than 10,000 lb. load rating.
- Non-tilt grate is safer in all traffic areas.
- 3/8" slots prevent large debris from entering the drainage system.
- Fully adjustable top assembly for ease of installation.
- Stainless Steel at the same price as Nickel Bronze.

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for



Introduction to the MIFAB ® Specification Catalog

The beginnings of the modern specification drainage product can be traced back to the early part of the twentieth century. Architects began to demand a drain with secondary drainage to protect both the aesthetics and structural integrity of their buildings. Until this time, a drain was

usually nothing more than a grate fitted in the end of a pipe which terminated at floor level. the Unfortunately, this led water seeping around the pipe and the ruining of ceilings, etc., in the floors below. The design of drain secondary drainage meant that a drain

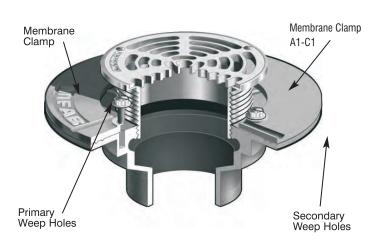

body had to be designed that allowed weepholes to remove water that may seep around the rim of the drain. Since then, architects and mechanical designers have been able to specify products that featured a variety of design considerations that were made necessary by the rapidly changing building techniques we have experienced since the beginning of the twentieth century.

As we built both higher and faster, architects and engineers realized the need for a drain with not

only secondary drainage, but also a clamping device to secure a waterproofing membrane in multi-story buildings. These developments ushered in the era of competition in the specification drainage market, as new manufacturers duplicated and expanded upon the

products of those who had produced before. More recently, the advent of the adjustable drain and the floor mounted carrier for off the floor fixtures added to the already overwhelming variety of specifiable products available to architect mechanical designer. Today, a specifier can

choose from literally thousands of products from many manufacturers. A mechanical designer has to be careful at every turn to make sure he has decided between non tilt or tractor grates, between ductile and gray cast iron, between adjustable and non-adjustable top assemblies, heel proof or non heel proof grates. In short a baffling array of options that do little to improve the basics of the design, i.e. free area and load bearing characteristics.

The MIFAB ® Advantage

A logical, function driven product line that replaces confusion with simplicity and offers all the features required by today's building practices without all the unnecessary duplication.

cleanout tops.



The MIFAB ® Design

Among the many outstanding design features of the MIFAB product line, the following are unique:

• Bodies/Modular design. The majority of floor drains, roof drains and cleanouts illustrated in this catalog incorporate the use of only three different bodies. The A1 body is used with floor drains, roof drains and cleanouts which are subject to pedestrian or heavy traffic loads and low flow



rates. The shallow design of the A1 body allows for installation in slabs of minimum thickness. Because a membrane clamp is usually not required (the majority of drains and cleanouts are installed slab on grade), MIFAB's A1 body design incorporates an integral female thread (4" N.P.S.M.) to receive adjustable strainers or

The A2 body with a 6" deep sump is used for floor and roof drains for most other applications. The A3 body with the 12" deep sump is designed for high flow applications in floors or roofs.

• Top Assemblies/Modular Design. MIFAB introduces the F1000/C1000 Series floor drains and cleanouts with Type CF8 (304) cast stainless steel strainers/top assemblies. This material offers superior corrosion resistance and will not discolor due to oxidization as well as the heavy duty load bearing characteristics



of stainless steel. This means the elimination of dished and discolored strainers and cleanout tops when this product is specified.

MIFAB's adjustable round and square top assemblies for unfinished areas incorporate

standard ductile iron grates which insure flush installation of the drains at the low point of the drainage area to be serviced and eliminates any unwanted movement or dishing of the grate due to heavy wheel loads. These top assemblies are available with optional stainless steel veneers to provide an attractive and heavy-duty installation in any application where an area drain with a cast or ductile iron grate alone would be unsightly, such as public promenade areas.

Maximum 3/8" wide grate drainage slots. This eliminates the need for the designer to differentiate between regular and pedestrian grates. In addition these narrow slots restrict solids from entering the drain, which reduces the

need for a sediment bucket or secondary strainer, both of which can reduce the flow rate of the drain by as much as 60%.



Other Modular Options. MIFAB's roof drain clamps are interchangeable as flashing clamp rings, deck clamps and extensions. This greatly



simplified system eliminates a significant number of parts found in other manufacturer's designs.

• Cleanouts. MIFAB's cleanout design incorporates a combined gasketed cover and cleanout plug at floor level which insures the cleanout will be gas tight so long as the cover/plug is in place. The elimination of secondary plugs made of plastic, brass or iron assures quick and simple emergency access to the drain line. An exclusive O-ring on the adjusting threads insures 100% test seal. When MIFAB's C1000-3 stainless steel Series is specified, you can be assured that this cleanout will not discolor or dish for the life of the building.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



- Carrier Fittings for off the floor Water Closets. MIFAB's unique design allows one carrier to be used for most standard or ADA rough in heights. In addition a reversible faceplate alllows the installation of either siphon jet or blowout bowl closets. Carriers are designed for any type of wall construction. Compact design insures minimum pipe space requirement.
- Availability/Cost MIFAB products are inventoried by full-line distributors in major cities throughout North America. Modular, interchangeable parts ensure fast delivery. MIFAB's products are realistically priced and in all cases are competitive with products of similar design and materials.

Materials and Finishes

MIFAB Stainless Steel, Suffix —3 Mifab cast stainless steel strainers are produced in Type CF8 (304) stainless steel which is an 18-8 austenitic stainless steel possessing excellent corrosion resistant characteristics. Fabricated SS veneers are formed from Type 304 SS sheet. Both cast & stainless products are polished to a number 4 satin finish. In highly corrosive areas strainers and cleanout covers are available with the option –29, Type 316 stainless steel. Body and collars assemblies in highly corrosive areas may be specified in solid cast Type 304 (-28) or solid cast Type 316 (-29).

MIFAB Nickel Bronze Suffix –1 MIFAB nickel bronze is a copper/nickel alloy (copper alloy 997) that is broadly used for adjustable strainers, funnels and cleanout tops and as veneers on standard ductile iron tops. In areas where there is a concern for discoloration due to oxidization, MIFAB stainless steel strainers, cleanout covers and area drain assemblies are recommended to be specified with solid cast strainers or cast or fabricated SS veneers.

MIFAB Acid Resistant Porcelain Enamel –A.R.E. Acid resistant porcelain enamel is a vitreous or glassy inorganic coating bonded to metal by fusion at a high temperature above 800°F. This coating is extremely hard and is ideal for sanitation in drainage applications. MIFAB's acid resistant procelain enamel coating conforms to the requirements of F.D.A. (Food and Drug Administration) Regulation 21-CFR5 117.1360.

MIFAB Ductile Iron Suffix –4Most MIFAB ferrous grates are supplied in ductile iron that has superior shock resisting qualities in addition to greater strength when compared to gray iron.

Design and dimensions are subject to modification. Prices do not include applicable taxes.

MIFAB's ductile iron complies to ASTM specification A 536-84, Grade 60-45-10. Recommended for all areas subjected to heavy vehicular traffic. Ductile iron also exhibits superior corrosion resistance when compared to regular gray iron.

MIFAB Coated Cast Iron Suffix –50 All MIFAB floor drain, roof drain and cleanout bodies, collars and clamping rings are manufactured with cast iron material that conforms to ASTMspecification for Gray Iron Castings A 48-83, Class 25. MIFAB cast iron has excellent resistance to corrosion in normal drainage applications because of the high quality coating which prevents rusting or discoloration in normal applications.

MIFAB Acid Resistant Epoxy Coating, Suffix

-11 Acid resistant epoxy coating is a baked-on powder coating, which produces a smooth, hard, high gloss finish. This epoxy based coating offers high impact resistance and long life expectancy in all applications. MIFAB's -11 coating conforms to the requirements of the F.D.A. (Food and Drug Administration) Regulation 21-CFR5 117.1360.

MIFAB Galvanized Cast Iron, Suffix –13 MIFAB galvanized cast iron is a process applied to specially prepared gray or ductile iron castings. This coating contains 95% zinc and increases longevity and is recommended where the discoloration or oxidization of iron or steel is objectionable. Galvanizing is recommended in coastal or industrial areas where a corrosive atmosphere may be encountered. MIFAB galvanizing meets or exceeds Government specification MIL-P-26433, MIL-P-21035, MIL-P 26915A and MIL-C-10578 (Type II). It also meets ASTM A239-89.

MIFAB Aluminum: Casting grade 319. This is an alloy that contains silicon and copper. It is a solid cast metal.



DYNAC?

(Do you need a clamp?)

Except for MIFAB, the specification drain manufacturers include a membrane clamp in most, if not all of their floor and area drains to receive fixed (non-adjustable) or adjustable top assemblies.

Most floor and area drains are installed in "slab on grade" areas where no waterproofing membrane is required.

The MIFAB body design incorporates a female thread to accept adjustable top assemblies up to 9" diameter or 8" square and lugs on the larger bodies which receive top assemblies 12" diameter and larger. THIS FEATURE SIGNIFICANTLY REDUCES THE INSTALLED COST OF MOST FLOOR AND AREA DRAINS BECAUSE THE INSTALLER CAN AVOID USING AND PAYING FOR THE CLAMP RING.

When MIFAB drains are installed in waterproofed areas, an optional (Suffix -C) membrane clamp is available.

Non membrane floors (no waterproofing) (90% of "on grade" applications) Membrane floors (with waterproofing) (10% of applications)

WITH MEMBRANE CLAMP





Specify MIFAB'S floor drains with heavy duty stainless steel strainers **FOR THE SAME PRICE** as conventional floor drains with membrane clamps and light duty nickel bronze strainers.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



THE MIFAB MODULAR SYSTEM

A Floor Drain



Is an Area Drain



Is a Roof Drain



Is a Cleanout



In 90% of today's "slab on grade" installations, there is no need for a membrane clamp, as there is no waterproofing membrane installed. Because MIFAB's unique design allows the strainer assembly to install directly into the throat of the drain body, the use of a membrane clamping collar is optional.

This is an opportunity for cost savings. Why use a drain with a membrane clamp if it is not neccessary?

The MIFAB Modular System


Design and dimensions are subject to modification. Prices do not include applicable taxes.

DRAIN **BODY DIMENSION HEIGHTS**



DRAIN BODY DIMENSION HEIGHTS


DRAIN BODY DIMENSION REFERENCE CHARTS



BODY HEIGHT 5 1/4"
5 1/4" 6 3/4"
Γhe A1 Body


A1 BOD	A1 BODY HEIGHT						
PIPE SIZE	PVC (-30) ABS (-31)	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	STAINLESS STEEL (-28)	
2"	2 5/8"	3"	3 3/8"	2 1/4"	3 3/4"	2 3/4"	
3"	3 1/4"	3"	3 3/8"	2 5/8"	3 3/4"	2 3/4"	
4"	3 1/2"	3"	3 3/8"	2 5/8"	3 3/4"	2 3/4"	
5"	-	3"	-	2 5/8"	6 7/8"	-	
6"	_	3 1/2"	6 7/8"	_	-	_	

*Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.





A1-90 THRE	ADEC	SIDE 0	UTLET BOD	Y HEIGHT
MODEL NUMBER	PIPE SIZE	"B" BODY HEIGHT	"A" FLANGE TO CENTER OF OUTLET	"C" Flange To top of Outlet
A1-2T-90-7	2"	3 5/8"	2 1/4"	5/8"
A1-3T-90-7	3"	6 1/8"	3 1/2"	-
A1-4T-90-7	4"	6 1/8"	3 1/4"	-
A1-90 NO H	IUB S	IDE OU	TLET BODY	HEIGHT
A1-2-90-NH-7	2"	3 1/2"	2 3/8"	1 1/8"
A1-3-90-NH-7	3"	4 3/8"	2 5/8"	1"
A1-4-90-NH-7	4"	5 3/8"	3 1/8"	1"

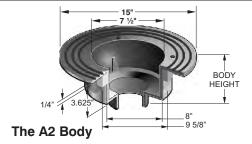

PIPE Size	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) ABS (-31)
2"	5 3/4"	5 1/2"	6 1/2"	6 1/2"	6 3/4"
3"	5 3/4"	5 1/2"	6 5/8"	6 1/2"	7 1/2"
4"	5 3/4"	5 1/2"	5 1/2"	6 1/2"	7 5/8"
5"	5 3/4"	-	6 5/8"	6 3/4"	-
6"	7 1/4"	5 5/8"	5 5/8"	6 1/2"	-
8"	5 7/8"	-	-	See note*	-

*FOR DRAINS REQUIRING AN 8" INSIDE CAULK CONNECTION, USE A7-8X BODY





A2-90 THRE	ADED	SIDE C	OTLET BOD	DY HEIGHT
MODEL NUMBER	PIPE SIZE		"A" Dimension Threaded Outlet	"A" DIMENSION NO HUB OUTLET
A2-2T-90-7	2"	5 3/4"	4"	7/8"
A2-3T-90-7	3"	5 3/4"	3 1/2"	7/8"
A2-4T-90-7	4"	5 3/4"	3 3/8"	7/8"
A2-90 NO H	UB S	IDE OU	TLET BODY	HEIGHT
A2-2-90-NH-7	2"	5"	4"	2 3/4"
A2-3-90-NH-7	3"	5"	3 1/2"	1 3/4"
A2-4-90-NH-7	4"	5"	2 7/8"	5/8"



BODY	
B HEIGHT	
The A5 Body	

BODY HEIGHT	
The A7 Body	

A3 BODY	A3 BODY HEIGHT				
PIPE SIZE	NO HUB Standard	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) ABS (-31)
2"	12 1/4"	12 1/2"	11 1/2"	13"	11 3/4"
3"	12 1/4"	12 5/8"	11 7/8"	13"	12 1/2"
4"	12 3/8"	12 5/8"	11 7/8"	13"	12 5/8"
5"	12 3/8"	-	11 7/8"	16"	-
6"	12 5/8"	16"	-	-	-

Note: The A3 body is manufactured as a transition body and require an A1 body assembled to it to form the outlet connection

A5 B	ODY HEIGHT	
PIPE SIZE	NO HUB (Standard)	INSIDE CAULK (X)
2"	6 1/2"	6.575"
3"	6 1/2"	6.575"
4"	6 1/2"	6.575"
6"	6 1/2"	6.575"


A7 B0	DDY HEIGHT		
PIPE SIZE	NO HUB OUTLET (STANDARD)	INSIDE CAULK OUTLET (X)	
8"	See note*	5 3/4"	
10"	5 5/8"	-	
12"	5 5/8"	-	


*For Drains Requiring and 8" No-Hub connection, use A2-8NH body

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB FLOOR DRAIN FEATURES

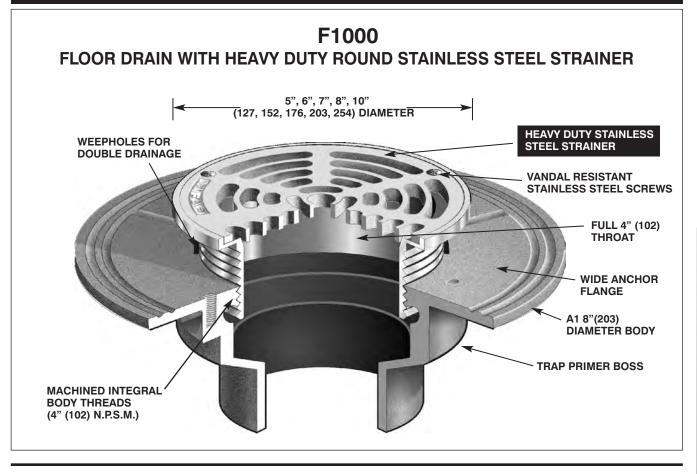


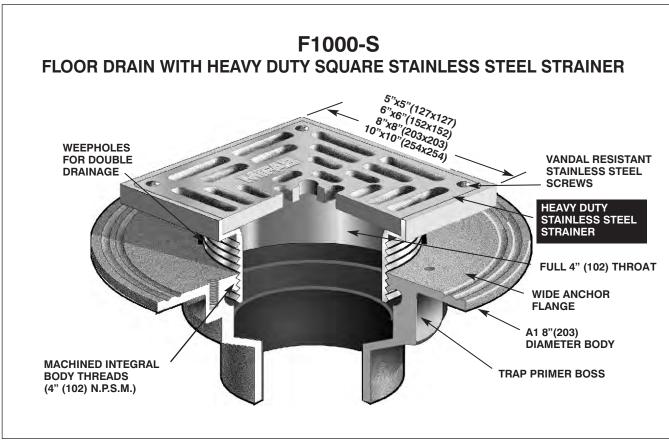


Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB AREA DRAIN FEATURES

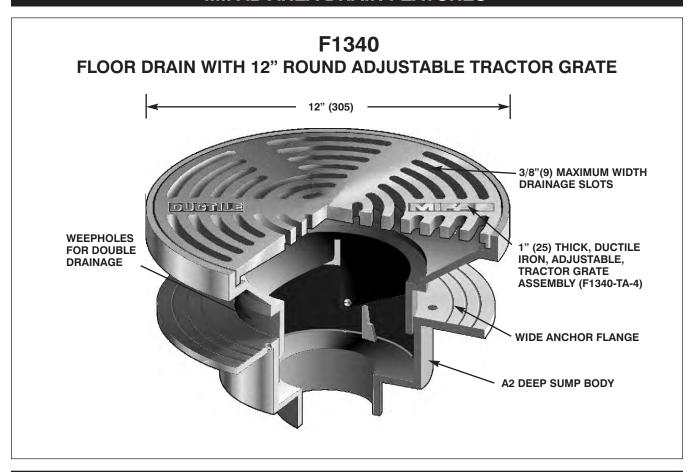

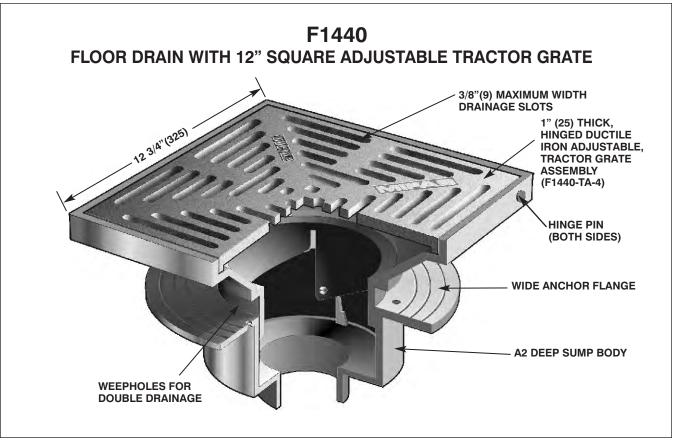

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Floor Drain Selection Guide

Floor drains and accessories combine to form the upstream or entrance terminals of a building's floor drainage system. Area drains serve in a similar capacity for drainage of surface areas immediately adjacent to the building. The selection and specification of drains for interior floor areas and exterior surface areas merit careful consideration. Such factors as size, shape, function and anticipated drainage requirements of the area must be taken into account when planning for adequate and proper drainage of the area. These elements are of equal importance when sizing and locating the drains and drainage lines to which they are connected. Furthermore, many factors concerning plumbing and building codes apply, so it is recommended that they be consulted at the outset of selection and specification considerations.

SIZING

The potential volume of drainage to be accommodated by drains serving interior areas can, as a rule, be calculated with reasonable accuracy using the total amount of water within the area as a basis for sizing. The area's function as well as types of water use equipment used within the area must be considered. For example, a public restroom, with its numerous types of water use fixtures, must include drains sized and located to handle potential overflow due to stoppage as well as routine custodial waste from cleaning byproducts. In addition to plumbing fixtures, water requiring floor drainage emanates from man's sources such as run-off from vehicles in garage areas, condensate waste and processed water discharge from equipment hose stations, and emergency drainage as from sprinkler systems or spills. It is a good practice to provide floor drains in any area where a water source is located. Moreover floor drains should be adequately sized and strategically located to avoid standing water on the floor, a potentially hazardous condition. Sizing of area drains for surfaces adjacent to the building is normally based on rainfall and size of the area to be drained. Information concerning such sizing is provided in the MIF AB Roof Drain section of this catalog. Placement of area drains depends on the topography of the area with drains placed at the low points where run-off is anticipated.

SPECIFIC POINTS FOR CONSIDERATION

After the preceding drainage requirements have been resolved and the drainage piping system is developed, the proper floor and area drains to serve the system must be selected and specified. There are a number of points to consider for such selection, knowledge of which will be of assistance in arriving at the proper decision, Comprehensive information on each of the following points for consideration is essential:

- location requirements
- floor construction
- traffic conditions
- drain top and outlet sizes
- drain top, materials and appearance
- trapping of sediment
- backflow prevention
- indirect waste
- · drain outlet connections

LOCATION REQUIREMENTS

The locations within and adjacent to the building structure which require provisions for drainage are many. Some significant locations for which drains must be selected are toilet and shower rooms, boiler and equipment rooms, basements, garage and parking areas, kitchens, laundry, utility and service rooms, elevator pits, entry areas, machining and processing areas, refrigeration rooms.... the list goes on and on. Drains should be considered and selected for any location where water is supplied and surface drainage must be accommodated.

FLOOR CONSTRUCTION

Floor construction has a distinct influence on drain selection and therefore must be considered at the outset of the selection process. Such elements as slab type and thickness, surface finish, depth of fill, waterproofing membrane and/or finishing materials will influence the selection. Installation drawings, on pages iv through vii of this section, depict various MIF AB floor drains in different types of construction for reference.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Floor Drain Selection Guide (Cont'd)

TRAFFIC CONDITIONS

Once installed, floor drains become integral components of the floor or area in which they are located. Therefore, the drain selected for each installation must have tops or grates capable of sustaining the type of load to be supported by the floor. This is particularly significant where drains selected are installed in traffic locations. It is recognized that top-loading requirements vary with the location, type of construction and service conditions. These requirements for floor and area drains are addressed in American National Standards Institute, Floor Drains. A112.6.3-2001.1M-2001 with the following five top loading classifications:

LIGHT DUTY - all grates having safe live load under 2000 lbs.

MEDIUM DUTY - all grates having safe live load between 2000 and 4999 lbs.

HEAVY DUTY - all grates having safe live load between 5000 and 7499 lbs.

EXTRA HEAVY DUTY- all grates having safe live load between 7500 and 10,000 lbs.

SPECIAL DUTY- all grates having safe live load over 10,000 lbs. shall be considered special and treated accordingly

The safe live load is computed by dividing the load at failure by two when the grate is loaded in accordance with the test procedure stipulated in the standard. A 3 1/2" (89) diameter platen was used during the load rating test and applied to the center of the grate. Using these top-loading classifications as a guide when loading requirements for the drains in a given location have been determined, the duty type required can be selected. MIFAB floor drains in this catalog are duty rated as an aid to selection. For additional information where a rating is not clear for unusual service conditions, contact MIFAB Customer Service.

DRAIN TOP AND OUTLET SIZES

A drain's top size, regardless of its shape-round, square, etc.-influences the number and size of openings between support members, which in total account for the grate's open or free area. Normally, the larger the top the greater the free area. Free area is the key factor used in evaluating the grate's ability to permit sufficient drainage to enter the drain for efficient utilization of the drainage system and prevent build-up of water on the floor or area served by the drain. Codes and standards stipulate that for proper

Design and dimensions are subject to modification. Prices do not include applicable taxes.

drainage, interior floor drains should have a grate free area equal to one and one-half times the transverse area of the connecting pipe and exterior area drains, subject to rain-fall, two times that of the connecting pipe. Thus, it is important in the selection of floor and area drains to consider the top and outlet sizes as they relate to each other. The following tabulation, taken from ANSI Floor Drain Standard A112.6.3-2001.1M-2001 provides at a glance the grate free area requirements for outlet sizes, thus connecting pipes, based on the ratios given.

DRAIN OUTLET TRANSVERSE AREA GRATE FREE AREA,			
CONNECTION SIZE	CONNECTING PIPE (SQ. INCHES)	MINIMUM (SQ. INCHES)	
(SQ. INCHES)	(0 0.1 1110111110)	INTERIOR	EXTERIOR
2	3.14	5.0	6.5
3	7.06	11.0	14.0
4	12.5	18.0	25.0
5	19.6	30.0	40.0
6	28.3	42.0	56.0

DRAIN TOP MATERIALS AND APPEARANCE

Cast iron is the primary material used in the production of floor drain components. MIFAB floor and area drains are cast in gray cast iron having a tensile strength of 25,000 to 30,000 psi. The ASTM specification for MIFAB's gray iron castings is A 48-83, class 25. Cast ductile iron grates are usually recommended tractor according to duty type for most locations where more than appearance, determining factor. For example, warehouses, equipment rooms, garages, basements, and service and machine areas in locations where severe service conditions, such as shock or impact loading are factors. Beyond ductility, ductile iron has superior strength to regular cast iron. The combination of strength and ductility make ductile iron the logical choice for such locations. In addition to our ductile iron grates for unfinished areas, MIFAB manufactures adjustable strainers of type CF8 (304) cast stainless steel. For larger capacity drains, with 7" to 24" top assemblies, MIFAB provides cast or fabricated stainless steel veneers polished to a number 4 satin finish. The use of stainless steel versus conventional nickel or polished bronze ensures that there will be no broken or dished grates or any discoloration due to oxidization. Most MIFAB stainless steel top assemblies and strainers are priced competitively with our conventional nickel bronze products.



MIFAB Floor Drain Selection Guide (Cont'd)

TRAPPING OF SEDIMENTS

There are few, if any, floors and areas that are free of sediments, debris, and bits of non-liquid waste that will gravitate to the floor drains. Such materials, if permitted to enter drains and drain lines unchecked, will inevitably lead to messy stoppage of the lines. Obviously proper custodial maintenance of the locations will preclude excessive amounts of such materials from entering the drains. However, the presence of a certain amount of debris is unavoidable. Therefore, preventive measures should be taken to assure free drainage without stoppage. Most MIFAB drains are designed with maximum 3/8" openings, which allows only solids that are transportable through the drainage system. Sediment buckets or baskets may be used in areas such as washrooms and showers to intercept valuables and hair. Floor drains, area drains and catch basins which have indicated openings in their grates in excess of 3/8" should have secondary strainers or sediment buckets specified in areas where sediments may clog drain lines. Specification of sediment buckets in all MIFAB drainage products may be indicated by specifying suffix -5.

BACKFLOW PREVENTION / TRAP SEAL PRIMING

Backflow through floor drains, a most undesirable and sometimes damaging condition, due to either clogged interior drain lines or overloaded sewers. can be effectively retained through employment of backwater valves. The most common type of backwater valve used in floor drains is the swing check and float types; either of which with proper maintenance will perform effectively for the purpose intended. When selecting drains for locations below curb or street elevation, where gravity drainage to the main sewer is planned, backwater valves should be used in any locations where backflow conditions could develop. When considering backflow prevention, it is the logical time to also consider prevention of inflow of noxious sewer gas. Most codes specify that floor drains shall connect into a trap and that the trap

seal be maintained to prevent the inflow of sewer gas. In locations where floor drains with integral traps or connected traps will be subject to infrequent use, evaporation with



loss of trap seal is probable. Therefore such drains should be provided with trap seal primer connections, to permit hook-up of seal water replenishment piping from a trap seal primer valve to maintain the trap seal. Specify suffix -7

INDIRECT WASTE

In locations where equipment will be producing indirect waste such as condensation, which cannot be piped directly into the drainage system, the drainage is normally directed to a

floor drain through discharge piping terminating above the drain. In these locations the floor drains should be equipped with funnels to direct the discharge into the drain and to



avoid splashing. The remaining grate free area outside the funnel in such drains is open for normal floor drainage. Floor drains with funnels must not be installed in traffic areas. Round funnels accommodate drainage from a single indirect source, while oval funnels are designed to receive drawings from more than one source. MIFAB offers a broad range of independent funnels for attachment to floor drains of the specifier's choice, and floor drains featuring funnels as standard equipment. These products merit consideration when specifications for handling indirect drainage in such locations are being developed.



MIFAB Typical Floor Drain Installations

SHOWER ROOM DRAIN


Shower drains are available with round, square or rectangular grates of different sizes to provide the drainage capacity or shape desired. This drain is provided with a seepage flange and clamping means to secure the waterproofing membrane to the floor drain body. The strainer is vertically adjustable to allow for variations in finished floor thickness. The strainer at floor level is an attractive polished Stainless Steel, suffix -3. Polished Nickel Bronze, suffix -1 is optional.


UNIVERSAL FLOOR DRAIN


Too often, a shower drain is selected for use in areas where the traffic load (either pedestrian or vehicular) may be unknown and too heavy for a shower drain grate. We have developed a universal floor drain that is suitable for use in shower or toilet rooms as well as any other finished or unfinished floor area. It is furnished with a round or square heavy duty stainless steel grate, to prevent dishing. Some of the optional variations available on the basic floor drain are a trap primer tapping, internal sediment bucket, internal backwater valves and top funnels for use as an indirect waste drain.

INDIRECT WASTE DRAIN

The F1100-EG version is shown here with an oblong funnel to provide an indirect waste connection. Open site or drip drains are primarily for condensate producing equipment and other mechanical equipment where a direct connection is not desired or permitted. The funnels are available in a round design for a single pipe waste and in oblong sizes for multi-pipe waste lines.

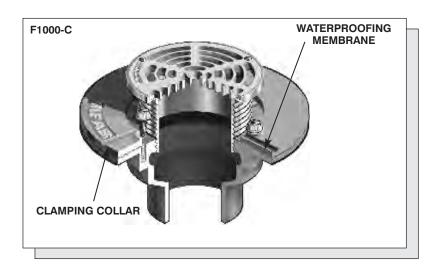

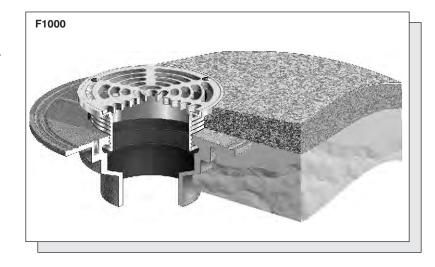

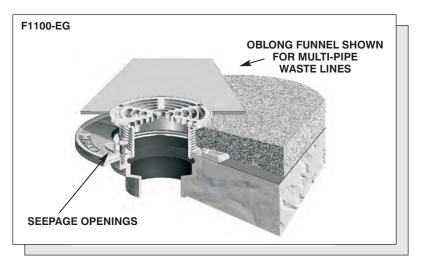

Design and dimensions are subject to modification. Prices do not include applicable taxes.



FLOOR DRAIN SELECTION GUIDE

TRAPPING OF SEDIMENTS

There are few, if any, floors and areas that are free of sediments, debris and bits of non-liquid waste that will gravitate to the floor areas. Such materials, if permitted to enter drains unchecked will lead to messy stoppage of the lines. Therefore, preventive measures should be taken to ensure free drainage without stoppage. MIFAB offers a complete range of sediment buckets for all applications (see details below). In addition, the specifier should consider that all of MIFAB's area drains are engineered with 3/8"maximum openings in the grates to prevent large matter from entering the drains, thus often rendering the sediment bucket unnecessary. Elimination of sediment buckets in area drains can increase flow by 60% since clogged sediment buckets are infrequently cleaned. Larger openings in grates often require sediment buckets that then clog and get thrown away, exposing the drainage system to unfiltered sediments, leading to expensive drain line maintenance. Sediment buckets may be used with MIFAB's floor drains in areas such as washrooms and showers to intercept valuables and hair. Choose Suffix-5 for the specification of sediment buckets. When sediment buckets are not available, a secondary dome strainer (Suffix-20) or a secondary flat strainer (Suffix-21) may be specified.



True-fit bucket design ensures bucket replacement after cleaning since the top grate cannot be inserted unless the bucket is in place because the grate is set into the bucket and the bucket suspends within the top assembly. Integral with F1320-TFB, F1340-TFB and F1360-TFB area drains.



Stainless steel (A1-SSB-3) and plastic sediment buckets (A1-PB) are engineered to suspend from the inside ledge of floor drain strainer shanks.



Cast iron (A1-MB) sediment buckets are engineered to suspend from the recessed, inside ledge, of the small area drain (F1300-TA, F1320-TA, F1420-TA) top assemblies. Stainless steel (A1-MB-3) sediment buckets are also available for use with nickel bronze and stainless steel top assemblies




F1340-TA


A2-MB

Cast iron (A2-MB) sediment buckets are engineered to suspend from the recessed, inside ledge, of the large area drain (F1340-TA, F1360-TA, F1440-TA, F1460-TA) top assemblies.


EXTENSIONS



The SPR-5-3(-1 for NB) is used with 5-1 and 5-3 strainers to increase the height of the strainer to match discrepancies in the finished floor grade. Any number of rings can be added on top of each other. Each ring adds 3/8" of height. Simply remove the grate, place the SPR-5-3(-1 for NB) into the cast in place shank, and then screw the grate into the ring. Longer bolts are provided by MIFAB. The vertical height of the strainer can be adjusted after the drain is poured in place.



The DD-50 extension is used with A1 and A4 bodies to receive any strainer or cleanout top with a 4" N.P.S. shank. The DD-50 has an adjustment range of 1 1/2" to 2 5/8".



The A2-XY is used with A2 and A3 bodies to receive the F1340-TA, F1360-TA, F1440-TA and F1460-TA top assemblies. It has an adjustment range of 3 7/8" to 5 3/8". The top assembly can be adjusted side to side to align with the floor tiles without changing vertical height. This is a benefit in promenade areas where the installer must align square tiles with the drain top assembly. The A2-XY is independent of the body and the top assembly is independent of the A2-XY.

Design and dimensions are subject to modification. Prices do not include applicable taxes.

 $\label{thm:com} \mbox{Visit ${\bf www.mifab.com}$ for the most recent product information.}$



FLOOR DRAIN SELECTION GUIDE


DRAIN OUTLET CONNECTIONS


Floor drains, are available in a variety of outlet connection types. The drain's outlet connection must be compatible with those of the drainage piping system to which it is connected. The most commonly employed connection types are as

1. NO-HUB (NH) (A/K/A Mechanical Joint)

The most widely used connection. A No-Hub connection is achieved by butting No Hub soil pipe or plastic pipe to the bottom of the drain and securing it with a NO HUB coupling. (MI-HUB and MI-XHUB no hub couplings are available from MIFAB - see page 121).

Unless specified otherwise, all of MIFAB drains are shipped standard with No-Hub connections.







	Α	В
2" No hub outlet	2"	2 3/8"
3" No hub outlet	3"	3 3/8"
4" No hub outlet	4"	4 3/8"
5" No hub outlet	5"	5 3/8"
6" No hub outlet	6"	6 3/8"
8" No hub outlet	8"	8 3/8"
10" No hub outlet	10"	10 1/2"
12" No hub outlet	12"	12 1/2"

2. PUSH-ON (P)

MIFAB "Push-on" is a unique labor saving compression gasketed connection designed to simply push on the stub end of the pipe. The Push-on drain body and gasket can be utilized with plastic, steel, No-Hub and service weight soil pipe. A unique pipe stop cast in each MIFAB Push-on drain body ensures that water will not accumulate around the connecting pipe. Specify suffix P for MIFAB's Push-on connections.

	Α	В	C
2" Push on outlet	2"	3 3/8"	3"
3" Push on outlet	3"	4 3/8"	4"
4" Push on outlet	4"	5 1/2"	5 1/8"
6" Push on outlet	6"	7 3/4"	6 1/4"






SPECIAL NOTE:

MIFAB "Push-on" gaskets are designed for use exclusively with MIFAB drainage products. They are not sold separately and all warranties either expressed or implied would be forfeited if used in other than a MIFAB drainage product. MIFAB's 2", 3" and 4" gaskets are designed to be used with both PVC and service weight (cast iron) pipe.

3. THREADED (T)

MIFAB Iron Pipe Threaded connection is an old industry standard. The female (NPT) threaded outlet is often specified on industrial and institutional applications. Specify suffix T for MIFAB's threaded connection.






	Α	В	C
2" Threaded outlet	2"	3 1/4"	9/16"
3" Threaded outlet	3"	4 1/2"	3/4"
4" Threaded outlet	4"	5 5/8"	15/16"
5" Threaded outlet	5"	6 3/4"	15/16"
6" Threaded outlet	6"	7 3/4"	15/16"
8" Threaded outlet	8"	9 3/8"	1 1/8"

4. INSIDE CAULK (X)

The Inside Caulk drain outlet connection is a bottomless hub into which the drainage pipe is inserted. The bottom of the outlet is sealed with oakum in the annular space between the pipe and the hub and the connection is then sealed with melted lead. Inside caulk connections are compatible with No-Hub, service weight and extra heavy soil pipe. They can also be used with ABS and PVC pipe. Specify suffix X for MIFAB's inside caulk connections.








	Α	В
2" Inside Caulk outlet	2 5/8"	3 1/16"
3" Inside Caulk outlet	3 3/4"	4 3/16"
4" Inside Caulk outlet	4 3/4"	5 3/16"
5" Inside Caulk outlet	5 3/4"	6 3/16"
6" Inside Caulk outlet	6 3/4"	7 3/16"
8" Inside Caulk outlet	8 7/8"	9 1/2"

5. PVC/ABS Socket (PVC=-30, ABS=-31)

Socket weld connections are proven installation time saver solutions. They provide a sanitary and resistant connection to the piping system for specialized applications.



	Α	В
2" PVC / ABS socket	2.385"	2.710"
2" PVC / ABS socket	3.525"	3.910"
2" PVC / ABS socket	4.475"	4.950"



All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.


Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Typical Floor Drain Installations (Cont'd)


GENERAL PURPOSE FLOOR DRAIN

This floor drain is suitable for any application where traffic loads and waste water flows are expected. This drain has provision for securing water-proofing membranes to the drain body and provides for final vertical adjustment to finished floor level by the adjustable body collar. Optional variations such as a sediment bucket to retain debris and round or square polished grates and top frames are available.

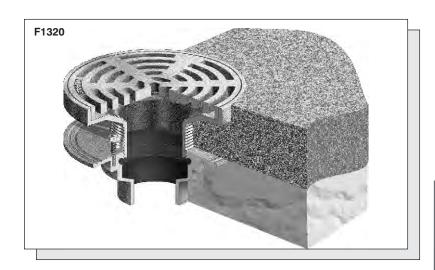


INTEGRAL TRAP FLOOR DRAIN

One of the most practical floor drains to be developed is a floor drain with an integral deep seal trap and No Hub side outlet connection. This drain is ideal for use in floor areas built on grade where the sewer line is shallow. The drain body has a floor level cleanout opening and may be supplied with such optional variations as a sediment bucket, seepage or anchoring flange and an internal backwater valve for back-flow protection.

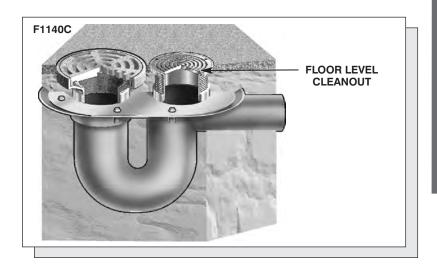

FLOOR DRAIN WITH SURFACE MEMBRANE CLAMP

This type of floor drain is designed for installation where a water-proof seal is required at the top level of the grate. The adjustable strainer has a two-piece beveled nickel bronze top which clamps the top flashing material securely to the drain to ensure a water tight joint.

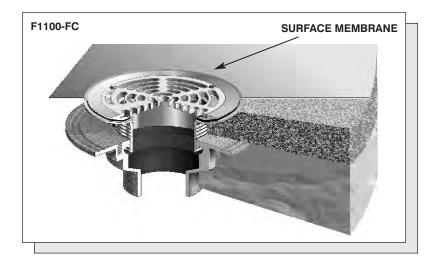


Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Typical Floor Drain Installations (Cont'd)


PIT DRAIN

This type of drain is used in elevator pits, pools and trenches where a side wall outlet is required. The angle grate is located in the wall to prevent blockage by debris. It is supplied with a gasketed seal type backwater valve to prevent backflow of waste water into the pit or sump being drained.

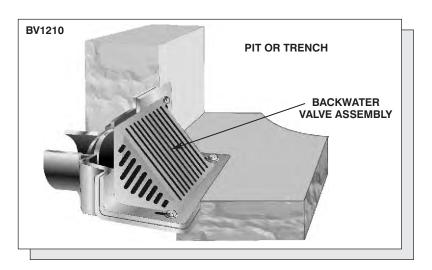


WIDE FLANGE DECK DRAIN

Special drains are available for thin deck or floor covering. A 4" wide flange, which is recessed the same thickness as the deck covering, provides a large bearing surface for the bonding of the neoprene, latex or similar waterproof deck material. This type of deck finish is used in traffic areas such as promenade decks, plazas, recreation areas and interior floors.

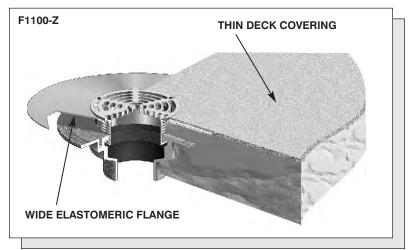

FLUSHING RIM FLOOR DRAIN

A flushing rim floor drain is desirable in mortuaries, prison wards, hospitals, sanatoriums and veterinary establishments where sanitary wastes are to be disposed through a floor drain. The interior surface of this type of drain is coated to provide maximum sanitation. The flushing connection enters the body a peripheral washing action on the entire inner surface to dispose of sanitary waste matter. Several types of grates are available. A perforated hinged grate is recommended to intercept solids while disposing of fluids. A loose-set or secured "oriental" bar-type grate would be used in areas where both solid and fluid wastes are to be discharged.

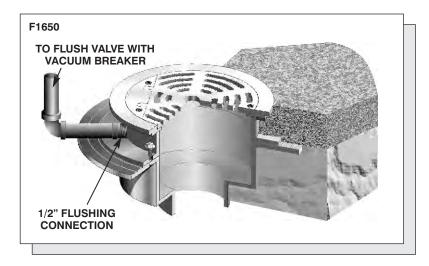

Design and dimensions are subject to modification. Prices do not include applicable taxes.




MIFAB Typical Floor Drain Installations (Cont'd)

GARBAGE CAN WASHING DRAIN


This type of drain is designed to serve as a combination floor drain and garbage can washer. The drain is furnished with a spray nozzle that is designed to thoroughly scour the inside of garbage cans. The top grate and large sediment bucket intercept waste debris washed down from the cans. A 1/2" water supply connection is provided on the side of the drain body to accommodate hot, cold or mixed spray water. The water supply should be connected through a vacuum breaker and control valve easily accessible to the cleaning personnel.

(See catalog page 74, F1670)

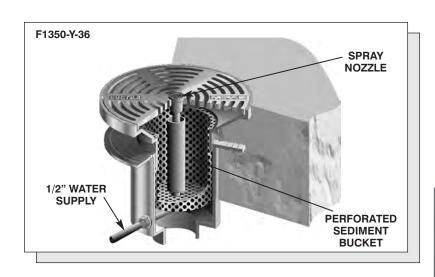


HEAVY DUTY ROADWAY DRAIN

This drain is recommended for use in outside areas in yards, airports and parking areas that are subject to heavy vehicular traffic and where a large drainage capacity is required due to rainfall. The standard heavy duty cast iron grate has a maximum load capacity of 12,000 lbs. If specified with a Ductile Iron grate, the load capacity would be in excess of 25,000 lbs.

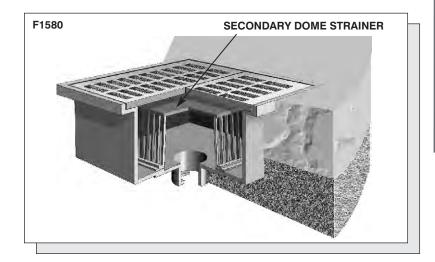

PLANTING AREA DRAIN

Although a planting area drain may not be considered a true floor drain, we have included it in this catalog. It is designed for use in planting areas or flower boxes indoors or out where drainage of excess moisture is required without loss of the soil. The perforated adjustable standpipe and dome may be located as shown or ordered long enough to extend to finished grade level to provide easy access for rodding if the occasion occurs. The floor drain body is designed to provide a means to secure the planter floor pan or waterproofing membrane to the drain

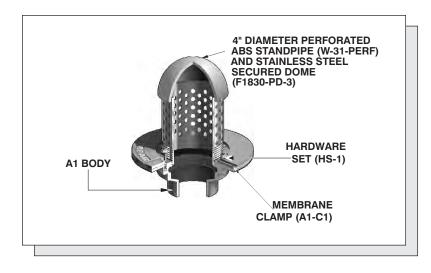

Design and dimensions are subject to modification. Prices do not include applicable taxes.



ALLSTAR® COVER









Allstar cover with any MIFAB A1 body



Allstar cover with any MIFAB A4 body

MIFAB's new, patent pending Allstar© cover is available in 5" and 6" round sizes to work with any of MIFAB's 5" and 6" round floor drain and cleanout tops.

It is manufactured from recycled plastic and is designed to fit into any of MIFAB's A1 and A4 PVC, ABS or cast iron bodies.

Contractors fit the Allstar cover into the top of the MIFAB drain body before the concrete contractors to measure the level of the concrete floor from the top of the Allstar cover.

After the concrete pour around the top of the Allstar cover, the Allstar cover is removed with a channel lock tool placed into the recessed slot in the middle of the cover and pried off.

The 4" NPSM threads machined into the top of all of MIFAB's A1 and A4 bodies are then exposed to allow the contractor to thread in any MIFAB 5" (use the 5" Allstar cover) or 6" (use the 6" Allstar cover) round floor drain and cleanout top into the top of the bodies. The tops can be adjusted to the finished floor.

There is only a 1/8" space around the outside diameter of the floor drain or cleanout top of finished off with grout.

The Allstar cover is appropriately ¾" high and is made from smooth plastic material with angled sides to ensure removal after the pour.

There are several advantages to the Allstar cover:

- 1) The contractor can avoid taping the floor drain and cleanout tops prior to installation to ensure that they are protected during the construction process. This eliminates time to tape the floor drain / cleanout tops and also eliminates cleaning time to remove the tape from them before the project is handed over to the client.
- 2) The contract can avoid installing the floor drain and cleanout tops until the end of the project-reducing the risk that they will be stolen or damaged.
- (3) The floor drain / cleanout tops can be adjusted to the finished floor after the concrete pour.
- 4) The Allstar cover can be purchased separately from the floor drain and cleanout bodies.
- 5) The Allstar cover can be used over and over again.

MODEL NUMBER	LIST PRICE
A1-5-ALLSTAR	See CLPB List Price Book
A1-6-ALLSTAR	See CLPB List Price Book

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.



FLOOR DRAIN, ROOF DRAIN AND CLEANOUT MODEL NUMBER STRUCTURE

ROOF DRAINS (R1200 Series as the example)

1) Outlet connection size is always stated by the last of the four digits in the model number.

For example: R1204. The 4 indicates a 4" no hub outlet connection. If there is no letter following the fourth digit, then the outlet connection is no hub (most common). Alternative outlet connection types, P (push on), T (threaded), X (inside caulk), -28 (Type 304 stainless steel), -29 (Type 316 stainless steel), -30 (PVC outlet connection) or -31 (ABS outlet connection) would follow next.

For example: R1204P. The P indicates a 4" push on outlet connection. **For example:** R1204-30. The -30 indicates a 4" PVC outlet connection.

2) Roof Drain Series is always stated next by the suffix following the outlet size and type.

For example:, R1204-30-EU. The –EU indicates that this is the –EU Series roof drain. The R1200 Series roof drain has the following standard Series of drains: -BUV, -EU, -F, -G, -HC, -JC, -PR, -PR15, -R, -RS, -W, -Z and –90 (found on pages 79 through 86 of the price book)

3) Alpha, then, numeric options follow the roof drain Series.

For example, R1204-30-EU-B-M-80-6. The –B and –M-80 (-M-80 is one option (low profile aluminum dome and should not be separated) are in alpha order following the Series (-EU) followed by the –6 option in numeric order.

FLOOR DRAINS (F1100 Series as the example)

1) Outlet connection size is always stated by the last of the four digits in the model number.

For example: F1103-C-5-1. The 3 indicates a 3" no hub outlet connection. See same explanation as in the Roof Drain section for the other outlet connection variables.

2) Clamp ring or no Clamp ring? is always stated after the outlet size and type.

For example, F1103-30-C-5-1. The –C indicates that there is a clamp ring. F1103-30-5-1. Indicates that there is no clamp ring.

3) Size (type) and material finish of strainer is always stated after the clamp ring suffix (or outlet type and size if no -C).

For example, F1103-30-C-5-1. The –5-1 indicates that the strainer is 5" round and that it is nickel bronze material. **For example,** F1103-30-C-S6-3. The –S6-3 indicates that the strainer is 6" x 6" square and that it is stainless steel material.

For example, F1444-175-3-5-13. The -175-3 indicates that the strainer has a three quarter grate with a stainless steel veneer. The -5 indicated that the drain has a sediment bucket and the -13 indicates that the body and sediment bucket are galvanized.

4) Numeric options then follow

For example, F1103-30-C-5-1-5-6-15.

The second -5 indicates a sediment bucket, the -6 indicates security screws and the -15 indicates an extension.

CLEANOUTS (C1100 Series as the example)

1) Outlet connection size is always stated by the last of the four digits in the model number

For example: C1104-R-1. The 4 indicates a 4" no hub outlet connection. See same explanation as in the Roof Drain section for the other outlet connection variables.

2) Size (type) and material finish of cover is always stated after the outlet size.

For example, C1104-R-1. The –R-1 indicates that the cover is 5" round and that it is nickel bronze material. **For example,** C1104-S-3. The –S-3 indicates that the cover is 5" x 5" square and that it is stainless steel material.

3) Numeric options then follow


For example, C1104-R-1-6.

The -6 indicates security screws.



FLOOR DRAIN WITH HEAVY DUTY ROUND STAINLESS STEEL ADJUSTABLE STRAINER

F1000

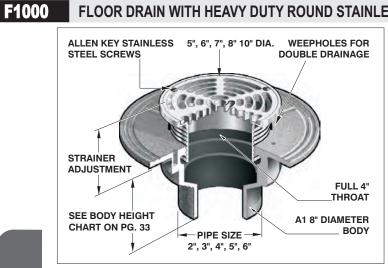

	STRAINER DIAMET (SEE CHART)	STRAINER ADJUSTMEN (SEE CHART)
WEEPHOLES FOR DOUBLE DRAINAG		RZZZZ I
TRAP PRIMER BOSS		BODY HEIGHT (SEE CHART)
4[100]NP\$-8 XI.1[38] DP		PPE SIZE SEE CHART)

STRAINER A	ADJUSTMENT	ANSI/ASME RATING		
STRAINER	MIN	MAX	FREE AREA	LOAD RATING
5" DIA	1/2"	1 1/2"	8 IN ²	5000-7499 lbs
6" DIA	11/16"	1 1/2"	9 IN ²	5000-7499 lbs
7" DIA	9/16"	1 9/16"	12 IN ²	5000-7499 lbs
8" DIA	11/16"	2 1/4"	18 IN ²	5000-7499 lbs
10" DIA	11/16"	2 1/4"	26 IN ²	5000-7499 lbs

LACQUERED CAST IRON BODY WITH STAINLESS STEEL STRAINER						
MODEL Number	WT. Lbs	STRAINER SIZE	LIST PRICE			
F1002, 3, 4-5-3	5.50	5" DIA.	\$162.00			
F1002, 3, 4-6-3	6.00	6" DIA.	\$ 225.00			
F1002, 3, 4-7-3	6.50	7" DIA.	\$311.00			
F1002, 3, 4-8-3	7.50	8" DIA.	\$441.00			
F1002, 3, 4-10-3	8.50	10" DIA.	\$555.00			
WHEN A MEMBRANE CLAMP IS RI	EQUIRED, ADD SUFFIX	((-C) AND ADD \$54.00				


PARTS




(*) Denotes strainer diameter (5", 6", 7", 8" or 10")

F1000-S FLOOR DRAIN WITH HEAVY DUTY SQUARE STAINLESS STEEL ADJUSTABLE STRAINER

F1000-S

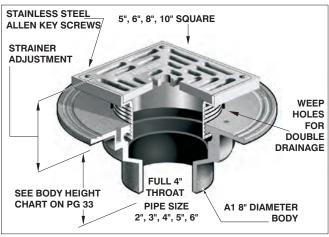

STRAINER ADJUSTMENT ANSI/ASME RATING						
STRAINER	MIN	MAX	FREE AREA	LOAD RATING		
5" x 5"	5/8"	1 9/16"	9 IN ²	5000-7499 lbs		
6" x 6"	7/8"	1 9/16"	12 IN ²	5000-7499 lbs		
8" x 8"	1 1/4"	2 13/16"	26 IN ²	5000-7499 lbs		
10" x 10"	1 1/4"	2 13/16"	28 IN ²	5000-7499 lbs		

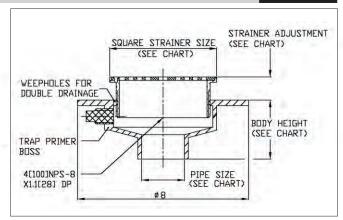

LACQUERED CAST IRON BODY WITH STAINLESS STEEL STRAINER						
MODEL NUMBER	WT. Lbs	STRAINER Size	LIST PRICE			
F1002, 3, 4-S5-3	6.50	5" x 5"	\$245.00			
F1002, 3, 4-S6-3	9.00	6" x 6"	\$390.00			
F1002, 3, 4-S8-3	10.50	8" x 8"	\$501.00			
F1002, 3, 4-S10-3	12.00	10" x 10"	\$788.00			
WHEN A MEMBRANE CLAMP IS R	EQUIRED, ADD SUFFIX	((-C) AND ADD \$54.00				

A1 BODY

S(*)-3

(*) Denotes strainer size (5"x 5", 6"x 6", 8"x 8", or 10"x 10")

Design and dimensions are subject to modification. Prices do not include applicable taxes.


Visit www.mifab.com for the most recent product information.


PARTS



F1100 FLOOR DRAIN WITH ROUND ADJUSTABLE NICKEL BRONZE STRAINER

F1100

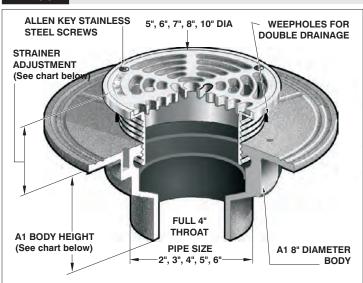

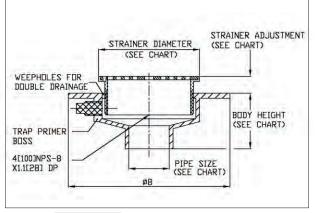

PARTS	
A1 BODY	(*) -1

*) Denotes strainer diameter (5", 6", 7	. 8 . or 10)
---	-------------	---

A1 BODY HEIGHT								
PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) ABS (-31)			
2"	3"	3 3/8"	2 1/4"	3 3/4"	2 5/8"			
3"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/4"			
4"	3"	3 3/8"	2 5/8"	3 1/2"	3 1/2"			
5"	3"	-	2 5/8"	6 7/8"	-			
6"	3 1/2"	6 7/8"	-	-	-			

F1100				
MODEL	WT.	STRAINER	LIST PRI	CE
NUMBER	Lbs.	DIAMETER	NICKEL BRONZE (-1)	DUCTILE IRON (-4)
F1102, 3, 4-5	5.50	5"	\$162.00	\$128.00
F1102, 3, 4-6	6.00	6"	\$225.00	-
F1102, 3, 4-7	6.50	7"	\$311.00	\$154.00
F1102, 3, 4-8	7.50	8"	\$441.00	\$172.00
F1102, 3, 4-10	8.50	10"	\$555.00	-

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00 $\,$

STRAINER	ADJUST	IMENT	ANSI/ASME RATING		
STRAINER	MIN	MAX	FREE AREA	LOAD RATING	
5" DIA	1/2"	1 1/2"	8 IN ²	2000 lbs	
6" DIA	11/16"	1 1/2"	9 IN ²	2000 lbs	
7" DIA	9/16"	1 9/16"	12 IN ²	2000 lbs	
8" DIA	11/16"	2 1/4"	18 IN ²	2000 lbs	
10" DIA	11/16"	2 1/4"	26 IN ²	2000 lbs	

DYNAC

(DO YOU NEED A CLAMP?)

In 90% of today's "slab on grade" installations, there is no need for a membrane clamp, as there is no waterproofing membrane installed. Because MIFAB's unique design allows the strainer assembly to install directly into the throat of the drain body, the use of a membrane clamping collar is optional.

This is an opportunity for cost savings.

Why use a drain with a membrane clamp if it is not neccessary?


F1000 AND F1100 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-5	Sediment bucket (A1-PB)	\$ 32.00	-C2	High rough-in membrane clamp (A1-C2)	\$ 54.00			
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00			
-7	Trap seal primer tapping	\$ 14.00	-F4-50	4" cast iron round funnel	\$ 72.00			
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-F6-(1,3)	6" NB or SS round funnel	\$ 208.00			
-10	Decorative polished top	\$ 174.00	-F6-50	6" cast iron round funnel (F1530-TA or F1540-TA)	\$ 113.00			
-11	Acid resistant epoxy coated body	\$ 212.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00			
-13	Galvanized body	\$ 108.00	-G-50	4" x 9" C.I. oval funnel	\$ 100.00			
-15	Extension (DD-50)	\$ 62.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00			
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00			
-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$1,473.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00			
-30	PVC Socket Connection Body (2", 3" or 4")	\$ 28.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00			
-31	ABS Socket Connection Body (2", 3" or 4")	\$ 28.00	-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$ 881.00			
-34	Closure plug (C1440 Series)	\$ 65.00	Х	Inside caulk outlet (2", 3" or 4")	No Add			
-40	Underdeck clamp (A1-C3)	\$ 108.00	5	5" no hub outlet	\$ 185.00			
-41	Sump receiver (A1-BP)	\$ 108.00	5T	5" threaded outlet	\$ 246.00			
-49	Chrome plated strainer assembly (add to -1 only)	\$ 90.00	5X	5" inside caulk outlet	\$ 185.00			
-69	Stainless steel sediment bucket (A1-SSB)	\$ 328.00	6	6" no hub outlet	\$ 185.00			
-90	Threaded side outlet (2", 3") (N/A in -30,-31)	\$ 168.00	6P	6" push on outlet*	\$ 210.00			
	4" threaded side outlet (N/A in -30,-31)	\$ 168.00	* Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.					
-95	Client logo	\$ 168.00	* Add -NH to -90 for no hub outlet - No Add .					
-C	Membrane clamp (A1-C1)	\$ 54.00						

Design and dimensions are subject to modification. Prices do not include applicable taxes.



FLOOR DRAIN WITH ADJUSTABLE ANGLE STRAINER

F1100-AS

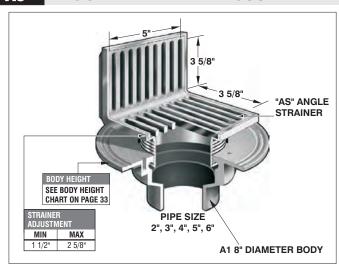

		3.65 [9	3] X 5 [127]	WIDE	
		3.65	[93]		NER ADJUSTMEN HART)
WEEPHOLES F DOUBLE DRAI				7777	
TRAP PRIMER BOSS					BODY HEIGHT (SEE CHART)
4[100]NPS-8 X1.35[34] DP	/	Ø8 [203]	PIPE SI (SEE C		

FLOOR DRAIN WITH ADJUSTABLE ANGLE STRAINER					
MODEL WT. STRAINER NICKEL BRONZE (-					
NUMBER	Lbs	SIZE			
F1102, 3, 4-AS	8.00	4" x 5" x 4"	\$481.00		
WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00					

504
AS-1
Imd


F1100-AS, F1100-DD, F1100-EF, and F1100-EG OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (A1-PB)	\$ 32.00	-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$1,473.00
-7	Trap seal primer tapping	\$ 14.00	-30	PVC Socket Connection Body (2", 3" or 4")	\$ 28.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-31	ABS Socket Connection Body (2", 3" or 4")	\$ 28.00
-10	Decorative polished top	\$ 174.00	-34	Closure plug (C1440 Series)	\$ 65.00
-11	Acid resistant epoxy coated body	\$ 212.00	-40	Underdeck clamp (A1-C3)	\$ 108.00
-13	Galvanized body	\$ 108.00	-41	Sump receiver (A1-BP)	\$ 108.00
-15	Extension (DD-50)	\$ 62.00	-49	Chrome plated strainer assembly (add to -1 only)	\$ 90.00


PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes

See next page for more options.

F1100-DD FLOOR DRAIN WITH ADJUSTABLE HUB INDIRECT WASTE STRAINER

F1100-DD

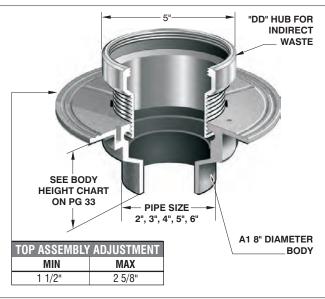

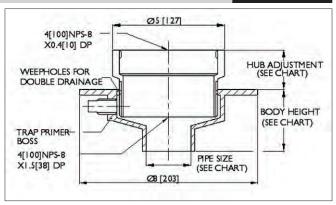



(*) Denotes strainer finish (-1, -3 or -50)

FL0	FLOOR DRAIN WITH ADJUSTABLE HUB INDIRECT STRAINER						
	MODEL NUMBER	WT. Lbs	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE CAST IRON (-50)		
F110	2,3,4-DD	6.00	HUB DRAIN	\$ 340.00	-		
F110	2,3,4-DD-50	6.00	HUB DRAIN	-	\$107.00		

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00


Visit www.mifab.com for the most recent product information.


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1100-EF FLOOR DRAIN WITH ROUND ADJUSTABLE STRAINER AND 4" FUNNEL

F1100-EF

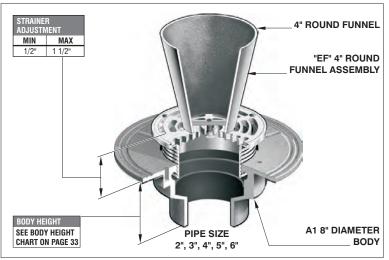

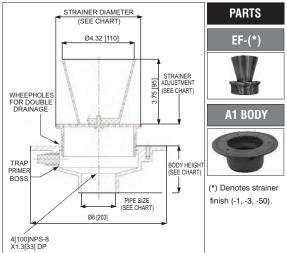


FLOOR DRAIN WITH ADJUSTABLE 4" DIA. FUNNEL STRAINER					
MODEL NUMBER	WT. Lbs	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE CAST IRON (-50)	
F1102,3,4-EF	7.00	5" DIA	\$314.00	-	
F1102,3,4-EF-50	7.00	5" DIA	-	\$255.00	


WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

F1100-AS	, F1100-DD, F1100-EF, and F1100-EG OPTI	ONAL VARIATIOI	NS: CONT	FROM Page 34		
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-69	Stainless steel sediment bucket (A1-SSB)	\$ 328.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00	
-90	Threaded side outlet (2", 3") (N/A in -30,-31)	\$ 168.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00	
	4" threaded side outlet (N/A in -30,-31)	\$ 168.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00	
-95	Client logo	\$ 168.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00	
-C	Membrane clamp (A1-C1)	\$ 54.00	-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$ 881.00	
-C2	High rough-in membrane clamp (A1-C2)	\$ 54.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add	
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	5	5" no hub outlet	\$ 185.00	
-F4-50	4" cast iron round funnel	\$ 72.00	5T	5" threaded outlet	\$ 246.00	
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	5X	5" inside caulk outlet	\$ 185.00	
-F6-50	6" cast iron round funnel	\$ 113.00	6	6" no hub outlet	\$ 185.00	
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	6P	6" push on outlet*	\$ 210.00	
-G-50	4" x 9" C.I. oval funnel	\$ 100.00	* Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.			
			* Add -NH to -90 for no hub outlet - No Add.			

F1100-EG FLOOR DRAIN WITH ROUND STRAINER AND 4"x 9" ELONGATED FUNNEL

F1100-EG

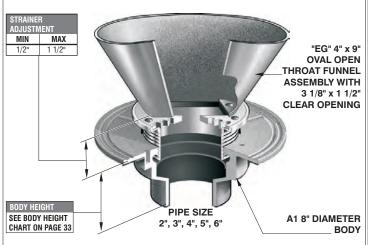

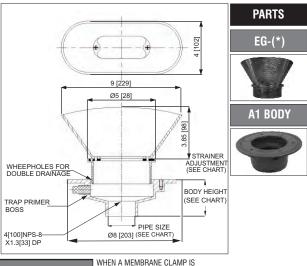

FLOOR DRAIN WIT	WHEN A MEMBRANE CLAMP REQUIRED, ADD SUFFIX (-C)				
MODEL NUMBER	WT. Lbs	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE Cast Iron (-50)	AND ADD \$54.00
F1102,3,4-EG	7.50	5" DIA	\$381.00	-	
F1102,3,4-EG-50	7.50	5" DIA	-	\$215.00	(*)

(*) Denotes strainer finish (-1, -3, -50)


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.


F1100-ER



EXTENDED RIM FLOOR DRAIN

F1100-ER

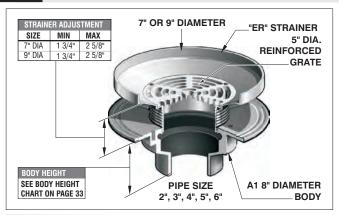

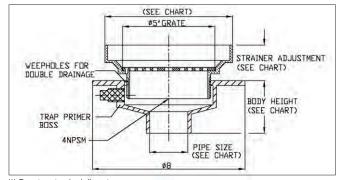

(*) Denotes standard diameter (7" or 9") (**) Denotes finish (-1, -3 or -50)

PARTS A1 BODY

ER(*)-(**)

EXTENDED RIM FLOOR DRAIN						
MODEL Number	WT. Lbs	STRAINER SIZE	LIST PRICE NICKEL BRONZE (-1) STAINLESS STEEL (-3)	CAST IRON (-50)		
F1102,3,4-ER7	6.00	7" DIA	\$542.00	-		
F1102,3,4-ER7-50	7.00	7" DIA	-	\$156.00		
F1102,3,4-ER9	8.00	9" DIA	\$718.00	-		
F1102,3,4-ER9-50	8.00	9" DIA	-	\$290.00		

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00


F1100-EF	R, F1100-FC, F1100-FT AND F1100-HG OPTIO	NAL VARIATIO	NS:	CONTINUE	
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (A1-PB)	\$ 32.00	-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$1,473.00
-7	Trap seal primer tapping	\$ 14.00	-30	PVC Socket Connection Body (2", 3" or 4")	\$ 28.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-31	ABS Socket Connection Body (2", 3" or 4")	\$ 28.00
-10	Decorative polished top	\$ 174.00	-34	Closure plug (C1440 Series)	\$ 65.00
-11	Acid resistant epoxy coated body	\$ 212.00	-40	Underdeck clamp (A1-C3)	\$ 108.00
-13	Galvanized body	\$ 108.00	-41	Sump receiver (A1-BP)	\$ 108.00
-15	Extension (DD-50)	\$ 62.00	-49	Chrome plated strainer assembly (add to -1 only)	\$ 90.00


PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes

See next page for more options.

F1100-FC FLOOR DRAIN WITH SURFACE MEMBRANE CLAMP

F1100-FC

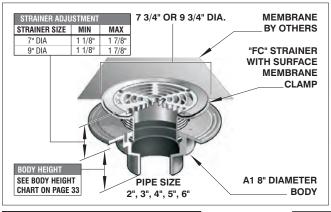

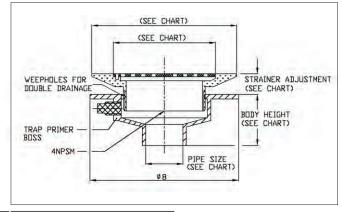

ANSI/ASME RATING					
STRAINER	FREE AREA	LOAD RATING			
FC7-1	12.0 IN ²	UP TO 2000 lbs			
FC9-1	16.92 IN ²	UP TO 2000 lbs			
FC7-3	12.0 IN ²	5000-7499 lbs			
FC9-3	16.92 IN ²	5000-7499 lbs			



(*) Denotes strainer diameter. (7" or 9") Denotes strainer finish (-1 or -3)

FLOOR DRAIN WITH SURFACE MEMBRANE CLAMP						
MODEL WT. STRAINER GRATE LIST PRICE						
NUMBER	Lbs	SIZE	SIZE	NICKEL BRONZE (-1) STAINLESS STEEL (-3)		
F1102,3,4-FC7	8.00	7 3/4" DIA	5 1/2" DIA	\$ 372.00		
F1102,3,4-FC9	10.50	9 3/4" DIA	9 3/4" DIA	\$ 647.00		


OPTIONAL LONGER SCREWS FOR THICK FLOOR MEMBRANES						
PART NUMBER	DESCRIPTION	LIST PRICE				
H-1014	\$50.00					
SS Flat Head Screws						

WHEN NO MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00




FLOOR DRAIN WITH RECESSED TILE FLANGE

F1100-F1

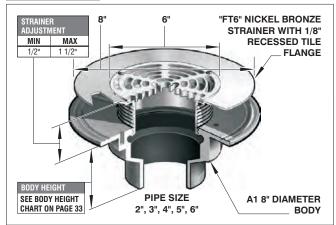

ANSI/ASME RAT	ING	
STRAINER	FREE AREA	LOAD RATING
FT6-1	9 IN ²	UP TO 2000 lbs
FT6-3	9 IN ²	5000-7499 lbs

FLOOR DRAIN WITH RECESSED TILE FLANGE WT. MODEL **STRAINER LIST PRICE: NICKEL BRONZE (-1) NUMBER** Lbs SIZE STAINLESS STEEL (-3) F1102,3,4-FT6 7.00 6" DIA \$983.00

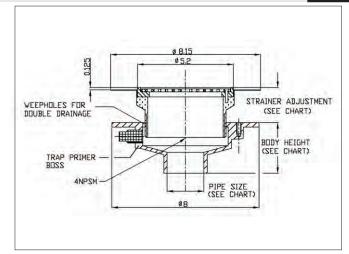




MHEN A MEMB	WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00 (7) Deficies sitalifer liftish (-1 of -5)					
F1100-ER,	F1100-ER, F1100-FC, F1100-FT AND F1100-HG OPTIONAL VARIATIONS CONTINUED FROM PAGE 36					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-69	Stainless steel sediment bucket (A1-SSB)	\$ 328.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00	
-90	Threaded side outlet (2", 3") (N/A in -30,-31)	\$ 168.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00	
	4" threaded side outlet (N/A in -30,-31)	\$ 168.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00	
-95	Client logo	\$ 168.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00	
-C	Membrane clamp (A1-C1)	\$ 54.00	-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$ 881.00	
-C2	High rough-in membrane clamp (A1-C2)	\$ 54.00	Х	Inside caulk outlet (2", 3" or 4")	No Add	
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	5	5" no hub outlet	\$ 185.00	
-F4-50	4" cast iron round funnel	\$ 72.00	5T	5" threaded outlet	\$ 246.00	
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	5X	5" inside caulk outlet	\$ 185.00	
-F6-50	6" cast iron round funnel	\$ 113.00	6	6" no hub outlet	\$ 185.00	
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	6P	6" push on outlet*	\$ 210.00	
-G-50	4" x 9" C.I. oval funnel	\$ 100.00				
	* Add -NH to -90 for no hub outlet - No Add.					


F1100-HG FLOOR DRAIN WITH ROUND ADJUSTABLE HINGED STRAINER

F1100-HG

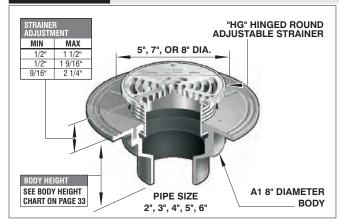

FLOOR DRAIN WITH ROUND ADJUSTABLE HINGED STRAINER						
MODEL NUMBER	WT. Lbs	STRAINER SIZE	LIST PRICE STAINLESS STEEL (-3)			
F1102,3,4-HG5	6.00	5" DIA	\$ 424.00			
F1102,3,4-HG7	7.00	7" DIA	\$ 569.00			
F1102,3,4-HG8	8.00	8" DIA	\$ 618.00			
MULENI A MEMBERANE OLAMO	IC DECLUDED	ADD CHEEN (O)	AND ADD 6E 4 OO			

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

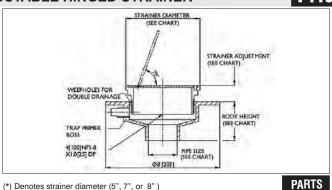

(*) Denotes strainer diameter (5", 7", or 8")

A1 BODY


HG(*)-3


ANSI/ASME RATING						
STRAINER	FREE AREA	LOAD RATING				
HG5-3	8 IN ²	5000-7499 lbs				
HG7-3	9 IN ²	5000-7499 lbs				
HG8-3	18.0 IN ²	5000-7499 lbs				



FLOOR DRAIN WITH DOME STRAINER

F1100-K

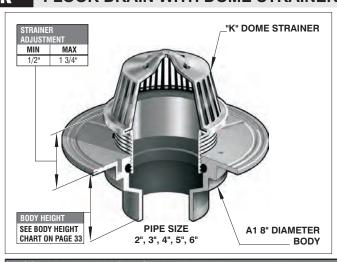

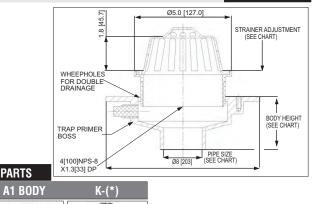

A1 BODY

(*) Denotes strainer finish (-1, -3, or -50)

FLOOR DRAIN WITH DOME STRAINER							
WT.	DOME		LIST PRICE				
Lbs	SIZE	NICKEL BRONZE (-1)	STAINLESS STEEL (-3)	CAST IRON (-50)			
5.75	5" DIA	\$202.00	\$202.00	\$142.00			
W/SS	\$190.00						
	WT. Lbs 5.75	WT. DOME Lbs SIZE 5.75 5" DIA	WT. DOME Lbs NICKEL BRONZE (-1) 5.75 5" DIA \$202.00	WT. DOME LIST PRICE Lbs Size Nickel Bronze (-1) Stainless Steel (-3)			

ANSI/ASME RATING FREE AREA 15 IN²

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

	7 7 7				
F1100-K	X, F1100-N, F1100-RS AND F1100-S OPTIONA	L VARIATIONS:		CONTINUE	
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (A1-PB)	\$ 32.00	-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only	\$1,473.00
-7	Trap seal primer tapping	\$ 14.00	-30	PVC Socket Connection Body (2", 3" or 4")	\$ 28.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-31	ABS Socket Connection Body (2", 3" or 4")	\$ 28.00
-10	Decorative polished top	\$ 174.00	-34	Closure plug (C1440 Series)	\$ 65.00
-11	Acid resistant epoxy coated body	\$ 212.00	-40	Underdeck clamp (A1-C3)	\$ 108.00
-13	Galvanized body	\$ 108.00	-41	Sump receiver (A1-BP)	\$ 108.00
-15	Extension (DD-50)	\$ 62.00	-49	Chrome plated strainer assembly (add to -1 only)	\$ 90.00


PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes


See next page for more options.

FLOOR DRAIN WITH 7" OR 9" TRACTOR GRATE F1100-N

F1100-N

PARTS

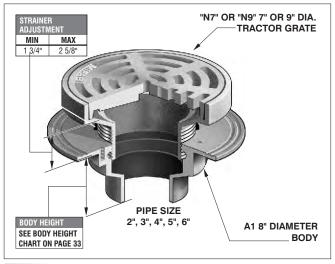

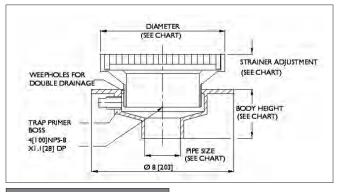

A1 BODY	N(*)-(**)
9	

FLOOR DRAIN WITH 7" OR 9" TRACTOR GRATE							
MODEL	WT.	STRAINER	LIST PRICE				
NUMBER	Lbs	SIZE	NICKEL BRONZE (-1)	STAINLESS STEEL (-3)	DUCTILE IRON (-4)		
F1102,3,4-N7*	8.00	7" DIA	\$ 487.00	\$487.00	-		
F1102,3,4-N7-4	8.00	7" DIA	-	-	\$154.00		
F1102,3,4-N9*	9.00	9" DIA	\$ 707.00	\$707.00	-		
F1102,3,4-N9-4	9.00	9" DIA	-	-	\$207.00		
*ADD 3/8" TO DIAMETER AND 3/16" TO HEIGHT FOR (-1), (-3), NB OR SS VENEER							

(*) Denotes strainer diameter (7", or 9") (**) Denotes strainer finish (-1,-3 or -4)

ANSI/ASME RATING						
STRAINER	FREE AREA	LOAD RATING				
N7	11.0 IN ²	OVER 10000 lbs				
N9	18.0 IN ²	OVER 10000 lbs				

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00


Visit www.mifab.com for the most recent product information.


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1100-RS FLOOR DRAIN WITH RECTANGULAR STRAINER

F1100-RS

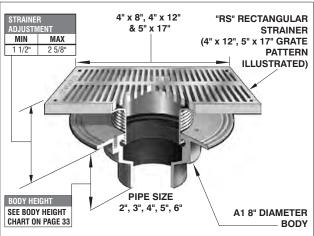

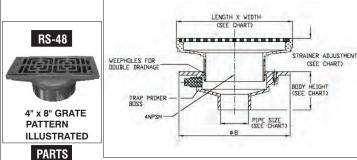

A1 BODY RS(*)-(**)

(*) Denotes strain	er size (4"x 8", 4"x

12", or 5"x 17") Denotes strainer finish (-1 or -3)


ANSI/ASME RATING						
STRAINER	FREE AREA	LOAD RATING				
RS48-1*	11.0 IN ²	UP TO 2000 lbs				
RS412-1*	15.0 IN ²	UP TO 2000 lbs				
RS517-3	20.0 IN ²	5,000 TO 7,499 lbs				
*STAINLESS (-3) F	OR ABOVE					


FLOUR DRAIN WITH RECTANGULAR STRAINER							
MODEL	WT.	STRAINER	LIST PRICE: NICKEL BRONZE (-1)				
NUMBER	Lbs	SIZE	STAINLESS STEEL (-3)				
F1102,3,4-R\$48	6.50	4" x 8"	\$398.00				
F1102,3,4-RS412	8.00	4" x 12"	\$432.00				
F1102,3,4-RS517-3	8.00	5" x 17"	\$875.00				
WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00							

F1100-K,	F1100-K, F1100-N, F1100-RS AND F1100-S OPTIONAL VARIATIONS CONT. FROM PAGE 38							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-69	Stainless steel sediment bucket (A1-SSB)	\$ 328.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00			
-90	Threaded side outlet (2", 3") (N/A in -30,-31)	\$ 168.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00			
	4" threaded side outlet (N/A in -30,-31)	\$ 168.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00			
-95	Client logo	\$ 168.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00			
-C	Membrane clamp (A1-C1)	\$ 54.00	-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$ 881.00			
-C2	High rough-in membrane clamp (A1-C2)	\$ 54.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add			
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	5	5" no hub outlet	\$ 185.00			
-F4-50	4" cast iron round funnel	\$ 72.00	5T	5" threaded outlet	\$ 246.00			
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	5X	5" inside caulk outlet	\$ 185.00			
-F6-50	6" cast iron round funnel	\$ 113.00	6	6" no hub outlet	\$ 185.00			
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	6P	6" push on outlet*	\$ 210.00			
-G-50	4" x 9" C.I. oval funnel	\$ 100.00	* Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.					
			* Add -NH	to -90 for no hub outlet - No Add.				

F1100-S **SQUARE FLOOR DRAIN**

F1100-S

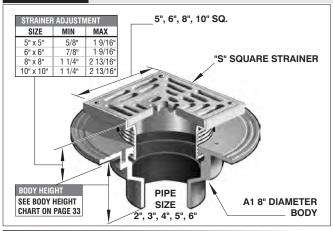

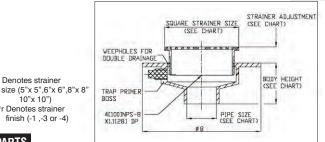

PARTS

(*) Denotes strainer

10"x 10") (**r Denotes strainer

finish (-1,-3 or -4)

A1 BODY S(*)-(**





FLOOR DRAIN WITH SQUARE STRAINER						
MODEL NUMBER	WT. Lbs	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE DUCTILE IRON (-4)		
F1102,3,4-S5	6.50	5" x 5"	\$ 245.00	-		
F1102,3,4-S6	9.00	6" x 6"	\$ 390.00	-		
F1102,3,4-S8	10.50	8" x 8"	\$ 501.00	\$234.00		
F1102,3,4-S10	12.00	10" x 10"	\$ 788.00	-		
WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00						

ANSI/ASME RATING							
STRAINER	FREE AREA	LOAD RATING					
5" x 5" NB	9 IN ²	UP TO 2000 lbs					
6" x 6" NB	12 IN ²	UP TO 2000 lbs					
8" x 8" NB	26 IN ²	UP TO 2000 lbs					
8" x 8" DI	26 IN ²	OVER 10,000 lbs					
5" x 5" SS	9 IN ²	5000 TO 7499 lbs					
6" x 6" SS	12 IN ²	5000 TO 7499 lbs					
10" x 10" SS	28 IN ²	5000 TO 7499 lbs					

Design and dimensions are subject to modification. Prices do not include applicable taxes.

F1100-SD



FLOOR DRAIN WITH SQUARE SOLID HINGED COVER


F1100-SD

STRAINER ADJUSTMENT (SEE CHART)

BODY HEIGHT (SEE CHART)

SQUARE (SEE CHART)

ØR

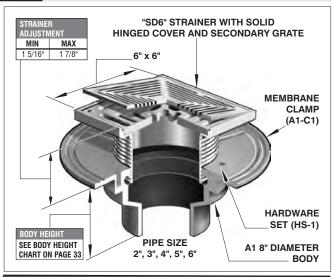

FLOOR DRAIN WITH SQUARE SOLID HINGED COVER						
MODEL Number	WT. Lbs	STRAINER SIZE	NICKEL BRONZE (-1) STAINLESS STEEL (-3)			
F1102,3,4-SD6 10.00 6" x 6" \$562.00						
WHEN A MEMBRANE CLAMP	WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00					

 ANSI/ASME RATING

 STRAINER
 FREE AREA
 LOAD RATING

 SD6-1,3
 12 IN²
 5000 - 7499 lbs

WEEPHOLES FOR

DOUBLE DRAINAGE

TRAP PRIMER

SD6-(*)

(*) Denotes strainer finish (-1 or -3)

PIPE SIZE (SEE CHART)

F1100-SE	F1100-SD, F1100-SHG, F1100-T AND F1100-VD OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (A1-PB)	\$ 32.00	-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$1,473.00
-7	Trap seal primer tapping	\$ 14.00	-30	PVC Socket Connection Body (2", 3" or 4")	\$ 28.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-31	ABS Socket Connection Body (2", 3" or 4")	\$ 28.00
-10	Decorative polished top	\$ 174.00	-34	Closure plug (C1440 Series)	\$ 65.00
-11	Acid resistant epoxy coated body	\$ 212.00	-40	Underdeck clamp (A1-C3)	\$ 108.00
-13	Galvanized body	\$ 108.00	-41	Sump receiver (A1-BP)	\$ 108.00
-15	Extension (DD-50)	\$ 62.00	-49	Chrome plated strainer assembly (add to -1 only)	\$ 90.00

PARTS


A1 BODY

PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes

See next page for more options.


F1100-SHG FLOOR DRAIN WITH SQUARE ADJUSTABLE HINGED STRAINER

F1100-SHG

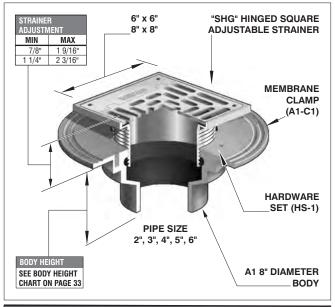

FLOOR DRAIN WITH SQUARE ADJUSTABLE HINGED STRAINER							
MODEL	LIST PRICE						
NUMBER	Lbs	SIZE	STAINLESS STEEL (-3)				
F1102,3,4-SHG6-3	10.00	6" x 6"	\$ 424.00				
F1102,3,4-SHG8-3	11.00	8" x 8"	\$ 594.00				
WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00							

Design and dimensions are subject to modification. Prices do not include applicable taxes.

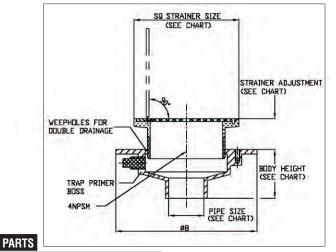

ANSI/ASME RATING
STRAINER FREE AREA LOAD BA

A1 BODY

ANSI/ASME	RATING	
STRAINER	FREE AREA	LOAD RATING
6" x 6"	9 IN ²	5000 - 7499 lbs
8" x 8"	20 IN ²	5000 - 7499 lbs


SHG(*)-3

(*) Denotes strainer size (6"x 6" or 8"x 8")



F1100-T FLOOR DRAIN WITH ROUND STRAINER AND SOLID SECURED COVER

F1100-T

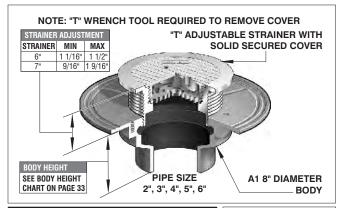


ANSI/ASME RATING				
STRAINER	FREE AREA	LOAD RATING		
6" DIA	9 IN ²	5000 - 7499 lbs		
7" DIA	12 IN ²	5000 - 7499 lbs		

H-1042 "T" WRENCH TOOL

FLOOR DRAIN V	WITH ROUND	STRAINER	& SOLID SECURED COVER
MODEL	WT.	STRAINER	LIST PRICE
NUMBER	Lbs	SIZE	STAINLESS STEEL (-3)
F1102,3,4-T6-3	10.50	6" DIA	\$ 670.00
F1102,3,4-T7-3	12.50	7" DIA	\$ 974.00
H-1042	"T" WRENCH 1	Г00L	\$ 87.00

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$ 54.00

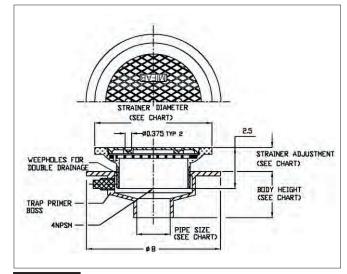


PARTS (*) Denotes strainer diameter (6" or 7")



WHEN A MEMBERANE CEANIF TO THE COTTEN (-0) AND ADD \$ 54.00							
F1100-SD	F1100-SD, F1100-SHG, F1100-T AND F1100-VD OPTIONAL VARIATIONS CONTINUED FROM PAGE 40						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-69	Stainless steel sediment bucket (A1-SSB)	\$ 328.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00		
-90	Threaded side outlet (2", 3") (N/A in -30,-31)	\$ 168.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00		
	4" threaded side outlet (N/A in -30,-31)	\$ 168.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00		
-95	Client logo	\$ 168.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00		
-C	Membrane clamp (A1-C1)	\$ 54.00	-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$ 881.00		
-C2	High rough-in membrane clamp (A1-C2)	\$ 54.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add		
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	5	5" no hub outlet	\$ 185.00		
-F4-50	4" cast iron round funnel	\$ 72.00	5T	5" threaded outlet	\$ 246.00		
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	5X	5" inside caulk outlet	\$ 185.00		
-F6-50	6" cast iron round funnel	\$ 113.00	6	6" no hub outlet	\$ 185.00		
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	6P	6" push on outlet*	\$ 210.00		
-G-50	4" x 9" C.I. oval funnel						
		* Add -NH to -90 for no hub outlet - No Add.					

F1100-VD FLOOR DRAIN WITH ROUND STRAINER AND SOLID HINGED COVER


F1100-VD

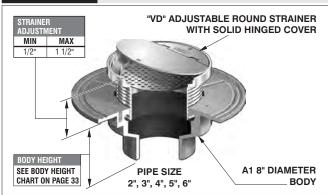

ANSI/ASME RATING						
STRAINER	LOAD RATING					
5" DIA	5 IN ²	5000 - 7499 lbs				

FLOOR DRAIN WITH ROUND STRAINER AND SOLID HINGED COVER						
MODEL WT. STRAINER LIST PRICE						
NUMBER	Lbs	SIZE	STAINLESS STEEL (-3)			
F1102,3,4-VD5	10.00	5" DIA	\$400.00			

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

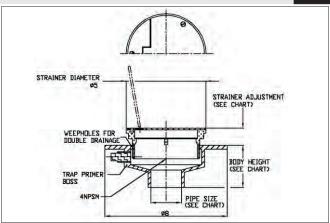

PARTS	
A1 BODY	VD5-3


Design and dimensions are subject to modification. Prices do not include applicable taxes.

F1100-WD



OVERFLOW DRAIN WITH STANDPIPE AND OPTIONAL DOME

F1100-WD

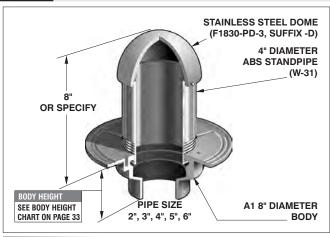

	Ø5.8 [147]
STAINLESS STEEL DOME-OPTIONAL	38 [96.5]
Ø5.2 [132]	7.4 [188] OR AS REQUIRED
WHEEPHOLES FOR DOUBLE DRAINAGE	BODY HEIGHT
TRAP PRIMER BOSS	(SEE CHART)
4[100]NPS-8 X1.5[38] DP	Ø8 [203] (SEE CHART)

OVERFLOW DRAIN WITH STANDPIPE AND DOME						
MODEL Number	WT. STANDPIPE Lbs DIA X HT.		LIST PRICE Stainless Steel (-3)			
NUMBER	rn2	DIA A III.	STAINLESS STEEL (-3)			
F1102,3,4-WD-3	8.00	4" x 6"	\$1174.00			

DEDUCT FOR: LESS DOME - (DELETE SUFFIX (-D) AND DEDUCT \$180.00 WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

PARTS
A1 BODY WD-3


F1100-W	F1100-W(D), F1100-X, F1100-XS AND F1100-Z OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-5	Sediment bucket (A1-PB)	\$ 32.00	-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$1,473.00	
-7	Trap seal primer tapping	\$ 14.00	-30	PVC Socket Connection Body (2", 3" or 4")	\$ 28.00	
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-31	ABS Socket Connection Body (2", 3" or 4")	\$ 28.00	
-10	Decorative polished top	\$ 174.00	-34	Closure plug (C1440 Series)	\$ 65.00	
-11	Acid resistant epoxy coated body	\$ 212.00	-40	Underdeck clamp (A1-C3)	\$ 108.00	
-13	Galvanized body	\$ 108.00	-41	Sump receiver (A1-BP)	\$ 108.00	
-15	Extension (DD-50)	\$ 62.00	-91	Stainless steel standpipe (W-3)	No Add	


PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes

See next page for more options.

F1100-X FLOOR DRAIN WITH ROUND HEAVY DUTY STRAINER



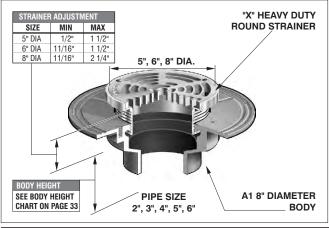

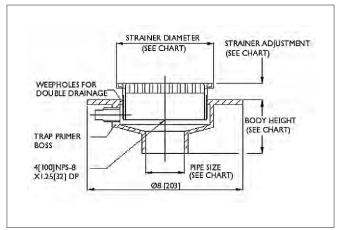

ANSI/ASME	ANSI/ASME RATING			
STRAINER	FREE AREA	NICKEL BRONZE	STAINLESS STEEL	DUCTILE IRON
5" DIA	8 IN ²	5000-7499 lbs	5000-7499 lbs	5000 - 7499 lbs
6" DIA	9 IN ²	5000-7499 lbs	5000-7499 lbs	-
8" DIA	18 IN ²	5000-7499 lbs	5000-7499 lbs	OVER 10,000 lbs

PARTS	A1 BODY	X(*)-(**)
	9	

FLOOR DRAIN WITH ROUND HEAVY DUTY STRAINER						
MODEL WT. STRAINER LIST PRICE: NICKEL BRONZE (-1) LIST PRICE NUMBER Lbs SIZE STAINLESS STEEL (-3) DUCTILE IRON (-4)						
F1102,3,4-X5	6.00	5" DIA	\$ 218.00	\$ 128.00		
F1102,3,4-X6	6.50	6" DIA	\$ 289.00	-		
F1102,3,4-X8	8.00	8" DIA	\$ 441.00	\$ 172.00		

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

(*) Denotes strainer diameter (5", 6", or 8") (**) Denotes strainer finish (-1, -3, or -4)

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.


) Denotes strainer linistr (-1, -0, or -4)


XS(*)-(**)



FLOOR DRAIN WITH HEAVY DUTY SQUARE STRAINER

F1100-XS

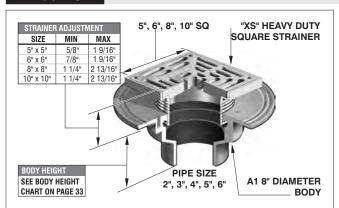

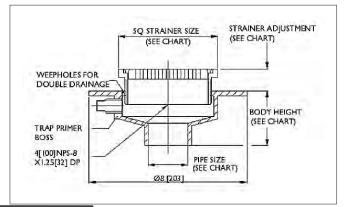

PARTS A1 BODY

ANSI/ASME RATING		LOAD RATING		
STRAINER	FREE AREA	NICKEL BRONZE	STAINLESS STEEL	DUCTILE IRON
5" x 5"	9 IN ²	5000-7499 lbs	5000-7499 lbs	OVER 10,000 lbs
6" x 6"	12 IN ²	5000-7499 lbs	5000-7499 lbs	-
8" x 8"	26 IN ²	5000-7499 lbs	5000-7499 lbs	OVER 10,000 lbs
10" x 10"	28 IN ²	-	5000-7499 lbs	-

FLOOR DRAIN WITH HEAVY DUTY SQUARE STRAINER							
MODEL NUMBER	LIST PRICE DUCTILE IRON (-4)						
F1102,3,4-XS5	7.00	5" x 5"	\$ 245.00	-			
F1102,3,4-XS6	9.50	6" x 6"	\$ 322.00	-			
F1102,3,4-XS8	11.00	8" x 8"	\$ 555.00	\$234.00			
F1102,3,4-X\$10	12.00	10" x 10"	\$ 788.00	-			
WHEN A MEMBRANE CLAMP I	WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00						


(**) Denotes strainer finish (-1, -3, or -4)

(*) Denotes strainer size (5"x 5", 6"x 6", 8"x 8" or 10"x 10")

	THE ATTEMPT WE CENTER TO THE COLLEGE, THE COLLEGE TO THE COLLEGE T							
F1100-W	F1100-W(D), F1100-X, F1100-XS AND F1100-Z OPTIONAL VARIATIONS CONTINUED FROM PAGE 42							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-49	Chrome plated strainer assembly (add to -1 only)	\$ 90.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00			
-69	Stainless steel sediment bucket (A1-SSB)	\$ 328.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00			
-90	Threaded side outlet (2", 3") (N/A in -30,-31)	\$ 168.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00			
	4" threaded side outlet (N/A in -30,-31)	\$ 168.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00			
-95	Client logo	\$ 168.00	-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$ 881.00			
-C	Membrane clamp (A1-C1)	\$ 54.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add			
-C2	High rough-in membrane clamp (A1-C2)	\$ 54.00	5	5" no hub outlet	\$ 185.00			
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	5T	5" threaded outlet	\$ 246.00			
-F4-50	4" cast iron round funnel	\$ 72.00	5X	5" inside caulk outlet	\$ 185.00			
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	6	6" no hub outlet	\$ 185.00			
-F6-50	6" cast iron round funnel	\$ 113.00	6P	6" push on outlet*	\$ 210.00			
-G-(1,3)								
-G-50 4" x 9" C.I. oval funnel \$100.00 * Add -NH to -90 for no hub outlet - No Add.								

FLOOR DRAIN WITH ELASTOMERIC FLANGE


F1100-Z

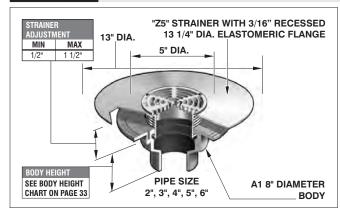

FLOOR DRAIN WITH ROUND STRAINER AND SOLID HINGED COVER							
MODEL WT. STRAINER LIST PRICE: NICKEL BRONZE (-1)							
NUMBER	Lbs	SIZE	STAINLESS STEEL (-3)				
F1102,3,4-Z5	7.00	5" DIA	\$600.00				
WILLIEN A MEMBERANE OF AME	MALIEN A MENDRANE OLAMO IC DECLIDED. ADD CLIEFLY (C) AND ADD CE (OC						

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.

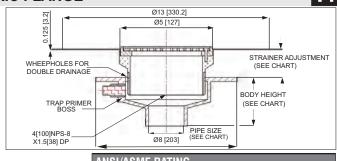

	ANSI/ASIVIE KATING						
*) Denotes strainer	STRAINER	FREE AREA	LOAD RATING				
nish (-1 or -3)	Z5-1	8 IN ²	UP TO 2000 lbs				
PARTS	Z5-3	8 IN ²	5000 - 7499 lbs				




F1100-ZS



FLOOR DRAIN WITH SQUARE STRAINER AND ELASTOMERIC FLANGE

F1100-ZS

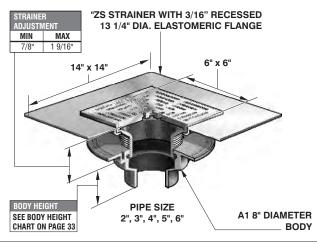

		SQ 14			
DOUBL	HOLES FOR LE DRAINAGE PRIMER	08	PIPE SIZE (SEE CHART	BDDY HEIGHT (SEE CHART)	NER ADJUSTMEN

ANSI/ASME	RATING	
STRAINER	FREE AREA	LOAD RATING
ZS-1	12 IN ²	UP TO 2000 lbs
79-3	10 INI2	5000 - 7/00 lbc

PARTS ZS-(*) A1 BODY (*) Denotes strainer finish (-1 or -3)


FLOOR DRAIN WITH SQUARE STRAINER AND ELASTOMERIC FLANGE							
MODEL NUMBER	WT. Lbs	STRAINER LIST PRICE: NICKEL BRONZE (-1) SIZE STAINLESS STEEL (-3)					
F1102,3,4-ZS	F1102,3,4-ZS 10.00 6" x 6" \$631.00						
WHEN A MEMBRANE CLAMP I	HEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$\$4.00						

OPTIONAL VARIATIONS CONTINUE ON PAGE 45

CONTINUE

F1100-90 FLOOR DRAIN WITH SIDE OUTLET

F1100-9

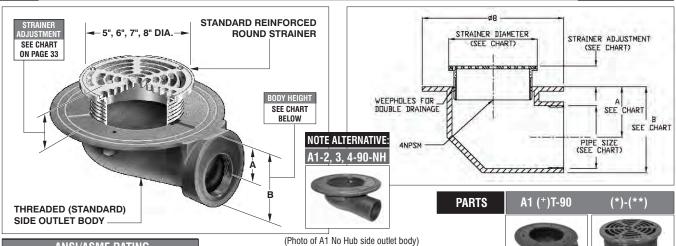

ANSI/ASME RATING FREE AREA / LOAD RATING SEE STD (*) STRAINER CHART ON PAGE 33

Add Suffix -NH for no hub outlet and specify integral A1 no hub body A1-2,3,4-90-NH-7. No Add.

FOR ALL OTHER STRAINER TYPES, TAKE STRAINER PRICE FROM PAGES 46-47 AND ADD \$168.00 FOR 2" AND 3"

THREADED SIDE OUTLET BODY AND \$100 FOR 4 THREADED SIDE OUTLET BODY							
FLOOR DRAIN WITH SIDE OUTLET							
MODEL NUMBER	WT. Lbs	OUTLET SIZE	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE DUCTILE IRON (-4)		
F1102,3-90-5	6.00	2", 3"	5" DIA	\$ 285.00	\$ 251.00		
F1104-90-5	6.00	4"	5" DIA	\$ 285.00	\$ 251.00		
F1102,3-90-6	6.50	2", 3"	6" DIA	\$ 348.00	-		
F1104-90-6	6.50	4"	6" DIA	\$ 348.00	-		
F1102,3-90-7	7.00	2", 3"	7" DIA	\$ 434.00	-		
F1104-90-7	7.00	4"	7" DIA	\$ 434.00	-		
F1102,3-90-8	7.50	2", 3"	8" DIA	\$ 555.00	\$ 295.00		
F1104-90-8	7.50	4"	8" DIA	\$ 555.00	\$ 295.00		

1 1 107-30-0	1.00		0 01/1	
WHEN A MEMBRANE CLAMP	IS REQUIRED,	ADD SUFFIX (-	C) AND ADD \$54.0	00

Denotes strainer diameter (5," 6,"7, br 8 ") (**) Denotes strainer finish (-1, -3, or -4) (+) Denotes threaded outlet (2", 3", or 4")

BODY HEIGHT		
PIPE SIZE	Α	В
2"	2 15/16"	3 7/8"
3"	3"	4 3/8"
4"	3 1/4"	4 3/8"

ABOVE DIMENSIONS ARE FOR STANDARD THREADED OR OPTIONAL NO HUB OUTLET



F1000 THROUGH F1100-90

VISUAL REFERENCE TO POPULAR OPTIONAL VARIATIONS

"-C2" HIGH ROUGH-IN MEMBRANE CLAMP





A1-C1

Because MIFAB'S * unique design allows the strainer assembly to install directly into the throat of the body, one can eliminate the membrane clamping collar and save \$54.00







-6 Security Screws

-7 Trap Seal Primer Tapping







-34 Closure Plug

OPTIONAL VARIATIONS

SUFFIX	DESCRIPTION	LIST PRICE
-3	Heavy duty Stainless Steel strainer (Type 304)	No Add
-5	Sediment bucket (A1-PB)	\$ 32.00
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00
-7	Trap seal primer tapping (except F1160 + F1170)	\$ 14.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00
-10	Decorative polished top	\$ 174.00
-11	Acid resistant epoxy coated body	\$ 212.00
-13	Galvanized body	\$ 108.00
-15	Extension (DD-50)	\$ 62.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub)	\$1,473.00
-30	Stainless Steel Body (Type 304) (2", 3", 4" No Hub) PVC Socket Connection Body (2", 3" or 4")	\$ 28.00
-31	ABS Socket Connection Body (2", 3" or 4")	\$ 28.00
-34	Closure plug (C1440 Series)	\$ 65.00
-40	Underdeck clamp (A1-C3)	\$ 108.00
-41	Sump receiver (A1-BP)	\$ 108.00
-49	Chrome plated strainer assembly (-add to 1 only)	\$ 90.00
-69	Stainless steel sediment bucket (A1-SSB)	\$ 328.00
-90	Threaded side outlet (2", 3") (N/A in -30, -31)	\$ 168.00
	4" threaded side outlet (N/A in -30, -31)	\$ 168.00
-95	Client logo	\$ 168.00
-C	Membrane clamp (A1-C1)	\$ 54.00
-C2	High rough-in membrane clamp (A1-C2)	\$ 54.00
-F4-(1,3)		\$ 152.00
-F4-50	4" cast iron round funnel	\$ 72.00
-F6-(1,3)		\$ 208.00
-F6-50	6" cast iron round funnel	\$ 113.00
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00
-G-50	4" x 9" C.I. oval funnel	\$ 100.00
-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00
-J-50	3" x 1" cast iron oval funnel	\$ 113.00
Р	Push on outlet (2", 3" or 4")	\$ 25.00
T	Threaded outlet (2", 3" or 4")	\$ 61.00
-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$ 881.00
X	Inside caulk outlet (2", 3" or 4")	No Add
5	5" no hub outlet	\$ 185.00
5T	5" threaded outlet	\$ 246.00
5X	5" inside caulk outlet	\$ 185.00
6	6" no hub outlet	\$ 185.00
6P	6" push on outlet	\$ 210.00

^{*(}Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2",3",4" sizes use same gasket).

* Add -NH to -90 for no hub outlet - No Add.

F1000 THROUGH F1100-90

A1 BODY (F1100)



Description	List Price
2", 3", 4" body only	\$ 45.00
5", 6", body only	\$230.00
2", 3", 4" body and	
A1-C2 membrane clamp	\$ 99.00

A1 BODY (F1100 W/SUFFIXES) -30(PVC) or -31(ABS)



Description	List Price
2", 3", 4" PVC (-30) body	\$ 73.00
2", 3", 4" ABS (-31) body	\$ 73.00
2", 3", 4" body and	
A1-C2 membrane clamp	\$127.00

A1-90 BODY (F1100-90)



П	Description	List Price
	2", 3" Threaded	
	Side outlet body only	\$168.00
	4" Threaded side	
	outlet body only	\$168.00

A1-90-NH BODY

MODULAR BODIES



Description	List Price
2", 3"no hub side	
outlet body only	\$168.00
4" no hub side	
outlet body only	\$168.00

F1120 INTEGRAL TRAP BODY			

400.00
482.00
687.00
54.00

F1130C INTEGRAL TRAP & CLEANOUT BODY AND MEMBRANE CLAMP



Description	List Price
2", 3", 4"	\$1675.00

F1160 INTEGRAL TRAP BODY



Description	List Price
3" Outlet	\$536.00
4" Outlet	\$536.00

F1170 INTEGRAL TRAP BODY W/AUX. INLETS



- 1		
1	Description	List Price
)	F1173-PB	\$536.00
)	F1174-PB	\$536.00

A4 PVC/ABS BODY



Description	List Price
2", 3", 4" PVC body	
only (A4-2,3,4-30-7)	\$73.00
2", 3", 4" ABS body	
only (A4-2,3,4-31-7)	\$73.00

A4 CAST IRON BODY



Description	List Price
2", 3", 4"	\$45.00
Cast iron	
body only	

Design and dimensions are subject to modification. Prices do not include applicable taxes.

STRAINERS



F1000 THROUGH F1100-90 MODULAR STRAINERS

F1100 STRAINERS

MIFAB ADJUSTABLE **STRAINERS**

ADJUSTABLE STRAINERS MAY BE USED WITH PLASTIC "FITTING" BODIES; ATTACHED WITH "NH" CLAMP TO CAST IRON OR PLASTIC PIPE OR THREADED INTO MIFAB BODY ASSEMBLIES.

FOR STRAINER DIMENSIONS AND **ADJUSTMENT RANGE, SEE F1100 SERIES ON PAGES 32 TO 44**

NOTE: -1 = NICKEL BRONZE, -2 = POLISHED BRASS,-3 = STAINLESS STEEL, -4 = DUCTILE IRON -49 = POLISHED CHROME, -50 = CAST IRON

STANDARD REINFORCED **ROUND STRAINER**



Description	Wt.	List Price	List Price
	lbs	NB (-1)	SS (-3)
5" Dia.	1.25	\$117.00	\$117.00
5" Dia.	1.25	\$207.00	
6" Dia.	1.75	\$180.00	\$180.00
7" Dia.	2.50	\$266.00	\$266.00
8" Dia.	4.00	\$396.00	\$396.00
10" Dia.	8.50	\$510.00	\$510.00
	5" Dia. 5" Dia. 6" Dia. 7" Dia. 8" Dia.	S Dia. 1.25 5" Dia. 1.25 6" Dia. 1.75 7" Dia. 2.50 8" Dia. 4.00	Ibs NB (-1)



"DD" INDIRECT WASTE HUB - 5" —



Part No.	Description	Wt. Ibs	List Price NB (-1)	List Price SS (-3)
DD	4" Hub	2.50	\$295.00	\$295.00
DD-50	4" C/Iron Hub	2.25	\$62.00	

"EF" 4" ROUND FUNNEL **STRAINER**



Part No.	Description	Wt. Ibs	List Price		
EF-(1,3)*	4" Dia. Funnel	3.25	\$269.00		
EF-50	4" Dia. Funnel	3.50	\$210.00		
EF6-(1,3)*	6" Dia. Funnel	4.25	\$325.00		
EF6-50	6" Dia. Funnel	4.50	\$240.00		
*Available in Stainless Steel or Nickel Bronze					

"EG" 4" & 9" ELONGATED **FUNNEL STRAINER**



٦	Part	Description	Wt.	List			
	No.		lbs	Price			
1	EG-(1,3)*	9" Oval	4.25	\$336.00			
	EG-50	9" Oval	5.25	\$170.00			
1	*Available in Stainless Steel or Nickel Bronze						

"F" FUNNELS ONLY*



Part	Description	Wt.	List
No.		lbs	Price
F4-(1,3)*	(4" Round funnel only)	1.50	\$152.00
F4-50	(4" Round funnel only)	1.75	\$ 72.00
F6-(1,3)*	(6" Round funnel only)	2.00	\$208.00
F6-50	(6" Round funnel only)	2.50	\$113.00
*Available ir	Stainless Steel or Nickel Bror	ıze	

"G" & "J" FUNNELS ONLY*



Part	Description	Wt.	List	Part	Description	Wt.	List
No.		lbs	Price	No.	·	lbs	Price
F4-(1,3)*	(4" Round funnel only)	1.50	\$152.00	G-(1,3)*	(4"x 9" Oval funnel only)	2.50	\$207.00
F4-50	(4" Round funnel only)	1.75	\$ 72.00	G-50	(4"x 9" Oval funnel only)	3.50	\$100.00
F6-(1,3)*	(6" Round funnel only)	2.00	\$208.00	J-(1,3)*	(3"x 1" Oval funnel only)	2.00	\$208.00
F6-50	(6" Round funnel only)	2.50	\$113.00	J-50	(3"x 1" Oval funnel only)	3.00	\$113.00
*Available in Stainless Steel or Nickel Bronze			*Available in Stainless Steel or Nickel Bronze				
*Includes H	-1083 (1/4 x 20 x 3/4 hex head	d screw and	H-1081 washer)	+Includes H-	1083 (1/4 x 20 x 3/4 hex head :	screw and F	l-1081 washer)

"ER" EXTENDED RIM STRAINER



Part No.	Description	Wt. Ibs	List Price NB (-1) SS (-3)	List Price CI (-50)
ER7	7" Diameter	4.50	\$497.00	\$111.00
ER9	9" Diameter	5.75	\$673.00	\$245.00

"FC" STRAINER WITH SURFACE MEMBRANE CLAMP



Part No.	Description	Wt. Ibs	List Price NB (-1)	List Price SS (-3)
FC7	7" Diameter	5.25	\$ 327.00	\$ 327.00
FC9	9" Diameter	6.25	\$ 602.00	\$ 602.00

"FT" STRAINER WITH RECESSED TILE FLANGE



Part	Description	Wt.	List Price	List Price
No.		Ibs	NB (-1)	SS (-3)
FT6	6" Diameter	3.25	\$938.00	\$ 938.00

"HG" ROUND HINGED STRAINER



Part No.	Description	Wt. Ibs	List Price
HG5-3	5" Diameter	2.50	\$379.00
HG7-3	7" Diameter	5.00	\$524.00
HG8-3	8" Diameter	5.50	\$573.00

"K" DOME STRAINER



Part No.	Description	Wt. Ibs	List Price
K-1	5" Diameter NB Dome	2.00	\$157.00
K-3	5" Diameter SS Dome	2.00	\$157.00
K-50	5" Diameter CI Dome	3.00	\$ 97.00

"N" TRACTOR GRATE



Part	Description	Wt.	List
No.		lbs	Price
N7-1,3	7" Dia. NB or SS	5.75	\$ 442.00
N7-4	7" Dia. Ductile Iron	6.25	\$ 109.00
N9-1,3	9" Dia. NB or SS	7.25	\$ 662.00
N9-4	9" Dia. Ductile Iron	8.00	\$ 162.00

"RS" RECTANGULAR STRAINER



4" x 8" grate pattern illustrated

Part No.	Description	Wt. Ibs	List Price NB (-1)	List Price SS (-3)
RS48	4" x 8"	4.50	\$353.00	\$353.00
RS412	4" x 12"	5.50	\$387.00	\$387.00
RS517	5" x 17"	11.00	-	\$830.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1100 STRAINERS F1000 THROUGH F1100-90 MODULAR STRAINERS

STRAINERS





Part	Description	Wt.	List Price	List Price
No.		lbs	NB (-1)	SS (-3)
S5*	5" x 5"	2.00	\$200.00	\$200.00
S6	6" x 6"	3.00	\$345.00	\$345.00
S8	8" x 8"	7.00	\$456.00	\$456.00
S10	10" x 10"	12.00	\$743.00	\$743.00
*Also a	vailable in S5-2 and	S5-49	\$275.00	

"SD" SECONDARY GRATE WITH SOLID HINGED COVER



Part No.	Description	Wt. Ibs	List Price NB (-1) SS (-3)	
SD6-(1,3)	6" x 6"	4.50	\$517.00	
*Available in Stainless Steel or Nickel Bronze				

"SHG" SQUARE HINGED **STRAINER**



Part	Description	Wt.	List Price
No.		lbs	SS (-3)
SHG6-3	6" x 6" SS	6.00	\$379.00
SHG8-3	8" x 8" SS	7 25	\$549.00

"T" ROUND STRAINER AND SOLID SECURED COVER



Part No.	Description	Wt. Ibs	SS (-3)
T6-3	6" Diameter	4.00	\$ 625.00
T7-3	7" Diameter	5.00	\$ 929.00

"VD" ROUND STRAINER AND **SOLID HINGED COVER**



Part No.	Description	Wt. Ibs	List Price SS (-3)
VD5-3	5" Diameter	3.00	\$355.00

W(D) STANDPIPE (DOME)



Part No.	Description	Wt. Ibs	List Price
A1-W-3	(Less Dome)	4.00	\$ 949.00
WD-3	(With Dome)	5.50	\$ 1129.00

"X" HEAVY DUTY ROUND **STRAINER**



Part No.	Description	Wt. Ibs	List Price NB (-1) SS (-3)	List Price DI (-4)
X5	5" Diameter	2.00	\$173.00	\$83.00
X6	6" Diameter	3.00	\$244.00	-
X8	8" Diameter	5.00	\$396.00	\$127.00

"XS" HEAVY DUTY SQUARE **STRAINER**



Part No.	Description	Wt. Ibs	List Price NB (-1) SS (-3)	List Price DI (-4)
XS5	5" x 5"	2.25	\$200.00	-
XS6	6" x 6"	3.50	\$277.00	-
XS8	8" x 8"	7.00	\$510.00	\$234.00
		•		

"Z" ROUND STRAINER WITH **ELASTOMERIC FLANGE**



•	Part No.	Description	Wt. Ibs	List Price NB (-1)	List Price SS (-3)
	Z5	5" Diameter	10.25	\$555.00	\$555.00

"ZS" SQUARE STRAINER WITH **ELASTOMERIC FLANGE**



Part	Description	Wt.	List Price	List Price
No.		Ibs	NB (-1)	SS (-3)
ZS	6" x 6"	17.50	\$586.00	\$586.00

All of MIFAB's F1100 strainers are manufactured with 4" N.P.S.M. threads so they can be installed into any 4" female pipe threaded body, coupling or accessory.

"SPR" SPACER RING FOR 5" OR 6" ROUND STRAINERS

Number Of Rings	Hardware (3 pieces required)	List Price		
1 Ring	H-1014	\$18.00		
2 Rings	H-1015	\$20.00		
3 Rings	H-1016	\$20.00		
4 Rings	H-1018	\$24.00		
4+ Rings Contact MIFAB				
NOTE: The same hardware is used for the 5" and 6" diameter spacer rings				

Part	Description	Wt.	List Price	List Price		
No.		lbs	NB (-1)	SS (-3)		
SPR-5	5" Dia. x 3/8"	0.75	\$179.00	\$179.00		
SPR-6 6" Dia. x 3/8" 1.00 \$179.00 \$179.00						
NOTE: Must order hardware separately						



Note: **SCREW THREAD SPECIFICATION** IS #10-24-UNC

The SPR spacer ring can be used to adjust the height of the strainer to match any discrepancies in finished floor grade.

Any number of rings can be added together. Each ring adds 3/8" of height.




Design and dimensions are subject to modification. Prices do not include applicable taxes.

F1120



TERRACE DRAIN WITH INTEGRAL DEEP SEAL TRAP

F1120

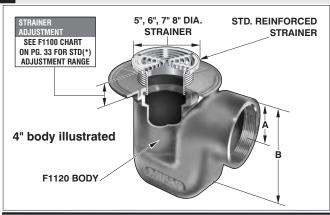





PARTS

2" body illustrated

(*) Denotes strainer diameter (5", 6", 7" or 8") (**) Denotes strainer finish (-1, -3 or -4) ANSI/ASME RATING

TERRACE DRAIN WITH INTEGRAL DEEP SEAL TRAP					
MODEL NUMBER	WT. Lbs	OUTLET SIZE	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE DUCTILE IRON (-4)
F1122,3T-5	15.00	2", 3"	5" DIA	\$ 599.00	\$565.00
F1124T-5	16.00	4"	5" DIA	\$ 804.00	\$771.00
F1122,3T-6	17.00	2", 3"	6" DIA	\$ 662.00	-
F1124T-6	18.00	4"	6" DIA	\$ 867.00	-
F1122,3T-7	17.50	2", 3"	7" DIA	\$ 748.00	-
F1124T-7	18.50	4"	7" DIA	\$ 953.00	-
F1122,3T-8	19.00	2", 3"	8" DIA	\$ 878.00	\$609.00
F1124T-8	20.00	4"	8" DIA	\$1083.00	\$815.00
*ADD SHEER WH FOR	NO HIR ADADTO	D EUB 3" VDD ¢	68 UU EUB 3" VDL	\$86.00 EOD 4" ADD \$118.00	

\$86.00, FOR 4" ADD \$118.00 WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

SEE F1100 CHART ON	
PG. 33 FOR RATINGS	
ODY HEIGHT	

BODY HEIGHT					
PIPE SIZE	Α	В			
2"*	2 1/4"	5 3/16"			
3"*	2 1/2"	5 3/16"			
4"*	2 3/4"	7 3/8"			


*ABOVE DIMENSIONS FOR STANDARD THREADED OR OPTIONAL NO HUB OUTLET

F1120, F	F1120, F1130C AND F1140C OPTIONAL VARIATIONS					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-5	Sediment bucket (A1-PB)	\$ 32.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-F4-50	4" cast iron round funnel	\$ 72.00	
-7	Trap seal primer tapping (2", 3", 4")	\$ 14.00	-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	
-8	Backwater valve (BV1254) (Cannot use with -5)	\$ 55.00	-F6-50	6" cast iron round funnel	\$ 113.00	
-11	Acid resistant epoxy coated body	\$ 171.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	
-13	Galvanized body	\$ 171.00	-G-50	4" x 9" C.I. oval funnel	\$ 100.00	
-15	Extension (DD-50)	\$ 62.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00	
-15	Extension (F1130C, F1140C) (2 pcs DD-50)	\$ 124.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00	
-AI	Auxiliary inlet (specify 1 1/2" or 2")	\$ 122.00	*-NH	No hub outlet (F1120 only)	See MI-850	
-C	Membrane clamp (except F1120) (A1-C1)	No Add				

FOR OPTIONAL STRAINERS, SEE PAGES 46-47

F1130C FLOOR DRAIN WITH INTEGRAL DEEP SEAL TRAP AND CLEANOUT

F1130C

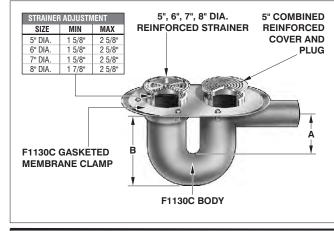







- (*) Denotes strainer diameter (5", 6", 7" or 8") (**) Denotes strainer finish (-1, -3 or -4)
 - **PARTS**

COVER ADJUSTMENT

ANSI/ASME RATING SEE F1100 CHART ON PG. 33 FOR RATINGS

FLOOR DRAIN WITH INTEGRAL DEEP SEAL TRAP AND CLEANOUT					
MODEL	WT.	OUTLET	STRAINER	LIST PRICE: NICKEL BRONZE (-1)	LIST PRICE
NUMBER	Lbs	SIZE	SIZE	STAINLESS STEEL (-3)	DUCTILE IRON (-4)
F1132,3,4C-5	41.00	2", 3", 4"	5" DIA	\$ 1848.00	\$907.00
F1132,3,4C-6	43.00	2", 3" 4"	6" DIA	\$ 1909.00	-
F1132,3,4C-7	45.00	2", 3" 4"	7" DIA	\$ 1996.00	-
F1132,3,4C-8	47.00	2", 3" 4"	8" DIA	\$ 2125.00	\$1070.00
, ,		,			•

MIN		MAX		
1 5/8"		2 5/8"		
BODY HEIGHT				
PIPE SIZE	Α	В		
2" NO HUB	5 3/8"	13 1/2"		

6"

6 1/4"

13 1/2"

13 1/2"

Design and dimensions are subject to modification. Prices do not include applicable taxes.


Visit www.mifab.com for the most recent product information.


3" NO HUB

4" NO HUB



F1140C FLOOR DRAIN WITH 7" OR 9" ROUND TRACTOR GRATE, INTEGRAL DEEP SEAL TRAP & CLEANOUT

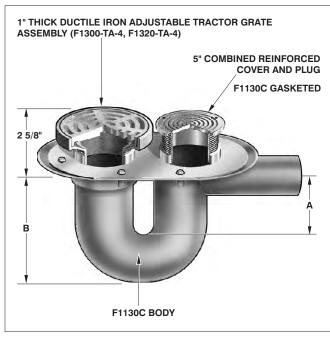

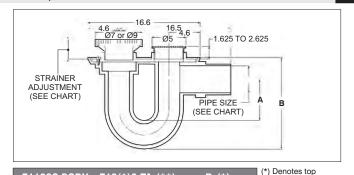

F1130C BODY F13(*)0-TA-(**) R-(*)

assembly finish (-1, -3 or -4)

PARTS

F1160 BODY

(*) Denotes strainer diameter (F1300 or F1320) (**) Denotes strainer finish (-1, -3, or -4)

SEE PAGE 48 FOR OPTIONAL VARIATIONS

ANSI/ASME RATING					
STRAINER	FREE AREA	LOAD RATING			
F1300-TA-4	11.0 IN ²	OVER 10,000 lbs			
F1320-TA-4	18.0 IN ²	OVER 10,000 lbs			


FLOOR DRAIN WITH 7" OR 9" ROUND TRACTOR GRATE, INTEGRAL DEEP SEAL TRAP & CLEANOUT					
MODEL NUMBER	WT. Lbs	NO HUB OUTLET SIZE	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE DUCTILE IRON (-4)
F1142,3,4C-7	45.00	2", 3", 4"	7" DIA	\$2117.00	\$1791.00
F1142,3,4C-9*	50.00	2", 3", 4"	9" DIA	\$2331.00	\$1980.00


BUDY HEIGHT					
Α	В				
5 3/8"	13 1/2"				
6"	13 1/2"				
6 1/4"	13 1/2"				
	A 5 3/8" 6"				

FOR OPTIONAL STRAINERS, SEE PAGES 46-47

FOR F1160 OPTIONAL VARIATIONS, SEE PAGE 50 PRISON CELL FLOOR DRAIN

F1160

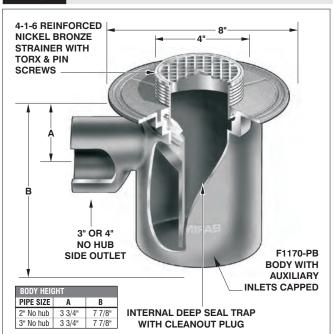

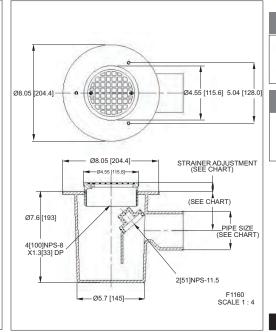

	-
Ø4.55 [115.6] 5.04 [128.0]	4-1-6
TOTAL PLANTS	
STRAINER ADJUSTMENT (SEE CHART)	
(SEE CHART)	
(SEE CHART)	
2[51]NPS-11.5	
F1160 SCALE 1 : 4	
	PARTS

PRISON CELL FLOOR DRAIN						
MODEL	WT.	NO HUB	STRAINER	LIST PRICE	LIST PRICE	
NUMBER	Lbs	OUTLET SIZE	SIZE	NICKEL BRONZE (-1)	CHROME PLATED (-49)	
F1162-4-1-6	13.00	2"	4" DIA	\$ 639.00	\$769.00	
F1163-4-1-6	13.00	3"	4" DIA	\$ 712.00	\$841.00	

ANSI/ASME RATING					
STRAINER FREE AREA LOAD RATING					
4-1-6	3.5 IN ²	UP TO 2000 lbs			

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.


^{*}ADD 3/8" TO 9" STRAINER DIAMETER AND 3/16" TO STRAINER HEIGHT FOR NB OR SS VENEER



F1170 FLOOR DRAIN WITH MULTI INLETS, ROUND STRAINER AND INTEGRAL TRAP

F1170

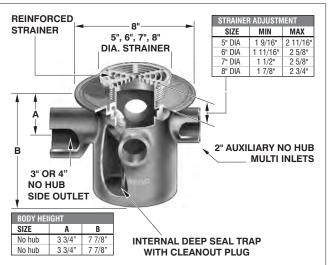

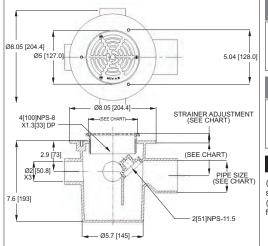







PARTS

(*) Denotes strainer size (5, 6, 7 or 8) (**) Denotes strainer) finish (-1 or -3

FLOOR DRAIN WITH MULTI INLETS, ROUND STRAINER AND INTEGRAL TRAP						
MODEL NUMBER	WT. Lbs	OUTLET SIZE	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)		
F1173,4-5	21.00	3", 4"	5" DIA	\$653.00		
F1173,4-6	21.50	3", 4"	6" DIA	\$716.00		
F1173,4-7	22.00	3", 4"	7" DIA	\$802.00		
F1173,4-8	23.00	3", 4"	8" DIA	\$932.00		
WHEN A MEMBRANE O	LAMP IS RECLUR	ED ADD SHEETY	(-C) AND ADD \$54	nn		


ANSI/ASME RATING FREE AREA / LOAD RATING SEE F1100 CHART ON PG. 33 FOR RATINGS


F1160	F1160 AND F1170 VARIATIONS:						
SUFFIX	DESCRIPTION LIST PRICE SUFFIX DESCRIPTION		DESCRIPTION	LIST PRICE			
-5	Sediment bucket (A1-PB)	\$ 32.00	-44	2" no hub side inlet (specify location)	\$122.00		
-6	Security screws (TR25 Torx & pin) (H-1039A)	\$ 25.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00		
-7	Trap seal primer tapping	\$ 14.00	-F4-50	4" cast iron round funnel	\$ 72.00		
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-F6-(1,3)	6" NB or SS round funnel	\$208.00		
-10	Decorative polished top	\$ 174.00	-F6-50	6" cast iron round funnel	\$113.00		
-11	Acid resistant epoxy coated body	\$ 230.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$207.00		
-13	Galvanized body	\$ 230.00	-G-50	4" x 9" C.I. oval funnel	\$100.00		
-15	Extension (DD-50)	\$ 62.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$208.00		
-34	Closure plug (C1440 Series)	\$ 65.00	-J-50	3" x 1" cast iron oval funnel	\$113.00		
			-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)	\$881.00		

F1170-SD FLOOR DRAIN WITH MULTI INLETS, SQUARE SOLID HINGED COVER & INTEGRAL TRAP

F1170-SD

F1170 BODY

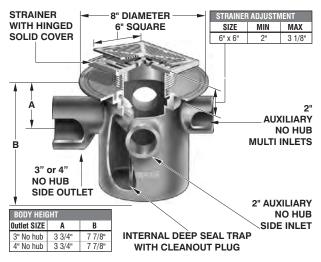

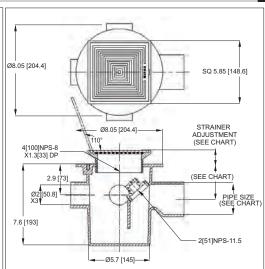



FLOOR DRAIN WITH MULTI INLETS, SQUARE STRAINER AND INTEGRAL TRAP				
MODEL NUMBER	WT. Lbs	OUTLET SIZE	STRAINER SIZE	LIST PRICE: NICKEL BRONZE (-1) STAINLESS STEEL (-3)
F1172,3,4-SD6	25.50	2", 3", 4"	6" x 6"	\$1053.00

ANSI/ASME RATING				
FREE AREA LOAD RATING				
12.0 IN ²	5,000-7,499 Lbs			

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) AND ADD \$54.00

Visit www.mifab.com for the most recent product information.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1210C FLOOR DRAIN FOR MEMBRANE FLOOR AREAS

F1210C






STRAINE	AINER ADJUSTMENT A		ANSI/ASME RATING BODY HE		EIGHT	F1210	OC OPTIONAL VARIATI	ONS
PIPE SIZE	MIN	MAX	LOAD RATING	PIPE SIZE	THREADED	SUFFIX	DESCRIPTION	LIST PRICE
2", 3", 4"	1 1/4"	2 3/8"	UP TO 2000 Lbs	2"	2 5/16"	-15	Extension (Cast iron)	\$77.00


FLOOR DRA	FLOOR DRAIN FOR MEMBRANE FLOOR AREAS					
MODEL NUMBER	WT. Lbs	STRAINER SIZE	OUTLET SIZE	AVAILABLE IN 2" THREADED	LIST PRICE CHROME PLATED (-49)	
F1212TC	3.65	4" DIA	2" I.P.S.	CONNECTION ONLY	\$ 243.00	

F1220 FLOOR DRAIN FOR NON MEMBRANE & CORE DRILL FLOOR AREAS

F1220

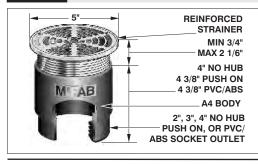

F1220 Series available with all strainers on pages 46,47. Add price of strainer to A4 body price on page 277.






(*) Denotes strainer	diameter (5", 6", 7" or 8
(**) Denotes straine	er finish (-1, -3 or -4)


FLOOR DRAIN FOR NON MEMBRANE & CORE DRILL FLOOR AREAS						
MODEL Number	WT. Lbs	OUTLET SIZE	STRAINER SIZE	NICKEL BRONZE (-1) STAINLESS STEEL (-3)	LIST PRICE DUCTILE IRON (-4)	
F1222,3,4	5.00	2,3,4" NO HUB	5" DIA	\$162.00	\$128.00	
F1222,3,4P	6.00	2,3,4" PUSH ON	5" DIA	\$187.00	\$153.00	
F1222,3,4-30/31	3.00	2,3,4" PVC/ABS	5" DIA	\$190.00	\$156.00	

ANSI/ASME RATING						
STRAINER	FREE AREA	LOAD RATING				
5" DIA DI	8 IN ²	OVER 10,000 lbs				
5" DIA NB	8 IN ²	UP TO 2000 lbs				
5" DIA SS	8 IN ²	5000-7499 lbs				

F1230 F1230 FLOOR DRAIN & F1230-WF WOOD DECK FLOOR DRAIN

F1230

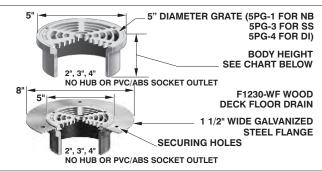

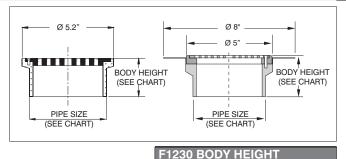

F1230 & F1230-WF FLOOR DRAIN							
MODEL	WT.	OUTLET	STRAINER	LIST PRICE: NB BODY W/NB (-1)	LIST PRICE: CI BODY (-50)		
Number	Lbs	SIZE	SIZE	STAINLESS STEEL (-3)	W/DUCTILE IRON (-4)		
F1232,3,4	4.00	2", 3", 4"		\$117.00	\$ 91.00		
F1232,3,4-WF	4.75	2", 3", 4"		\$199.00	\$160.00		
MODEL	WT.	OUTLET	STRAINER	LIST PRICE: PVC OR ABS SOCKET I	LIST PRICE: PVC OR ABS SOCKET		
NUMBER	Lbs	SIZE	SIZE	BODY W/NICKEL BRONZE (-1)	BODY W/DUCTILE IRON (-4)		
F1232,3,4-30-,31	2.00	2", 3", 4"	-	\$117.00	\$ 91.00		
F1232,3,4-WF-30,31	2.75	2", 3", 4"		\$199.00	\$160.00		

2" NO HUB	2 1/2"	2 15/16"
3" NO HUB	2 1/2"	2 15/16"
4" NO HUB	2 1/2"	2 15/16"
F1230, F	1230-WF	
ANSI/ASM	E RATING	
STRAINER	FREE AREA	LOAD RATING
NB GRATE	8 IN ²	UP TO 2000 lbs
DI GRATE	8 IN ²	OVER 10,000 lbs
SS GRATE	8 IN ²	5000-7499 lbs

PVC/ABS

Design and dimensions are subject to modification. Prices do not include applicable taxes. Vis

Visit **www.mifab.com** for the most recent product information.

PIPE SIZE | CAST IRON


STRAINER

F1240-PG-4



F1240 NON ADJUSTABLE AREA DRAIN

F1240

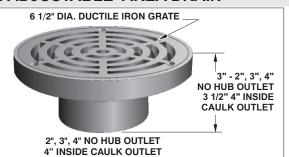

6 1/2" DIA. DUCTILE IRON GRATE	_
	3" - 2", 3", 4" NO HUB OUTLET 3 1/2" 4" INSIDE CAULK OUTLET
2", 3", 4" NO HUB OUTLET 4" INSIDE CAULK OUTLET	
F1240 ANSI/ASME RATING	Note: Flow through shank

1	SME RATING		Note
	FREE AREA	LOAD RATING	of to
	10.0 IN ²	OVER 10,000 lbs	

e: Flow through shank op assembly is equal pipe.

1	Ø6.3	
3" FOR NO HUB OUTLET. FOR 4" INSIDE CAULK OUTLET BODY HEIGHT IS 3 1/2"		0.9 Ø2 Ø3 Ø4 NO HUB OUTLET OR 4" I.C. OUTLET


F1240 NON ADJUSTABLE AREA DRAIN							
MODEL WT. OUTLET STRAINER LIST PRICE NUMBER Lbs Size Size DUCTILE IRON							
F1242,3,4	5.00	2", 3", 4"	6 1/2" DIA	\$88.00			
F1244X	5.00	4" I.C.	6 1/2"DIA	\$88.00			

F130	F1300-C, F1320-C & F1320-C-TFB OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LI	ST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-5	Sediment bucket (Std. with -TFB) (A1-MB)	\$	32.00	-150	Half grate	\$ 32.00			
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072)	\$	86.00	-175	Three quarter grate	\$ 32.00			
-7	Trap seal primer tapping	\$	14.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00			
-8	Backwater valve (2", 3", 4") (BV1250 Series) (2", 3", 4")	\$	55.00	-F4-50	4" cast iron round funnel	\$ 72.00			
-11	Acid resistant epoxy coated body	\$	212.00	-F6-(1,3)	6" NB or SS round funnel	\$ 208.00			
-12	Galvanized top assembly	\$	64.00	-F6-50	6" cast iron round funnel	\$ 113.00			
-13	All galvanized	\$	290.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00			
-15	Extension (DD-50)	\$	62.00	-G-50	4" x 9" C.I. oval funnel	\$ 100.00			
-16	Square top assembly (Except -TFB)	\$	318.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00			
-21	Secondary S.S. flat strainer (2", 3", 4") (FD-9600 series)	\$	62.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00			
-25-1	Solid Secured Hinged NB Cover (For 9" round only)	\$	174.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00			
-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$	1,473.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00			
-30	PVC Socket Connection Body (2", 3" or 4")	\$	28.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add			
-31	ABS Socket Connection Body (2", 3" or 4")	\$	28.00	-Z	Extended wide flange on top (Substitute for F1530)	\$ 881.00			
-32	2", 3", 4" Integral deep seal trap (MI-950 series)	\$	411.00	5	5" no hub outlet	\$ 185.00			
-34	Closure plug (C1440 Series)	\$	65.00	5T	5" threaded outlet	\$ 246.00			
-40	Underdeck clamp (A1-C3)	\$	108.00	5X	5" inside caulk outlet	\$ 185.00			
-41	Sump receiver (A1-BP)	\$	108.00	6	6" no hub outlet	\$ 185.00			
-90	Threaded side outlet (2", 3") (N/A in -30,-31)	\$	168.00	6P	6" push on outlet*	\$ 210.00			
-90	Threaded side outlet (4") (N/A in -30,-31)	\$	168.00						

^{*}PVC/ABS Socket bodies available for 2", 3", 4" connection sizes

F1300-C AREA DRAIN W/7" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE W/MEMBRANE CLAMP




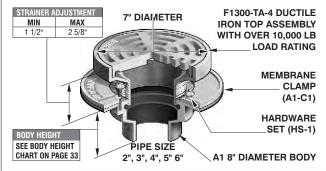

ANSI/ASME RATING							
STRAINER	FREE AREA	LOAD RATING					
F1300-TA-1	11.0 IN ²	OVER 10,000 lbs					
F1300-TA-3	11.0 IN ²	OVER 10,000 lbs					
F1300-TA-4	11.0 IN ²	OVER 10,000 lbs					

PARTS

Note: Flow through shank of top assembly is equal to 4" pipe.

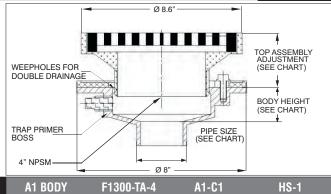

A1 BODY



F1300-TA-4





HS-1

F1300-C AREA DRAIN WITH 7" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE WITH MEMBRANE CLAMP								
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:					
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (-1)	STAINLESS STEEL (-3)			
F1302,3,4-C	12.00	7" Dia. Adj. tractor grate	\$212.00	\$462.00	\$462.00			
F1302,3,4-C-14	12.00	7" Dia. Adj. flat grate	\$212.00	\$462.00	\$462.00			
F1302,3,4-C-Y	12.00	7" Dia. Non-Adj. tractor grate	\$212.00	\$462.00	\$462.00			
F1302,3,4-C-Y-14	12.00	7" Dia. Non-Adj. flat grate	\$212.00	\$462.00	\$462.00			

WHEN NO MEMBRANE CLAMP IS REQUIRED DELETE SUFFIX (-C) AND DEDUCT \$54.00


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.


^{*}Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket. *Add -NH to -90 for no hub outlet - No Add .



F1320-C AREA DRAIN WITH 9" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE W/MEMBRANE CLAMP

F1320-0

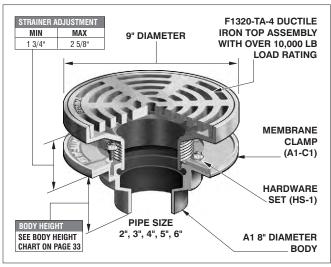

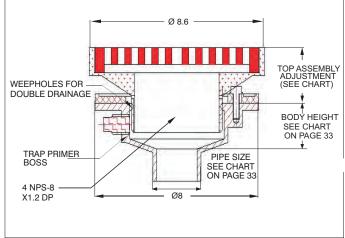

ANSI/ASME RATING							
STRAINER	FREE AREA	LOAD RATING					
F1320-TA-1	18.0 IN ²	OVER 10,000 lbs					
F1320-TA-3	18.0 IN ²	OVER 10,000 lbs					
F1320-TA-4	18.0 IN ²	OVER 10,000 lbs					

*Add 3/8" to 9" Strainer Diameter and 3/16" to Strainer Height for NB or SS Veneer PARTS

(*) Denotes strainer finish (-1, -3 or- 4)

A1 BODY F1320-TA-(*) A1-C1 HS-1

F1320-C AREA DRAIN WITH 9" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE WITH MEMBRANE CLAMP							
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:				
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE VENEER (-1)	STAINLESS STEEL VENEER (-3)		
F1322,3,4-C	17.50	9" Dia. Adj. tractor grate	\$422.00	\$780.00	\$780.00		
F1322,3,4-C-14	17.50	9" Dia. Adj. flat grate	\$380.00	\$641.00	\$641.00		
F1322,3,4-C-Y	17.50	9" Dia. Non-Adj. tractor grate	\$325.00	\$667.00	\$667.00		
F1322,3,4-C-Y-14	17.50	9" Dia. Non-Adj. flat grate	\$325.00	\$667.00	\$667.00		


WHEN NO MEMBRANE CLAMP IS REQUIRED, DELETE SUFFIX (-C) AND DEDUCT \$54.00

Note: Flow through shank of top assembly is equal to 4" pipe.

FOR F1320-C AND F1320-C-TFB OPTIONAL VARIATIONS, SEE PAGE 52


F1320-C-TFB AREA DRAIN W/9" ROUND ADJ. HEAVY DUTY TRACTOR GRATE MOUNTED IN TRUE FIT BUCKET W/MEMBRANE CLAMP

F1320-C-TFB

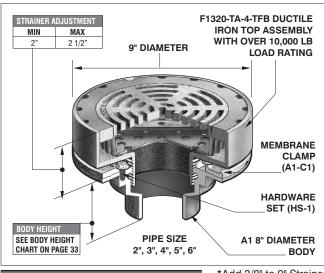

ANSI/ASME RATING					
STRAINER	FREE AREA	LOAD RATING			
F1320-TFB-4	18.0 IN ²	OVER 10,000 lbs			

*Add 3/8" to 9" Strainer Diameter and 3/16" to Strainer Height for NB or SS Veneer

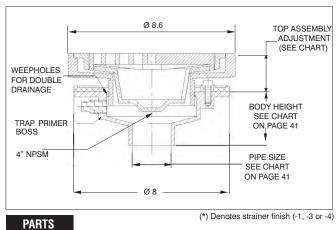

A1 BODY F1320-TA-(*)-TFB A1-C1 HS-1

(*) Denotes strainer finish (-1, -3 or -4)

F1320-C-TFB AREA DRAIN WITH 9" ROUND ADJ. HEAVY DUTY TRACTOR GRATE MOUNTED IN TRUE FIT BUCKET W/MEMBRANE CLAMP					
MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:				DY WITH:	
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE VENEER (-1)	STAINLESS STEEL VENEER (-3)
F1322,3,4-C-TFB	19.00	9" Dia. Adj. tractor grate	\$380.00	\$702.00	\$702.00


WHEN NO MEMBRANE CLAMP IS REQUIRED, DELETE SUFFIX (-C) AND DEDUCT \$54.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1330C AREA DRAIN WITH 9" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE & DEEP SUMP

F1330C

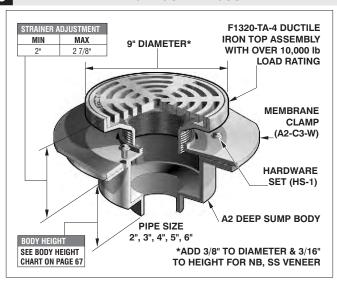

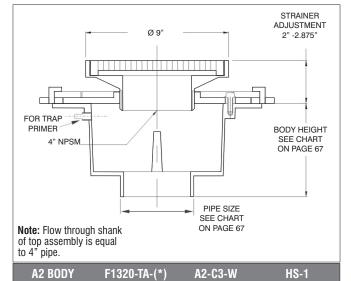

ANSI/ASME RATING					
STRAINER	FREE AREA	LOAD RATING			
F1320-TA-1	18.0 IN ²	OVER 10,000 lbs			
F1320-TA-3	18.0 IN ²	OVER 10,000 lbs			
F1320-TA-4	18.0 IN ²	OVER 10,000 lbs			

SEE PAGE 55 FOR OPTIONAL VARIATIONS

PARTS









(*) Denotes Strainer finish (-1, -3 or -4	4
---	---

AREA DRAIN WITH 9" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE & DEEP SUMP						
MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:					DDY WITH:	
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4) NICKEL BRONZE (VENEER) (-1) STAINLESS STEEL (VENEER) (-3)			
F1332,3,4,6C	37.00	9" Dia. Adj. tractor grate	\$377.00	\$633.00	\$ 633.00	

F1340 AREA DRAIN WITH 12" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE

F1340

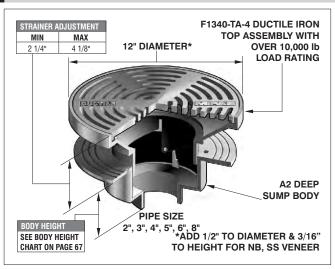

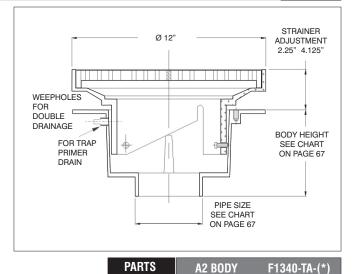

ANSI/ASME RATING				
STRAINER	FREE AREA	LOAD RATING		
F1340-TA-1	33.0 IN ²	OVER 10,000 lbs		
F1340-TA-3	33.0 IN ²	OVER 10,000 lbs		
F1340-TA-4	33.0 IN ²	OVER 10,000 lbs		

SEE PAGE 55 FOR OPTIONAL VARIATIONS

AZ DODÍ TIO40-

(*)	Denotes	Strainer	finish	(-1,	-3 or	-4)

F1340 AREA DRAIN WITH 12" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE						
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:			
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)	
F1342,3,4,6,8	39.00	12" Dia. Adj. tractor grate	\$ 669.00	\$ 1120.00	\$ 1120.00	
F1342,3,4,6,8-14	39.00	12" Dia. Adj. flat grate	\$ 578.00	\$ 1148.00	\$ 1148.00	
F1342,3,4,6,8-Y	39.00	12" Dia. Non-Adj. tractor grate	\$ 485.00	\$ 685.00	\$ 685.00	
F1342,3,4,6,8-Y-14	39.00	12" Dia. Non-Adj. flat grate	\$ 392.00	\$ 635.00	\$ 635.00	


When a membrane clamp is required add Suffix (-C), No Add


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1340-TFB AREA DRAIN WITH 12" ROUND ADJ. HEAVY DUTY TRACTOR GRATE MOUNTED IN TRUE FIT BUCKET

F1340-TFB

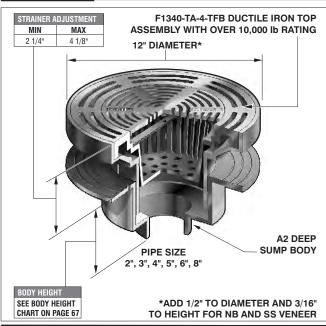

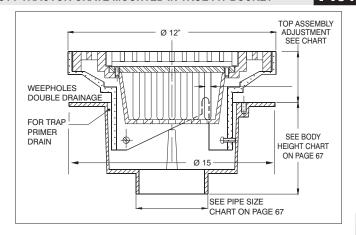



F1340-TFB AREA DRAIN WITH 12" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE WITH MEMBRANE CLAMP						
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:			
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)	
F1342,3,4,6-TFB	45.00	12" Dia. Adj. tractor grate	\$ 802.00	\$1187.00	\$1187.00	
F1348-TFB	48.00	12" Dia. Adj. tractor grate	\$ 966.00	\$1348.00	\$1348.00	

For F1352,3,4,6-TFB, add A3 body list price of \$314.00 to the above price. WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C), NO ADD

	F1340 AND F1340-TFB VARIATIONS:			
SUFFIX	DESCRIPTION	F1330C	F1340	F1340-TFB
-5	Sediment bucket	\$ 136.00	\$ 136.00	Standard
-6	Vandal proof secured grate (TR30 Torx and Pin) (H-1072)	\$ 111.00	\$ 111.00	\$ 111.00
-7	Trap seal primer tapping	\$ 14.00	\$ 14.00	\$ 14.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	\$ 55.00	\$ 55.00
-11	Acid resistant epoxy coating	\$ 278.00	\$ 291.00	\$ 291.00
-12	Galvanized top assembly	\$ 101.00	\$ 106.00	\$ 106.00
-13	All galvanized	\$ 201.00	\$ 201.00	\$ 210.00
-15	Extension, Per 2"	\$ 150.00	\$ 181.00	\$ 181.00
-16	Square top	See F1430C	See F1440	N/A
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	\$ 62.00	\$ 62.00
-24	Solid secured cover	\$ 379.00	\$ 391.00	N/A
-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$ 2403.00	\$ 2403.00	\$2403.00
-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00	\$ 28.00	\$ 28.00
-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00	\$ 28.00	\$ 28.00
-32	2", 3", 4" Integral deep seal trap(MI-950 Series)	\$ 411.00	\$ 411.00	\$ 411.00
-34	Closure plug (C1440 Series)	\$ 65.00	\$ 65.00	\$ 65.00
-35	Stainless Steel mesh over bucket	\$ 329.00	\$ 329.00	\$ 329.00
-40	Underdeck clamp (A2-C3)	\$ 108.00	\$ 108.00	\$ 108.00
-41	Sump receiver (A2-BP)	\$ 108.00	\$ 108.00	\$ 108.00
-90	Threaded side outlet (2", 3", 4") (N/A in -30,-31)	\$ 123.00	\$ 148.00	\$ 148.00
-150	Half grate	\$ 63.00	\$ 63.00	\$ 63.00
-175	Three quarter grate	\$ 63.00	\$ 63.00	\$ 63.00
-C	Membrane clamp (A2-C3)	Standard	No Add	No Add
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	\$ 152.00	\$ 152.00
-F4-50	4" cast iron round funnel	\$ 72.00	\$ 72.00	\$ 72.00
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	\$ 208.00	\$ 208.00
-F6-50	6" cast iron round funnel	\$ 113.00	\$ 113.00	\$ 113.00
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	\$ 207.00	\$ 207.00
-G-50	4" x 9" C.I. oval funnel	\$ 100.00	\$ 100.00	\$ 100.00
-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00	\$ 208.00	\$ 208.00
-J-50	3" x 1" cast iron oval funnel	\$ 113.00	\$ 113.00	\$ 113.00
D 00	Push on outlet (2", 3" or 4")	\$ 25.00	\$ 25.00	\$ 25.00
Γ	Threaded outlet (2", 3" or 4")	\$ 61.00	\$ 61.00	\$ 61.00
΄	Inside caulk outlet (2", 3", or 4")	No Add	No Add	No Add
-Z	Extended wide elastomeric flange on top (F1530-TA or F1540-TA)	\$ 881.00	\$ 881.00	\$ 881.00

^{*}PVC/ABS Socket bodies available for 2", 3", 4" connection sizes

^{*}Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.

^{*}Add -NH to -90 for no hub outlet - No Add.


Design and dimensions are subject to modification. Prices do not include applicable taxes.


F1340-Y-Q



SHALLOW BODY AREA DRAIN WITH 12" ROUND, NON ADJUSTABLE HEAVY DUTY TRACTOR GRATE

F1340-Y-Q

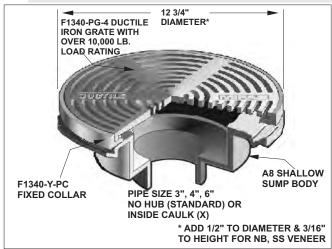

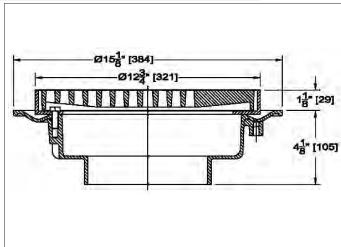

ANSI / ASME RATING					
STRAINER	FREE AREA	LOAD RATING			
F1340-Q-TA-1	33.0 IN ²	OVER 10,000 lbs.			
F1340-Q-TA-3	33.0 IN ²	OVER 10,000 lbs.			
F1340-Q-TA-4	33.0 IN ²	OVER 10,000 lbs.			

PARTS	H-1136	F1340-Y-Q-PC-50	A8 BODY	F1340-PG-(*)
	7777	0		

(*) Denotes Strainer Finish (-1,-3 or -4)

F1340-Y-Q SHALI	F1340-Y-Q SHALLOW BODY AREA DRAIN WITH 12" ROUND, NON ADJUSTABLE HEAVY DUTY TRACTOR GRATE						
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:				
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER)(-1)	STAINLESS STEEL (VENEER)(-3)		
F1343,4,6-Y-Q-14	32.00	12" DIA. Non-Adj. flat grate	\$ 476.00	\$973.00	\$973.00		
F1343,4,6-Y-Q	32.00	12" DIA. Non-Adj. tractor grate	\$ 476.00	\$973.00	\$973.00		

When a membrane clamp is required add Suffix (-C), No Add

F1340-Y-Q (OPTIONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket	\$ 159.00
-6	Vandal proof secured grate (TR30 Torx and Pin) (H-1072)	\$ 84.00
-7	Trap seal primer tapping	\$ 18.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00
-11	Acid resistant epoxy coating	\$ 291.00
-12	Galvanized top assembly	\$ 106.00
-13	All galvanized	\$ 291.00
-15	Extension (per 2")	\$ 181.00
-16	Square top	See F1440-Y-Q
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-24	Solid secured cover	\$ 391.00
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub only)	\$ 2403.00
-32	2", 3", or 4" integral deep seal trap (MI-950 Series)	\$ 411.00
-34	Closure plug (C1440 Series)	\$ 65.00
-35	Stainless steel mesh over bucket	\$ 279.00
-40	Underdeck clamp (A8-UDC)	\$ 108.00
-41	Sump receiver (A8-BP)	\$ 108.00
-150	Half grate	\$ 63.00
-175	Three quarter grate	\$ 63.00
-C	Membrane clamp (F1340-Y-PC-50)	No Add
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00
-F4-50	4" cast iron round funnel	\$ 72.00
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00
-F6-50	6" cast iron round funnel	\$ 113.00
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00
-G-50	4" x 9" cast iron oval funnel	\$ 100.00
-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00
-J-50	3" x 1" cast iron oval funnel	\$ 113.00
Χ	Inside caulk outlet (2", 3" or 4")	No Add
-Z	Extended wide elastomeric flange on top (F1540-TA)	\$ 881.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



OUR REPUTATION IS STAINLESS

KEY FEATURES AND BENEFITS:

- Modular system with fewer parts, reduced confusion on job site, and fewer returns.
- Standard A1 body serves as a floor drain, cleanout and roof drain. This reduces inventory.
- Cast 304 stainless steel grates and cleanout covers for same price as nickel bronze. Prevents dishing, corrosion and discoloration.
- 4" NPSM threads at top of A1 body allows drain to be installed without membrane clamp for nonwaterproof slab on grade floors.
- A1 body with no hub connection is only 3" deep for compact rough-in.
- A1 body always shipped tapped and plugged for trap seal primer connection.
- All area drain grates are adjustable and made of ductile iron with a load rating of over 10,000 lbs. for maximum on site adjustment and load bearing.
- Closet and lavatory carriers designed and packaged with features to save installation time and handling cost.

NOW YOU CAN SPECIFY STAINLESS STEEL AT THE SAME PRICE AS NICKEL BRONZE. SPECIFY MIFAB STAINLESS FOR A LASTING IMPRESSION



AREA DRAIN FEATURES




MIFAB AREA DRAIN STANDARD BENEFITS

- 4 Ductile iron grate offers greater than 10,000 lb. load rating.
- 4 Non-tilt grate is safer in all traffic areas.
- 4 3/8" slots prevent large debris from entering the drainage system.
- 4 Fully adjustable top assembly for ease of installation.
- 4 Stainless Steel at the same price as Nickel Bronze.


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1350 AREA DRAIN WITH 12" ROUND ADJ. HEAVY DUTY TRACTOR GRATE & EXTRA DEEP SUMP

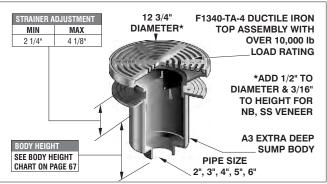



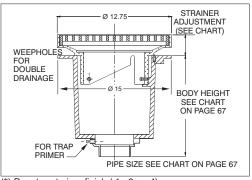

	. , , , , , , ,		(*) Denotes strainer finish (-)	1, -3 or -4)				
H 12" RC	12" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE & EXTRA DEEP SUMP							
WT.	STRAINER	LIST PR	ICE LACQUERED CAST IRON BO	DY WITH:				
Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VI	ENEER) (-3)			
50.00	12" Dia. Adj. tractor grate	\$ 768.00	\$1196.00	\$1196.00				

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C), NO ADD.

AREA DRAIN WITH 12"

MODEL **NUMBER**


F1352,3,4,6

The first transfer of the control of						
F1350, F	1360 AND F1360-TFB OPTIONAL VARIATIONS:			■ CONTINUE ■ ►		
SUFFIX	DESCRIPTION	F1350	F1360	F1360-TFB		
-5	Sediment bucket	\$ 136.00	\$ 136.00	Standard		
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072B)	\$ 111.00	\$ 111.00	\$ 111.00		
-7	Trap seal primer tapping	\$ 14.00	\$ 14.00	\$ 14.00		
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	\$ 55.00	\$ 55.00		
-11	Acid resistant epoxy coating	\$ 450.00	\$ 230.00	\$ 450.00		
-12	Galvanized top assembly	\$ 228.00	\$ 116.00	\$ 228.00		
-13	All galvanized	\$ 457.00	\$ 450.00	\$ 457.00		
-15	Extension, Per 2"	\$ 181.00	\$ 181.00	\$ 181.00		
-16	Square top	See F1450	See F1460	N/A		
-17	with trap and cleanout (MI-OS Series)	See MI-OS	See MI-OS	See MI-OS		
-18	with trap and oil cone and cleanout (MI-OS Series)	See MI-OS	See MI-OS	See MI-OS		
-20	Secondary dome strainer (FS1500-PD)	\$ 83.00	\$ 83.00	\$ 83.00		
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	\$ 62.00	\$ 62.00		
-24	Solid secured cover	\$ 391.00	\$ 601.00	N/A		
-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$2403.00	\$2403.00	\$ 2403.00		
-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00	\$ 28.00	\$ 28.00		
-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00	\$ 28.00	\$ 28.00		

*PVC/ABS Socket bodies available for 2", 3", 4" connection sizes See next page for more options.

F1350-Y-36 GARBAGE CAN WASH DRAIN W/12" ROUND HEAVY DUTY TRACTOR GRATE & EXTRA DEEP SUMP

F1350-Y-36

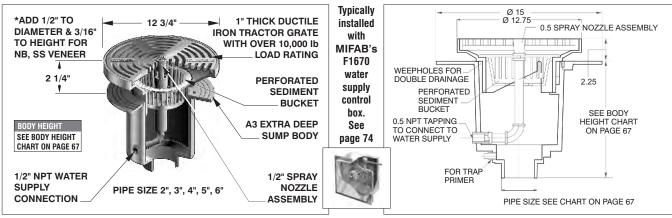

F1350-Y-36 GARBAGE CAN WASH DRAIN WITH 12" ROUND HEAVY DUTY TRACTOR GRATE AND EXTRA DEEP SUMP						
MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:						
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)	
F1352,3,4,6-Y-36	F1352,3,4,6-Y-36 55.00 12" Dia. Adj. tractor grate \$2297.00 \$2694.00 \$2694.00					
WHEN A MEMBRANE CLAN	WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C), NO ADD.					

F1350-\	7-36 OPTIONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PR
-13	All galvanized	\$605


F1350-Y	F1350-Y-36 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-13	All galvanized	\$695.00	T	Threaded outlet	\$ 61.00				
Р	Push on outlet	\$ 28.00	X	Inside caulk	\$ 61.00				
			-11	Acid resistant epoxy coating	\$695.00				


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1360 AREA DRAIN WITH 16" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE

F1360

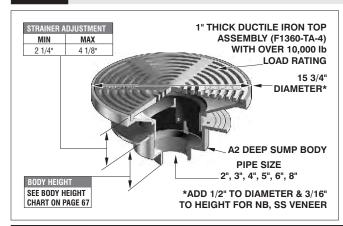

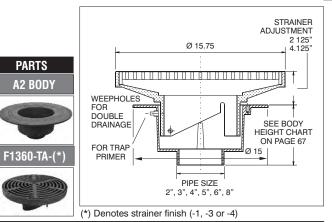


AREA DRAIN WITH 16" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE							
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:				
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4) NICKEL BRONZE (VENEER) (-1) STAINLESS STEEL (V				
F1362,3,4,6,8	53.00	16" Dia. Adj. tractor grate	\$1728.00	\$2814.00	\$2814.00		
F1362,3,4,6,8,8-Y	53.00	16" Dia. Non-Adj. tractor grate	\$1881.00	\$4111.00	\$4111.00		
F1362,3,4,6,8,-Y-14	53.00	16" Dia. Non-Adj. flat grate	\$1728.00	\$3690.00	\$3690.00		
WHEN A MEMBRANE CLAMP	WHEN A MEMBRANE CLAMP IS RECUIRED AND SUFFIX (.C.) NO AND						


THE WILLIAM TO THE GETTIN TO THE GOTT IN (0), THE FOREST									
F1350, F	F1350, F1360 AND F1360-TFB OPTIONAL VARIATIONS CONTINUED FROM PAGE 58								
SUFFIX	DESCRIPTION	F1350	F1360	F1360-TFB					
-32	2", 3", 4" Integral deep seal trap(MI-950 Series)	\$ 411.00	\$ 411.00	\$ 411.00					
-34	Closure plug (C1440 Series)	\$ 65.00	\$ 65.00	\$ 65.00					
-35	Stainless Steel mesh over bucket	\$ 274.00	\$ 274.00	\$ 481.00					
-40	Underdeck clamp (A2-C3)	\$ 108.00	\$ 108.00	\$ 108.00					
-41	Sump receiver (A2-BP)	\$ 108.00	\$ 108.00	\$ 108.00					
-90	Threaded side outlet (2", 3", 4") (N/A in -30,-31)	\$ 148.00	\$ 148.00	\$ 148.00					
-150	Half grate	\$ 63.00	\$ 63.00	\$ 63.00					
-175	Three quarter grate	\$ 63.00	\$ 63.00	\$ 63.00					
-C	Membrane clamp (A2-C3)	No Add	No Add	No Add					
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	\$ 152.00	\$ 152.00					
-F4-50	4" cast iron round funnel	\$ 72.00	\$ 72.00	\$ 72.00					
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	\$ 208.00	\$ 208.00					
-F6-50	6" cast iron round funnel	\$ 113.00	\$ 113.00	\$ 113.00					
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	\$ 207.00	\$ 207.00					
-G-50	4" x 9" C.I. oval funnel	\$ 100.00	\$ 100.00	\$ 100.00					
-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00	\$ 208.00	\$ 208.00					
-J-50	3" x 1" cast iron oval funnel	\$ 113.00	\$ 113.00	\$ 113.00					
Р	Push on outlet (2", 3" or 4")	\$ 25.00	\$ 25.00	\$ 25.00					
T	Threaded outlet (2", 3" or 4")	\$ 61.00	\$ 61.00	\$ 61.00					
-Z	Extended wide elastomeric on top (F1540-TA or F1550-TA)	\$ 881.00	\$ 881.00	\$ 881.00					

^{*}Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket. * Add -NH to -90 for no hub outlet - No Add

F1360-TFB AREA DRAIN W/16" ROUND ADJ. HEAVY DUTY TRACTOR GRATE MOUNTED IN TRUE FIT BUCKET

F1360-TFB

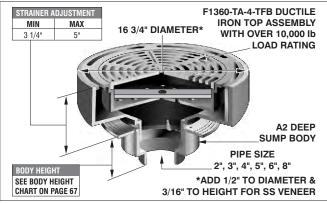

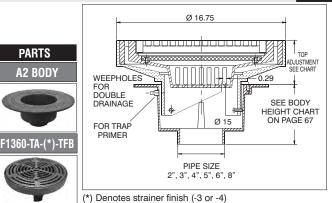


AREA DRAIN WITH 16" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE MOUNTED IN TRUE FIT BUCKET						
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:			
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	STAINLESS STEEL (VENEER) (-3)		
F1362,3,4,6,8-TFB	62.00	16" Dia. Adj. tractor grate	\$1968.00	\$4283.00		


WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C), NO ADD

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



AREA DRAIN W/16" ROUND ADJ. HEAVY DUTY TRACTOR GRATE & EXTRA DEEP SUMP

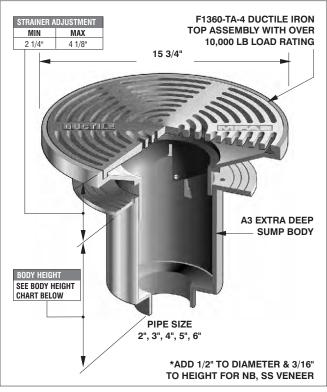

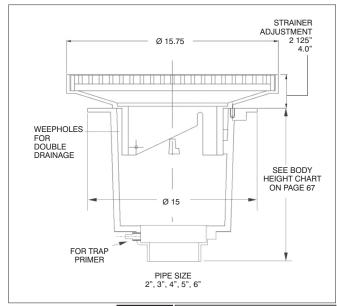

	PARTS	A3 BODY	F1360-TA-(*)
(*) Denotes strainer finish (-1, -3 or -4)	9	

AREA DRAIN WITH 16" ROUND ADJUSTABLE HEAVY DUTY TRACTOR GRATE & EXTRA DEEP SUMP						
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:			
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)	
F1372,3,4,6	64.00	16" Dia. Adj. tractor grate	\$1897.00	\$3925.00	\$3925.00	
F1372,3,4,6-Y	64.00	16" Dia. Non-Adj. tractor grate	\$1897.00	\$3925.00	\$3925.00	
F1372,3,4,6-Y-14	64.00	16" Dia. Non-Adj. flat grate	\$1897.00	\$3925.00	\$3925.00	

WHEN A MEMBRA	NE CLAMP IS	REQUIRED, ADD	SUFFIX (-C),	NO ADD.
---------------	-------------	---------------	--------------	---------

F1370	F1370 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-5	Sediment bucket (A2-MB)	\$ 136.00	-35	SS mesh over bucket	\$ 274.00		
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072B)	\$ 111.00	-40	Underdeck clamp (A2-C3)	\$ 108.00		
-7	Trap seal primer tapping	\$ 14.00	-41	Sump receiver (A2-BP)	\$ 108.00		
-8	Backwater valve (BV1250 Series)(2", 3",4")	\$ 55.00	-90	Threaded side outlet (N/A in -30,-31)	\$ 148.00		
-11	Acid resistant epoxy coating	\$ 290.00	-150	Half grate	\$ 63.00		
-12	Galvanized top assembly	\$ 263.00	-175	Three quarter grate	\$ 63.00		
-13	All galvanized	\$ 290.00	-C	Membrane clamp (A2-C3)	No Add		
-15	Extension (per 2") (A2-XY)	\$ 181.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00		
-16	Square top	See F1470	-F4-50	4" cast iron round funnel	\$ 72.00		
-17	with trap and cleanout (see MI-OS Series)	(See MI-OS)	-F6-(1,3)	6" NB or SS round funnel	\$ 208.00		
-18	with trap and oil cone and cleanout (see MI-OS Series)	(See MI-OS)	-F6-50	6" cast iron round funnel	\$ 113.00		
-20	Secondary dome strainer (FS1500-PD)	\$ 83.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00		
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	-G-50	4" x 9" Cast iron oval funnel	\$ 100.00		
-28	Stainless Steel Body (Type 304) (2". 2", 4" No Hub only)	\$4807.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00		
-30	PVC Socket Connection Body* (2", 3" or 4")	\$ 28.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00		
-31	ABS Socket Connection Body* (2", 3" or 4")	\$ 28.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00		
-32	2", 3", 4" Integral deep seal trap (MI-950 Series)	\$ 411.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00		
-34	Closure plug (C1440 Series)	\$ 65.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add		
			-Z	Extended wide elastomeric flange on top (F1550-TA)	\$ 881.00		

^{*}PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes

^{*} Add -NH to -90 for no hub outlet - No Add.



BODY HE	BODY HEIGHT A3 BODY BASED DRAINS								
PIPE SIZE	NO HUB Standard	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30/-31)				
2"	12 1/4"	12 1/2"	11 1/2"	13"	11 3/4"				
3"	12 1/4"	12 5/8"	11 7/8"	13"	12 1/2"				
4"	12 3/8"	12 5/8"	11 7/8"	13"	12 5/8"				
5"	12 3/8"	-	11 7/8"	16"	-				
6"	12 5/8"	16"	-	-	-				

The A3 body is manufactured as a transition body and requires an A1 body assembled to it to form the outlet connection. Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most




F1420-C AREA DRAIN WITH 8" SQUARE ADJUSTABLE HEAVY DUTY TRACTOR GRATE

DUCTILE

\$530.00

F1420-0

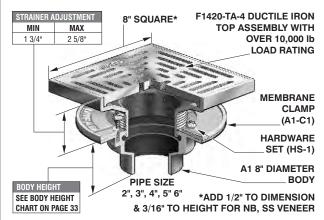

F1420-C AREA DRAIN WITH 8" SQUARE ADJUSTABLE HEAVY DUTY


STRAINER

DESCRIPTION

8" x 8" Adj. tractor grate

8" x 8" Non-Adj. flat grate

8" x 8" Non-Adj. tractor grate

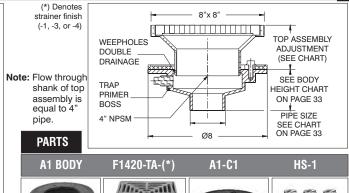

R		
UTY TRACTOR (GRATE	
LIS	T PRICE LACQUERED CAST IRON I	BODY WITH:
TILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)
\$530.00	\$ 1106.00	\$ 1106.00
\$530.00	\$ 1106.00	\$ 1106.00

\$ 1106.00

\$ 1106.00

WHEN NO MEMBRANE CLAMP IS REQUIRED, DELETE SUFFIX (-C) AND DEDUCT \$54.00

WT.

Lbs

17.00

17.00

17.00

MODEL

NUMBER

F1422,3,4,6-C-Y-14

F1422,3,4,6-C-Y

F1422,3,4,6-C


F1420-	F1420-C & F1430C OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	F1420-C	F1430C	SUFFIX	DESCRIPTION	F1420-C	F1430C	
-5	Sediment bucket (A1-MB)	\$ 32.00	\$ 32.00	-90	Threaded side outlet (2", 3") (NA in -30,-31)	\$168.00	\$148.00	
-6	Vandal proof secured grate (TR30 Torx and pin H-107	2)\$ 111.00	\$ 111.00	-90	Threaded side outlet (4") (NA in -30,-31)	\$168.00	\$148.00	
-7	Trap seal primer tapping	\$ 14.00	\$ 14.00	-150	Half grate	\$ 63.00	\$ 63.00	
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	\$ 55.00	-175	Three quarter grate	\$ 63.00	\$ 63.00	
-11	Acid resistant epoxy coating	\$ 291.00	\$ 278.00	-F4-(1,3)	4" NB or SS round funnel	\$152.00	\$152.00	
-12	Galvanized top assembly	\$ 128.00	\$ 128.00	-F4-50	4" cast iron round funnel	\$ 72.00	\$ 72.00	
-13	All galvanized	\$ 317.00	\$ 201.00	-F6-(1,3)	6" NB or SS round funnel	\$208.00	\$208.00	
-15	Extension (DD-50)	\$ 62.00	\$ 62.00	-F6-50	6" cast iron round funnel	\$113.00	\$113.00	
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	\$ 62.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$207.00	\$207.00	
-28	Stainless Steel body (Type 304) (2", 3", 4" No Hub only)	\$1473.00	\$ 2403.00	-G-50	4" x 9" Cast iron oval funnel	\$100.00	\$100.00	
-30	PVC Socket Connection Body (2", 3", 4")	\$ 28.00	\$ 28.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$208.00	\$208.00	
-31	ABS Socket Connection Body (2", 3", 4")	\$ 28.00	\$ 28.00	-J-50	3" x 1" cast iron oval funnel	\$113.00	\$113.00	
-32	2", 3", 4" Integral deep seal trap (MI-950 Series)	\$ 411.00	\$ 411.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00	\$ 25.00	
-34	Closure plug (C1440 Series)	\$ 65.00	\$ 65.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00	\$ 61.00	
-40	Underdeck clamp (A1-C3)	\$ 108.00	\$ 108.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add	No Add	
-41	Sump receiver (A1-BP)	\$ 108.00	\$ 108.00	-Z	Extended wide elastomeric flange on body	\$881.00	\$881.00	
					(20" x 20" x 1/4" dia.)			


^{*}PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes

*Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket. *Add -NH to -90 for no hub outlet - No Add .

F1430C AREA DRAIN 8" SQUARE ADJUSTABLE HEAVY DUTY TRACTOR GRATE AND DEEP SUMP



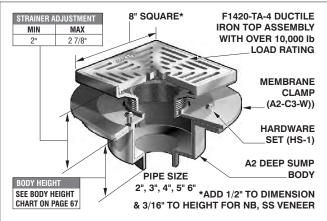

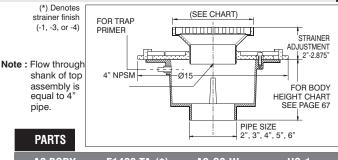


A2 BODY	F1420-TA-(*)	A2-C3-W	HS-1
9			777


F1430C AREA DRAIN WITH 8"x 8" SQUARE ADJUSTABLE HEAVY DUTY TRACTOR GRATE & DEEP SUMP					
MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:					
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)
F1432,3,4,-C	28.00	8" x 8" Adj. tractor grate	\$ 616.00	\$ 987.00	\$ 987.00
F1432,3,4,-C-Y 28.00 8" x 8" Non-Adj. tractor grate \$ 616.00 \$ 987.00 \$ 987.00					
Design and dimensions a	Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.				



F1440 AREA DRAIN WITH 12"SQ. ADJ. HEAVY DUTY HINGED TRACTOR GRATE

F1440

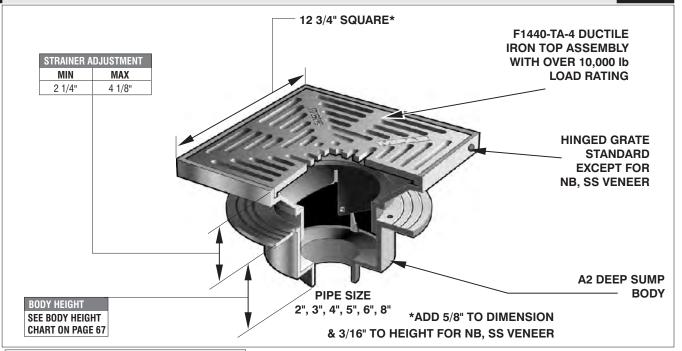



(*) Denotes strainer finish (-1, -3, or -4)



AREA DRAIN WITH 12" SQUARE ADJUSTABLE HEAVY DUTY HINGED TRACTOR GRATE							
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:				
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4) NICKEL BRONZE (VENEER) (-1) STAINLESS STEEL (VENEER) (-3				
F1442,3,4,6	52.75	12" x 12" Adj. tractor grate	\$ 945.00	\$1621.00	\$1621.00		
F1442,3,4,6-Y	52.75	12" x 12" Non-Adj. tractor grate	\$ 588.00	\$1229.00	\$1229.00		
F1442,3,4,6-Y-14	52.75	12" x 12" Non-Adj. flat grate	\$ 588.00 \$1229.00 \$1229.00				
		with shallow body					

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C), NO ADD	-
F1440 OPTIONAL VARIATIONS:	


F1440	F1440 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-5	Sediment bucket (A2-MB)	\$ 136.00	-41	Sump receiver (A2-BP)	\$ 108.00		
-6	Vandal proof secured grate (TR30 Torx and Pin) (H-1072)	\$ 111.00	-90	Threaded side outlet (2", 3", 4") (N/A in -30, -31)	\$ 148.00		
-7	Trap seal primer tapping	\$ 14.00	-150	Half grate	\$ 63.00		
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-175	Three quarter grate	\$ 63.00		
-11	Acid resistant epoxy coating	\$ 291.00	-C	Membrane clamp (A2-C3)	No Add		
-12	Galvanized top assembly	\$ 327.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00		
-13	All galvanized	\$ 516.00	-F4-50	4" cast iron round funnel	\$ 72.00		
-15	Extension (per 2") (A2-XY)	\$ 181.00	-F6-(1,3)	6" NB or SS round funnel	\$ 208.00		
-20	Secondary dome strainer (FS1500-PD)	\$ 86.00	-F6-50	6" cast iron round funnel	\$ 113.00		
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00		
-24	Solid secured cover	\$ 71.00	-G-50	4" x 9" cast iron oval funnel	\$ 100.00		
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub only)	\$2403.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00		
-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00		
-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00		
-32	2", 3", or 4" integral deep seal trap (MI-950 Series)	\$ 411.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00		
-34	Closure plug (C1440 Series)	\$ 65.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add		
-35	Stainless steel mesh over bucket	\$ 329.00	-Z	Extended wide elastomeric flange on body (20" x 20" x 1/4" thick)	\$ 881.00		
-40	Underdeck clamp (A2-C3)	\$ 108.00	8	8" No hub outlet	No Add		


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



F1440-Y-Q SHALLOW BODY AREA DRAIN WITH 12" SQUARE, NON ADJUSTABLE HEAVY DUTY TRACTOR GRATE



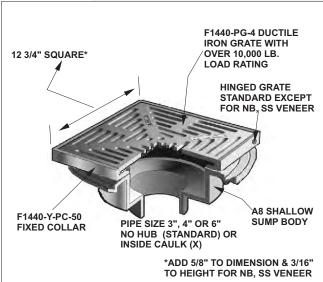

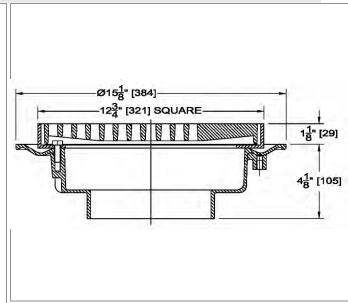

ANSI / ASME RATING							
STRAINER	FREE AREA	LOAD RATING					
F1440-Q-TA-1	40.0 IN ²	OVER 10,000 lbs.					
F1440-Q-TA-3	40.0 IN ²	OVER 10,000 lbs.					
F1440-Q-TA-4	40.0 IN ²	OVER 10,000 lbs.					

PARTS	H-1136	F1440-Y-PC-50	A8 BODY	F1440-PG-(*)				
	ffff	0						
(*) Denotes Strainer Fini	(*) Denotes Strainer Finish (-1,-3 or -4)							

F1440-Y-Q SHALLOW BODY AREA DRAIN WITH 12" SQUARE, NON ADJUSTABLE HEAVY DUTY TRACTOR GRATE									
MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON SHALLOW BODY WITH:									
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER)(-1)	STAINLESS STEEL (VENEER)(-3)				
F1443,4,6-Y-Q-14	45.00	12" Sq. Non-Adj. flat grate	\$ 945.00	\$1621.00	\$1621.00				
F1443,4,6-Y-Q	45.00	12" Sq. Non-Adj. tractor grate	\$ 945.00	\$1621.00	\$1621.00				

When a membrane clamp is required add Suffix (-C), No Add


F1440-Y-Q 0	PTIONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket	\$ 136.00
-6	Vandal proof secured grate (TR30 Torx and Pin) (H-1072)	\$ 111.00
-7	Trap seal primer tapping	\$ 14.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00
-11	Acid resistant epoxy coating	\$ 291.00
-12	Galvanized top assembly	\$ 327.00
-13	All galvanized	\$ 516.00
-15	Extension (per 2")	\$ 181.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-24	Solid secured cover	\$ 71.00
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub only)	\$2403.00
-32	2", 3", or 4" integral deep seal trap (MI-950 Series)	\$ 411.00
-34	Closure plug (C1440 Series)	\$ 65.00
-35	Stainless steel mesh over bucket	\$ 329.00
-40	Underdeck clamp (A8-UDC)	\$ 108.00
-41	Sump receiver (A8-BP)	\$ 108.00
-150	Half grate	\$ 63.00
-175	Three quarter grate	\$ 63.00
-C	Membrane clamp (F1340-Y-PC-50)	No Add
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00
-F4-50	4" cast iron round funnel	\$ 72.00
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00
-F6-50	6" cast iron round funnel	\$ 113.00
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00
-G-50	4" x 9" cast iron oval funnel	\$ 100.00
-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00
-J-50	3" x 1" cast iron oval funnel	\$ 113.00
Χ	Inside caulk outlet (2", 3" or 4")	\$ 61.00
-Z	Extended wide elastomeric flange on top (F1540-TA)	\$ 881.00


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



F1450 AREA DRAIN WITH 12"SQ. ADJ. HEAVY DUTY HINGED TRACTOR GRATE & EXTRA DEEP SUMP

F1450

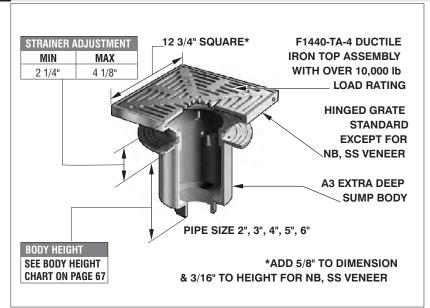

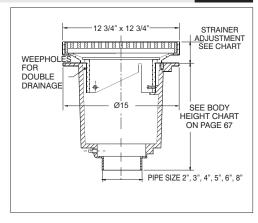

(*) Denotes strainer finish (-1, -3, or -4)

PARTS	A3 BODY	F1440-TA-(*)
	-	Tried

AREA DRAIN WITH 12" SQUARE ADJUSTABLE HEAVY DUTY HINGED TRACTOR GRATE & EXTRA DEEP SUMP									
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:						
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4) NICKEL BRONZE (VENEER) (-1) STAINLESS STEEL (V						
F1452,3,4,6	61.00	12" x 12" Adj. tractor grate	\$ 1174.00	\$ 1717.00	\$ 1717.00				
F1452,3,4,6-14	61.00	12" x 12" Adj. flat grate	\$ 1174.00	\$ 1717.00	\$ 1717.00				
F1452,3,4,6-Y	61.00	12" x 12" Non-Adj. tractor grate	\$ 1174.00	\$ 1717.00	\$ 1717.00				
F1452,3,4,6-Y-14	61.00	12" x 12" Non-Adj. flat grate	\$ 1174.00	\$ 1717.00	\$ 1717.00				
WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C), NO ADD.									


F1450 OPTI	ONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (A2-MB)	\$ 136.00
-6	Vandal proof secured grate (TR30 Torx and Pin) (H-1072)	\$ 111.00
-7	Trap seal primer tapping	\$ 14.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00
-11	Acid resistant epoxy coating	\$ 523.00
-12	Galvanized top assembly	\$ 232.00
-13	All galvanized	\$ 457.00
-15	Extension (per 2") (A2-XY)	\$ 516.00
-20	Secondary dome strainer (FS-1500-PD)	\$ 181.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00
-24	Solid secured cover	\$ 323.00
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub only)	\$4807.00
-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00
-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00
-32	2", 3", or 4" integral deep seal trap (MI-950 Series)	\$ 411.00
-34	Closure plug (C1440 Series)	\$ 65.00
-35	Stainless steel mesh over bucket	\$ 329.00
-40	Underdeck clamp (A2-C3)	\$ 108.00
-41	Sump receiver (A2-BP)	\$ 108.00
-90	Threaded side outlet (2", 3", 4") (N/A in -30, -31)	\$ 148.00
-150	Half grate	\$ 63.00
-175	Three quarter grate	\$ 63.00
-C	Membrane clamp (A2-C3)	No Add
-F4-(1,3)	4" NB or SS round funnel	\$ 152.00
-F4-50	4" cast iron round funnel	\$ 72.00
-F6-(1,3)	6" NB or SS round funnel	\$ 208.00
-F6-50	6" cast iron round funnel	\$ 113.00
-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00
-G-50	4" x 9" cast iron oval funnel	\$ 100.00
-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00
-J-50	3" x 1" cast iron oval funnel	\$ 113.00
P	Push on outlet (2", 3" or 4")	\$ 25.00
T	Threaded outlet (2", 3" or 4")	\$ 61.00
X	Inside caulk outlet (2", 3" or 4")	\$ 61.00
-Z	Extended wide elastomeric flange on body (20" x 20" x 1/4" thick)	\$ 881.00
8	8" no hub outlet	No Add

Design and dimensions are subject to modification. Prices do not include applicable taxes.




F1460 AREA DRAIN WITH 16" SQUARE ADJUSTABLE HEAVY DUTY TRACTOR GRATE

F1460

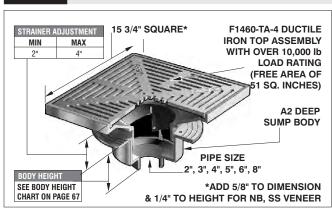





AREA DRAIN WITH 16" SQUARE ADJUSTABLE HEAVY DUTY TRACTOR GRATE								
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:					
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)			
F1462,3,4,6	69.00	16" x 16" Adj. tractor grate	\$1231.00	\$2262.00	\$2262.00			
F1462,3,4,6-Y	69.00	16" x 16" Non-Adj. flat grate	\$1231.00	\$2262.00	\$2262.00			


WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C) NO ADD

	AND F1470 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (A2-MB)	\$ 136.00	-41	Sump receiver (A2-BP)	\$ 108.00
-6	Vandal proof secured grate (TR30 Torx and Pin) (H-1072B)	\$ 111.00	-90	Threaded side outlet (2", 3", 4") (N/A in -30, -31)	\$ 148.00
-7	Trap seal primer tapping	\$ 14.00	-150	Half grate	\$ 63.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-175	Three quarter grate	\$ 63.00
-11	Acid resistant epoxy coating	\$ 720.00	-C	Membrane clamp (A2-C3)	No Add
-12	Galvanized top assembly	\$ 460.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00
-13	All galvanized	\$ 720.00	-F4-50	4" cast iron round funnel	\$ 72.00
-15	Extension (per 2") (A2-XY)	\$ 181.00	-F6-(1,3)	6" NB or SS round funnel	\$ 208.00
-20	Secondary dome strainer (FS1500-PD)	\$ 83.00	-F6-50	6" cast iron round funnel	\$ 113.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00
-24	Solid secured cover	\$ 421.00	-G-50	4" x 9" cast iron oval funnel	\$ 100.00
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub only)	\$4807.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00
-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00
-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00
-32	2", 3", or 4" integral deep seal trap (MI-950 Series)	\$ 411.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00
-34	Closure plug (C1440 Series)	\$ 65.00	Χ	Inside caulk outlet (2", 3" or 4")	\$ 61.00
-35	Stainless steel mesh over bucket	\$ 329.00	-Z	Extended wide elastomeric flange on body (20" x 20" x 1/4" thick)	\$ 881.00
-40	Underdeck clamp (A2-C3)	\$ 108.00	8	8" No hub outlet	No Add

*PVC/ABS Socket bodies available for 2", 3" or 4" connection sizes * Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket. * See next page for more options


F1470 AREA DRAIN WITH 16" SQ. ADJ. HEAVY DUTY TRACTOR GRATE & EXTRA DEEP SUMP



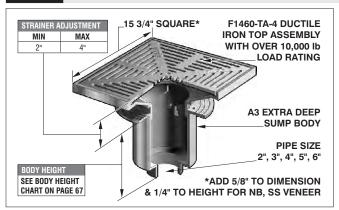



PARTS

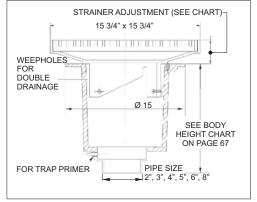

AREA DRAIN WITH 16" SQUARE ADJUSTABLE HEAVY DUTY TRACTOR GRATE & EXTRA DEEP SUMP								
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:					
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)			
F1472,3,4,6	75.00	16" x 16" Adj. tractor grate	\$1428.00	\$2428.00	\$2428.00			
F1472,3,4,6-Y	75.00	16" x 16" Non-Adj. tractor grate	\$1428.00	\$2428.00	\$2428.00			
F1472,3,4,6-Y-14	75.00	16" x 16" Non-Adj. flat grate	\$1428.00	\$2428.00	\$2428.00			

WHEN A MEMBRANE CLAMP IS REQUIRED, ADD SUFFIX (-C), NO ADD


Visit www.mifab.com for the most recent product information.


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1480(-FL) AREA DRAIN WITH 12"SQUARE HEAVY DUTY TRACTOR GRATE & DEEP SUMP

F1480(-FL)

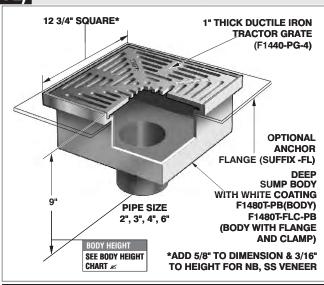



PARTS





A3-PG



F1440-PG-(*)



F1480T-PB

(*) Denotes strainer finish (-1, -3 or -4)


F1480 B0	F1480 BODY HEIGHT								
PIPE	NO HUB	PUSH ON	THREADED	INSIDE CAULK					
SIZE	STANDARD	(P)	(T)	(X)					
OILL	UINIUNIU	(')	(1)	(A)					


AREA DRAIN WITH 12" SQUARE ADJUSTABLE HEAVY DUTY HINGED TRACTOR GRATE AND DEEP SUMP BODY								
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:					
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4) NICKEL BRONZE (VENEER) (-1) STAINLESS STEEL (
F1482,3,4,6	55.00	12" x 12" tractor grate	\$ 834.00	\$1389.00	\$1389.00			
F1482,3,4,6-FL	55.00	12" x 12" tractor grate	\$1042.00	\$1667.00	\$1667.00			
		with anchor flange						

F1480	AND F1490 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	F1480	F1490	SUFFIX	DESCRIPTION		F1480		F1490
-5	Sediment bucket (F1480-PB for F1480, F1490-PB for F1490)	\$ 136.00	\$ 136.00	-22	Less grate (-4) Deduct	-\$	353.00	-\$	499.00
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072B)	\$ 111.00	\$ 111.00	-22	Less grate (-1 or -3) Deduct	-\$	661.00	-\$	1042.00
-7	Trap seal primer tapping	\$ 14.00	\$ 14.00	-28	Stainless Steel body (Type 304)(2",3",4" NH)	\$	4807.00	\$4	4807.00
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	\$ 55.00	-150	Half grate	\$	63.00	\$	63.00
-11	Acid resistant epoxy coating	\$ 579.00	\$ 764.00	-175	Three quarter grate	\$	63.00	\$	63.00
-13	All galvanized	\$ 579.00	\$ 764.00	-C	Membrane clamp (-FL only)	\$	97.00	\$	278.00
-20	Secondary dome strainer (FS1500-PD)	\$ 83.00	\$ 83.00	P	Push on outlet (2", 3" or 4")	\$	29.00	\$	29.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	\$ 62.00	T	Threaded outlet (2", 3" or 4")	\$	61.00	\$	61.00
				Х	Inside caulk outlet (2", 3" or 4")	\$	61.00	\$	61.00

F1490(-FL) AREA DRAIN WITH 16" SQ. ADJUSTABLE HEAVY DUTY TRACTOR GRATE & DEEP SUMP

F1490(-FL)

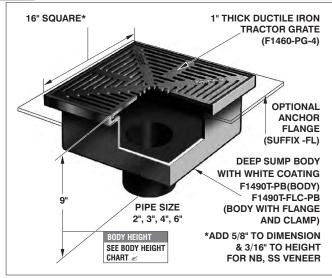

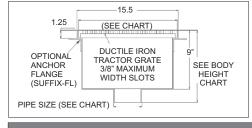

PARTS

A1 BODY

A3-PG

F1460-PG-(*)











(*) Denotes strainer finish (-1, -3 or -4)

F1490 BODY HEIGHT								
PIPE	NO HUB	PUSH ON	THREADED	INSIDE CAULK				
SIZE	STANDARD	(P)	(T)	(X)				
ALL	12" (305)	12 3/8" (314)	11 1/4" (286)	12 3/4" (324)				

AREA DRAIN WITH 16" SQUARE HEAVY DUTY TRACTOR GRATE & DEEP SUMP BODY						
MODEL	WT.	STRAINER	LIST PRICE LACQUERED CAST IRON BODY WITH:			
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4) NICKEL BRONZE (VENEER) (-1) STAINLESS STEEL (VENEER			
F1492,3,4,6	69.00	16" x 16" Tractor grate	\$1251.00	\$2084.00	\$2084.00	
F1492,3,4,6-FL	69.00	16" x 16" Sq. tractor grate	\$1528.00	\$2361.00	\$2361.00	
		with anchor flange				

Design and dimensions are subject to modification. Prices do not include applicable taxes.


DRAIN BODY

DIMENSION

HEIGHTS



BODY DIMENSION HEIGHTS DRAIN BODY DIMENSION REFERENCE CHARTS



BODY HEIGHT

The A1 Body

The A1-90 Body

A1 BODY HEIGHT PIPE PVC (-30) NO HUB **PUSH ON** THREADED INSIDE CAULK **STAINLESS** SIZE ABS (-31) (STANDARD) (P) **STEEL (-28)** (T) (X) 2" 2 5/8" 3" 3 3/8 2 1/4' 3 3/4" 2 3/4" 3" 3 1/4" 3" 3 3/8" 2 5/8" 3 3/4" 2 3/4" 4" 3 1/2" 3" 2 5/8" 3 3/4" 2 3/4" 3 3/8" 5" 3" 2 5/8" 6 7/8" 3 1/2" 6 7/8"

*Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.



					\searrow
The A	A1-90	No	Hub	Outlet	Body

A1-90 THRE	A1-90 THREADED SIDE OUTLET BODY HEIGHT							
MODEL NUMBER	PIPE SIZE		"A" Flange to Center Of Outlet	"C" FLANGE TO TOP OF OUTLET				
A1-2T-90-7	2"	3 5/8"	2 1/4"	5/8"				
A1-3T-90-7	3"	6 1/8"	3 1/2"	-				
A1-4T-90-7	4"	6 1/8"	3 1/4"	-				
A1-90 NO H	HUB S	IDE OU	TLET BODY	HEIGHT				
A1-2-90-NH-7	2"	3 1/2"	2 3/8"	1 1/8"				
A1-3-90-NH-7	3"	4 3/8"	2 5/8"	1"				
A1-4-90-NH-7	4"	5 3/8"	3 1/8"	1"				



A2 BOD	A2 BODY HEIGHT							
PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) ABS (-31)			
2"	5 3/4"	5 1/2"	6 1/2"	6 1/2"	6 3/4"			
3"	5 3/4"	5 1/2"	6 5/8"	6 1/2"	7 1/2"			
4"	5 3/4"	5 1/2"	5 1/2"	6 1/2"	7 5/8"			
5"	5 3/4"	-	6 5/8"	6 3/4"	-			
6"	7 1/4"	5 5/8"	5 5/8"	6 1/2"	-			
8"	5 7/8"	-	-	See note*	-			

*FOR DRAINS REQUIRING AN 8" INSIDE CAULK CONNECTION, USE A7-8X BODY

BODY **HEIGHT**











- * A4 BODY HEIGHTS SEE PAGE 51
- * A8 BODY HEIGHTS SEE PAGE 56

A2-90 THRE	A2-90 THREADED SIDE OUTLET BODY HEIGHT							
MODEL NUMBER	PIPE SIZE	"B" Body Height	"A" Dimension Threaded Outlet	"A" DIMENSION NO HUB OUTLET				
A2-2T-90-7	2"	5 3/4"	4"	7/8"				
A2-3T-90-7	3"	5 3/4"	3 1/2"	7/8"				
A2-4T-90-7	4"	5 3/4"	3 3/8"	7/8"				
A2-90 NO H	UB S	IDE OU	TLET BODY	HEIGHT				
A2-2-90-NH-7	2"	5"	4"	2 3/4"				
A2-3-90-NH-7	3"	5"	3 1/2"	1 3/4"				
A2-4-90-NH-7	4"	5"	2 7/8"	5/8"				

A3 BODY	A3 BODY HEIGHT							
PIPE SIZE	NO HUB Standard	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) ABS (-31)			
2"	12 1/4"	12 1/2"	11 1/2"	13"	11 3/4"			
3"	12 1/4"	12 5/8"	11 7/8"	13"	12 1/2"			
4"	12 3/8"	12 5/8"	11 7/8"	13"	12 5/8"			
5"	12 3/8"	-	11 7/8"	16"	-			
6"	12 5/8"	16"	-	-	-			

Note: The A3 body is manufactured as a transition body and require an A1 body assembled to it to form the outlet connection

A5 BODY HEIGHT						
PIPE SIZE	NO HUB (Standard)	INSIDE CAULK (X)				
2"	6 1/2"	6.575"				
3"	6 1/2"	6.575"				
4"	6 1/2"	6.575"				
6"	6 1/2"	6 575"				

A7 BODY HEIGHT					
PIPE SIZE	NO HUB OUTLET (STANDARD)	INSIDE CAULK OUTLET (X)			
8"	See note*	5 3/4"			
10"	5 5/8"	-			
12" 5 5/8" -					
*For Drains Requiring and 8" No-Hub connection, use A2-8NH body					


Design and dimensions are subject to modification. Prices do not include applicable taxes.




F1510 12" x 12" EPOXY COATED PARKING AREA FLOOR DRAIN WITH HEAVY DUTY HINGED TRACTOR GRATE & SEDIMENT BUCKET (CONFORMS TO CSA STD. S413-94)

F1510

PARTS

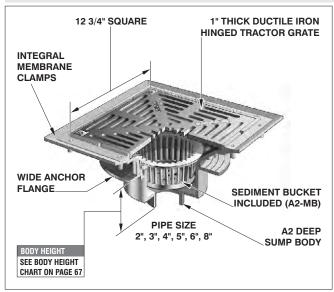





A2-MB HS-1 **A2 BODY** F1510-TA-4

EPOXY COATED PARKING AREA FLOOR DRAIN						
MODEL WT. EPOXY COATED CAST IRON BODY WITH NUMBER Lbs DUCTILE IRON HINGED GRATE (-4)						
F1512,3,4,6,8	55.00	\$1534.00				

F1510 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-6	Vandal proof secured grate (TR30 Torx and pin)	\$ 111.00	-80	All Aluminum	No Add		
-7	Trap seal primer tapping	\$ 14.00	-C	Membrane clamp	Standard		
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-TE	2" Extension (F1510-TE)	\$ 161.00		

PARKING AREA DRAIN WITH 9" ROUND HEAVY DUTY TRACTOR GRATE W/DEEP SUMP & HEAVY DUTY MEMBRANE COLLAR W/SEEPAGE OPENINGS

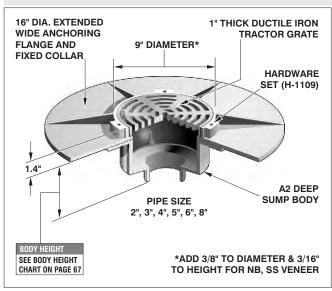

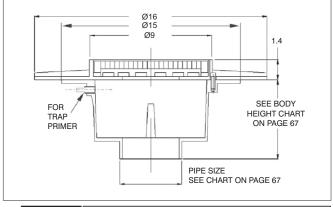

	4	SEE CHART ON	PAGE 67
PARTS	A2 BODY	F1530-TA-(*)	H-1109
(*) Denotes Strainer finish (-1, -3 or -4)	9		ttt

PARKING AREA DRAIN WITH 9" ROUND HEAVY DUTY TRACTOR GRATE					
MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:					
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)
F1532,3,4,6,8	45.00	9" Dia. tractor grate	\$ 810.00	\$1152.00	\$1152.00

F1530 O	F1530 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-5	Sediment bucket (FS1750-PB)	\$ 136.00	-13	All galvanized	\$ 201.00			
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072)	\$ 111.00	-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00			
-7	Trap seal primer tapping	\$ 14.00	-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00			
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-90	Threaded side outlet (2", 3", or 4") (NA in -30,-31)	\$ 148.00			
-11	Acid resistant epoxy coating	\$ 201.00	Р	Push on outlet (2", 3", 4" or 6")	\$ 29.00			
-12	Galvanized grate	\$ 184.00	T	Threaded outlet (2", 3", 4" or 6")	\$ 61.00			
*PVC/ABS	Socket bodies available for 2", 3" or 4" connection sizes		Χ	Inside caulk outlet (2", 3", 4" or 6")	\$ 61.00			


^{*}Add -NH to -90 for no hub outlet - No Add


Design and dimensions are subject to modification. Prices do not include applicable taxes.

F1550



F1540 PARKING AREA DRAIN WITH 12" ROUND HEAVY DUTY TRACTOR GRATE WITH DEEP SUMP AND HEAVY DUTY MEMBRANE COLLAR WITH SEEPAGE OPENINGS

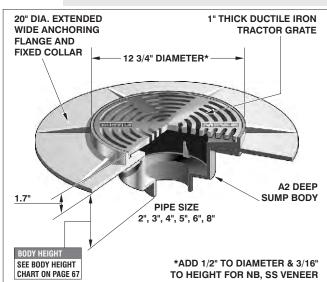

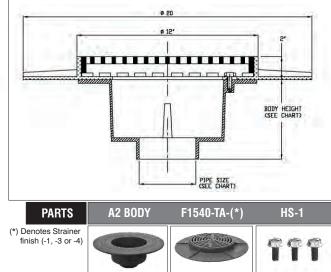



PARKING AREA DRAIN WITH 12" ROUND HEAVY DUTY TRACTOR GRATE							
MODEL	MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:						
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)		
F1542,3,4,6	75.00	12" Dia. tractor grate	\$688.00	\$1150.00	\$1150.00		
F1548	48.00	12" Dia. tractor grate	\$933.00	\$1406.00	\$1406.00		

F1540	F1540 AND F1550 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-5	Sediment bucket (FS1750-PB)	\$ 136.00	-13	All galvanized	\$ 210.00			
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072)	\$ 111.00	-90	Threaded side outlet (2", 3" or 4") (NA in -30,-31)	\$ 148.00			
-7	Trap seal primer tapping	\$ 14.00	-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00			
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00	-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00			
-11	-11 Acid resistant epoxy coating		Р	Push on outlet (2", 3", 4" or 6")	\$ 29.00			
-12 Galvanized grate \$ 1		\$ 184.00	T	Threaded outlet (2", 3", 4" or 6")	\$ 61.00			
*PVC/AE	3S Socket bodies available for 2", 3" or 4" connection sizes		Χ	Inside caulk outlet (2", 3", 4" or 6")	\$ 61.00			

^{*}Add -NH to -90 for no hub outlet - No Add.

F1550 PARKING AREA DRAIN WITH 16" ROUND HEAVY DUTY TRACTOR GRATE WITH DEEP SUMP AND HEAVY DUTY MEMBRANE COLLAR WITH SEEPAGE OPENINGS

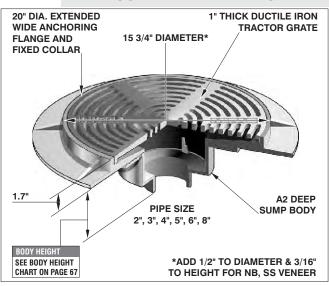

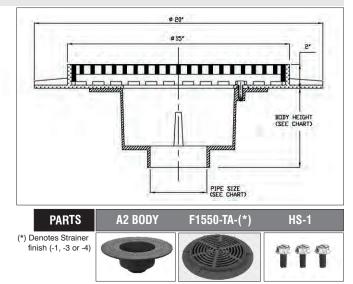


PARKING AREA DRAIN WITH 16" ROUND HEAVY DUTY TRACTOR GRATE WITH DEEP SUMP							
MODEL	MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:						
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)		
F1552,3,4,6	75.00	16" Dia. tractor grate	\$2139.00	\$3281.00	\$3281.00		
F1558	78.00	16" Dia. tractor grate	\$2139.00	\$3281.00	\$3281.00		

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



12" x 12" HEAVY DUTY AREA DRAIN WITH INTERNAL TRAP & SEDIMENT BUCKET


F1560

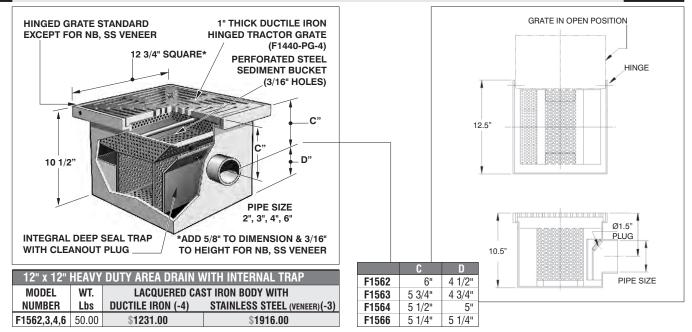


F1560 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072B)	\$ 111.00	-13	Galvanized body and grate	\$ 904.00	
-7	Trap Seal primer tapping	\$ 14.00	-28	Stainless Steel body (Type 304)	\$4807.00	
-11	Acid resistant epoxy	\$ 904.00	-C	Membrane clamp	\$ 221.00	
-12	Galvanized grate	\$ 389.00	-FL	Anchor flange	\$ 303.00	
			-GS	Grounding strap	\$ 476.00	

F1570 24" x 24" HEAVY DUTY PARKING AREA CATCH BASIN

F1570

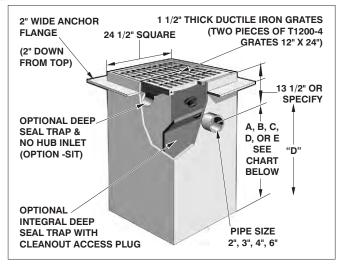

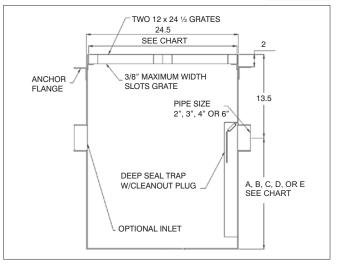

24" X 24" HEAVY DUTY PARKING AREA CATCH BASIN							
MODEL Number	WT. Lbs	LIST PRICE BAKED EPOXY COATED STEEL BODY WITH: DUCTILE IRON (-4) STAINLESS STEEL (VENEER) (-3)					
F1572,3,4,6A	650.00	\$6060.00	\$13825.00				
F1572,3,4,6B	872.00	\$6318.00	\$14219.00				
F1572,3,4,6C	1100.00	\$6576.00	\$14562.00				
F1572,3,4,6D	1300.00	\$6834.00	\$15518.00				

BODY DEPTH				
MODEL NO.	"D"	OVERALL DEPTH		
F1570A	18"	31.5"		
F1570B	24"	37.5"		
F1570C	30"	43.5"		
F1570D	36"	49.5"		


F1570 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-6	Vandal proof secured grate (TR30 Torx and pin) (H-1072B)	\$ 126.00	-SI	No hub side inlet	\$125.00		
-13	All galvanized	\$1063.00	-SIT	Side inlet with trap	\$250.00		
-28	Stainless Steel body (Type 304)	\$7210.00					
-C	Membrane Clamp	\$ 321.00					


Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1580 24" x 24" HEAVY DUTY DEEP SUMP AREA DRAIN WITH BOTTOM OUTLET

F1580

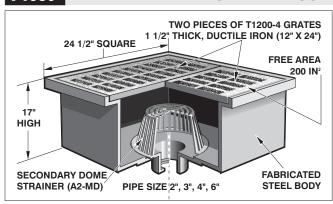

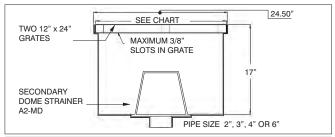



24"SQ HEAVY DUTY DEEP SUMP AREA DRAIN W/BOTTOM OUTLET							
MODEL	WT.	BAKED EPOXY COATED STEEL BODY WITH:					
NUMBER	Lbs	DUCTILE IRON (-4)	STAINLESS STEEL (VENEER) (-3)				
F1582,3,4,6	400.00	\$6938.00	\$7932.00				

F1580	F1580 OPTIONAL VARIATIONS:								
SUFFIX DESCRIPTION			SUFFIX	DESCRIPTION	LIST PRICE				
-5	Sediment bucket (FS1700-PB)	\$402.00	-13	All galvanized	\$1006.00				
-6	Vandal proof secured grates (TR30 Torx and pin) (H-1072B)	\$154.00	-28	Stainless Steel Body (Type 304)	\$4807.00				
-8	Backwater valve (BV1250 Series)(2", 3", 4")	\$366.00	-FL	Anchor flange	\$ 839.00				
-12	Galvanized grates	\$463.00	-FLC	Anchor flange and membrane clamp	\$1361.00				

F1590 24" x 24" HEAVY DUTY AREA DRAIN WITH OFFSET BOTTOM OUTLET

F1590

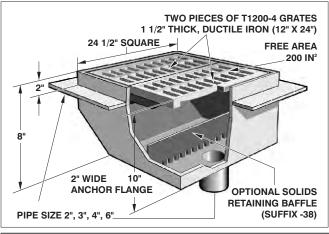

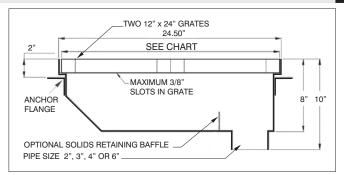



24" SQ. HEAVY DUTY AREA DRAIN WITH OFFSET BOTTOM OUTLET						
MODEL	WT.	BAKED EPOXY COATED STEEL BODY WITH:				
NUMBER	Lbs	DUCTILE IRON (-4)	STAINLESS STEEL (VENEER) (-3)			
F1592,3,4,6	400.00	\$6406.00	\$7932.00			

F159	F1590 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-6	Vandal proof secured grates (TR30 Torx and pin) (H-1072B)	\$402.00	-13	All galvanized	\$1006.00				
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$366.00	-28	Stainless Steel Body (Type 304)	\$4807.00				
-12	Galvanized grates	\$463.00	-38	Solids retaining baffle	\$ 368.00				
			-C	Membrane clamp	\$ 522.00				

F1590-90 24" x 24" HEAVY DUTY PARKING AREA DRAIN WITH SIDE OUTLET

F1590-90

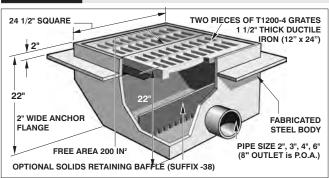

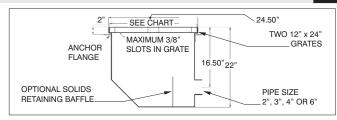

24" X 24" HEAVY DUTY PARKING AREA DRAIN WITH SIDE OUTLET							
MODEL	WT.	BAKED EPOXY COATED STEEL BODY WITH:					
NUMBER	Lbs	DUCTILE IRON (-4)	STAINLESS STEEL (VENEER) (-3)				
F1592,3,4,6-90	400.00	\$4990.00	\$7932.00				

F1590	F1590-90 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-6	Vandal proof secured grates (TR30 Torx and pin) (H-1072B)	\$ 402.00	-28	Stainless Steel Body (Type 304)	\$4807.00				
-12	Galvanized grates	\$ 463.00	-38	Solids retaining baffle	\$ 463.00				
-13	All galvanized	\$1006.00	-C	Membrane clamp	\$ 522.00				


Design and dimensions are subject to modification. Prices do not include applicable taxes.

F1600-C



ISOLATION FLOOR DRAIN W/ROUND REINFORCED ADJ. STRAINER

F1600-C

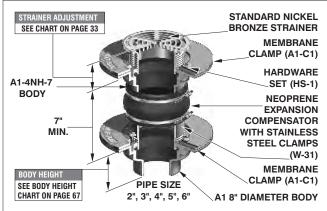




(*) Denotes strainer size (5", 6", 7" or 8") (**) Denotes strainer finish (-1, -3 or -4)

F1600-C ISOLATION DRAIN WITH ROUND REINFORCED ADJUSTABLE STRAINER								
MODEL WT. STRAINER LIST PRICE LACQUERED CAST IRON BODY WITH:								
NUMBER	Lbs	DESCRIPTION	DUCTILE IRON (-4)	NICKEL BRONZE (-1)	STAINLESS STEEL (-3)			
F1602,3,4-C-5	15.00	5" Diameter	\$ 665.00	\$ 699.00	\$ 699.00			
F1602,3,4-C-6	17.00	6" Diameter	-	\$ 762.00	\$ 762.00			
F1602,3,4-C-7	17.50	7" Diameter	-	\$ 849.00	\$ 849.00			
F1602,3,4-C-8	19.00	8" Diameter	\$745.00	\$ 978.00	\$ 978.00			

F1620-C ISOLATION AREA DRAIN W/9" ROUND ADJ. TRACTOR GRATE

F1620-C

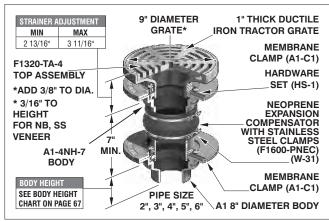

			PARTS
	W-31	A1-C1	HS-1
Note: Flow through shank of top assembly is equal to 4" pipe.		O	X2
A1-4NH-7 BODY	F1600-PNEC	A1 BODY	(*)-(**)
		9	
	(*) Denotes stra	iner finish (-1, -	3 or -4)

F1620-C ISOLATION FLOOR DRAIN WITH 9" ROUND ADJUSTABLE TRACTOR GRATE							
MODEL Number	WT. Lbs	STRAINER DESCRIPTION	LACQUERE DUCTILE IRON (-4)	O IMINLEGO O I EEL			
F1622,3,4-C	24.00	9" Diameter	\$675.00	\$1088.00	\$1088.00		


ANSI/ASME RATING						
STRAINER	FREE AREA	LOAD RATING				
F1320-TA-4	18.0 IN ²	OVER 10,000 lbs				

F1600-	C AND F1620-C OPTIONAL VARIATIONS	:					
SUFFIX	DESCRIPTION	F1600-C	F1620-C	SUFFIX	DESCRIPTION	F1600-C	F1620-C
-5	Sediment bucket (A1-PB)	\$ 32.00	\$ 32.00	-41	Sump receiver (A1-BP)	\$ 108.00	\$108.00
-6	Vandal proof (TR25 (F1600), TR30 (F1620) Torx and pin)	\$ 25.00	\$ 86.00	-49	Chr. Pl. strainer assembly (-1 only)	\$ 90.00	N/A
-7	Trap seal primer tapping	\$ 14.00	\$ 14.00	-90	Threaded side outlet (NA in -30,-31)	\$ 168.00	\$ 168.00
-8	Backwater valve (BV1250 Series) (2",3", 4")	\$ 55.00	\$ 55.00	-95	Client logo	\$ 168.00	N/A
-10	Decorative polished top	\$ 174.00	N/A	-C2	High rough in membrane clamp (A1-C2)	\$ 54.00	\$ 54.00
-11	Acid resistant epoxy coating	\$ 486.00	\$ 555.00	-F4-(1,3)	4" NB or SS round funnel	\$ 152.00	\$ 152.00
-13	All galvanized	\$ 486.00	\$ 555.00	-F4-50	4" cast iron round funnel	\$ 72.00	\$ 72.00
-15	Extension (DD-50)	\$ 62.00	\$ 62.00	-F6-(1,3)	6" NB or SS round funnel	\$ 208.00	\$ 208.00
-16	Square top	-	\$ 62.00	-F6-50	6" cast iron round funnel	\$ 113.00	\$ 113.00
-20	Secondary dome strainer	-	\$ 67.00	-G-(1,3)	4" x 9" NB or SS oval funnel	\$ 207.00	\$ 207.00
-21	Secondary flat strainer (FD-9600 Series)	-	\$ 62.00	-G-50	4" x 9" C.I. oval funnel	\$ 100.00	\$ 100.00
-24	Solid secured cover	-	\$ 379.00	-J-(1,3)	3" x 1" NB or SS oval funnel	\$ 208.00	\$ 208.00
-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)	\$2403.00	\$2403.00	-J-50	3" x 1" cast iron oval funnel	\$ 113.00	\$ 113.00
-30	PVC Socket Connection Body* (2", 3", 4")	\$ 28.00	\$ 28.00	Р	Push on outlet (2", 3" or 4")	\$ 25.00	\$ 25.00
-31	ABS Socket Connection Body* (2", 3", 4")	\$ 28.00	\$ 28.00	T	Threaded outlet (2", 3" or 4")	\$ 62.00	\$ 62.00
-32	Integral 2,3,4" Deep Seal Trap (MI-950 Series)	\$ 411.00	\$ 411.00	-Z	Extended wide elastomeric flange on body	\$ 881.00	\$ 881.00
-34	Closure plug (C1440 Series)	\$ 65.00	\$ 65.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add	No Add
-40	Underdeck clamp (A1-C3)	\$ 108.00	\$ 108.00	6	6" no hub outlet	\$ 185.00	\$ 185.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1640 DUAL 9" ADJUSTABLE DRAIN SET

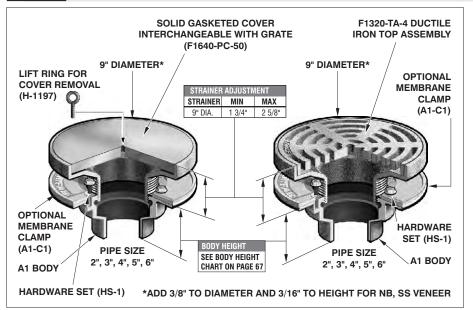

Note: Flow through shank of top assembly is equal to 4" pipe.






(*) Denotes strainer finish (-3 or -4)

LAQ. CAST IRON FLOOR DRAINS (2) W/ONE TRACTOR GRATE & ONE GASKETED SOLID COVER								
MODEL NUMBER	WT. Lbs	GRATE & PLUG Diameter	DUCTILE IRON (-4)	STAINLESS STEEL (VENEER) (-3)				
F1642,3,4	35.00	9"	\$840.00	\$1781.00				
ONE DRAIN WITH	SOLID COV	/ER ONLY (SUFFIX -SC)	\$578.00	\$1251.00				

F1640, F1640-L OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	F1640	F1640-L	SUFFIX	DESCRIPTION	F1640	F1640-L
-5	Sediment bucket (A1-MB for F1640, A2-MB for F1640-L)	\$ 64.00	\$ 271.00	-31	ABS Socket Connection Body (2",3",4")	\$ 56.00	\$ 56.00
-11	Acid resistant epoxy finish	\$422.00	\$ 555.00	-C	Membrane clamp	No Add	No Add
-13	All galvanized	\$753.00	\$ 555.00	Р	Push on outlet (2", 3" or 4")	\$ 59.00	\$ 59.00
-15	Extension (DD-50 for F1640, A2-XY for F1640-L)	\$123.00	\$ 123.00	T	Threaded outlet (2", 3" or 4")	\$120.00	\$120.00
-21	Secondary flat strainer (FD-9600 Series)	\$132.00	\$ 132.00	Χ	Inside caulk outlet (2", 3", or 4")	\$120.00	\$120.00
-30	PVC Socket Connection Body (2", 3", 4")	\$ 56.00	\$ 56.00	6	6" no hub outlet	\$370.00	\$370.00

F1640-L DUAL 12" TOP ADJUSTABLE DRAIN SET

F1640-L

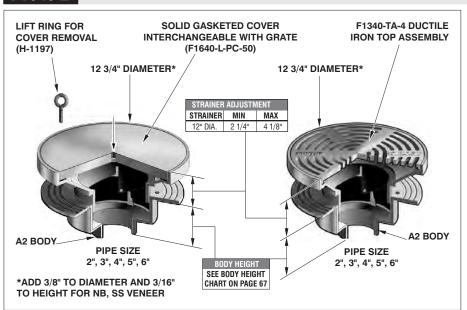


LAQ. CAST IRON AREA DRAINS (2) W/ONE TRACTOR GRATE & ONE GASKETED SOLID COVER						
MODEL	WT.	GRATE & PLUG	DUCTILE	STAINLESS STEEL		
NUMBER	Lbs	DIAMETER	IRON (-4)	(VENEER) (-3)		
F1642,3,3,4-L	115.00	12"	\$1389.00	\$2361.00		
ONE DRAIN WITH S	OLID COV	ER ONLY (SUFFIX -SC)	\$ 695.00	\$1389.00		

PARTS F1640-L-PC-(*)





F1650 FLUSHING RIM FLOOR DRAIN

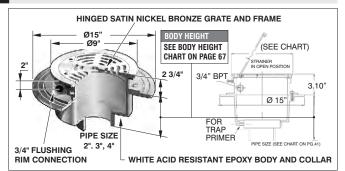




A.R.E. COATED CAST IRON BODY WITH HINGED GRATE & FLUSHING RIM CONNECTION						
MODEL	WT.	STAINLESS	NICKEL			
NUMBER	Lbs	STEEL (-3)	BRONZE (-1)			
F1652,3,4	33.00	\$ 2357.00	\$ 2357.00			

ANSI/ASME KATING						
STRAINER	FREE AREA	LOAD RATING	STRAINER	FREE AREA	LOAD RATING	
9" DIA NB	18.0 IN ²	2000-4000 lbs	9" DIA SS	18.0 IN ²	5000-7499 lbs	

F1650 AND	F1650 AND F1650-G OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-6	Vandal proof fixed grate (TR25 Torx and pin)	\$ 189.00				
-30	PVC socket connection body (F1650 only) (2", 3", 4")	\$ 28.00				
-31	ABS socket connection body (F1650 only) (2", 3", 4")	\$ 28.00				
-A	Loose set grate	\$ 181.00				
P	Push on outlet (2", 3", 4")	\$ 29.00				
T	Threaded outlet (2", 3", 4")	\$ 61.00				
X	Inside caulk outlet (2", 3", 4")	\$ 61.00				
-Z	Extended wide flange on body (20"dia. X 1/4" thick)	\$ 881.00				

F1660 24" LARGE CAPACITY FLUSHING RIM FLOOR DRAIN

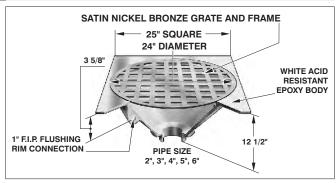


ANSI/ASME RATING						
STRAINER	FREE AREA	LOAD RATING				
24" DIA.	232.0 IN ²	UP TO 2000 lbs				

F1660 OPTI	F1660 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-5	Sediment bucket	\$ 65.00					
-6	Vandal proof fixed grate (TR30 Torx and pin)	\$ 72.00					
-8	Backwater valve (BV1250 Series) (2", 3", 4")	\$ 55.00					
-13	Galvanized body	\$682.00					
-30	PVC socket connection body (2". 3", 4")	\$ 28.00					
-31	ABS socket connection body (2", 3", 4")	\$ 28.00					
-G	Trap with flushing connection	\$482.00					
Р	Push on outlet (2", 3", 4")	\$ 29.00					
T	Threaded outlet (2", 3", 4")	\$ 61.00					
X	Inside caulk outlet (2", 3", 4")	\$ 61.00					

Design and dimensions are subject to modification. Prices do not include applicable taxes.

F1650-G FLUSHING RIM FLOOR DRAIN WITH DEEP SEAL TRAP & FLUSHING CONNECTION

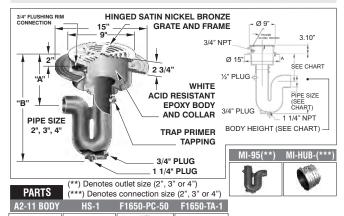


F1650-G BODY HEIGHT							
PIPE SIZE	"B" BODY HEIGHT	"A" DIMENSION Threaded outlet	"A" DIMENSION No hub outlet				
2" (51)	20 3/4"	12 5/16"	12 5/16"				
3" (76)	24 1/4"	13 1/2"	13 1/2"				
4" (102)	25 7/8"	14"	14"				

	ANSI/ASME RATING								
	STRAINER	FREE AREA	LOAD RATING	STRAINER	FREE AREA	LOAD RATING			
ſ	9" DIA NB	18.0 IN ²	2000-4000 lbs	9" DIA SS	18.0 IN ²	5000-7499 lbs			

A.R.E. COATED CAST IRON BODY W/HINGED GRATE, INTEGRAL TRAP & FLUSHING RIM CONNECTION							
MODEL	WT.	NICKEL	STAINLESS				
NUMBER	Lbs	BRONZE (-1)	STEEL (-3)				
F1652,3,4-G	50.00	\$3070.00	\$3070.00				
Trap with flushing connection							

F1670 WATER SUPPLY CONTROL BOX

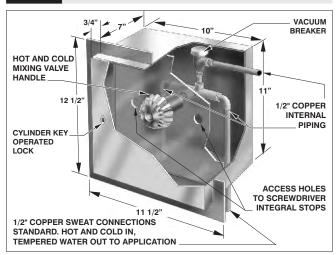

MIFAB Series F1670 water supply control box manufactured from Type 304 stainless steel. Box complete with cylinder key lock. Features single hot and cold mixing valve handle and atmospheric type vacuum breaker with integral screwdriver stops.


Recommended for installation with flushing rim & garbage can wash drains (F1650 and F1350-Y-36)

WATER SUPPLY CON	ITROL BOX	
MODEL	WT.	STAINLESS STEEL
NUMBER	Lbs	(-3)
F1670	18.00	\$2250.00

WATER SUF	WATER SUPPLY CONTROL BOX OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-LM	Less internal assembly vacuum breaker and mixing valve)(deduct)	-\$631.00				
-RK	Seal repair kit	\$240.00				
-S	Surface mounted	No Add				



F1720 2 1/4" x 3 3/4" GUTTER DRAIN

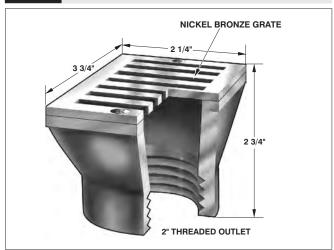


ANSI/ASME RATING				
STRAINER FREE AREA LOAD RATING				
2" x 3"	3.0 IN ²	2000 lbs		

2 1/4" x 3 3/4" GUTTER DRAIN			
MODEL Number	WT. Lbs	LACQUERED CAST IRON BODY WITH NICKEL BRONZE (-1)	
F1722	2.00	\$184.00	

F1720 OPT	F1720 OPTIONAL VARIATIONS		
SUFFIX	DESCRIPTION	LIST PRICE	
-6	Vandal proof secured grate (T25 Torx & pin) (H-1039A)	\$25.00	
-13 Galvanized body		\$66.00	

F1780 INDIRECT WASTE FUNNEL

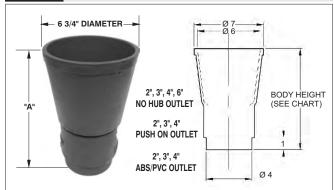


F1780 INDIRE	F1780 INDIRECT WASTE FUNNEL				
MODEL NUMBER	WT. Lbs	DESCRIPTION	CAST IRON (-50)		
F1782	11.25	2" OUTLET	\$123.00		
F1783	11.75	3" OUTLET	\$184.00		
F1784	12.25	4" OUTLET	\$547.00		
F1786	12.50	6" OUTLET	\$638.00		

BODY HEIGHT					
PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	PVC (-30) ABS (-31)		
2" (51)	10" (254)	10 3/8" (263)	10 3/8" (263)	_	
3" (76)	10" (254)	10 3/8" (263)	10 3/8" (263)		
4" (102)	10" (254)	10 3/8" (263)	10 3/8" (263)		
6" (152)	8 3/4" (222)	-	-		

F1780 OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE	
-11	Acid resistant epoxy finish	\$212.00	
-13	All galvanized	\$108.00	
-20	Secondary dome strainer (FS1500-PD)	\$ 62.00	
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	
-30	PVC socket connection body* (2", 3", 4")	\$ 28.00	
-31	ABS socket connection body* (2", 3", 4")	\$ 28.00	
-C	Membrane clamp	\$ 54.00	
Р	Push on connection (2", 3", 4")	\$ 25.00	

Design and dimensions are subject to modification. Prices do not include applicable taxes.

7" x 15" HEAVY DUTY GUTTER DRAIN WITH ANCHOR FLANGE **F1760-FL**

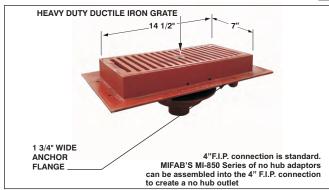

ANSI/ASME RATING				
STRAINER	FREE AREA	LOAD RATING		
F1760-PG-4	39.0 IN ²	OVER 10,000 lbs		

F1760-FL 7" x 15" HEAVY DUTY GUTTER DRAIN W/ANCHOR FLANGE					
MODEL	ODEL WT. LACQUERED CAST IRON BODY WITH				
NUMBER	Lbs	DUCTILE IRON (-4) STAINLESS STEEL (VENEER) (-3)			
F1762,3,4-FL	30.00	\$ 272.00 \$836.00			

F1760-FL OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE	
-6	Vandal proof secured grate (TR30 Torx & pin)	\$ 97.00	
-8	Backwater valve (BV1250 Series) (2". 3". 4")	\$367.00	
-11	Acid resistant epoxy finish	\$335.00	
-13	All galvanized	\$335.00	
-22	Less flange (deduct)	\$ 56.00	
-C	Membrane clamp	\$117.00	
-NH	No hub outlet connection (use MI-850 Series)	\$118.00	

INDIRECT WASTE FUNNEL WITH BACKWATER VALVE F1790



F1790 INDIRECT WASTE FUNNEL				
MODEL NUMBER	WT. Lbs	DESCRIPTION	CAST IRON (-50)	
F1792	11.75	2" OUTLET	\$ 489.00	
F1793	12.25	3" OUTLET	\$ 550.00	
F1794	12.75	4" OUTLET	\$ 914.00	
F1796	13.00	6" OUTLET	\$1005.00	

(BV1250 Series)


BODY HEIGHT					
PIPE SIZE	NO HUB (Standard)	PUSH ON (P)	PVC (-30) ABS (-31)		
2" (51)	10" (254)	10 3/8" (263)	10 3/8" (263)		
3" (76)	10" (254)	10 3/8" (263)	10 3/8" (263)		
4" (102)	10" (254)	10 3/8" (263)	10 3/8" (263)		
6" (152)	8 3/4" (222)	-	- '		


F1790 OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE	
-11	Acid resistant epoxy finish	\$212.00	
-13	All galvanized	\$108.00	
-20	Secondary dome strainer (FS1500-PD)	\$ 62.00	
-21	Secondary flat strainer (FD-9600 Series)	\$ 62.00	
-30	PVC socket connection body* (2", 3", 4")	\$ 28.00	
-31	ABS socket connection body* (2", 3", 4")	\$ 28.00	
-C	Membrane clamp	\$ 54.00	
Р	Push on connection (2", 3", 4")	\$ 25.00	



F1810 PLANTING AREA DRAIN

F1810

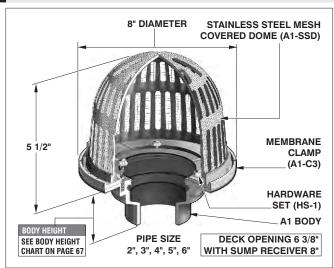

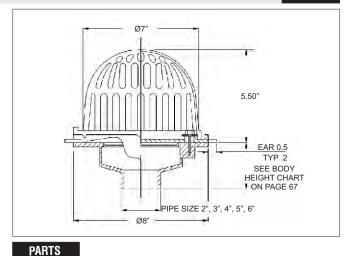

F1810 PLANTING AREA DRAIN						
MODEL NUMBER	WT. Lbs	LACQUERED CAST IRON BODY WITH METAL DOME WITH SS MESH SCREEN (-50)				
F1812,3,4,6	7.00	\$348.00				

A1 BODY A1-C3 A1-SSD HS-1

DESCRIPTION

Threaded side outlet (2", 3") (4" - \$123.00)(NA in -30,-31)

Sump receiver (A1-BP)

Push on outlet (2", 3", 4") Threaded outlet (2", 3", 4")

Inside caulk outlet (2", 3", 4")

Rough bronze dome with mesh

F1810 OF	F1810 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-6	Vandal proof	\$ 25.00					
-11	Acid resistant epoxy coating	\$ 86.00					
-13	Galvanized body	\$ 86.00					
-30	PVC socket connection body (2", 3", 4")	\$ 28.00					
-31	ABS socket connection body (2", 3", 4")	\$ 28.00					
-40	Deck clamp (A1-C3)	\$108.00					

* Add -NH to -90 for no hub outlet - No Add

SUFFIX

-41

-81

-90

Р

Τ

Χ

F1820 LARGE FREE AREA PLANTING AREA DRAIN

F1820

\$108.00

\$212.00

\$123.00

\$ 26.00

\$ 61.00

No Add


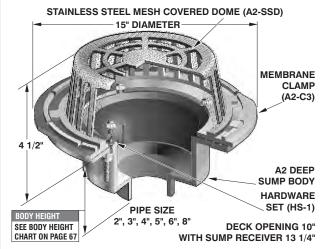


CHART ON PAGE	67	WITH SUMP RECEIVER 13 1/4"				
F1820 LARGE	F1820 LARGE FREE AREA PLANTING AREA DRAIN					
MODEL NUMBER	WT. Lbs	LACQUERED CAST IRON BODY WITH ALUMINUM DOME WITH SS MESH SCREEN (-4)				
F1822,3,4,6,8	31.50	\$657.00				

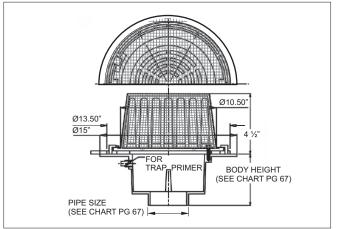

PARTS			
A2 BODY	A2-C3	A2-SSD	HS-1
9	0		999

F1820 O	F1820 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-6	Vandal proof	\$ 76.00	-41	Sump receiver (A2-BP)	\$108.00	
-11	Acid resistant epoxy coating	\$290.00	-81	Rough bronze dome with mesh	\$227.00	
-13	All galvanized	\$190.00	-90	Threaded side outlet (2", 3", 4") (NA in -30,-31)	\$148.00	
-30	PVC socket connection body (2", 3", 4")	\$ 28.00	Р	Push on outlet (2", 3", 4")	\$ 29.00	
-31	ABS socket connection body (2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00	
-40	Deck clamp (A2-C3)	\$108.00	X	Inside caulk outlet (2", 3", 4")	\$ 61.00	


Design and dimensions are subject to modification. Prices do not include applicable taxes.


* Add -NH to -90 for no hub outlet - No Add



F1830-P PLANTING AREA DRAIN WITH 8" HIGH PERFORATED STANDPIPE & DOME

F1830-P

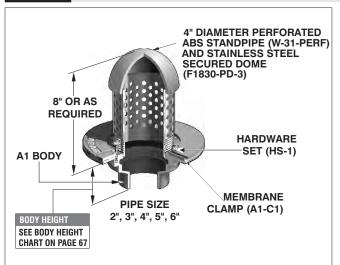

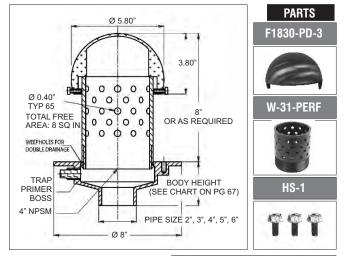


F1830-P PLANTING AREA DRAIN WITH 8" HIGH PERFORATED STANDPIPE AND DOME					
MODEL	WT.	STANDPIPE	LACQUERED CAST IRON BODY & ABS STANDPIPE WITH:		
NUMBER	Lbs	SIZE	STAINLESS STEEL DOME (-3)		
F1832,3,4-P	8.50	4" DIA x 6" HIGH	\$ 944.00		


A1 BODY A1-C1

F1830-P	F1830-P OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-13	Galvanized body	\$108.00	-79	Standpipe over 8", per inch	\$ 98.00	
-30	PVC socket connection body (2", 3", 4")	\$ 28.00	-90	Threaded side outlet (2", 3") (4" \$117.00) (NA in -30,-31)	\$123.00	
-31	ABS socket connection body (2", 3", 4")	\$ 28.00	-92	Stainless steel perforated stand pipe	No Add	
-40	Deck clamp (A1-C3)	\$108.00	Р	Push on outlet (2", 3", 4")	\$ 26.00	
-41	Sump receiver (A1-BP)	\$108.00	T	Threaded outlet (2", 3", 4")	\$ 61.00	
-43	Solid standpipe (W-31)	No Add	Χ	Inside caulk outlet (2", 3", 4")	No Add	

F1830-PL LARGE PLANTING AREA DRAIN W/8" HIGH PERFORATED STANDPIPE & DOME

F1830-PL

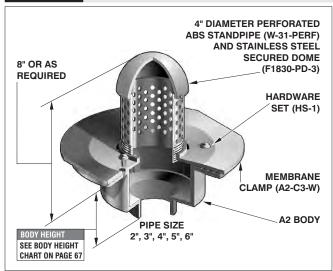

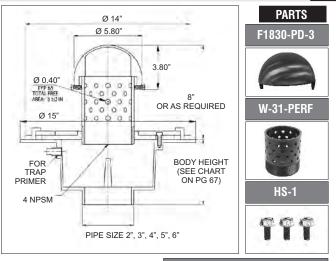

F1830-PL LARGE PLANTING AREA DRAIN WITH 8" HIGH PERFORATED STANDPIPE & DOME						
MODEL Number						
F1832,3,4-PL	18.00	4" DIA x 6" HIGH	\$ 591.00	\$ 1100.00		

A2 BODY	A2-C3-W
9	0


F1830-P	F1830-PL OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-13	Galvanized body	\$152.00	-79	Standpipe over 8", per inch	\$ 98.00	
-30	PVC socket connection body (2", 3", 4")	\$ 28.00	-90	Threaded side outlet (2", 3", 4") (NA in -30,-31)	\$148.00	
-31	ABS socket connection body (2", 3", 4")	\$ 28.00	-92	Stainless steel perforated stand pipe	No Add	
-40	Deck clamp (A2-C3)	\$108.00	Р	Push on outlet (2", 3", 4")	\$ 29.00	
-41	Sump receiver (A2-BP)	\$108.00	T	Threaded outlet (2", 3", 4")	\$ 61.00	
-43	Solid standpipe (W-31)	No Add	Χ	Inside caulk outlet (2", 3", 4")	\$ 61.00	

Design and dimensions are subject to modification. Prices do not include applicable taxes.



F1840 PLANTING AREA DRAIN W/9" ADJUSTABLE TRACTOR GRATE W/STAINLESS STEEL BALLAST GUARD


F1840

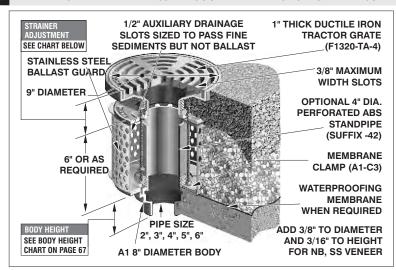

F1840 PLANTING AREA DRAIN WITH 9" ADJUSTABLE TRACTOR GRATE WITH STAINLESS STEEL BALLAST GUARD					
M ODEL	WT.	STANDPIPE	LACQU	ERED CAST IRON BODY	WITH:
NUMBER	Lbs	DIAMETER	DUCTILE IRON (-4)	NICKEL BRONZE (-1)	STAINLESS STEEL (VENEER) (-3)
F1842,3,4,6	25.00	4"	\$2054.00	\$2249.00	\$2249.00

STRAINER ADJUSTMENT				
STRAINER	MIN	MAX		
9" DIA.	1 3/4"	2 5/8"		


ANSI/ASME RATING					
STRAINER	FREE AREA	LOAD RATING			
F1320-TA-4	18.0 IN ²	OVER 10,000 lbs			

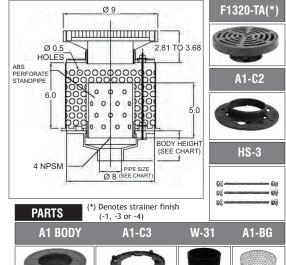

F1840	F1840 OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE		
-42	Perforated standpipe(W-31-PERF)	No Add		
-AR	Ballast guard other than 6"	\$601.00		

F1860 F1870

12" and 16" SQUARE OPEN HOPPER DRAIN W/LOOSE SET BOTTOM GRATE

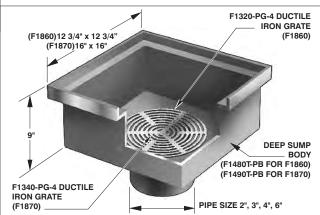


F1860 PARTS (*) Denotes strainer finish (-1, -3 or -4)					
		F1480T-PB BODY (F1860)	F1320-PG-(*) (F1860)		
A3-PG	A1 BODY	F1490T-PB BODY (F1870)	F1340-PG-(*) (F1870)		
0	9				

	F1860 12"/F1870 16" SQUARE OPEN HOPPER DRAIN WITH LOOSE SET BOTTOM GRATE				
	MODEL	WT.	LACQUERED CAST IRON BODY WITH:		
	NUMBER	Lbs	DUCTILE IRON (-4)	STAINLESS STEEL (VENEER) (-3)	NICKEL BRONZE (-1)
	F1862,3,4	25.00	\$572.00	\$1046.00	\$ 1046.00
	F1873,4,6	30.00	\$943.00	\$1851.00	\$ 1851.00
•					

F1860 a	nd F1870 OPTIONAL VARIATIONS:		
SUFFIX	DESCRIPTION	F1860	F1870
-5	Sediment bucket (FS1700-PB)	\$158.00	\$ 386.00
-11	Acid resistant epoxy finish	\$495.00	\$ 538.00
-13	All galvanized	\$374.00	\$ 412.00
-16-4	DI floor level square grate (F1440-PG-4)	\$126.00	\$ 336.00
-16-1	NB floor level square grate (veneer) (F1440-PG-1)	\$383.00	\$1156.00
-16-3	SS floor level square grate (veneer) (F1440-PG-3)	\$383.00	\$1156.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	\$ 66.00
-FL	Anchor flange	\$208.00	\$ 208.00
-FLC	Anchor flange & membrane clamp	\$486.00	\$ 522.00
Design an	d dimensions are subject to modification. Prices do not in	nclude appli	cable taxes.

F1880 / F1890 4" x 8" AND F1890 6" x 12" OPEN SIGHT DRIP DRAINS

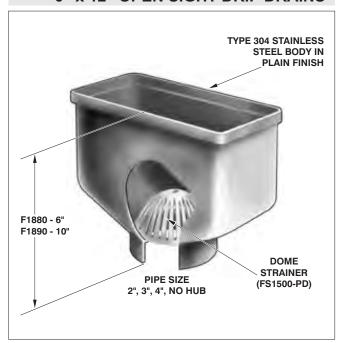

F1880 4" x 8" & F1890 6" X 12" OPEN SIGHT DRAINS				
MODEL NUMBER	WT. Lbs	DESCRIPTION	STAINLESS STEEL (-3)	
F1882,3,4,6	13.00	4" x 8"	\$3606.00	
F1892,3,4,6	30.00	6" x 12"	\$4807.00	

SUFFIX	DESCRIPTION	F1880	F1890
-21	Secondary flat strainer (FD-9600 Series)	\$ 40.00	\$ 40.00
-34	Closure plug (C1440 Series)	\$ 65.00	\$ 65.00
-34B	Bronze closure plug	\$481.00	\$481.00
-FL	Anchor flange	\$481.00	\$721.00
-FLC	Anchor flange & membrane clamp	\$601.00	\$841.00
T	Threaded connection (2", 3" 4")	\$ 61.00	\$ 61.00
Χ	Inside caulk outlet (2", 3" 4")	\$ 61.00	\$ 61.00







TRENCH DRAIN SYSTEMS

ENGINEERED TRENCH DRAIN PRODUCTS



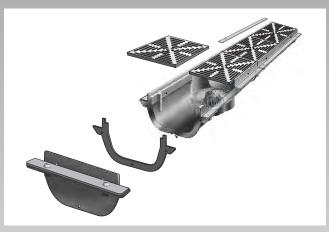

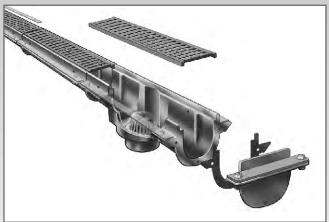





KEY FEATURES AND BENEFITS



MIFAB®

SUPPORT BOARD - Every body section shipped with a support board assembled into the top of the body to maintain rigidity during the concrete pour and to keep debris out of the trench. This is standard with every body section and eliminates the time and money required to purchase and cut plywood to place inside of the bodies.

LIGHTWEIGHT AND STRONG - Body sections are made of polypropylene material which is acid resistant and lightweight for easy handling. Lightweight body sections take less time to install than heavy, polymer concrete bodies and are less likely to break during shipment. They are also less costly to transport

BODY SUPPORT LEGS - Legs are molded into the bottom of the bodies. They support the body in the trench after pre-mix is poured. This can eliminate the need for time consuming and costly rebar supports.

INTERLOCKING BODIES - Body sections easily snap together. No screws or hardware are required which can save time during installation.39.37"Length for easy handling and transport on standard sized pallets to save transport cost.

GRATE LOCKDOWN HARDWARE -

Field adjustable to position anywhere inside of the body. Grates can still be locked down into the body, regardless of where the body sections are cut. Two are shipped standard inside of every body section.


REBAR TIE DOWN CLIPS EVERY 20"

- Alternative method of securing body in the trench excavation during the concrete pour by gripping rebar. They are located every 20" to provide more rigidity during the concrete pour to prevent warping and rework.

END AND BOTTOM OUTLETS - Snap into bodies quickly for fast installation.

EASY TO INSTALL CATCH BASINS -

The body sections snap directly into the catch basin. This eliminates the opportunity for a gap to develop between the catch basin and the body.

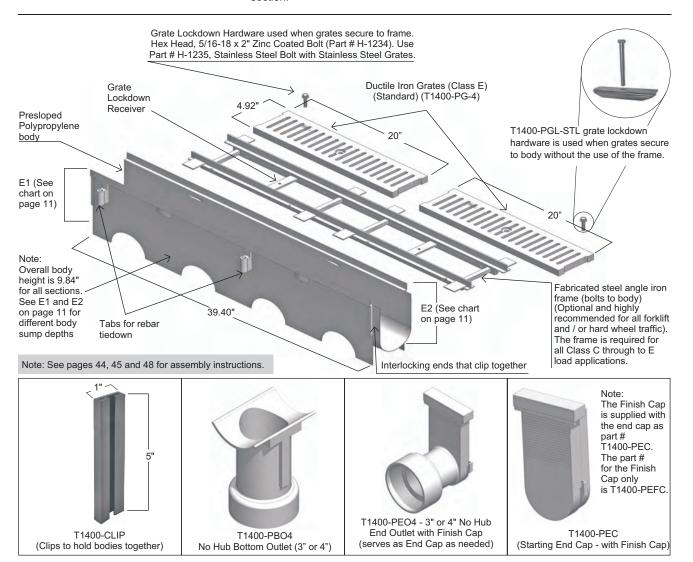

Design and dimensions are subject to modification. Prices do not include applicable taxes.



T1000 TO T1200 TRENCH DRAINS

T1000 - T1200

T1000 5" x 20" STAINLESS STEEL TRENCH DRAIN GRATE WITH OPTIONAL "F" ANGLE FRAME					
MODEL NUMBER	SIZE	GRATE MATERIAL	FRAME MATERIAL	LIST PRICE	
T1000-3	5" x 20" grate	Stainless Steel	None	\$ 834.00	
T1000-F-3	5 1/2" x 20" section	Stainless Steel	Stainless Steel	\$1042.00	

T1100 5" x 20" T	T1100 5" x 20" TRENCH DRAIN GRATE WITH OPTIONAL "F" ANGLE FRAME					
MODEL NUMBER	SIZE	GRATE MATERIAL	FRAME MATERIAL	LIST PRICE		
T1100-4	5" x 20" grate	Ductile Iron	None	\$ 208.00		
T1100-4-3	5" x 20" grate	Ductile Iron, Stainless Steel veneer	None	\$ 834.00		
T1100-F-4	5 7/8" x 20" section	Ductile Iron	Steel	\$ 278.00		
T1100-F-4-3	6" x 20" section	Ductile Iron, Stainless Steel veneer	Stainless Steel	\$ 1111.00		

T1000 AND T1100 OPTIONAL VARIATIONS				
SUFFIX	DESCRIPTION	LIST PRICE		
-6	Vandal proof - per grate (H-1110)	\$194.00		
-11	Acid resistant epoxy - per section	\$244.00		
-13	All galvanized - per section	\$244.00		

T1150-(F) 12" x 12" TRENCH DRAIN GRATE WITH OPTIONAL "F" ANGLE FRAME					
MODEL NUMBER	SIZE	GRATE MATERIAL	FRAME MATERIAL	LIST PRICE	
T1150-4	12" x 12" grate	Ductile Iron	None	\$ 164.00	
T1150-4-3	12" x 12" grate	Ductile Iron, Stainless Steel veneer	None	\$ 801.00	
T1150-F-4	12 1/4" x 12 1/4" section	Ductile Iron	Steel	\$ 280.00	
T1150-F2-4	12 1/4" x 24 1/4" section	Ductile Iron	Steel	\$ 463.00	
T1150-F-4-3	12 1/4" x 12 1/4" section	Ductile Iron, Stainless Steel veneer	Stainless Steel	\$ 1009.00	
T1150-F2-4-3	12 1/4" x 24 1/4" section	Ductile Iron, Stainless Steel veneer	Stainless Steel	\$ 2223.00	

T1150-(F) OPTIONAL VARIATIONS				
SUFFIX	DESCRIPTION	LIST PRICE		
-6	Vandal proof - per grate (H-1072)	\$ 194.00		
-11	Acid resistant epoxy - per section	\$ 271.00		
-12	Galvanized grate - per grate	\$ 271.00		
-13	All galvanized - per section	\$ 348.00		

T1200-(F) 12" x 24" TRENCH DRAIN GRATE WITH OPTIONAL "F" ANGLE FRAME										
MODEL NUMBER	SIZE	GRATE Material	FRAME Material	LIST PRICE	ADD FOR 24" EXTENSION					
T1200-4	12" x 24" grate	Ductile Iron	None	\$ 637.00	\$ 637.00					
T1200-4-3	12" x 24" grate	DI grate W/SS veneer	None	\$ 1953.00	\$ 1953.00					
T1200-F-4	12 1/2" x 24 1/2" section	Ductile Iron	Steel	\$ 722.00	\$ 876.00					
T1200-F-4-3	12 3/8" x 24 3/8" section	Ductile Iron, SS veneer	Stainless Steel	\$ 2423.00	\$ 2423.00					

T1200-(F) OPTIONAL VARIATIONS								
SUFFIX	DESCRIPTION	LIST PRICE						
-6	Vandal proof - per grate (H-1072)	\$328.00						
-11	Acid resistant epoxy - per section	\$555.00						
-13	All galvanized - per section	\$555.00						
-95	Client logo (-3 SS veneer only) per grate	\$601.00						

T1200-F2 24 1/2" x 24 1/2" TRENCH DRAIN GRATE AND FRAME ASSEMBLY									
MODEL NUMBER	SIZE	GRATE Material	FRAME Material	LIST PRICE	ADD FOR 24" EXTENSION				
T1200-F2-4	24 1/2" x 24 1/2" section	Ductile Iron	Steel	\$1709.00	\$ 596.00				
T1200-F2-4-3	24 1/2" x 24 1/2" section	DI grate W/SS veneer	Stainless Steel	\$5773.00	\$5773.00				


T1200-	T1200-F2 OPTIONAL VARIATIONS								
SUFFIX	DESCRIPTION	LIST PRICE							
-6	Vandal proof - per grate (H-1072)	\$328.00							
-11	Acid resistant epoxy - per grate	\$555.00							
-13	All galvanized - per grate	\$555.00							
-95	Client logo (-3 SS veneer only) per grate	\$601.00							

Design and dimensions are subject to modification. Prices do not include applicable taxes.

T1200-F-4
12 3/8" x 24 3/8" Section



1 3/4" x 1 3/4" x 1/4" Angle Iron Frame (Suffix -F)



T1000-F-3 5 1/2" x 20" x 3/4" Section



1" x 3/4" x 1/8" Stainless Steel Angle Frame (Suffix -F)

Free area 20 in²per running foot 16 gauge slotted Stainless Steel Grate



1" x 3/4" x 1/8" Mild Steel Angle Frame (Suffix -F) or S.S. Frame (Suffix -F-3)

Free area 20 in²per running foot Ductile Iron Grate (S.S. Veneer, add (-3)

T1150-4 12" x 12" Grate



Ductile Iron Grate (-4) Free area 51 in²

T1150-F-4


12 3/8" x 12 3/8" Section



Ductile Iron Grate (-4) Free area 51 in² 1" x 1" x 1/8" Angle Iron Frame (Suffix -F)

T1150-F2-4

12 1/4" x 24 1/4" Section



T1200-F2-4 24 3/8" x 24 3/8" Section




Ductile Iron Grate (Standard) Free area 200 in²



T1320-FL 6 1/8" x 20" CAST IRON TRENCH DRAIN WITH ANCHOR FLANGE

T1320-FL

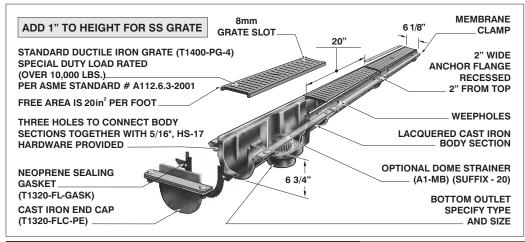

Custom fabricated trench drains are our specialty. Any custom configuration is possible. See page 83 for order instruction guide.


T1320-FL 6 1/8" x 20" CAST IRON TRENCH DRAIN WITH ANCHOR FLANGE										
MODEL NUMBER	SIZE	MATERIAL	FRAME MATERIAL	LIST PRICE PER 20" SECTION						
T1322,3,4-FL-4	6 1/8" x 20" section	Cast iron body, DI grate	Cast iron	\$ 883.00 20"/section						
T1322,3,4-FL-4-3	6 1/8" x 20" section	Cast iron body, DI grate W/SS veneer	SS veneer	\$1981.00 20" /section						

T1320	O-FL OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (per piece) (A1-MB)	\$191.00	-20	Dome bottom outlet strainer (per piece) (A1-MB)	\$185.00
-6	Vandal proof grate (per grate) (TR30 Torx and pin) (H-1109A)	\$158.00	-C	Membrane clamp (per 20" section)	\$103.00
-8	Backwater valve (per piece) (BV1254)	\$366.00	Р	Push on bottom outlet (2", 3" or 4")	\$ 26.00
-11	Acid resistant epoxy (per 20" section)	\$503.00	S	End outlet (4" No hub only)	\$250.00
-12	Galvanized grate (per 20" section)	\$420.00	T	Threaded bottom outlet (2", 3" or 4")	\$ 61.00
-13	All galvanized (per 20" section)	\$503.00	Χ	Inside caulk bottom outlet (2", 3" or 4")	No Add

ALL TRENCH DRAIN ORDERS REQUIRE A FACTORY DRAWING APPROVED BY THE CUSTOMER PRIOR TO PRODUCTION

T1350-FL 12 1/4" x 12" CAST IRON TRENCH DRAIN WITH ANCHOR FLANGE

T1350-FL

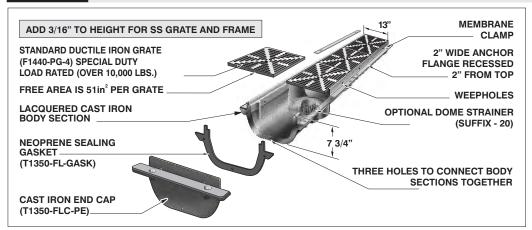

Custom fabricated trench drains are our specialty. Any custom configuration is possible.
See page 83 for order

See page 83 for order instruction guide.

T1350-FL 12 1/4" x 12" CAST IRON TRENCH DRAIN WITH ANCHOR FLANGE										
MODEL NUMBER	SIZE	MATERIAL	FRAME MATERIAL	LIST PRICE PER 12" SECTION						
T1352,3,4,6-FL-4	12 1/4" x 12" section	Cast iron body, DI grate	Cast iron	\$ 1282.00 /12"section						
T1352,3,4,6-FL-4-3	12 1/4" x 12" section	Cast iron body, DI grate W/SS veneer	SS veneer	\$ 2010.00 /12"section						

T1350-F	L OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (per outlet section)	\$191.00	-20	Dome bottom outlet strainer (per piece)	\$185.00
-6	Vandal proof grate (per grate) (H-1072B)	\$158.00	-95	Client logo (-3 SS veneer only)	\$601.00
	(lockdown grate to body)		-C	Membrane clamp (per foot)	\$103.00
-8	Backwater valve (per piece) (BV1254)	\$ 56.00	Р	Push on bottom outlet (2", 3" or 4")	\$ 26.00
-11	Acid resistant epoxy (per 12" section)	\$503.00	S	End outlet (No Hub only, 4")	\$250.00
-12	Galvanized grate	\$467.00	T	Threaded bottom outlet (2", 3" or 4")	\$ 61.00
-13	All galvanized (per 12" section)	\$887.00	Χ	Inside caulk bottom outlet (2", 3" or 4")	No Add

ALL TRENCH DRAIN ORDERS REQUIRE A FACTORY DRAWING APPROVED BY THE CUSTOMER PRIOR TO PRODUCTION



T1320-FL T1320-FL ORDER GUIDE

STEP 1: Determine the total length required. Once total length is known, divide by 20" (each cast iron body section with grate is 20" long) to determine the total number of cast iron body sections required. Specify the total number of T1320-FLC-PB body sections required.

STEP 2: Determine how many outlet and connection type are required. Are they bottom outlet, (most common) or end outlet? If bottom outlet, specify the total number of T1320T-FLC-PB body sections required. Reduce the total number of body sections required in STEP 1 by the total number of bottom outlet sections required.

Remember to add the A3-PG sealing gasket and appropriate A1 body for each bottom outlet

Remember to add one piece of the T1320-FLC-GASK for every body section and also for every end piece.

Remember to add one piece of the HS-17 hardware pack with everybody section required.

STEP 3: Specify the total number of end pieces required (Part No:T1320-FLC-PE).

STEP 4: Determine the type and number of grates required.

The number of grates required will equal the total number of body sections required.

ORDER EXAMPLE:


Twenty feet of T1324-FL-4-12SEC trench is required by the customer with one bottom outlet (4", no hub connection) and standard ductile iron grates.

Number of body sections required is twelve. One of these body sections will be the outlet body section.

PARTS REQUIRED:

T1320-FLC-PB (T1320-FL-GASK Incl.) 11 pieces T1320T-FLC-PB (T1320-FL-GASK Incl.) 1 piece 1 piece A1-4NH-7 A3-PG 1 piece HS-17 13 pieces T1320-FLC-PE 2 pieces T1400-PG-4 12 pieces T1400-PGL-STL 12 pieces

Enter the order into the system by part number and quantity for each.

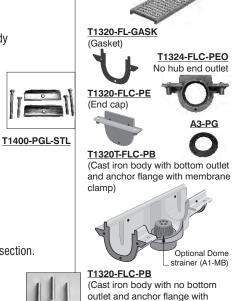

HS-17

T1400-PG-4

(Standard grate)

A1-MB Sediment bucket (Suffix -5)

T1350-F

1350-F T T1350-FL ORDER GUIDE

STEP 1: Determine the total length required. Once total length is known, divide by 12" (each cast iron body section with grate is 12" long) to determine the total number of cast iron body sections required. Specify the total number of T1350-FLC-PB body sections required.

STEP 2: Determine how many outlets and connection types are required. Are they bottom outlet. (most common) or end outlet? If bottom outlet, specify the total number of T1350T-FLC-PB body sections required. Reduce the total number of body sections required in STEP1 by the total number of bottom outlet sections required.

Remember to add the A3-PG sealing gasket and appropriate A1 body for each bottom outlet required.

Remember to add one piece of the T1350-FLC-GASK for every body section and also for every end piece.

Remember to add one piece of the HS-17 hardware pack with every body section required.

STEP 3: Specify the total number of end pieces required (Part No: T1350-FLC-PE).

STEP 4: Determine the type and number of grates required.

The number of grates required will equal the total number of body sections required.

ORDER EXAMPLE:


Ten feet of T1354-FL-4-10SEC trench is required by the customer with one bottom outlet (4", no hub connection) and standard ductile iron grates.

Number of body sections required is ten. One of these body sections will be the outlet body section.

PARTS REQUIRED:

T1350-FLC-PB (T1350-FL-GASK- incl.) 9 pieces T1350T-FLC-PB(T1350-FL-GASK- incl.) 1 piece 1 piece A1-4NH-7 A3-PG 1 piece HS-17 11 pieces T1350-FLC-PE 2 pieces F1440-PG-4 10 pieces

Enter the order into the system by part number and quantity for each.

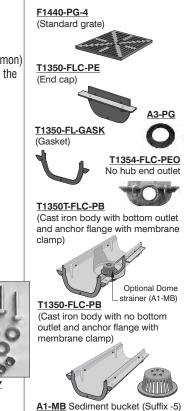



T1400 6" WIDE TRENCH DRAIN SYSTEM

T1400

	Body Sur	mp Depth	Overall				Weig	ht
Body Part Number	E1 (Min.	E2 (Max.)	Body Depth	GPM Gallons per	LPS Litres per	CFS Cubic Feet per	(Less C	
	,		Inches	Minute	Second	Second	Lbs.	Kg.
◯ T1400N	5.90" (150)	5.90" (150)	9.84"	130	8.39	0.289	5.00	2.20
● T1401	5.90" (150)	6.10" (155)	9.84"	130	8.39	0.289	5.00	2.20
● T1402	6.10" (155)	6.29" (160)	9.84"	145	9.35	0.323	5.00	2.20
● T1403	6.29" (160)	6.49" (165)	9.84"	160	10.32	0.356	5.00	2.20
● T1404	6.49" (165)	6.69" (170)	9.84"	175	11.29	0.389	5.00	2.20
O T1405	6.69" (170)	6.89" (175)	9.84"	190	12.26	0.423	5.00	2.20
◯ T1405N	6.89" (175)	6.89" (175)	9.84"	190	12.26	0.423	5.00	2.20
T1406	6.89" (175)	7.08" (180)	9.84"	215	13.87	0.478	5.00	2.20
● T1407	7.08" (180)	7.28" (185)	9.84"	230	14.84	0.512	5.00	2.20
● T1408	7.28" (185)	7.48" (190)	9.84"	245	15.80	0.545	5.00	2.20
● T1409	7.48" (190)	7.67" (195)	9.84"	260	16.77	0.579	5.00	2.20
T1410	7.67" (195)	7.87" (200)	9.84"	275	17.74	0.612	5.00	2.20
◯ T1410N	7.87" (200)	7.87" (200)	9.84"	275	17.74	0.612	5.00	2.20
● T1411	7.87" (200)	8.07" (205)	9.84"	290	18.71	0.645	5.00	2.20
T1412	8.07" (205)	8.26" (210)	9.84"	305	19.67	0.679	5.00	2.20
T1413	8.26" (210)	8.46" (215)	9.84"	320	20.64	0.712	5.00	2.20
O T1414	8.46" (215)	8.66" (220)	9.84"	335	21.61	0.745	5.00	2.20
T1415	8.66" (220)	8.85" (225)	9.84"	350	22.58	0.788	5.00	2.20
◯ T1415N	8.85" (225)	8.85" (225)	9.84"	365	23.54	0.812	5.00	2.20

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
□ -4 □ -4-3	Ductile Iron Slotted Grate, Class E Extra heavy duty ductile iron slotted grate	☐ -HD-13	Galvanized Steel Frame and Ductile Iron Grate, Class F	-PHPP	Polypropylene, Heel Proof, Perforated Grate, Class C
	with stainless steel veneer, Class E (Standard) (must order together with steel	☐☐ -HP-4	Ductile Iron, Heel Proof Longitudinal Slotted Grate, Class E	☐ -PS	Stainless Steel, Fabricated Perforated Grate, Class A
	frame with Stainless Steel veneer. Part # for assembly is T1400-PFO-TA-3 with open frame.	-HP-4-13	Ductile Iron, Galvanized Heel Proof Longitudinal Slotted Grate, Class E	-RFS	Stainless Steel, Reinforced Slotted Grate, Class B
-4-13	Ductile Iron Slotted Grate, Galvanized, Class E	-HPP	Polypropylene, Heel Proof Slotted Grate, Class A (Standard)	☐☐ -RG	Galvanized Steel, Reinforced Perforated Grate, Class B
-45 -90	45 degree body section 90 degree body section	☐ -HPSS ☐ -LG-4	Stainless Steel, Heel Proof Slotted Grate, Class A Ductile Iron, Longitudinal Slotted Grate, Class E	-RPS	Stainless Steel, Reinforced Perforated Grate, Class B
-AWG -CDA	Aluminum Wire Grate, Class A Stainless Steel, Circular Decorative Grate,	☐☐ -LG-4-13	Galvanized Ductile Iron, Longitudinal Slotted Grate, Class E	☐ -SBG	Stainless Steel, Slotted Bar Grate, Class E
CDB	Class A Stainless Steel, Circular Decorative Grate,	☐ -LGHP ☐ -PBO2	Steel, Heel Proof Slotted Grate, Class B 2" No Hub Bottom Outlet	SBGGS	Galvanized Steel, Slotted Bar Grate, Class C
	Class B	PBO3	3" No Hub Bottom Outlet	SBGST	Steel, Slotted Bar Grate, Class C
☐ -CDC ☐ -CF	Steel, Circular Decorative Grate, Class C Cross Fabrication	-PBO4 -PBDS	4" No Hub Bottom Outlet Bottom Dome Strainer	☐ -SC ☐ -SDG	Solid Steel Cover, Class E Decorative Steel Grate, Class B
-CI -DDA	Stainless Steel, Circular Decorative Grate,	-PBRD	Support Board	SOF	Side Outlet Fabrication
	Class A	-PEC	Closed End Cap	SSDA	Stainless Steel, Decorative
-DDB	Stainless Steel, Circular Decorative Grate,	-PEFC	Top Finishing Cap (always included with the		Grate, Class A
	Class B		T1400-PEC-30 Closed End Cap)	SSDB -SSDB	Stainless Steel, Decorative
☐ -DSG	Steel, Circular Decorative Grate, Class A	— -PEO2	2" No Hub End Outlet		Grate, Class B
DWG	Steel, Decorative Wave Grate, Class A	PEO3	3" No Hub End Outlet	SSWG	Stainless Steel Wire Grate,
☐ -FS	Stainless Steel, Fabricated Slotted Grate, Class A	☐ -PEO4 ☐ -PGG	4" No Hub End Outlet	- OVE	Class A
□ -FSB	Galvanized Steel, Reinforced Slotted Grate,		Galvanized Steel, Fabricated Perforated Grate, Class A	SVF	Stainless Steel Top Veneer Frame
SB	Class B	-PGLVP	2" Long Vandal Resistant Grate Hardware	-TEE	Polypropylene Tee
□ -FSGA	Galvanized Steel, Fabricated Slotted Grate,		Steel Frame and Ductile Iron Grate w/ Stainless		1 dispropsione rec
	Class A		Steel Veneer, Class F		
☐ -HD	Steel Frame and Ductile Iron Grate, Class F	-PGV-LG-4-3	Steel Frame and Longitudinal Ductile Iron Grate		
☐☐ -HD-3	Stainless Steel Frame Assembly		w/ Stainless Steel Veneer, Class F		

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

T1404

T1405

T1405N

NEUTRAL

T1403

T1407

7.28"

T1406

T1401

T1400N


NEUTRAL

T1402




6" Wide Grates for T1400 Trench Drain Systems and T1400-CB620 **Catch Basins**

Grate Part	Suffix	Description	Material	Weight	Lameth	Free Area	Slot Width /	ADA		Load Rat	tings	
Number	Sullix	Description	Material	(lbs./ft.)	Length	(sq. in. per ft.)	Hole Size	ADA	DIN	ANSI	H-20	FAA
T1400-PG- AWG	-AWG	Aluminum wire grate	Aluminum	0.70	40"	37.50	0.250"	Yes	А	Light Duty	No	No
T1400- PG-CDA	-CDA	Circular Decorative	Stainless Steel	1.70	40"	17.60	0.250"	No	А	Light Duty	No	No
T1400- PG-DDA	-DDA	Diagonal Decorative	Stainless Steel	1.70	40"	17.90	0.250"	Yes	А	Light Duty	No	No
T1400-PG- SSDA	-SSDA	Decorative	Stainless Steel	1.70	40"	16.90	0.250"	No	А	Light Duty	No	No
T1400-PG- DSG	-DSG	Diagonal Decorative	Steel	5.00	40"	17.90	0.250"	Yes	А	Light Duty	No	No
T1400-PG- DWG	-DWG	Decorative Wave	Steel	5.00	40"	36.90	0.900"	No	А	Light Duty	No	No
T1400- PG-FSGA	-FSGA	Fabricated Slotted	Galvanized Steel	1.70	40"	12.00	0.375"	No	А	Light Duty	No	No
T1400- PG-FS	-FS	Fabricated Slotted	Stainless Steel	1.70	40"	12.00	0.375"	No	А	Light Duty	No	No
T1400-PG- HPSS	-HPSS	Heel Proof Slotted	Stainless Steel	7.10	40"	17.00	0.250"	Yes	А	Light Duty	No	No
T1400- PG-HPP	-HPP	Heel Proof Slotted	Polypropylene	0.90	20"	14.50	0.250"	Yes	А	Light Duty	No	No
T1400- PGG	-PGG	Fabricated Perforated	Galvanized Steel	1.60	40"	5.30	0.250" Dia.	Yes	А	Light Duty	No	No
T1400-PG- PHPP	-PHPP	Heel Proof Perforated	Polypropylene	0.90	20"	14.50	0.250" Dia.	Yes	А	Light Duty	No	No
T1400- PG-PS	-PS	Fabricated Perforated	Stainless Steel	1.80	40"	5.30	0.250" Dia.	Yes	А	Light Duty	No	No




T1400-PG-CDA




T1400-PG-DWG



T1400-PG-SSDA



T1400-PGG / PS



T1400-PG-HPP



T1400-PG-DDA / DSG



T1400-PG-FSGA / FS



T1400-PG-HPSS



T1400-PG-AWG



T1400-PG-PHPP

See TRENCH DRAIN Price Book TDLP-2013-CAN for List Prices and discount structure of T1400 Series of TRENCH DRAIN PRODUCTS

7.28"	T1408	T1409	T14010	T1410N	T1411	T1412	T1413	T1414	T1415	T1415N	8.85"
1											

NEUTRAL



6" Wide Grates for T1400 Trench Drain Systems and T1400-CB620 **Catch Basins**

Grate Part	Cuttin	Description	Material	Weight	Lameth		Slot Width /		Load Ratings				
Number	Suffix	Description	Materiai	(lbs./ft.)	Length	(sq. in. per ft.)	Hole Size	ADA	DIN	ANSI	H-20	FAA	
T1400- PG-SSWG	-SSWG	Stainless Steel wire grate	Stainless Steel	2.50	40"	37.50	0.250"	Yes	А	Light Duty	No	No	
T1400- PG-SDG	-SDG	Decorative	Steel	5.00	40"	16.90	0.250"	No	В	Medium Duty	No	No	
T1400-PG- LGHP	-LGHP	Heel Proof Longitudinal	Steel	5.00	40"	17.00	0.250"	Yes	В	Medium Duty	No	No	
T1400- PG-FSB	-FSB	Reinforced Slotted	Galvanized Steel	4.60	40"	6.00	0.500"	Yes	В	Medium Duty	No	No	
T1400- PG-CDB	-CDB	Circular Decorative	Stainless Steel	7.20	40"	17.60	0.250"	No	В	Medium Duty	No	No	
T1400- PG-DDB	-DDB	Diagonal Decorative	Stainless Steel	6.30	40"	17.90	0.250"	Yes	В	Medium Duty	No	No	
T1400-PG- SSDB	-SSDB	Decorative	Stainless Steel	5.60	40"	16.90	0.250"	No	В	Medium Duty	No	No	
T1400-PG- RFS	-RFS	Reinforced Slotted	Stainless Steel	4.00	40"	12.00	0.375"	No	В	Medium Duty	No	No	
T1400-PG- RG	-RG	Reinforced Perforated	Galvanized Steel	4.00	40"	5.30	0.250" Dia.	Yes	В	Medium Duty	No	No	
T1400-PG- RPS	-RPS	Reinforced Perforated	Stainless Steel	3.80	40"	5.30	0.250" Dia.	Yes	В	Medium Duty	No	No	
T1400-PG- SBGGS	-SBGGS	Slotted Bar Grate	Galvanized Steel	4.50	40"	23.90	0.360"	No	С	Heavy Duty	Yes	No	
T1400-PG- SBGST	-SBGST	Slotted Bar Grate	Steel	4.50	40"	23.90	0.360"	No	С	Heavy Duty	Yes	No	
T1400-PG- CDC	-CDC	Circular Decorative	Steel	4.75	40"	17.60	0.250"	No	С	Heavy Duty	No	No	




T1400-PG-LGHP




T1400-PG-CDB / CDC



T1400-PG-SDG / SSDB




T1400-PG-DDB



T1400-PG-RG / RPS



T1400-PG-FSB / RFS




T1400-PG-SSWG / SBGGS / SBGST



6" Wide Grates for T1400 Trench Drain Systems and T1400-CB620 Catch Basins


Grate Part				Weight		Free Area	Slot Width /		Load Ratings			
Number	Suffix	Description	Material	(lbs./ft.)	Length	(sq. in. per ft.)	Hole Size	ADA	DIN	ANSI	H-20	FAA
T1400-PG-SC	-SC	Solid Cover	Steel	7.50	40"	N/A	N/A	Yes	Е	Special Duty	Yes	Yes
T1400-PG-4	-4	Slotted	Ductile Iron	6.40	20"	27.80	0.500"	No	Е	Special Duty	Yes	Yes
T1400-PG-HP-4	-HP-4	Longitudinal Slotted	Ductile Iron	6.40	20"	16.50	0.250"	Yes	Е	Special Duty	Yes	Yes
T1400-PG- HP-4-13	-HP-4-13	Longitudinal Slotted	Galvanized Ductile Iron	6.40	20"	16.50	0.250"	Yes	Е	Special Duty	Yes	Yes
T1400-PG-LG-4	-LG-4	Longitudinal Slotted	Ductile Iron	6.40	20"	27.80	0.500"	No	E	Special Duty	Yes	Yes
T1400-PG-LG- 4-13	-LG-4-13	Longitudinal Slotted	Galvanized Ductile Iron	6.40	20"	27.80	0.500"	No	Е	Special Duty	Yes	Yes
T1400-PG-4-13	-4-13	Slotted	Galvanized Ductile Iron	6.40	20"	27.80	0.500"	No	Е	Special Duty	Yes	Yes
T1400-PG-SBG	-SBG	Slotted Bar Grate	Stainless Steel	9.40	40"	27.70	0.500"	No	Е	Special Duty	Yes	Yes
T1400-PFO and T1400-PG-4	-HD	Steel Frame and Ductile Iron Grate	Steel / Duc- tile Iron	12.00	20"	27.80	0.500"	No	F	Special Duty	Yes	Yes
T1400-PFO-13 and T1400-PG-4-13	-HD-13	Galvanized Steel Frame and Ductile Iron Grate	Galv. Steel / Ductile Iron	12.00	20"	27.80	0.500"	No	F	Special Duty	Yes	Yes
T1400-PGV-4-3	-PGV-4-3	Steel Frame and Ductile Iron Grate with Stainless Steel veneer	Steel / Ductile Iron with S.S. veneer	12.00	20"	27.80	0.500"	No	F	Special Duty	Yes	Yes
T1400-PGV- LG-4-3	-PGV- LG-4-3	Steel Frame and Longitudinal Duc- tile Iron Grate with Stainless Steel veneer	Steel / Ductile Iron with S.S. veneer	12.00	20"	27.80	0.500"	No	F	Special Duty	Yes	Yes




T1400-PG-4 / -4-13




T1400-PG-HP-4 (-4-13)



T1400-PG-LG-4 / -LG-4-13



T1400-PFO and -PG-4 (PFO-13 and -4-13) (PGV-4-3)



T1400-PGV-LG-4-3



T1400-PG-SC



T1400-PG-SBG

A variety of different colors are available with MIFAB's polypropylene grates. Contact MIFAB®. Custom grate patterns and logos in steel and stainless steel are available upon request. Contact MIFAB®.

Design and dimensions are subject to modification. Prices do not include applicable taxes.


Visit $\ensuremath{\textbf{www.mifab.com}}$ for the most recent product information.




T1400-CB620 6" x 20" CATCH BASIN

T1400-CB620



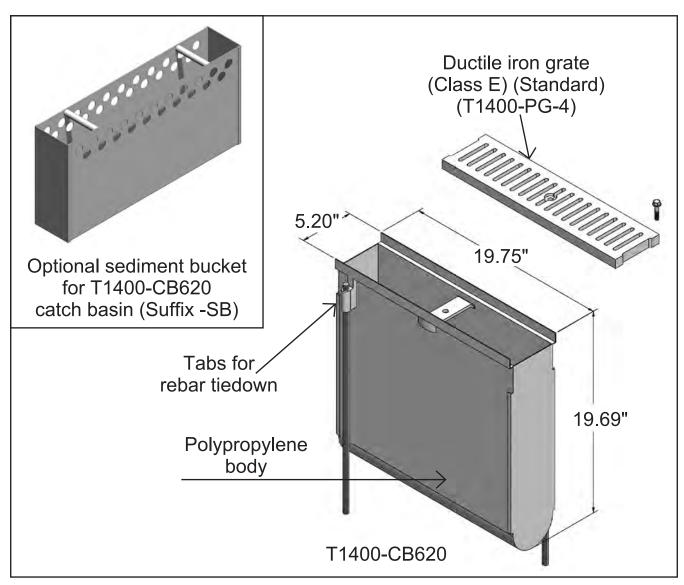





Design and dimensions are subject to modification. Prices do not include applicable taxes.



2000 12" WIDE POLYPROPYLENE TRENCH DRAIN SYSTEM

T2000

Specifications: MIFAB Series T2000 wide pre-sloped trench drain system. Polypropylene drain body with integral top frame and 0.5% per section bottom slope, anchor flange with slotted tabs every 15.5" for rebar tie down and leveling, grate lockdown assembly, body support system, interlocking ends and radiused bottom. Standard with ANSI rated "Extra Heavy Duty" lacquered ductile iron grates and a galvanized steel frame with a safe live load of over 10,000 lbs. (Load Class C)

Function: Used in airports, car washes, malls and plazas, golf courses, factories and any other facilities that require large areas of surface drainage. Chemical resistant polypropylene material provides for long life.

BODY PART	OVERALI	L DEPTH	MAX. FLOW RATE
NUMBER	E1 (MIN) E2 (MAX)		(GPM)
T2001N	10.24"	10.24"	278
T2001	10.24"	10.43"	278
T2002	10.43"	10.62"	387
T2003	10.62"	10.81"	500
T2004N	10.81"	10.81"	500
T2004	10.81"	11.00"	616
T2005	11.00"	11.19"	734
T2006	11.19"	11.38"	855
T2007	11.38"	11.57"	975
T2008N	11.57"	11.57"	975
T2008	11.57"	11.76"	1222
T2009	11.76"	11.95"	1345
T2010	11.95"	12.14"	1470
T2011	12.14"	12.33"	1595
T2012N	12.33"	12.33"	1595
T2012	12.33"	12.52"	1720

11.60"

CROSS SECTION VIEW

13.50" (343) (343)		18.00" [458]	15.37" [390]
	•		
	13.50" [343]		II

PLAN VIEW

SIDE VIEW

FRAME 1.50" [38] 17" E1 [432] 39.37" [1000]

SUFFIX	DESCRIPTION	
-PBDS	Bottom dome strainer	
-PB04	4" no hub bottom outlet	
-PB06	6" no hub bottom outlet	
-PB08	8" no hub bottom outlet	
-PEC	Closed end cap	
-PE04	4" no hub end outlet	
-PE06	6" no hub end outlet	
-PE08	8" no hub end outlet	
-FS	Fabricated stainless steel (Type 304) slotted grate (Load Class A)	
-PGC-4-13	Galvanized "Extra Heavy Duty" ductile iron grate (Load Class C)	
-PGLVP	Vandal resistant grate lockdown assembly	
-PC	Fabricated 10 gauge steel solid cover, A.R.E. Coated (Load Class B)	
-PCSS	Fabricated 10 gauge stainless steel (Type 304) solid cover (Load Class B)	
-PF-3	Type 304 stainless steel top veneer frame	
-PF-13 Galvanized steel frame assembly (Standard)		
-PGG	Perforated galvanized steel light duty grate (Load Class A)	
-PGC-4	"Extra Heavy Duty" ductile iron grate (Standard) (Load Class C)	
-PGC-4-11	A.R.E. Coated "Extra Heavy Duty" ductile iron grate	
-PGF	Slotted, galvanized steel "Light Duty" grate (Load Class A)	
-PGF-4	"Special Duty" ductile iron slotted grate (Airport application) (Load Class F)	
-PGF-4-11	A.R.E. Coated "Special Duty" ductile iron slotted grate (Airport application) (Load Class F)	
-PGF-4-13	Galvanized "Special Duty" ductile iron slotted grate (Airport application) (Load Class F)	
-PS	Perforated stainless steel (Type 304) light duty grate, ADA Compliant, (Load Class A)	
-FIB	Square, slotted fibreglass grate (Load class A)	
-RFS	Reinforced stainless steel (Type 304) slotted grate (Load Class B)	
-RG	Reinforced galvanized steel perforated grate, ADA Compliant, (Load Class B)	
-RGS	Reinforced slotted galvanized steel grate (Load Class B)	
-RPS	Reinforced stainless steel (Type 304) perforated grate (Load Class B)	
-SGB	Stainless steel (Type 304) bar grate (Load Class C)	

See TRENCH DRAIN Price Book TDLP-2013-CAN for List Prices and discount structure of T1400 Series of TRENCH DRAIN PRODUCTS


▼									
12.13"	T2007	T2008N	T2008	T2009	T2010	T2011	T2012N	T2012	13.17"
A		NEUTRAL					NEUTRAL		J

Design and dimensions are subject to modification. Prices do not include applicable taxes.




12" WIDE POLYPROPYLENE TRENCH DRAIN SYSTEM

MIFAB's 12" wide polypropylene trench drain bodies are 1 metre long (39.37") and are standard with a uniform exterior and 0.5% sloped or neutral (depending on the section number) interior with a full radius bottom for efficient liquid drainage. Drainage options include bottom outlet, end outlet or catch basin. Bottom and end outlet fittings in PVC material are available in 4", 6" or 8" (8" available in fabricated steel) diameter. They are also available in the same diameter in polypropylene material where chemical resistance is required. The end fittings fit all bodies and can be field trimmed to the required height.

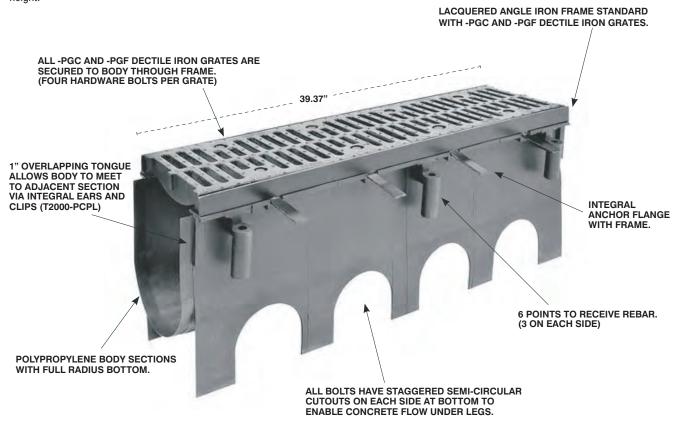


LEGS SUPPORT BODIES UPRIGHT.

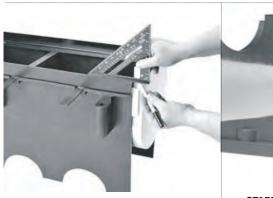

MEASURING END CAP:

Insert starting cap on most up-stream channel. Mark to top of frame and adjust down 1/4" for outline. (allows for 1/4" height of finish cap)



STARTING END CAP ASSEMBLY:

Cut SC and apply appropriate sealant on grove area. Use spacer clip to clip starting end cap to channel.



OUTLET END CAP ASSEMBLY:


Fix to downstream channel tongue. Mark to top of frame and adjust down 1/4" for outline. (allows 1/4" height of finish cap) Cut and apply appropriate sealant to tongue area and assemble to channel with T2000-CLIP.

See TRENCH DRAIN Price Book TDLP-2013-CAN for List Prices and discount structure of T2000 Series of TRENCH DRAIN PRODUCTS

Design and dimensions are subject to modification. Prices do not include applicable taxes.



GRATES AND FRAMES

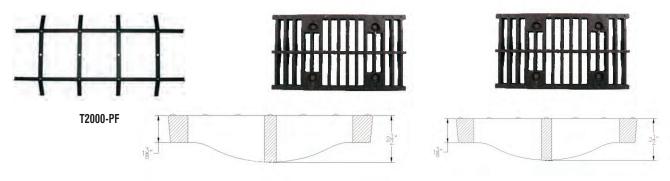

T2000-PGC-4

T2000-PGF-4

MODEL NO.	TIEST BIPTION		LOAD Rating Asme/ansi	DIN	FREE Area/Meter Sq. In./ft.	WEIGHT LBS.
T2000-PF	1" Angle Iron frame assembly (included with channel)	1 m				8 lbs.
T2000-PGC-4	Standard Ductile Iron Grate 1/2 metre (Load Class C)	1/2 m	Heavy Duty	С	57.50	55 lbs.
T2000-PGF-4	Heavy Duty Ductile Iron Grate 1/2 metre (Load Class F)	1/2 m	Special Duty	F	57.00	60 lbs.

ACCESSORIES

ENDCAPS



T2000-PEC-30

MODEL NO.	DESCRIPTION
T2000-PEC	Starting End Cap Polypropylene
T2000-PEC-30	Starting End Cap PVC (shows finish cap assembly)





MODEL NO.	DESCRIPTION
T2000-PEO8-NH	8" outlet end cap - Fabricated steel
T2000-PEO6	6" outlet end cap PP
T2000-PEO6-30	6" outlet end cap PVC
T2000-PEO4	4" outlet end cap PP
T2000-PEO4-30	4" outlet end cap PVC
T2000-PBO8-NH	8" bottom outlet pipe - Fabricated steel
T2000-PBO6	6" bottom outlet pipe PP
T2000-PBO6-30	6" bottom outlet pipe PVC
T2000-PBO4	4" bottom outlet pipe PP
T2000-PBO4-30	4" bottom outlet pipe PVC
T2000-PFC	Finish cap PVC
T2000-PFC-30	Finish cap PVC (assembled on cap)

ACCESSORIES

CLIPS

T2000-CLIP


T2000-CLIP MUST BE ORDERED SEPARATELY



MODEL NO.	DESCRIPTION
T2000-CLIP	Quick click spacer. PP
T2000-CLIP	Must be ordered separately

See TRENCH DRAIN Price Book TDLP-2013-CAN for List Prices and discount structure of T2000 Series of TRENCH DRAIN PRODUCTS



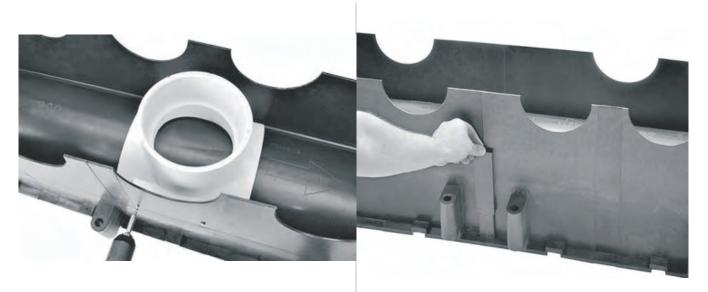

BOTTOM OUTLET POP (BO) ASSEMBLY:

Position bottom outlet on appropriate channel. Mark position and cut hole with 4" or 6" hole saw. Screw through channel skirt into boss area on bottom outlet to square prior to pour.


ASSEMBLE CHANNEL:

Layout with channel number visible upon completion of end cap assembly, begin assembling channels in sequential order. Apply appropriate sealant on tongue areas and clip channels together with quick clips. Once completed, move system into trench and slake with number 5 rebar or 3/8" all thread and level.

ASSEMBLY NOTE: Layout tench drain run in sequential order. Identify starting upstream and ending downstream channels and assemble starting end cap(s) and outlet end cap(s).

RECOMMENDED CONCRETE PLAN

GENERAL NOTES ON INSTALLATION: General installation requires frames to be in place and assembled in channels before/during cement pour. Defer to project engineer for any special requirements for channel installation. Diagram is for general purpose installations only.

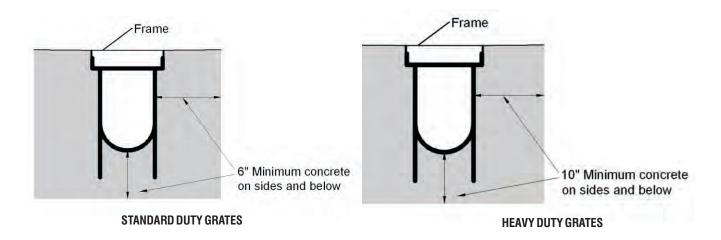

See TRENCH DRAIN Price Book TDLP-2013-CAN for List Prices and discount structure of TRENCH DRAIN PRODUCTS





SANITARY FLOOR AREA AND INDIRECT WASTE DRAINS

TOP

Available in round or square in a variety of sizes and materials, each of which allows maximum flow, sanitation and serviceability. See individual series for proper selection.

MEMBRANE CLAMP

Provided for applications in finished floors which incorporate a waterproofing membrane. Used to secure the membrane to the drain body, the flashing clamp provides a watertight seal at the drain.

BODY

Cast iron with A.R.E.coating inside giving a smooth finish which allows for easy drainage as well as increased sanitation. Easily cleaned because of the smooth finish, the drains are highly functional as well as aesthetically pleasing.

GRATE

Furnished A.R.E.-coated cast iron, stainless steel or nickel bronze. Each is ultimately designed for smooth flow into the drain body. Regularly furnished with a full grate, also available are half grate and three-quarter grates. (See page 94, bottom right corner for MIFAB's unique 3 in 1 nickel bronze and

3 in 1 nickel bronze and stainless steel floor sink design).

WEEPHOLES

Provided when the body is specified with a flange. Weepholes allow for the drainage of entrapped water which seeps down the outside of the body.

DOME STRAINER


Minimizes splashing as well as preventing debris from entering the drainage lines. The dome also allows for maximum water flow.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Sanitary Floor Area and Indirect Waste Drain Selection Guide

Sanitary floor sinks are used to receive surface drainage in areas where sanitation is a priority, such as institutional kitchens and hospitals and to drain indirect waste from various sinks, lavatories, condensate drains and other equipment. In order to specify the correct drain, the specifier must be aware of the floor sink's location and the type of equipment in the area to be served. While the round top will be compatible with most floors, a square top design is available for floor coverings with a square or straight -line pattern. Top sizes are 8" inches for normal usage and 12 inches for larger flow or where a greater free area is required. Stainless steel rims and grates are an excellent choice for traffic areas because of their corrosion-resistant qualities. Drop-in A.R.E. coated cast iron grates are available for nontraffic areas.





FUNNELS

Funnels are used to prevent splashing of wastewater while the remaining free area receives surface drainage. A four inch round funnel is used for single drain lines. A six inch round funnel and nine inch oval funnel are used for multiple drain line discharge points. Specify suffix -F4 for 4" round funnel. Specify suffix -F6 for 6" round funnel. Specify suffix -G for 9" oval funnel.

BUCKETS


Sediment buckets are used when debris such as peelings, vegetable cuttings, bones, pits and other solid waste kitchen material is to be intercepted and retained. **Specify suffix -5.**

DOME AND INSIDE STRAINER

The regularly furnished dome not only minimizes splashing; it also prevents debris from entering drain lines. The dome also allows maximum water flow. If added protection is needed for the drain, an inside strainer can be specified along with a sediment bucket. **Specify suffix -21.**


Design and dimensions are subject to modification. Prices do not include applicable taxes.





GRATES AND COVERS

MIFAB sanitary floor sinks are regularly furnished with white A.R.E. coated cast iron grates. For high use areas it is advisable to consider the use of a Nickel Bronze or Stainless Steel frame and grate.



Specify suffix -1 for Nickel Bronze or -3 for Stainless Steel. Note that the -1 and / or -3 frame must be installed on top of the floor sink body before installation because the frame is mounted on top of the floor sink body and cannot be installed on top of the body after the body is installed flush to the floor.

A grate is not required for floor sinks installed in non traffic areas where indirect waste applications are usually applied. Specify suffix -22 for Less Grate.

In areas such as frozen food cases or vegetable or meat cases; part of the floor sink may be covered and part left open to receive waste. Specify suffix -150 for half grate or suffix -175 for three-quarter grate.

MIFAB's patent pending -1 and -3 floor sink frame and grate design is always shipped as a full grate. The installer has the option to remove either one quarter of the grate (to achieve a three quarter grate) or two quarters of the grate (to achieve a half grate). This provides maximum flexibility and choice during the installation process.






MIFAB Typical Floor Area and Indirect Waste Drain Installations


FS1520-175

Sanitary Floor Sink with three quarter grate and dome strainer. Illustrated as installed in finished concrete floor slab on grade.

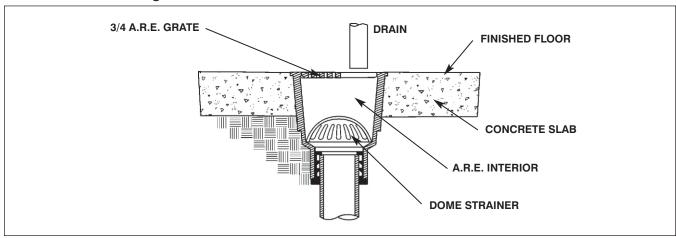


FS1730-FL-C-1

Sanitary Floor Sink with nickel bronze rim and grate, integral flange and dome strainer. Illustrated as installed flush with floor in concrete deck.

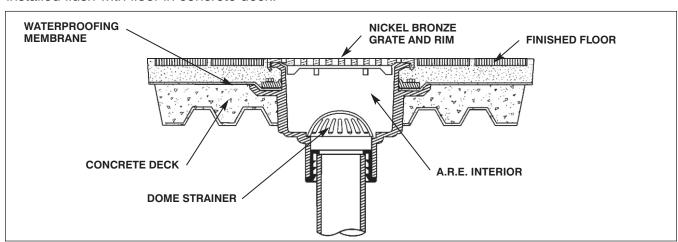

FS1750-22

Sanitary Floor Sink less grate with dome strainer. Illustrated as installed in finished concrete floor slab on grade.

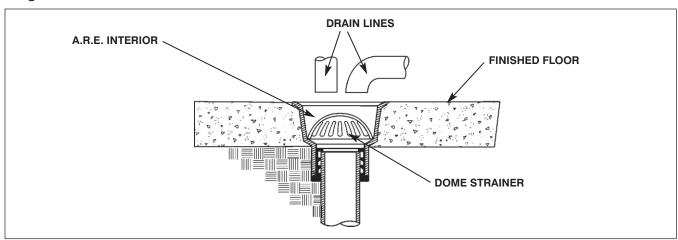

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Transition Floor Sink Information

MIFAB offers our Floor Sink bodies with transition outlet connections. Transition outlet floor sink bodies allow the installer to use any A1 body in order to attain the outlet connection size and type required (limited only to the outlet size and type of the A1 bodies).

A gasket (part # A3-PG) is installed between the transition floor sink body and the top of the A1 body in order to attain a watertight seal. The A1 body is screwed tightly onto the 4" NPSM male threaded transition connection of the floor sink body. The A1 body has the -7 trap seal primer connection as standard. The height of the transition bodies are increased slightly because of the A1 body. See table below:

How to order in parts: Transition bodies are identified within the MIFAB Kwik Order system by a Tafter the connection size. For example: FS1720T-PB (is the transition floor sink body only). A3-PG is the gasket required and the A1 body to stock in components.

How to order an assembled transition floor sink:


Select the required floor sink body size and type and then the applicable connection size and type.

For example: FS1723TBP-FL-150 indicates a 3" push on outlet connection, with anchor flange and half grate.

MODEL NUMBER	THREADED (T)	INSIDE CAULK (X)	PVC / ABS (-30, -31)	NO HUB	PUSH ON (P)
FS1520T-PB	.,	, ,	· · ·		``
2"	8 1/2"	10"	9 1/4"	9 1/4"	9 5/8"
3"	8 7/8"	10"	9 1/4"	9 1/4"	9 5/8"
4"	8 7/8"	10"	9 1/4"	9 1/4"	9 5/8"
FS1530T-PB					
2"	6 1/2"	8"	7 1/4"	6 1/2"	6 7/8"
3"	6 7/8"	8"	7 1/4"	6 1/2"	6 7/8"
4"	6 7/8"	8"	7 1/4"	6 1/2"	6 7/8"
FS1720T-PB					
2"	8 1/2"	10"	9 1/4"	8 1/2"	8 7/8"
3"	8 7/8"	10"	9 1/4"	8 1/2"	8 7/8"
4"	8 7/8"	10"	9 1/4"	8 1/2"	8 7/8"
F\$1730T-PB					
2"	10 1/2"	12"	11 1/4"	10 1/2"	10 7/8"
3"	10 7/8"	12"	11 1/4"	10 1/2"	10 7/8"
4"	10 7/8"	12"	11 1/4"	10 1/2"	10 7/8"
FS1740T-PB					
2"	12 1/2"	14"	13 1/4"	12 1/2"	12 7/8"
3"	12 7/8"	14"	13 1/4"	12 1/2"	12 7/8"
4"	12 7/8"	14"	13 1/4"	12 1/2"	12 7/8"
FS1750T-PB					
2"	8 1/2"	10"	9 1/4"	8 1/2"	8 7/8"
3"	8 7/8"	10"	9 1/4"	8 1/2"	8 7/8"
4"	8 7/8"	10"	9 1/4"	8 1/2"	8 7/8"
FS1760T-PB					
2"	10 1/2"	12"	11 1/4"	10 1/2"	10 7/8"
3"	10 7/8"	12"	11 1/4"	10 1/2"	10 7/8"
4"	10 7/8"	12"	11 1/4"	10 1/2"	10 7/8"
FS1920T-FL-PB					
2"	8 1/8"	8 5/8"	9 5/8"	8 5/8"	9 1/8"
3"	8 1/2"	8 5/8"	9 5/8"	8 5/8"	9 1/8"
4"	8 1/2"	8 5/8"	9 5/8"	8 5/8"	9 1/8"
FS1930T-FL-PB					
2"	10 1/8"	10 5/8"	11 5/8"	10 5/8"	11 1/8"
3"	10 1/2"	10 5/8"	11 5/8"	10 5/8"	11 1/8"
4"	10 1/2"	10 5/8"	11 5/8"	10 5/8"	11 1/8"
FS1940T-FL-PB					
2"	12 1/8"	12 5/8"	13 5/8"	12 5/8"	13 1/8"
3"	12 1/2"	12 5/8"	13 5/8"	12 5/8"	13 1/8"
4"	12 1/2"	12 5/8"	13 5/8"	12 5/8"	13 1/8"








Design and dimensions are subject to modification. Prices do not include applicable taxes.



8" x 8" x 6" DEEP FLOOR SINK

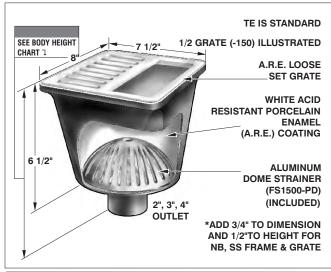

FS1520 PARTS	FS1520-PB-7	F\$1500-P
Note: Specify outlet size and connection		
type.		

Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1520T (Transition FS1500-PG-(*) A3-PG FS1520T-PB Body) PARTS Note: Specify outlet

size and connection type.

Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS152	FS1520 and FS1520T BODY HEIGHT								
PIPE NO HUB PUSH ON SIZE STANDARD (P)		INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)				
2"	7 3/4"	7 3/4"	8 5/8"	*8 1/2"	*9 5/8"	*9 5/8"			
3"	7 3/4 "	7 3/4"	8 5/8"	*8 7/8"	*9 5/8"	*9 5/8"			
4"	7 3/4	*9 5/8"	**8 5/8"	*8 7/8"	*9 5/8"	*9 5/8"			

*Indicates outlet size and connection available with transition outlet body only.

** 4" Inside Caulk outlet body only available with -FL anchor flange (as a std. body design not transition)


A.R.E. CAST IRO	A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER							
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL			
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)			
FS1522,3,4	18.00	8" x 8" x 6" Deep	\$ 998.00	\$1394.00	\$1394.00			

FS1520	FS1520 AND FS1520-FL OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-5	Sediment bucket (FS1500-PB)	\$126.00	-32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	\$411.00				
-6	Security screws (H-1039A, 4 pcs) (-1, -3 only)	\$ 56.00	-51	2 ½" round center grate opening (-1, -3 only)	\$251.00				
-7	Trap seal primer connection	\$107.00	-69	Stainless Steel Sediment bucket (FS1500-PB-3)	\$272.00				
-9	Hinged grate (-3 only)(see page 282)	\$223.00	-83	Stainless Steel mesh over stainless steel bucket (add to S.S. Bucket)	\$296.00				
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-150	Half grate	No Add				
-22	Less Enamel Cast Iron grate (deduct)	-\$ 80.00	-175	3/4 grate	No Add				
-22	Less Nickel Bronze grate (deduct)	-\$155.00	-C	Membrane clamp (add to FS1520-FL only)	\$ 92.00				
-22	Less Stainless Steel grate (deduct)	-\$155.00	Р	Push on outlet (2", 3" or 4")	\$ 26.00				
-30	PVC socket connection W/A.R.E. Body (2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3" or 4")	\$ 61.00				
-31	ABS socket connection W/A.R.E. body (2", 3", 4")	\$ 28.00	Χ	Inside caulk outlet (2", 3" or 4")	No Add				

FLOOR S	FLOOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) STAINLESS STEEL (-3)	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) STAINLESS STEEL (-3)		
-F4	4" round funnel	\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00		
-G	4" x 9" oval funnel	\$303.00	\$207.00	-J	3" x 1" oval funnel	\$216.00	\$208.00		

5 5 5 20 F 8" x 8" x 6" DEEP FLOOR SINK WITH FLANGE

FS1520-FL

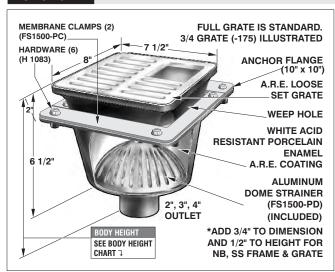

U AAD AINIK ATANDADD EUNINEL ADEIANAL MADIATIANA

FS1520-FL PARTS FS1520-FL-PB-7 Note: Specify outlet size and connection

Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA

	ilisteau oi -i u aliu s	pecify - 1 for Mich	NOI DIVIIZE AII	u -o iui otaiilie	33 0
FS1520T-FL (Tran-	FS1520T-FL-PB	FS1500-PG-(*) A3-PG	A1 Body	
sition Body) PARTS	Ch				
Note: Specify outlet					
size and connection					

type. Dome strainer

included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

PIPE SIZE	SIZE STANDARD (P)		INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	7 3/4"	7 3/4"	*10"	*8 1/2"	* 9 1/4"	* 9 1/4"
3"	7 3/4"	*9 5/8"	8 5/8"	*8 7/8"	* 9 1/4"	* 9 1/4"
4"	7 3/4"	7 3/4"	8 5/8"	*8 7/8"	* 9 1/4"	* 9 1/4"


*Indicates outlet size and connection available with transition outlet body only.

** 4" Inside Caulk outlet body only available with -FL anchor flange (as a std. body design not transition)

A.R.E. CAST IRO	A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER						
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL		
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)		
F\$1522,3,4-FL	21.00	8" x 8" x 6" deep w/flange	\$1115.00	\$1512.00	\$1512.00		



FS1530 8" x 4" x 4" DEEP FLOOR SINK

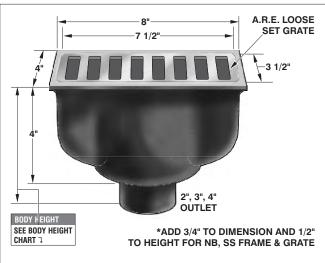

FS1530T (Transition	FS1530T-PB	FS1530-PG-(*)
Body) PARTS		
Note: Specify outlet size and connection type.		
Dome strainer		J [

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing

included with body.

Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel



FS153	FS1530T BODY HEIGHT								
PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)			
2"	*6 1/2"	*7 1/4"	*8"	*6 1/2"	*7 1/4"	*7 1/4"			
3"	*6 1/2"	*7 1/4"	*8"	*6 7/8"	*7 1/4"	*7 1/4"			
4"	*6 1/2"	*7 1/4"	*8"	*6 7/8"	*7 1/4"	*7 1/4"			

^{*}Indicates outlet size and connection available with transition outlet body only.

A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER						
MODEL Number	WT. Lbs	DESCRIPTION	A.R.E. LOOSE GRATE (STANDARD)	NICKEL BRONZE Frame and Grate (-1)	STAINLESS STEEL FRAME AND GRATE (-3)	
F\$1532,3,4	18.00	8" x 4" x 4" Deep	\$ 1084.00	\$ 1116.00	\$1116.00	

FS1530	FS1530 AND FS1530-FL OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE					
-5	Sediment bucket (FS1530-PB)	\$122.00	-32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	\$411.00					
-6	Security screws (H-1039A, 4 pcs.) (-1, -3 only)	\$ 56.00	-51	2 1/2" round center grate opening (-1, -3 only)	\$251.00					
-7	Trap seal primer connection	\$107.00	-69	Stainless steel sediment bucket	\$299.00					
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-83	Stainless steel mesh screen over stainless steel bucket (add to S.S. Bucket)	\$299.00					
-22	Less Enamel Cast Iron grate (deduct)	-\$100.00	-150	Half grate	No Add					
-22	Less Nickel Bronze grate (deduct)	-\$180.00	-175	3/4 grate	No Add					
-22	Less Stainless Steel grate (deduct)	-\$180.00	-C	Membrane clamp (Add to FS1530-FL only)	\$122.00					
-30	PVC socket connection W/A.R.E. body (2", 3", 4")	\$ 28.00	Р	Push on outlet (2", 3", 4")	\$ 26.00					
-31	ABS socket connection W/A.R.E. body (2", 3", 4")	\$ 28.00	Т	Threaded outlet (2", 3", 4")	\$ 61.00					
	- ` ` ` `		Χ	Inside caulk outlet (2", 3", 4")	No Add					


FLOOR S	LOOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	
-F4	4" round funnel	\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00	
-G	4" x 9" oval funnel	\$303.00	\$207.00	-J	3" x 1" oval funnel	\$216.00	\$208.00	

type.

Dome strainer

included with body.

8" x 4" x 4" DEEP FLOOR SINK WITH FLANGE

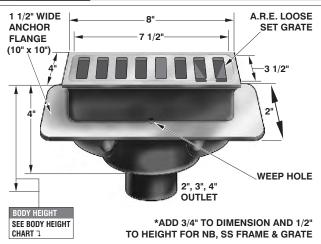

1				
FS1530T-FL (Tran-	FS1530T-FL-PB	FS1530-PG-(*)	A3-PG	A1 Body
sition Body) PARTS			0	
Note: Specify outlet size and connection			U	-

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel


- 1	FS153	OT-FL BODY H	EIGHT				
	PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
	2"	*6 1/2"	*7 1/4"	*8"	*6 1/2"	*7 1/4"	*7 1/4"
	3"	*6 1/2"	*7 1/4"	*8"	*6 7/8"	*7 1/4"	*7 1/4"
	4"	*6 1/2"	*7 1/4"	*8"	*6 7/8"	*7 1/4"	*7 1/4"

^{*}Indicates outlet size and connection available with transition outlet body only.

A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER						
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL	
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)	
FS1532,3,4-FL	21.00	8" x 4" x 4" Deep w/flange	\$1256.00	\$1288.00	\$1288.00	



12" x 12" x 6" DEEP FLOOR SINK

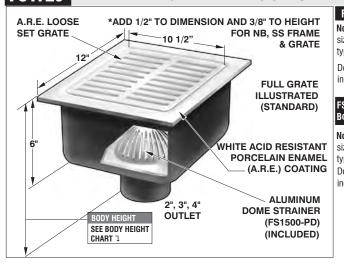

A D E GAGT IDON DODY WITH FULL ODATE & ALLI

FS1720 PARTS	F\$1720-PB-7	FS1700-PG-(*)
ote: Specify outlet ize and connection /pe.	Y	

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Dome strainer Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA included with body. instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1720T (Transition Body) PARTS Note: Specify outlet size and connection

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate type. Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA Dome strainer instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel included with body.

F\$172	0 and FS1720					
PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	7 3/4"	7 3/4"	*10"	*8 1/2"	*9 1/4"	*9 1/4"
3"	7 3/4"	7 3/4"	8 5/8"	*8 7/8"	*9 1/4"	*9 1/4"
4"	7 3/4"	*8 7/8"	**10"	*8 7/8"	*9 1/4"	*9 1/4"

^{*}Indicates outlet size and connection available with transition outlet body only.


^{** 4&}quot; Inside Caulk outlet body only available with -FL anchor flange

A.K.E. CAST IKUN BUDY WITH FULL GRATE & ALUWINUW DUWE STRAINER										
	MOD	EL	WT.		A.R.E. LC	OSE GRAT	E NICKEL BRONZI	Ē	STAINLESS	STEEL
	NUM	BER	Lbs	DESCRIPTION	(STA	NDARD)	FRAME AND GRATE	. (-1)	FRAME AND G	RATE (-3)
	F\$1722,3,4		29.00	12" x 12" x 6" Deep	\$14	149.00	\$2119.00		\$2119.0	0
	FS1720 AND FS1720-FL OPTIONAL VARIATIONS:									
	SUFFIX		D	ESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION			LIST PRICE
	-5	Sedime	nt bucket	(FS1700-PB)	\$186.00	-32	Deep seal trap (2", 3", 4" no h	iub)(MI-95	0 Series)	\$411.00

LIST PRICE
\$411.00
\$100.00
\$378.00
\$296.00
No Add
No Add
\$110.00
\$ 26.00
\$ 61.00
No Add

	FLOOR S	OOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:							
	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	
	-F4	4" round funnel	\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00	
1	-G	4" x 9" oval funnel	\$303.00	\$207.00	- J	3" x 1" oval funnel	\$216.00	\$208.00	

12" x 12" x 6" DEEP FLOOR SINK WITH FLANGE

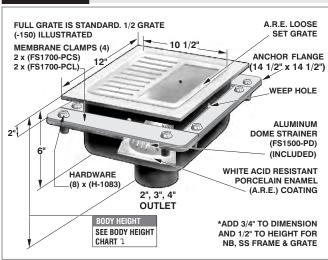



Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1720T-FL (Tran-FS1700-PG-(*) sition Body) PARTS Note: Specify outlet



Dome strainer included with body.

size and connection type

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	7 3/4"	7 3/4"	*10"	*8 1/2"	*9 1/4"	*9 1/4"
3"	7 3/4"	*8 7/8"	8 5/8"	*8 7/8"	*9 1/4"	*9 1/4"
4"	7 3/4"	*8 7/8"	8 5/8"	*8 7/8"	*9 1/4"	*9 1/4"


*Indicates outlet size and connection available with transition outlet body only.

A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER						
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL	
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)	
FS1722,3,4-FL	40.00	12" x 12" x 6" deep w/flange	\$1672.00	\$2342.00	\$2342.00	



F\$1730 12" x 12" x 8" DEEP FLOOR SINK

FS1730

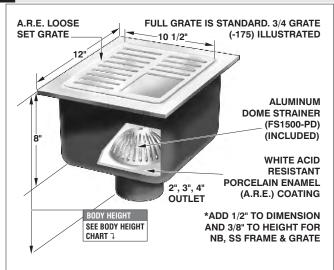

FS1730 PARTS	FS1730-PB-7
Note: Specify outlet size and connection	
type.	

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Dome strainer included with body. Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel FS1700-PG-(*) FS1730T-PB

FS1730T (Transition Body) PARTS

Note: Specify outlet size and connection

type. Dome strainer Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate

FS1700-PG-(*

included with body. instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel ind FS1730T BODY HEIGH NO HUB **PUSH ON** INSIDE CAULK THREADED SIZE STANDARD (P) (-30)(-31)(X) (T) *11 1/4" *11 1/4" *11 1/4" *11 1/4" 9 3/4 10 5/8 *10 1/2 3"


** 4" Inside Caulk outlet body only available with -FL anchor flange

A.R.E. CAST IROI	A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER									
MODEL WT. A.R.E. LOOSE				NICKEL BRONZE	STAINLESS STEEL					
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)					
FS1732,3,4	37.00	12" x 12" x 8" Deep	\$1409.00	\$1574.00	\$1574.00					

F\$1730	FS1730 AND FS1730-FL OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-5	Sediment bucket (FS1700-PB)	\$186.00	-32	Deep seal trap (2", 3", 4" no hub)(MI-950 Series)	\$411.00				
-6	Security screws (H-1039A, 4 pcs.) (-1, -3 only)	\$ 56.00	-51	2 1/2" round center grate opening (-1, -3 only)	\$100.00				
-7	Trap seal primer connection	\$107.00	-69	Stainless Steel Sediment bucket (FS1700-PB-3)	\$378.00				
-9	Hinged grate (-3 only) (see page 282)	\$212.00	-83	Stainless Steel mesh screen over stainless steel bucket (add to S.S. Bucket)	\$296.00				
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-150	Half grate	No Add				
-22	Less Enamel Cast Iron grate (deduct)	-\$ 80.00	-175	3/4 grate	No Add				
-22	Less Nickel Bronze grate (deduct)	-\$256.00	-C	Membrane clamp (add to FS1730-FL only)	\$110.00				
-22	Less Stainless Steel grate (deduct)	-\$256.00	Р	Push on outlet (2", 3", 4")	\$ 26.00				
-30	PVC socket connection W/A.R.E. Body(2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00				
-31	ABS socket connection W/A.R.E. Body(2", 3", 4")	\$ 28.00	Х	Inside caulk outlet (2", 3", 4")	No Add				

	FLOOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:								
	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	
	-F4	4" round funnel	\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00	
-G 4" x 9" oval funnel \$303.00 \$207.00 -J						3" x 1" oval funnel	\$216.00	\$208.00	

12" x 12" x 8" DEEP FLOOR SINK WITH FLANGE

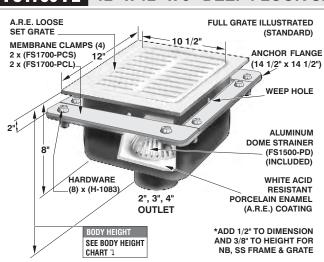

FS1730-FL PARTS FS1730-FL-PB-7 Note: Specify outlet size and connection

Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1730T-FL (Tran-	FS1730T-PB	F\$1700-PG-(*)	A3-PG	A1 Body
sition Body) PARTS	10			
Note: Specify outlet			U	
size and connection	(+) 0		- 0/4 aveta	- de la constant

Dome strainer included with body.

type.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1730-FL and FS1730T-FL BODY HEIGHT									
PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)			
2"	*10 1/2"	*10 7/8"	*12"	*10 1/2"	*11 1/4"	*11 1/4"			
3"	*10 1/2"	9 3/4"	10 5/8"	*10 7/8"	*11 1/4"	*11 1/4"			
4"	*10 1/2"	9 3/4"	10 5/8"	*10 7/8"	*11 1/4"	*11 1/4"			


*Indicates outlet size and connection available with transition outlet body only.

A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER								
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL			
NUMBER Lbs DESCRIPTION		(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)				
FS1732,3,4-FL	44.00	12" x 12" x 8" deep w/flange	\$1632.00	\$1798.00	\$1798.00			

^{*10 7/8&}quot; 9 3/4" 9 3/4" 10 5/8" *10 1/2" **10 5/8" *11 1/4" *11 1/4" *10 7/8" 9 3/4" *Indicates outlet size and connection available with transition outlet body only.



12" x 12" x 10" DEEP FLOOR SINK

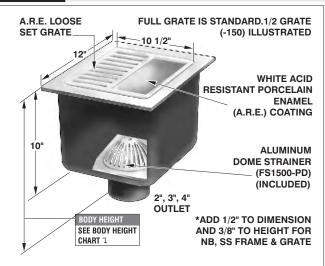

FS1740 PARTS Note: Specify outlet size and connection type. Dome strainer



(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1740T (Transition Body) PARTS

Dome strainer

included with body.

Note: Specify outlet size and connection type.



(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel included with body.

FS174	FS1740 and FS1740T BODY HEIGHT										
PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)					
2"	*12 1/2"	11 1/2"	*14"	*12 1/2"	*13 1/4"	*13 1/4"					
3"	*12 1/2"	11 1/2"	*14"	*12 7/8"	*13 1/4"	*13 1/4"					
4"	11 1/2"	11 1/2"	**12 5/8"	*12 7/8"	*13 1/4"	*13 1/4"					

*Indicates outlet size and connection available with transition outlet body only. 4" Inside Caulk outlet body only available with -FL anchor flange.


A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER								
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL			
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)			
FS1742,3,4	42.00	12" x 12" x 10" Deep	\$1491.00	\$2163.00	\$2163.00			

FS1740	AND FS1740-FL OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (FS1700-PB)	\$186.00	-32	Deep seal trap (2", 3", 4" no hub)(MI-950 Series)	\$411.00
-6	Security screws (H-1039A, 4 pcs.) (-1, -3 only)	\$ 56.00	-51	2 1/2" round center grate opening (-1, -3 only)	\$100.00
-7	Trap seal primer connection	\$107.00	-69	Stainless Steel Sediment bucket (FS1700-PB-3)	\$378.00
-9	Hinged grate (-3 only) (see page 282)	\$212.00	-83	Stainless Steel mesh screen over stainless steel bucket (add to S.S. Bucket)	\$296.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-150	Half grate	No Add
-22	Less Enamel Cast Iron grate (deduct)	-\$ 80.00	-175	3/4 grate	No Add
-22	Less Nickel Bronze grate (deduct)	-\$256.00	-C	Membrane clamp (add to FS1740-FL only)	\$110.00
-22	Less Stainless Steel grate (deduct)	-\$256.00	Р	Push on outlet (2", 3", 4")	\$ 26.00
-30	PVC socket connection W/A.R.E. Body(2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00
-31	ABS socket connection W/A.R.E. Body(2", 3", 4")	\$ 28.00	Χ	Inside caulk outlet (2", 3", 4")	No Add

	FLUUK S	FLOUR SINK STANDARD FUNNEL UPTIONAL VARIATIONS:								
	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)		
	-F4	4" round funnel	\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00		
Ì	-G	4" x 9" oval funnel	\$303.00	\$207.00	-J	3" x 1" oval funnel	\$216.00	\$208.00		

FS1740-FL 12" x 12" x 10" DEEP FLOOR SINK WITH FLANGE

FS1740-FL

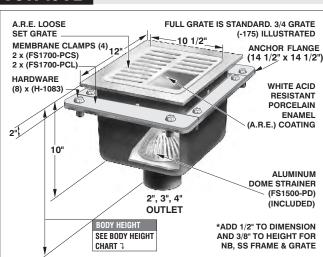

FS1740-FL PARTS FS1740-FL-PB-7 Note: Specify outlet size and connection type

Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1740T-FL (Transition Body) PARTS Note: Specify outlet size and connection

Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	11 1/2"	*12 7/8"	*14"	*12 1/2"	*13 1/4"	
3"	11 1/2"	*12 7/8"	12 5/8"	*12 7/8"	*13 1/4"	*13 1/4"
4"	11 1/2"	*12 7/8"	12 5/8"	*12 7/8"	*13 1/4"	*13 1/4"

*Indicates outlet size and connection available with transition outlet body only.


A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER								
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL			
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)			
FS1742,3,4-FL	58.00	12" x 12" x 10" deep w/flange	\$1714.00	\$2386.00	\$2386.00			

type.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information. FLOOR SINKS

F\$1750 8" ROUND x 6" DEEP FLOOR SINK

FS1750

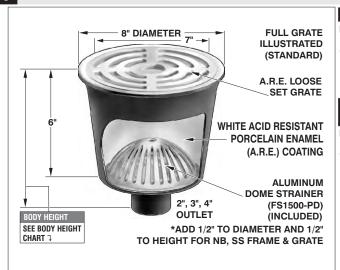

FS1750 PARTS	FS1750-PB-7	FS1750-PG-(*)
Note: Specify outlet size and connection type.	V	

Dome strainer (*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate included with body. Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1750-PG-(*) A3-PG FS1750T (Transition FS1750T-PB A1 Body Body) PARTS Note: Specify outlet size and connection

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate type. Dome strainer Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA included with body. instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

F\$175	0 and FS1750	T BODY HEIG	EIGHT						
PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)			
2"	*8 1/2"	7 1/2"	*10"	*8 1/2"	*9 1/4"	*9 1/4"			
3"	*8 1/2"	7 1/2"	7 1/2"	*8 7/8"	*9 1/4"	*9 1/4"			
4"	7 1/2"	7 1/2"	7 1/2"	*8 7/8"	*9 1/4"	*9 1/4"			

*Indicates outlet size and connection available with transition outlet body only. ** 4" Inside Caulk outlet body only available with -FL anchor flange.

A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER									
MODEL	WT.		A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL				
NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)				
FS1752,3,4 17.00 8" Round x 6" Deep			\$839.00	\$1093.00	\$1093.00				

FS1750	AND FS1750-FL OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (FS1750-PB)	\$122.00	-32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	\$411.00
-6	Security screws (H-1039A, 4 pcs.) (-1, -3 only)	\$ 56.00	-51	2 1/2" round center grate opening (-1, -3 only)	\$100.00
-7	Trap seal primer connection	\$107.00	-69	Stainless steel sediment bucket (FS1750-PB-3)	\$299.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-83	Stainless steel mesh screen over stainless steel bucket(Add to S.S. bucket)	\$299.00
-22	Less Enamel Cast Iron grate (deduct)	-\$100.00	-150	Half grate	No Add
-22	Less Nickel Bronze grate (deduct)	-\$180.00	-175	3/4 grate	No Add
-22	Less Stainless Steel grate (deduct)	-\$180.00	-C	Membrane clamp (add to FS1750-FL only)	\$122.00
-30 PVC socket connection W/A.R.E. Body (2", 3", 4")		\$ 28.00	Р	Push on outlet (2", 3", 4")	\$ 26.00
-31 ABS socket connection W/A.R.E. body (2", 3", 4")		\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00
			Х	Inside caulk outlet (2", 3", 4")	No Add

FLOOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:								
	SUFFIX	SUFFIX DESCRIPTION A.R.E. NICKEL BRONZE (-1) Stainless Steel (-3)			SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)
	-F4	-F4 4" round funnel \$215.00 \$152.00				6" round funnel	\$ 280.00	\$208.00
-F4 4" round funnel \$215.00 \$152.00 -F6 6" round funnel -G 4" x 9" oval funnel \$303.00 \$207.00 -J 3" x 1" oval funnel							\$216.00	\$208.00

FS1750-FL 8" ROUND x 6" DEEP FLOOR SINK WITH FLANGE

FS1750-FL

FULL GRATE IS STANDARD. 1/2 GRATE (-150) ILLUSTRATED 8" DIAMETER A.R.E. LOOSE HARDWARE (4) SET GRATE (H-1083) MEMBRANE CLAMPS (2) (FS1750-PC) **ANCHOR** FLANGE (11" DIA) WHITE ACID RESISTANT PORCELAIN ENAMEL (A.R.E.) COATING ALUMINUM DOME STRAINER (FS1500-PD) (INCLUDED) **BODY HEIGHT** 2", 3", 4" *ADD 1/2" TO DIAMETER SEE BODY HEIGHT OUTLET AND 1/2" TO HEIGHT FOR NB. SS FRAME & GRATE

FS1750-FL PARTS FS1750-FL-PB-7 Note: Specify outlet size and connection

Dome strainer

included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1750T-FL (Transition Body) PARTS Note: Specify outlet size and connection

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA Dome strainer included with body. instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	*8 1/2"	*8 7/8"	7 1/2"	*8 1/2"	*9 1/4"	*9 1/4"
3"	*8 1/2"	*8 7/8"	*10"	*8 7/8"	*9 1/4"	*9 1/4"
4"	7 1/2"	*8 7/8"	7 1/2"	*8 7/8"	*9 1/4"	*9 1/4"


*Indicates outlet size and connection available with transition outlet body only.

	A.R.E. CAST IRON					
MODEL WT.				A.R.E. LOOSE GRATE	NICKEL BRONZE	STAINLESS STEEL
	NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)
F\$1752,3,4-FL 19.00 8" Round x 6" Deep w/flange				\$1011.00	\$1264.00	\$1264.00

type.



12" ROUND x 8" DEEP FLOOR SINK

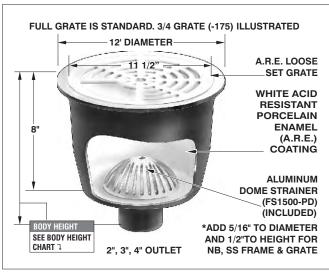

FS1760 PARTS Note: Specify outlet size and connection

Dome strainer included with body.

type.



(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1760T	(Transitior
Body) PAF	RTS

Note: Specify outlet size and connection

tvpe. Dome strainer

FS1760-PG-(*)





(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA included with body. instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

F\$17	60 and FS1760	T BODY HEIG	HT			
PIPE		PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	*10 1/2"	*10 7/8"	*12"	*10 1/2"	*11 1/4"	*11 1/4"
3" *10 1/2" *10 7/8"		*10 7/8"	*12"	*10 7/8"	*11 1/4"	*11 1/4"
4"	*10 1/2"	*10 7/8"	**10 5/8"	*10 7/8"	*11 1/4"	*11 1/4"


^{*}Indicates outlet size and connection available with transition outlet body only.
** 4" Inside Caulk outlet body only available with -FL anchor flange.

A.R.E. CAST IROI	N BODY V	WITH FULL GRATE & ALUMINU			
MODEL Number	WT. Lbs	DESCRIPTION	A.R.E. LOOSE GRATE (STANDARD)	NICKEL BRONZE Frame and Grate (-1)	STAINLESS STEEL FRAME AND GRATE (-3)
FS1762,3,4	29.00	12" Round x 8" Deep	\$1212.00	\$1705.00	\$1705.00

FS1760	AND FS1760-FL OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-5	Sediment bucket (FS1760-PB)	\$144.00	-32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	\$411.00
-6	Security screws (H-1039A, 4 pcs.) (-1, -3 only)	\$ 56.00	-51	2 1/2" round center grate opening (-1, -3 only)	\$100.00
-7	Trap seal primer connection	\$107.00	-69	Stainless steel sediment bucket (FS1760-PB-3)	\$347.00
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-83	Stainless steel mesh screen over stainless steel bucket(Add to S.S. bucket)	\$299.00
-22	Less Enamel Cast Iron grate (deduct)	-\$100.00	-150	Half grate	No Add
-22	Less Nickel Bronze grate (deduct)	-\$110.00	-175	3/4 grate	No Add
-22	Less Stainless Steel grate (deduct)	-\$110.00	-C	Membrane clamp (add to FS1760-FL only)	\$120.00
-30 PVC socket connection W/A.R.E. Body (2", 3", 4")		\$ 28.00	Р	Push on outlet (2", 3", 4")	\$ 26.00
-31	ABS socket connection W/A.R.E. body (2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00
			Χ	Inside caulk outlet (2", 3", 4")	No Add

	FLOOR S							
SUFFIX DESCRIPTION			A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)	SUFFIX	DESCRIPTION	A.R.E.	NICKEL BRONZE (-1) Stainless Steel (-3)
	-F4 4" round funnel		\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00
	-G	4" x 9" oval funnel	\$303.00	\$207.00	-J	3" x 1" oval funnel	\$216.00	\$208.00

FS1760-FL 12" ROUND x 8" DEEP FLOOR SINK WITH FLANGE

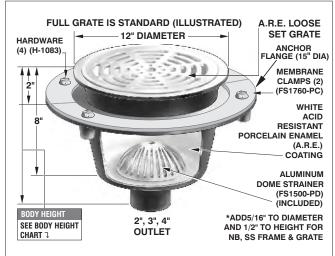

FS1760-FL PARTS FS1760-PG-(*

Note: Specify outlet size and connection type.

Dome strainer included with body.



(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel

FS1760T-FL (Transition Body) PARTS

Note: Specify outlet size and connection type.

Dome strainer included with body.

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze or Stainless Steel grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze and -3 for Stainless Steel


FS1760-FL and FS1760T-FL BODY HEIGHT							
	PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
	2"	*10 1/2"	*10 7/8"	*12"	*10 1/2"	*11 1/4"	*11 1/4"
	3"	*10 1/2"	*10 7/8"	*12"	*10 7/8"	*11 1/4"	*11 1/4"
	4"	*10 1/2"	*10 7/8"	10 5/8"	*10 7/8"	*11 1/4"	*11 1/4"

FS1760-PG-(*)

*Indicates outlet size and connection available with transition outlet body only.

	A.R.E. CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER							
MODEL WT. A.R.E. LOOSE GRATE			NICKEL BRONZE	STAINLESS STEEL				
	NUMBER	Lbs	DESCRIPTION	(STANDARD)	FRAME AND GRATE (-1)	FRAME AND GRATE (-3)		
	F\$1762,3,4-FL 40.00 12" Round x 8" Deep w/flange			\$1457.00	\$1952.00	\$1952.00		
	Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.							

FS1770 16" x 16" x 9" DEEP FLOOR SINK

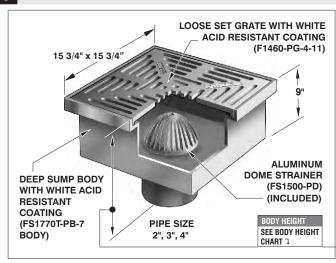

FS1770T (Transition	FS1770T-PB	F1460-PG-(*)-11	A3-PG	A1 Body
Body) PARTS			0	
Note: Specify outlet			O	
size and connection		7 7		

type. (*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Dome strainer Note: For Nickel Bronze grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze included with body.

F\$1770T BODY HEIGHT						
PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	*12"	*12 3/8"	*12 3/4"	*11 1/4"	*11 15/16"	*11 15/16'
3"	*12"	*12 3/8"	*12 3/4"	*11 5/8"	*12 3/4"	*12 3/4"
4"	*12"	*12 3/8"	*12 3/4"	*11 5/8"	*12 3/4"	*12 3/4"

^{*}Indicates outlet size and connection available with transition outlet body only.


	FS1770 BODY HEIGHT									
	PIPE SIZE	NO HUB Standard	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)					
~	ALL	12"	12 3/8"	11 1/4"	12 3/4"					

ACID RESISTANT COATED BODY WITH FULL GRATE & ALUMINUM DOME STRAINER									
MODEL WT. ACID RESISTANT LOOSE GRATE NICKEL BRONZE (-1) OR STAINI									
NUMBER	Lbs	DESCRIPTION	(STANDARD)	STEEL (-3) AND GRATE (VENEER)					
F\$1772,3,4	69.00	16" x 16" x 9" Deep with flange	\$2742.00	\$3865.00					

F\$1770	FS1770 AND FS1770-FL OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-5	Sediment bucket (F1490-PB-11)	\$527.00	-32	Deep seal trap (2", 3", 4" no hub/MI-950 Series)	\$411.00				
-6	Security screws (TR30 Torx and pin) (-1 only)	\$ 56.00	-51	2 1/2" round center grate opening	\$100.00				
-7	Trap seal primer connection	\$107.00	-83	Stainless steel mesh screen over stainless steel bucket (add to s.s. Bucket)	\$594.00				
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-150	Half grate	No Add				
-22	Less acid resistant Cast Iron grate (deduct)	-\$197.00	-175	3/4 grate	No Add				
-22	Less Nickel Bronze grate (deduct)	-\$541.00	-C	Membrane clamp (add to FS1770-FL only)	\$354.00				
-22	Less Stainless Steel grate (deduct)	-\$541.00	Р	Push on outlet (2", 3", 4")	\$ 26.00				
-30	PVC socket connection W/A.R.E. Body (2", 3", 4")	\$ 28.00	T	Threaded outlet (2', 3", 4")	\$ 61.00				
-31	ABS socket connection W/A.R.E. Body (2", 3", 4")	\$ 28.00	Х	Inside caulk outlet (2", 3", 4")	No Add				

FL00I	FLOOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:									
SHEEK HEST-KIPTHIN TOTAL						ACID Resistant	NICKEL BRONZE (-1) Stainless Steel (-3)			
-F4	4" round funnel	\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00			
-G	4" x 9" oval funnel	\$303.00	\$207.00	-J	3" x 1" oval funnel	\$216.00	\$208.00			

FS1770-FL 16" x 16" x 9" DEEP FLOOR SINK WITH FLANGE

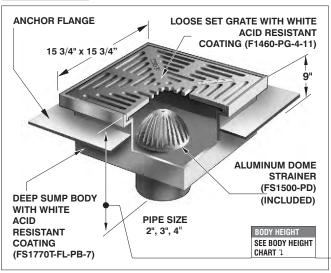

FS1770T-FL (Tran-		F1460-PG-(*)-11	A3-P
sition Body) PARTS			-
Note: Specify outlet size and connection	-D	**************************************	C
type.	(*) Specify 150 fo	or 1/2 grate 175 fe	or 3/4 (

Dome strainer included with body.

TO ATTO THE DODAY HELDHE

(*) Specify 150 for 1/2 grate, 175 for 3/4 grate or nothing for full grate Note: For Nickel Bronze grate and frame, specify -TA instead of -PG and specify -1 for Nickel Bronze

FS1770T-FL BODY HEIGHT						
PIPE SIZE	NO HUB Standard	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30)	ABS (-31)
2"	*12"	*12 3/8"	*12 3/4"	*11 1/4"	*11 15/16"	*11 15/16"
3"	*12"	*12 3/8"	*12 3/4"	*11 5/8"	*12 3/4"	*12 3/4"
4"	*12"	*12 3/8"	*12 3/4"	*11 5/8"	*12 3/4"	*12 3/4"

*Indicates outlet size and connection available with transition outlet body only.

	FS1//O-FL RODA HEICHI									
	PIPE SIZE	NO HUB Standard	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)					
~	ALL	12"	12 3/8"	11 1/4"	12 3/4"					


ACID RESISTANT	ACID RESISTANT COATED BODY WITH FULL GRATE & ALUMINUM DOME STRAINER									
MODEL	WT.		ACID RESISTANT LOOSE GRATE	NICKEL BRONZE (-1) OR STAINLESS						
NUMBER	Lbs	DESCRIPTION	(STANDARD)	STEEL (-3) AND GRATE (VENEER)						
FS1772,3,4-FL	69.00	16" x 16" x 9" Deep with flange	\$3579.00	\$4961.00						

Design and dimensions are subject to modification. Prices do not include applicable taxes.



F\$1790 24" x 24" x 17" DEEP FLOOR SINK

F\$1790

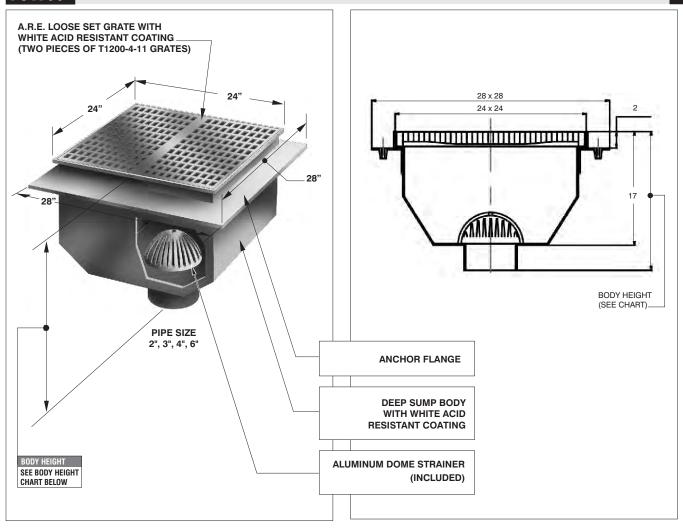

FS1790 BODY HEIGHT								
PIPE SIZE	NO HUB Standard	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) ABS (-31)			
ALL	18 1/2"	19 1/4"	17 1/2"	18 1/2"	18 3/4"			

FS1790 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-5	Sediment bucket	\$765.00	-32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	\$ 411.00			
-6	Security screws (TR30 Torx and pin) (-3 only)	\$232.00	-51	2 1/2" round center grate opening (-3 only)	\$ 100.00			
-7	Trap seal primer connection	\$237.00	-83	Stainless steel mesh screen over bucket (add to S.S. bucket)	\$1191.00			
-12	Galvanized body	\$630.00	-150	Half grate	No Add			
-13	Galvanized body and grate	\$840.00	-175	3/4 grate	No Add			
-21	Secondary flat strainer (FD-9600 Series)	\$ 66.00	-C	Membrane clamp	\$ 357.00			
-22	Less Enamel Cast Iron grate (deduct)	-\$489.00	Р	Push on outlet (2", 3", 4")	\$ 26.00			
-22	Less Stainless Steel grate (deduct)	-\$835.00	T	Threaded outlet (2", 3", 4")	\$ 61.00			
-30	PVC socket connection W/A.R.E. Body (2", 3", 4")	\$ 28.00	Х	Inside caulk outlet (2", 3", 4")	No Add			
-31	ABS socket connection W/A.R.E. Body (2", 3", 4")	\$ 28.00						


FLOOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:							
SUFFIX	SUFFIX DESCRIPTION ACID RESISTANT STAINLESS STE		STAINLESS STEEL (-3)	SUFFIX	DESCRIPTION	ACID Resistant	STAINLESS STEEL (-3)
-F4	4" round funnel	\$215.00	\$152.00	-F6	6" round funnel	\$280.00	\$208.00
-G	4" x 9" oval funnel	\$303.00	\$207.00	-J	3" x 1" oval funnel	\$216.00	\$208.00

ACID RESISTANT	ACID RESISTANT COATED CAST IRON BODY WITH FULL GRATE & ALUMINUM DOME STRAINER								
MODEL Number	WT. Lbs	DESCRIPTION	ACID RESISTANT LOOSE GRATE (STANDARD)	STAINLESS STEEL FRAME AND GRATE (VENEER) (-3)					
FS1792,3,4,6	250.00	24" x 24" x 17" deep with flange	\$5714.00	\$8043.00					



F\$1920-FL 12" x 12" x 6" DEEP STAINLESS STEEL FLOOR SINK WITH FLANGE

FS1920-FL

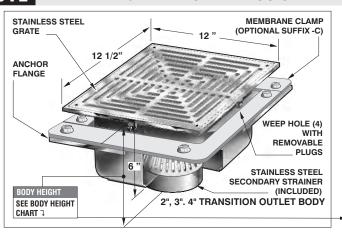


FS1920T-FL-C-PB	FS1700-TA-(*)-(**)	A3-PG	A1-13 BODY
		0	9
FS	31700-TA-(*)-(**) (*) specify 15		3/4 grate or nothing for full grate


		111717				
STAINLESS STEEL BODY WITH FULL GRATE & STAINLESS STEEL SECONDARY STRAINER						
MODEL	WT.	DEGGDIDTION	FULL GRATE			
NUMBER	Lbs	DESCRIPTION	(STANDARD)			
FS1922,3,4-FL	20.00	12" x 12" x 6" deep with flange	\$2778.00			

	FS1920-FL SERIES BODY HEIGHT										
	PIPE SIZE	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30-31)	NO HUB	PUSH ON (P)					
	2"	8 5/8"	10 1/8"	9"	9 3/8"	9 3/4"					
	3"	9"	10 1/8"	9 5/8"	9 3/8"	9 3/4"					
-	4"	9"	9 7/8"	9 7/8"	9 1/2"	9 3/4"					

FS1930-FL 12" x 12" x 8" DEEP STAINLESS STEEL FLOOR SINK WITH FLANGE

FS1930-FL

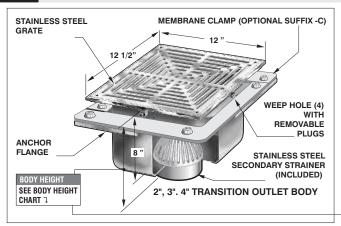





STAINLESS STEEL BODY WITH FULL GRATE & STAINLESS STEEL SECONDARY STRAINER						
MODEL NUMBER	WT. Lbs	DESCRIPTION	FULL GRATE (STANDARD)			
FS1932,3,4-FL	21.00	12" x 12" x 8" deep with flange	\$3192.00			

F8193	n-er zekiez ri	DDY HEIGHT				
PIPE THREADED SIZE (T)		INSIDE CAULK (X)	PVC/ABS (-30-31)	NO HUB	PUSH ON (P)	
2"	10 5/8"	12 1/8"	11"	11 3/8"	11 3/4"	
3"	11"	12 1/8"	11 5/8"	11 3/8"	11 3/4"	
4"	11"	11 7/8"	11 7/8"	11 1/2"	11 3/4"	

FS1940-FL 12" x 12" x 10" DEEP STAINLESS STEEL FLOOR SINK WITH FLANGE

FS1940-FL

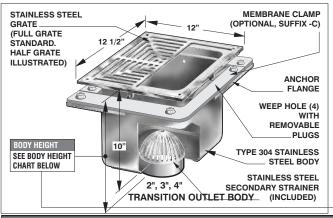



	STAINLESS STEEL BODY WITH FULL GRATE & STAINLESS STEEL SECONDARY STRAINER						
MODEL NUMBER	WT. Lbs	DESCRIPTION	FULL GRATE (STANDARD)				
FS1942.3.4-FL	21.00	12" x 12" x 10" deep with flange	\$3473.00				

	FS1940-FL SERIES BODY HEIGHT									
	PIPE SIZE	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30-31)	NO HUB	PUSH ON (P)				
	2"	12 5/8"	14 1/8"	13"	13 3/8"	13 3/4"				
	3"	13"	14 1/8"	13 5/8"	13 3/8"	13 3/4"				
-	4"	13"	13 7/8"	13 7/8"	13 1/2"	13 3/4"				

FS1920-FL, FS1930-FL and FS1940-FL OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-5	Sediment bucket (FS1700-PB-3)	\$378.00	-51	2 1/2" round center grate opening	\$100.00		
-6	Security screws (H-1039A, 4 pcs.) (-3 only)	\$ 56.00	-83	Stainless steel mesh screen over sediment bucket	\$378.00		
-7	Trap seal primer connection	\$107.00	-150	Half grate	No Add		
-9	Hinged grate (see page 282)	\$212.00	-175	3/4 grate	No Add		
-21	Secondary flat strainer (FD-9604)	\$ 66.00	-C	Membrane clamp	\$110.00		
-22	Less grate (deduct)	-\$256.00	Р	Push on outlet (2", 3", 4")	\$ 26.00		
-28	Stainless steel A1 body outlet	\$105.00	T	Threaded outlet (2", 3", 4")	\$ 61.00		
-30	PVC socket connection (2", 3", 4")	\$ 28.00	X	Inside caulk outlet (2", 3", 4")	No Add		
-31	ABS socket connection (2", 3", 4")	\$ 28.00	-Z	Extended wide flange on body (20" x 20" x 1/4" thick)	\$881.00		
-32	Deep seal trap (2", 3", 4", no hub) (MI-950 Series)	\$411.00					

FLOOR SINK STANDARD FUNNEL OPTIONAL VARIATIONS:						
	SUFFIX	DESCRIPTION	STAINLESS STEEL (-3)	SUFFIX	DESCRIPTION	STAINLESS STEEL (-3)
Ì	-F4	4" round funnel	\$152.00	-F6	6" round funnel	\$208.00
ĺ	-G	4" x 9" oval funnel	\$207.00	-J	3" x 1" oval funnel	\$208.00
- 1						

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-HUB REGULAR SHIELDED NO HUB COUPLINGS

MI-HUE



NO HUB COU	NO HUB COUPLINGS									
MODEL NUMBER	SIZE	CARTON QTY	PALLET QTY	LIST Price						
MI-HUB-150	1-1/2"	100	7,200	P.O.A.						
MI-HUB-2	2"	100	6,300	P.O.A.						
MI-HUB-2150	2"x1 1/2"	100	6,300	P.O.A.						
MI-HUB-3	3"	100	3,200	P.O.A.						
MI-HUB-32	3"x 2"	100	2,400	P.O.A.						
MI-HUB-4	4"	100	2,400	P.O.A.						
MI-HUB-42	4"x 2"	64	1,536	P.O.A.						
MI-HUB-43	4"X 3"	64	1,536	P.O.A.						
MI-HUB-5	5"	20	440	P.O.A.						
MI-HUB-6	6"	25	875	P.O.A.						
MI-HUB-8	8"	15	360	P.O.A.						
MI-HUB-10	10"	12	60	P.O.A.						
MI-HUB-12	12"	8	60	P.O.A.						
MI-HUB-15	15"	4	32	P.O.A.						

Note: Tighten bolts to 60 inch lbs. min./max torque.

Tested to maintain 4.3 p.s.i. maximum line pressure with 10' head.

See No Hub Coupling List Price Book NH-2014 for List Prices and discount structure of MI-HUB Series of No Hub couplings.

Tested and certified to ASTM Standard #C1277-12 and ASTM Standard #C564-09a. All models are listed with IAPMO (U.P.C.). 5/16" driver required to tighten bolts. Tested by I.A.P.M.O. to comply to the CISPI 310-2010 and CSA B602-05 standards. Also tested and certified to the CAN/ULC S102.2 "smoke test".

MI-XHUB HEAVY DUTY SHIELDED NO HUB COUPLINGS





HEAVY DUTY SHIELDED NO HUB COUPLINGS									
MODEL NUMBER	SIZE	CARTON QTY	PALLET QTY	LIST PRICE					
MI-XHUB-150	1-1/2"	60	2280	P.O.A.					
MI-XHUB-2	2"	72	1728	P.O.A.					
MI-XHUB-3	3"	24	912	P.O.A.					
MI-XHUB-32	3"x 2"	24	576	P.O.A.					
MI-XHUB-4	4"	24	576	P.O.A.					
MI-XHUB-42	4"x 2"	43	576	P.O.A.					
MI-XHUB-43	4"X 3"	43	576	P.O.A.					
MI-XHUB-5	5"	27	324	P.O.A.					
MI-XHUB-6	6"	27	324	P.O.A.					
MI-XHUB-8	8"	15	180	P.O.A.					
MI-XHUB-10	10"	9	108	P.O.A.					
MI-XHUB-12	12"	5	60	P.O.A.					
MI-XHUB-15	15"	4	32	P.O.A.					

Note: Tighten bolts to 80 inch lbs. min. torque to 100 inch lbs. max. torque.

Tested to maintain 15 p.s.i. maximum line pressure with 10' head.

See No Hub Coupling List Price Book NH-2014 for List Prices and discount structure of MI-XHUB Series of No Hub couplings.



Tested and certified to ASTM Standard #C1540-11 and ASTM Standard #C564-09a. All models are listed with IAPMO U.P.C.). 3/8" driver required to tighten bolts. Tested by I.A.P.M.O. to comply to the FM1680-1989 standards (up to 10")

CROSS REFERENCE								
MIFAB	ANACO	CLAMP-ALL	FERNCO	HUSKY	IDEAL	MISSION	TYLER	
MI-HUB	NH	_	NH	_	M8G	С	NH	
MI-XHUB	-	Hi-Torq 125	HD	SD4000	H8G	HW	Wide Body	

Design and dimensions are subject to modification. Prices do not include applicable taxes.



R1200 ROOF DRAIN COMMON PARTS

R1200

- 1. Dome strainer. 7 ½" high. Cast iron part # A2-MD illustrated (suffix -M). Standard dome receiver is the A2-PD polydome. Manufactured with 125 Sq. inches of free area. Dome receiver is also available in a low profile aluminum design (part # A2-MDL-80, suffix -M-80), in a low profile rough bronze design (part # A2-MDL-81, suffix -81) and in a low profile aluminum design with stainless steel mesh screen assembled around the dome strainer (part # A2-SSD, suffix -83). All of the low profile dome strainers are 4 ½" high. All of MIFAB's roof domes are engineered to lock underneath the tabs in the A2-C3 dome receiver for a secure fit. Specify suffix -6 to vandal proof secure any of the dome strainers to the A2-C3 dome receiver.
- HS-2 hardware pack. 5/16" threaded rods, nuts and washers are required to assemble the A2-C3 dome receiver and membrane clamp to the A2 roof drain body.
- 3. A2-C3 dome receiver and membrane clamp. Serves to secure the roof dome to the assembly and also to clamp the waterproofing membrane to the top flange of the A2 roof drain body. Raised grooves on the underside of the A2-C3 match the recessed grooves in the top flange of the A2 body to ensure a sealing grip onto the waterproofing
- 4. A2 body. Designed with a 15" diameter flange and a narrower and deeper sump than any JaSaWaZ body to: a) allow the contractor to cut a smaller diameter penetration in the roof (to better maintain the structural integrity of the roof), b) provide more efficient drainage of water since the head pressure in the deep sump of the body when filled with water is greater than in a shallower sump and c) narrower diameter sump requires only three sets of hardware to secure the membrane clamp to the body, thereby saving the contractor 33% installation time compared to any JaSaWaZ roof drain. MIFAB's A2 bodies are available with no hub, push on, threaded, inside caulk, PVC, ABS and stainless steel outlet connections.
- 5. A2-BP bearing pan (sump receiver). Manufactured with galvanized steel and painted with a lacquer finish. Engineered to recess the top flange of the A2 body into the roof deck to ensure easy flow of water from the roof deck into the sump of the roof drain (suffix -B). Securing slots in each corner permit easy assembly to the roof deck. Shipped one piece per carton for easy handling in warehouses and on the jobsite. The bearing pan should be specified with every roof drain to ensure a correct recessed installation of the roof drain into the roof deck unless the roof drain is required with an adjustable extension. In this case, the roof drain body is elevated off the deck, thereby eliminating the need for a bearing pan. This is a large cost savings compared to JaSaWaZ since their roof drain extension system always has the roof drain body installed into the deck, always requiring the use of the bearing
- **6.** HS-20 hardware pack. Three cast iron painted securing brackets, nuts and washers are shipped standard (no extra charge) packed inside every A2-BP carton. Designed to allow the contractor to assemble the bolts into the tappings on the underside of the A2 body flange, securing the A2-BP to the underside of the A2 body flange with the three cast iron brackets at the same time. The result is a roof drain secured to the A2-BP and also to the roof deck. This can eliminate the costly underdeck clamp and also the labor required to install the underdeck clamp.
- 7. A2-C3 adjustable extension ring. Installed on top of the roof deck. It is designed to elevate the roof drain body off the deck via the HS-3 hardware to accommodate the thickness of the insulation installed on top of the roof deck. This eliminates the use of any gaskets and o-rings (as required with the JaSaWaZ extension systems) that can cause leaks as the contrasting winter and summer weather causes expansion and contraction of gaskets and o-rings. Labor savings are also realized by the contractor with the simple MIFAB adjustable extension system (suffix -E).
- 8. HS-3 hardware pack. 5/16" threaded rods, nuts and washers are required to elevate the roof drain body off the deck to accommodate the thickness of the insulation installed on top of the roof deck. The HS-3 hardware threads into the tappings on the underside of the roof drain body.
- 9. A2-C3 underdeck clamp. It is installed underneath the roof deck and is engineered to "lock" the roof drain assembly into the roof deck, thereby reducing pipe vibration and potential damage. Can be eliminated when the MIFAB A2-BP sump receiver is installed with the unique HS-17 hardware pack as described above in point # 6. (suffix -U).

Note: (Reference #2 and #8) Hardware Kits (HS-2 and HS-3) provided contain standard 5/16" all threaded studs. Upon installation, excess rod may be cut to desired length for clean installation.

Visit www.mifab.com for the most recent product information.

119

LAB®

ROOF DRAINS

SELF LOCKING POLYDOME STRAINER WITH A FREE AREA OF 125 SQUARE INCHES

OPTIONAL CAST IRON DOME

HARDWARE SET (HS-3)

UNDERDECK CLAMP (-U)

2 5/16" (60) WIDE SERRATED MEMBRANE CLAMP AND GRAVEL STOP

DEEP SUMP

SERRATED ANCHOR FLANGE

ROOF MEMBRANE

A2 BODY


ADJUSTABLE CAST IRON EXTENSION DECK FLANGE (-E)

OPTIONAL CAST IRON DOME

2 5/16" (60) WIDE SERRATED MEMBRANE CLAMP

DEEP SUMP

A2 BODY



POLYDOME STRAINER WITH A FREE AREA OF 125 SQUARE INCHES

> ADJUSTABLE BALLAST GUARD WITH AUXILIARY DRAINAGE SLOTS SIZED TO PASS FINES BUT NOT BALLAST

> > 2 5/16" (60) WIDE SERRATED MEMBRANE CLAMP AND GRAVEL STOP

SERRATED ANCHOR FLANGE

ROOF MEMBRANE

OPTIONAL SUMP RECEIVER

OPTIONAL UNDERDECK CLAMP (-U)

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Roof Drain Selection Guide

The object of equipping a roof drain with an adjustable top via its adjustable extension is to place the top or inlet of the drain at the right above structural deck accommodate various thicknesses of insulation. This avoids the necessity of tapering or feathering the insulation layer down to the fixed body flange level of the drain causing a loss of insulation value at the drain location. MIFAB ACCOMPLISHES THE ADJUSTMENT BY INSTALLING A DECK FLANGE ONTO THE ROOF DECK AND SUPPORTING THE ROOF DRAIN BODY FLUSH OR SLIGHTLY BELOW THE MEMBRANE LEVEL (ABOVE THE INSULATION) UTILIZING THE HS-3 HARDWARE SET. A DECK CLAMP (SUFFIX -U) IS SECURED BENEATH THE DECK ON THE SAME HARDWARE TO ENSURE A RIGID INSTALLATION. IN ALL CASES, THERE IS NO USE OF GASKETS OR MASTIC COATINGS. THIS PRECLUDES THE POSSIBILITY OF ANY LEAKAGE DUE TO BACK-UP IN THE DRAINAGE SYSTEM AS A RESULT OF SURCHARGE OR BLOCKAGE.

On Promenade decks, a collar with a cam provides finite adjustment, with the collar being secured by three locking screws to the body of the roof drain. A similar system is used with the R1200-HC in IRMA (Inverted Membrane) systems. You do achieve the precise height with MIFAB roof drains with a minimum of effort. Moreover, MIFAB roof drains provide flexibility in top height often necessary to overcome construction irregularities impossible to compensate for with fixed extension drains.

COMBINED FLASHING CLAMP


LOCKING DOME

Once in place stays in place to provide positive protection for the roof drain and drainage system entrance. The vertical perimeter openings provide sufficient free drainage area, in compliance with codes and standards, for prompt and efficient drainage of the roof while protecting the system against entrance of potentially damaging objects. With the open or free area on top, which is merely for flood conditions, the dome has a total free area in excess of 125 square inches.

ADJUSTABLE EXTENSION DECK FLANGE (SUFFIX -E)

Adjustable extension is placed on the structural deck level to accommodate various thicknesses of insulation, thereby avoiding the necessity of tapering or feathering the insulation layer down to the fixed body flange level of the drain causing a loss of insulation value at the drain location. MIFAB accomplishes the adjustment by installing a deck flange onto the roof deck and supporting the roof drain body flush or slightly below the membrane level (above the insulation) utilizing the HS-3 hardware set. A Deck clamp (suffix -U) is secured beneath the deck on the same hardware to ensure a rigid installation.

HARDWARE SET (HS-3)

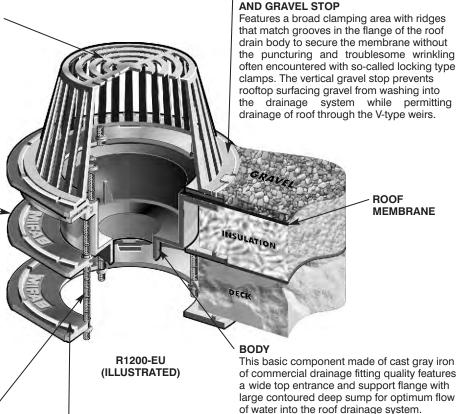

UNDERDECK CLAMP (SUFFIX -U)

Serves to unite roof drain and roof deck in a common bond through a vise-like compression principle that assures a positive permanent installation. The deck is sandwiched between the drain flange, or sump receiver and the underdeck clamp to preclude membrane or flashing rupture that could occur if the underdeck clamp is not utilized.

Design and dimensions are subject to modification. Prices do not include applicable taxes.




Roof drains and accessories combine to form the upstream or entrance terminals of the roof drainage system and as such play a key role in the success or failure of the system. Sizing and placement of roof drains are thoroughly covered in the next section of this catalog. However, prior to sizing and placement of drains, there are certain basic roof design factors that must be considered when selecting and specifying the proper roof drains and accessories for the job. Even though all roofs serve the same basic purpose of protecting the building and its contents from the elements, their design, construction composition, and drainage requirements do vary. Accordingly, when the specifications for the roof drains and accessories are developed, it is of vital importance that all design factors of the roof be addressed and reflected in the products specified to ensure a trouble free, successful installation. Also, insistence upon compliance with the specifications is essential, for departure there could result in a substandard roof drain installation potentially doomed to ultimate failure. Basic roof design factors for consideration with recommended drainage products follow.

ROOF DECKS ROOF DRAIN SUPPORT SUMP RECEIVERS

Roof decks, owing to the broad range of types and materials of construction, provide perhaps the greatest challenge to the specifier in his quest for the proper method of roof drain support for installation in a given deck. Unless the drain is

being installed in a poured concrete deck with drain in place completely surrounded and supported by the deck it will be necessary to provide a deck opening in which to set the drain. It is when such openings



are required that drain

support becomes the foremost consideration. Even though minimum deck openings are recommended in this catalog for each drain and maximum openings are stated based on the

drain's outside sump diameter, maintenance of the actual opening size within the range cannot always be assured. Therefore, a sump receiver, sometimes called drain receiver should be specified with the drain to compensate for deck opening irregularities and provide proper support for the drain. The sump receiver is simply a thin steel ring with a wide, flat flange and depressed center opening into which the roof drain body flange fits, supported by the lip of the opening. In addition to easing the deck opening tolerance requirements, the sump receiver helps to distribute the weight of the drain over a broader surface of the deck. By placing the top of the drain flange at deck level where it should be, the sump receiver helps to avoid the dam-like effect created when the drain flange rests on top of the deck opening. Specify Suffix -B

ROOF DECKS ROOF DRAIN SECURING UNDERDECK CLAMPS

Proper roof drain support having been resolved through employment of the sump receiver, it becomes necessary to consider a practical method of securing the drain to the deck. If the drain is not in a "poured-in-place," thus secured, installation of an auxiliary securing means must be provided. The most effective and positive means available in response to this requirement is

the underdeck clamp (suffix -U). With the drain in place and the sump receiver on top of the deck, the underdeck clamp of circular configuration, surrounding the drain and connected piping, is brought to bear



against the bottom of the deck and drawn tightly in place with hardware provided. This in effect sandwiches the deck into a positive union with the drain. Thus secured into place, the roof drain becomes an integral component of the deck with assurance of installation stability and optimum performance in its role as entrance terminal of the roof drainage system. **Specify Suffix –U**

Design and dimensions are subject to modification. Prices do not include applicable taxes.



ROOF DECKS EXPANSION AND CONTRACTION EXPANSION JOINTS

Expansion and contraction, primarily caused by alternating hot and cold environmental conditions, are of particular concern with roof decks and topping materials. Accordingly, these opposing reactions are compensated for in the roof structure by strategically located expansion joints which yield to maintain integrity of the roofing system. Equally important in the preservation of integrity of the roofing system is the roof drain's connection to the drainage piping system. This must permit the drain, an integral component of the roof, to move with the roof during the expansion and contraction process without rupture of either the connection or the watertight bond of drain to roof. In response to this requirement, horizontal offsets in leader piping immediately below the drain connection, which provide a swing joint effect, are employed as are in some cases a side outlet. When bottom outlet roof drains are selected, flexible expansion joints should be used to compensate for expansion and contraction of the roof if the leader cannot be horizontally offset. Specify Series R1900 Vertical Expansion Joints.

ROOF DRAINS APPLIED INSULATION ROOF DRAINS WITH ADJUSTABLE EXTENSION (DECK FLANGE)

The insulation layer, which is normally applied over the structural deck, merits consideration in the selection and specification of the roof drains.

A common practice has been to feather or taper the insulation layer down to meet the drain top at the structural deck level. This creates a sump surrounding the drain into which roof topping materials are brought for bonding with the drain



flange by means of the flashing clamp. Such sumps, or roof depressions at the drains, even though favored by some designers for their positive drainage aspects, have a downside as receptacles for debris with adverse effects to drainage and potential premature failure of the

drain-roof bond. To avoid these potential problems, an adjustable extension is placed on the structural deck level to accommodate various thicknesses of insulation. This avoids the necessity of tapering or feathering the insulation layer down to the fixed body flange level of the drain causing a loss of insulation value at the drain location. MIFAB accomplishes the adjustment by installing a deck flange and supporting the roof drain body flush or slightly below the membrane level utilizing the HS-3 hardware set.

Specify Suffix -E.

PARAPETS

ROOF PERIMETER PROJECTIONS DRAINAGE

Parapets, normally building outer wall projections above roof elevation, serve important functions in building structure and architectural aesthetics. Parapets also act as barriers against water being swept off the roof during storms, a potentially hazardous condition to passersby and to the building walls themselves. However as an adjunct to the primary roof drainage system, drainage through the parapets at their roof level base or at a predetermined overflow elevation through proper drains or scuppers is recommended, for parapet base-roof level drainage. Specify Series R1300 or R1320 and for overflow drainage specify Series R1940.

ROOF DECKS (IRMA) INSULATED MEMBRANE ROOF DRAINS WITH EXTENSION BALLAST GUARD

The increased popularity of insulated roof membrane assembly (IRMA) construction, sometimes referred to as inverted roof construction (because the membrane is under the insulation layer) has led to the development of roof drains equipped with ballast guards. The primary object of insulating the membrane is to protect it from damaging weather conditions thereby prolonging its integrity. In the roof membrane assembly. waterproof membrane is applied directly to the structural deck surface. Then specially designed insulation planks with drainage grooves are set in place on top of the membrane. Above this, a percolation layer of aggregate gravel is applied to secure the insulation, while permitting efficient

Design and dimensions are subject to modification. Prices do not include applicable taxes.



drainage away from the surface. With this arrangement of layers, rainfall quickly percolates through the gravel to the surface of the insulation layer from where over 90 percent gravitates to the roof drain and the balance finds its way between the insulation planks via the grooves to the roof drain. Thus with the bulk of the water arriving at the drain well above waterproof membrane elevation it is desirable to provide a ballast guard on the drain above structural deck level to screen out the undersized aggregate gravel that is carried through the gravel layer with the flowing water. Roof drains equipped with ballast guards are ideally suited for this application and should be specified for installation in all insulated roof membrane assembly type roofs. There are basically two schools of thought as to the proper location of the dome on ballast guard equipped roof drains. One suggests it be in its normal position assembled to the flashing clamp at structural deck level with the ballast guard surrounding the dome making for a dome recessed drain assembly. The other option is to place the


dome and its retaining ring on top of the ballast guard at the surface of the aggregate gravel layer The decision as to which type to specify remains with the engineer, as either type will function satisfactorily for the purpose intended.



ROOF DECKS ROOF DRAINS WITH WATER DAM

Sometimes, roofs are designed to contain a predetermined amount, thus depth, of water at all times for various reasons. Roof drains for installation in such roofs are equipped with a watertight open top collar either internal or external of the dome, with its flood level at the prescribed elevation above deck to serve as a dam to retain and maintain the desired amount of

water on the roof. Excess water, treated for drain purposes sizing rainfall, floods over the dam and is discharged into the roof drainage system in the normal manner. Specify suffix -R or -W.

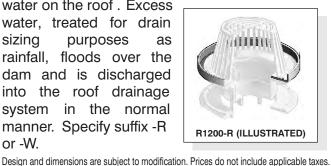

ROOF DECKS OVERFLOW DRAINAGE

Most codes require that an overflow system be installed in the event of a blockage or surcharge

of the main storm drain system. This may be accomplished by installation of scupper drains (R1300) with downspout nozzles (R1940). Another method to meet the code



requirement is install a completely separate roof drain with external water dams (R1200-R) or internal standpipes (R1200-W). MIFAB has also developed a combination primary and secondary roof drain in one unit requiring a single deck opening. Specify R1150 Series or R1270 Series.

ROOF DECKS GUTTER AND BALCONY DRAINAGE GUTTER DRAINS

Drainage requirements for gutter and small roof areas, such as balconies and the like, are handled by small compact roof drains referred to as gutter drains. Such drains, owing to their compact size, can readily be installed in confined locations which otherwise may not be properly drained. Specify Series R1400 through R1420.



MIFAB Rainfall Considerations for Roof Drains

Flat roof drainage is accomplished through a system of roof drains, vertical leaders, and horizontal storm drains sized and located in accordance with established criteria in conformance with local plumbing and building codes. Therefore, when considering the design of a roof drainage system, it is recommended that local code authorities be consulted regarding the rainfall rate acceptable in their jurisdiction for design purposes. National rainfall rate information is provided in the chart below, listing rainfall rates

in millimeters per hour for selected cities. When the rainfall rate for the locale of the project has been resolved, sizing of the roof drains, leaders and horizontal drainage piping can proceed.

Rainfall Rates for Selected Cities (millimeters per hour)

Based on a storm of one hour duration and a 100 year return period. Source: Environment Canada-National Climate Data and Information Archive

ALBERTA		MANTIOBA		NUNAVUT		QUEBEC	
Camrose	30.3	Brandon	48.7	Baker Lake	15.1	Deschambault	38.8
Coronation	34.8	Deerwood	50.7	Rankin Inlet	19.6	Duchesnay	43.6
Edmonton	36.5	Glenlea	79.5	Cape Dorset	12.3	Quebec	51.7
Ellerslie	41.2	Pilot Mound	61.3	Cylde	6.5	St. Alban	67.6
Vegreville	56.1	Berens River		,		Shawinigan	48.8
Lacombe	43.1	Bissett		ONTARIO		Brome	50.6
Books	46.2	Gimli	40.1	Atikokan	46.9	Danville	63.3
Calgary	42.6	Indian Bay	41.4	Kenora	68.2	Granby	54.7
Lethbridge	56.7	Dauphin	52.2	Armstrona	52.3	Lingwick	69.8
Pincher Creek	35.6	Flin Flon	76	Thunder Bay	63.6	Maple Leaf East	67
Vauxhall	38.5	Churchill	63.9	Sudbury	51.1	Ormstown	50
Manyberries	25.5	Gillam	49.7	Kapuskasing	37.5	St Flavien	41.7
Jasper	21.9	amarr	28.6	Moosonee	32.4	St Guillaume	53.1
Kananaskis	34.1	NEW BRUNSWICK	33.3	North Bay	53.2	Sherbrooke	47.4
Edson	36.9	Beechwood	33.7	Kemptville	56.2	West Ditton	39
Whitecourt	38.8	Buctouche	48.2	Kingston	45.3	Angers	48.9
Grande Prairie	27.3	Fredericton	46.2 31.5	Ottawa	45.3 50.1	Maniwaki	46.9
Peace River	32.5	Moncton	46.6	Beausoleil	70.9	Nominingue	61.9
Watino	32.3 42.3	Saint John	46.6 45.7	Utterson	36.3	Shawville	49.3
Wallio	42.3	Saint John	43.7		54.2		49.3 45.8
PRITICIL COLUMBIA		NEW FOUNDLAND		Wiarton		La Pocatiere	
BRITISH COLUMBIA	40.7	NEW FOUNDLAND	44.4	Chatham	59.7	Matane	40.1
North Cowichan	16.7	Argentia	41.4	Delhi	538	Notre Dame Du Lac	51.9
Parksville South	12.1	Burgeo	36.2	Harrow	63.7	Nouvelle	27.7
Port Alberni	23.2	La Scie	23.5	Nigrara Falls	49.5	St Malachie	43.7
Gibsons	20.9	St Anthony	23.7	Windsor	62.5	Roberval	36.6
Langara	20.6	St Lawrence	43.6	Elora	52.8	St Coeur De Marie	38.9
Sandspit	15.7	Battle Harbour	18.2	Kitchener City	49.5	La Tuque	55.6
Prince Rupert	23.4	Churchill Falls	22.8	London	64.2	Amos 49.2	
Stewart	11.6	Goose	27.8	Preston	55.6	La Grande Riviere	46.6
Terrace	24.2	Nain	19.5	Belleville	44.1	La Sarre	34.9
Quick	26.4			Greenwood	52.1	Matagami	44.4
Pemberton	20.1	NOVA SCOTIA		Hamilton	63.7	Schefferville	23.1
Southbank	19.4	Eddy Point	44.2	Orangeville	48.6		
Fort St James	18.4	Greenwood	44	Stouffville	61.8	SASKATCHEWAN	
Prince George	26.3	Halifax	39	Toronto City	56.8	Broadview	38.8
Abbotsford	29.6	Kentivlle	40.5	•		Estevan	60.8
Huntingdon	21.9	Sable Island	48.8			Moose Jaw	45.2
Ladner Bchpa	14.5	Sharpe Brook	37.7	PRINCE EDWARD ISI	LAND	Ormiston	38.8
Langley Lochiel	22.1	Shearwater	40.1	Charlottetown	39.8	Weyburn	66.9
Hells Gate	13.3	Shelburne	57.8	Summerside	45.8	Wynyard	56.1
Норе	24.8	Sydney	42.7	Harriington	31.8	Yorkton	47.9
Shalalth	12.6	Truro	39.7		00	Swift Current	39.1
Oliver	30.4	Western Head	47.7	YUKON TERRITORY		Kindersley	40.5
Vernon	19.7	Yarmouth	53.5	Burwash	13.4	North Battleford	42.4
Summerland	16.1	Talliouti i	30.0	Carmacks	17.5	Melfort	36.4
Cranbrook	26.1	NORTHWEST TERR	ITORIES	Dawson	22.2	Prince Albert	39.7
Kimberley	33.4	Fort Reliance	16.9	Mayo	13.3	Burralo Narrows	46.4
Sparwood	16.4	Simpson	33.1	Pelly Ranch	26.9	Island Falls	33.4
Kamloops	20.7	Inuvik	17.1	Teslin	18.9	Stony Rapids	29.7
	33.3	Norman Wells	17.1 25.8	Watson Lake	21.3		29.7
Salmon Arm					-	Uranium City	
Chetwynd	25.6	Tungsten	12.2	Whitehorse	16.4	Nipawin	39.2
Dawson Creek	35.7	Yellwknife	26.7			Hudson Bay	43.7

Design and dimensions are subject to modification. Prices do not include applicable taxes.



Sizing and Placement of MIFAB Roof Drains

As a first step in the sizing procedure it will be necessary to determine the quantity and placement of the drains required for the roof. Even though there are a number of opinions regarding roof areas that can be effectively drained by one drain, it is recognized that for minimized ponding with adequate drainage, two roof drains are required for roof areas of 10,000 square feet or less, and at least one drain is required per 10,000 square feet of area for larger roofs. Individual judgement will be necessary when considering quantity and placement of drains on roofs where shape and size of sections may require departure from the 10,000 square per drain recommendation. replacement of drains, uniform distribution is desirable for proper roof drainage. Locating drains within 50 feet of the roof perimeter and no more than 100 feet apart is acceptable practice. Also, careful consideration of roof structural members, dividers, expansion joints, and other projections including rooftop equipment is essential in planning the roof drainage system for adequate drainage of each area of the roof. Consultation with the architect and structural engineer regarding roof details is recommended.

RAINFALL CONVERSION: INCHES PER HOUR TO GPM

For sizing purposes, rainfall-which is expressed in inches per hour, (in the following calculation) - is converted to gallons per minute per square foot of

roof area. A one (1) inch per hour rainfall converts to .0104 GPM per square foot. For any given rainfall, multiply the inches per hour by .0104 to arrive at the GPM per square foot of roof area. Then multiply that figure by the square feet of roof area to be drained to arrive at the total gallons per minute to be handled by the drainage system.

For example: consider a 4-inch per hour rainfall on a 10,000 square foot roof:

 $0.0104 \times 4 \times 10,000 = 416 \text{ GPM}$

Roof Drain Sizing: Other Considerations

OVERFLOW DRAINAGE

Overflow scuppers and drains, as essential components of the roof drainage system, are employed to prevent potentially damaging overloading of roof structures. They must be installed in conformance with local codes. Generally, scuppers are installed in adjacent parapet walls no more than 5 inches above the low point of the roof at a ratio of at least one scupper per 20,000 sq. ft. of roof area. Overflow drains of the same size as the roof drains having above roof inlet elevation as specified by code, connected to drain lines independent from the roof drains, may be installed in lieu of scuppers.

VERTICAL WALLS

Finally, vertical walls that project above and permit storm water to drain on the roof area to be drained must be considered when planning the roof drainage system. An acceptable rule to follow in sizing roof drains, leaders, and horizontal drainage piping is to add one half of the area of any vertical wall that diverts rainwater to the roof to the projected area of that roof. By multiplying the area thus obtained by the GPM/sq.ft. conversion of inches per hour rainfall, the new total GPM discharge requirement is determined for the roof.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



ROOF DECKS VENT STACKS VENT CAPS

Even though vent stack and stack vent terminals extending above roof deck level are components of the sanitary drainage system of the building, they are included for consideration in this section because of roof penetration and roof level maintenance requirements. Vents maintain the air-hydraulic balance of the building's sanitary drainage system and in serving that purpose must be maintained open for positive circulation; i.e., the escape of gas and intake of fresh air. Because of the vent terminals exposure to the elements above the roof, it is vulnerable to fouling by various means-leaves, twigs, bird nests, etc., that somehow have a tendency to become lodged therein. To preclude this undesirable condition protective vent caps that permit free circulation of air while protecting the vent terminal against fouling are recommended.

Specify Series R1940.

ROOF DECKS VANDALISM VANDAL PROOFING

Specify Suffix -6.

Because of their "out of building" rooftop location, the exposed components of the roof drainage system, particularly roof drain domes and grates, are subject to vandalism. This is especially true on having easy access. Domes occasionally removed and at times flung over the roof edge to the detriment of any unfortunate person below. Also, drains congested with debris are rendered useless. To avoid these unlawful damaging circumstances, vandal proofing of roof drain domes and grates is recommended. Vandal proofing is accomplished by securing these components to their fixed mating parts with vandal proof screws or bolts which require special tools, available only to authorized maintenance personnel, for application and removal.

Introduction Controlled Flow Roof Drainage

In the early 1960's, the pervasive industrialization of the post war boom lead to a new problem for plumbing engineers. As more industrial parks, malls, entertainment facilities, factories and warehousing were built, the load on the local storm sewer system due to extensive paved areas surrounding these buildings for parking as well as their own extensive square footage of roof created an unprecedented demand. Where rain once fell on undeveloped land, and was subsequently absorbed or abated by natural drainage, it now fell on pavement, where no absorption factor meant the total rainfall for vast new areas now had to be conducted by municipal storm sewer systems. To avoid overtaxing the local systems, engineers began to be design flat roofs with controlled flow roof drains. Instead of just getting rid of the rain as fast as it fell, the idea was conceived of using the roof itself as a reservoir from which water could be drained off gradually after a storm abated, thus sparing the storm sewer from being overwhelmed. Roofs could then be built with 6" parapets to not only store the rainwater, but also act as wind break against miniature waves that might be caused on the reservoir in high winds with consequent spillage. On buildings with greater than 6" parapets, scupper drains had to be installed at the 5" level to guard against overloading should the drain system fail.

The Heart of the Controlled Flow Roof Drainage System, The Accuflow Weir



In order to use the roof as a reservoirit was necessary to design a system where the rate of flow was easily determined for any possible rainfall conditions. The problem is that the rate of flow naturally varies exponentially with the depth of stored water on the roof (a.k.a. head pressure). This made the calculations necessary to design a roof top rain storage system very difficult. The answer was to design a flow control weir with a parabolic opening which would make the flow off the roof linear instead of exponential. This meant that once a constant linear flow rate was

decided, a weir was designed to admit water to the system at only this fixed rate. The MIFAB system uses a fixed rate of 5 U.S. G.P.M. per inch of water.


Design and dimensions are subject to modification. Prices do not include applicable taxes.




ACCUFLOW CONTROLLED FLOW ROOF DRAIN SYSTEM

INAN UNREGULATED SYSTEM, FLOW IS EXPONENTIALLY PROPORTIONAL TO DEPTH OF RAINWATER ON THE ROOF, AND QUICKLY REACHES THE SATURATION POINT OF THE SYSTEM.

IN AN CONTROLLED SYSTEM, FLOW IS LINEARLY PROPORTIONAL TO DEPTH OF RAINWATER ON THE ROOF AND GRADUALLY DRAINS WITHOUT OVERLOADING THE STORM SEWER SYSTEM.

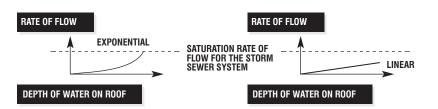

THE SPECIALLY DESIGNED PARABOLIC OPENING OF THE ACCUTROL WEIR CREATES A CONSTANT FLOW OF RAINWATER THAT INCREASES PROPORTIONATELY AT A RATE OF 5 GPM PER INCH OF STANDING WATER UP TO 30GPM ON THE R1200 SERIES AND 15 GPM ON THE R1100 SERIES.



Controlled Flow Roof Drainage: Design Considerations.

Three main considerations must guide the design of a controlled flow roof drainage system:

- It must drain quickly enough to avoid the weight of water building to the point of being an architectural hazard.
- It must drain slowly enough to prevent overloading the sewage system with the consequent risk of flooding or pollution or both.
- 3. It must drain down in a reasonable time to minimize the risk of freezing in low temperatures.

To meet these requirements, regional rainfall values had to be carefully considered. From these values, it is possible to calculate the number of gallons per minute (GPM) need to be drained to ensure the buildup in the worst conditions did not exceed a depth of three inches. The consideration of the worst conditions had to be determined from government statistics. The figures used were compiled by the Meteorological Branch of the Department of Transport. The information was combined to produce values that would predict the worst conditions that one could expect over a period of time, in this case ten, twenty-five and fifty years. Hence the expression, "ten year rain" or "fifty year rain".

As well, there are also the local building codes, which specify drain down time (in hours) and maximum head of water on the roof in inches. The maximum drain down time has been determined to be 30 hours to eliminate the possibility of freezing. A constant rate of flow makes it possible, with the use of our Area Selection Table, to quickly determine the number of drains needed for any size of roof where this value is known.

Controlled Flow Roof Drainage:Factors that can effect Roof Drain Sizing & Position.

Where a roof area is surrounded by vertical walls, some consideration must be given to the volume of rainwater that these walls might add to the total volume to be drained under "driving rain" conditions:

- 1. One wall: Add 50% of wall area
- 2. Two walls: Add 35% of wall area
- 3. Two walls opposite of differing heights: Add 50% of the difference in wall area of that part which extends above the lower wall.
- 4. Walls on three sides: Add 50% of the inner wall area above the top of the lowest wall(s).

Other Factors to consider:

- 5. Drains should be located with preference to the downwind side of the roof. In a storm, it is not uncommon for the rainwater level to differ significantly from one side to another due to the effects of high winds.
- 6. Drains should not be located at columns or other high spots.
- 7. Rooftop mechanical equipment shall be installed with proper allowances for the "ponding" a control flow roof drain system will create.
- 8. Parapets should be high enough to prevent spillage or worse, for in winter there is the danger of ice or snow blowing off the road that must be considered.

Controlled Flow Roof Drainage: Sizing Procedure.

- A Determine the roof area(s) (individual areas when the roof is divided by expansion joints, parapet walls, control joints, etc.) to be drained making the allowances for any of the factors (above) which may effect the total square footage of the roof.
- **B** Follow the location and placement guidelines for conventional roof drains as found on the next pages (viii & ix), allowing no more than 50 ft. from an edge, no more than 100 ft. apart, and a maximum square footage of 10,000 per drain, etc.
- C Calculate the number of weirs. Divide the total square footage by the area factor for the location of the roof. If the number of weirs is greater than the number of drains from **step B**, add 2-slot weirs to roof drains as necessary, starting with the drains closest to the downwind edges of the roof. If the number of weirs is fractional, round up. If the number of weirs is less than the number of drains, every drain should still be equipped with a one slot weir.
- **D** Based on the slope and area to be drained by each weir, the maximum flow from all the drains on the roof can be added together to determine vertical leader sizing and horizontal storm sewer requirements.


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



MIFAB Typical Roof Drain Installations


R1200-EU

Roof Drain with adjustable deck flange for varying thicknesses of insulation. Type of roof illustrated would have the waterproofing membrane above the insulation and below the ballast. (See Page 126)

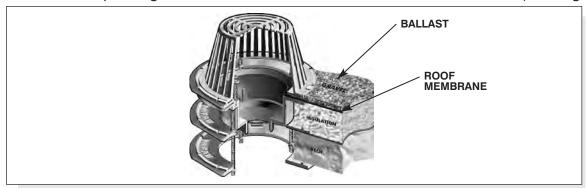


R1200-HC

Roof Drain with adjustable cast iron iron ballast and insulation guard. Used with Insulated Roof Membrane Assembly (IRMA) type roofs. An adjustable slotted extension serves to retain ballast on a flat roof **and slots are sized to pass fines**. (See Page 128)

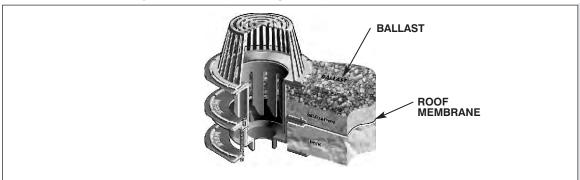


R1200-PR-BU

Promenade Roof Drain with sump receiver and adjustable collar to easily position grate to roof surface elevation. Type of roof illustrated shows pedestrian tile roof deck above an insulated precast concrete slab. (See Page 129)

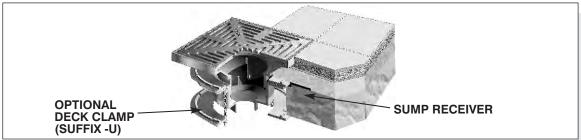

R1300 or R1320

Scupper Drain with flat or angle grate and flashing clamp grate frame. For installation at the base of parapets. Specify (–1) for Nickel Bronze or (-50) for cast iron. Available with 45° or 90° outlet. (See Page 142, 143)

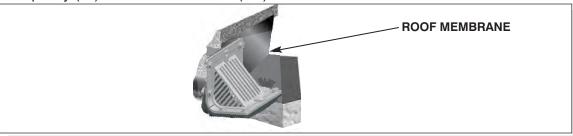

Design and dimensions are subject to modification. Prices do not include applicable taxes.

 $\label{thm:com} \mbox{ Visit } \textbf{www.mifab.com} \mbox{ for the most recent product information.}$



QUICK GUIDE TO GENERAL ROOF DRAIN SIZING

CHARTS A and B

As an aid to the sizing and placement of MIFAB roof drains, please refer to Charts A and B, which give leader and horizontal storm drain capacities at various slopes, with capacities in GPM and maximum projected roof areas in square feet in each case. It will be noted that a 6-inch leader, thus 6-inch drain, will be indicated by the preceding example. The horizontal storm drain required, depending on slope, would be 6 or 8 inch. However, remembering that two drains are recommended for areas of 10,000 square feet or less, it would be advisable to select smaller drains with total capacity of 416 GPM or more. The maximum projected roof areas in Charts A and B are based on the flow capacity of each pipe size shown. The total of the projected flows from the vertical leaders will determine the size and slope of the horizontal storm sewer required in chart B.

CHART A:

Vertical leader capacity in GPM with maximum serviceable roof area in square feet based on various anticipated hourly rainfall rates.

VERTICAL LEADER SIZ RAINFALL INCHES CAI PER HOUR		ROOF AREA Square Feet 1	ROOF AREA Square feet 2	ROOF AREA Square Feet 3	ROOF AREA Square feet 4	ROOF AREA Square Feet 5	ROOF AREA Square Feet 6
2	30	2880	1440	960	720	575	480
3	92	8800	4400	2930	2200	1760	1470
4	192	18400	9200	6130	4600	3680	3070
6	563	11600	27000	17995	13500	10800	9000
8	1208	116000	58000	38660	29000	23200	19315

CHART B:

Horizontal storm drain capacity in GPM for slopes given with maximum serviceable roof area in square feet based on system capacity.

	1/8 INCH PER	1/8 INCH PER FOOT SLOPE 1/4 INCH PER FOOT SLOPE			1/2 INCH PER FOOT SLOPE		
DRAIN Pipe Size (inches)	DRAIN Capacity (GPM)	MAXIMUM ROOF AREA (SQUARE FEET)	DRAIN Capacity (GPM)	MAXIMUM Roof Area (Square Feet)	DRAIN Capacity (GPM)	MAXIMUM Roof Area (Square Feet)	
3	34	822	48	1160	69	1644	
4	78	1880	110	2650	157	3760	
5	139	3340	197	4720	278	6680	
6	223	5350	315	7550	446	10700	
8	479	11500	679	16300	958	23000	
10	863	20700	1217	29200	1725	44100	
12	1388	33300	1958	47000	2775	66600	
15	2479	59500	3500	84000	4958	81900	

ROOF DRAIN SIZING - EXAMPLE

A warehouse is being built in a geographical area where the maximum hourly rainfall (from rainfall map) is 2.8 inches per hour. The building will be 200' x 400' and have a flat roof with no appreciable vertical surface.

Roof Drainage System Layout indicated by the sizing example.

CALCULATIONS:

• Total area to be drained (200 x 400) **80,000 Sq. ft.**

 Number of drains required (From sizing rule, one drain per 10,000 sq. Ft)

 Rainfall conversion from in. per hour GPM (0.0104 x 2.8 x 80,000)

• Expected flow from drain 292 (GPM ÷ number of drains) (2330÷8)

• Size of leader (from Chart A) 6 inch vertical

Size of horizontal storm sewers
 (from Chart B 1/4/ foot slope, combined
 flow of vertical leaders 8,10,12,15, inches


Design and dimensions are subject to modification. Prices do not include applicable taxes.



R1100

STANDARD ROOF DRAIN

R1100

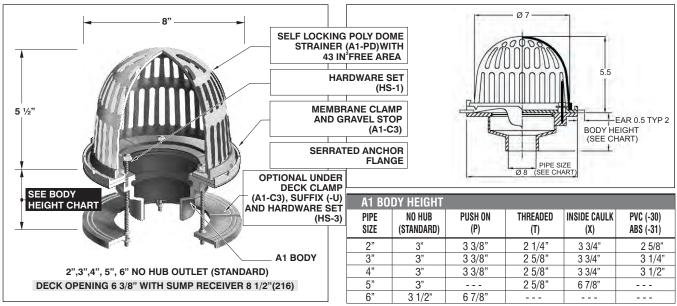

LACQUERED CAST IRON BODY WITH:							
MODEL NO.	WT Lbs.	POLY DOME (STANDARD)	METAL DOME (-M)				
R1102, 3, 4	7.00	2", 3", 4"	\$137.00	\$193.00			


PARTS	A1 BODY	A1-PD	HS-1	A1-C3
	9		fff	0

R110	00, R1100-EU, R1100-F, and R1100-G VARIATIO	DNS:		CONTIN	UE P
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (Metal dome only)(H-1029)	\$ 76.00	-30	PVC socket connection body*(2", 3", 4")	\$ 28.00
-11	Acid resistant epoxy(Excluding polydome)	\$ 247.00	-31	ABS socket connection body*(2", 3", 4")	\$ 28.00
-12	Galvanized metal dome	\$ 73.00	-81	Rough bronze dome add (A1-MD-81)	\$ 242.00
-12A	Galvanized body and membrane clamp	\$ 113.00	-83	Stainless steel mesh screen over dome (A1-SSD)	\$ 342.00
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-90	Threaded side outlet (2",3",4") (N/A in -30,-31)	\$ 123.00
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub only)	\$1473.00	-B	Sump Receiver add (A1-BP)	\$ 108.00
* Add I	NH to -90 for no hub side outlet - No Add		* P	VC/ABS Socket bodies available for 2", 3", 4" connections	ction sizes

NOTE: Underdeck clamp for A1-4X-7, A1-4P-7 and all 5" No hub outlet A1 bodies. (Part # A1-C3-4PO). Underdeck clamp not available with all 5" threaded and Inside caulk and all 6" outlet bodies.

R1100-EU ROOF DRAIN FOR INSULATED ROOF DECK

R1100-EU

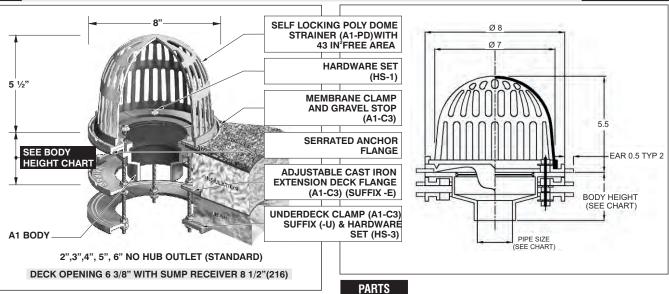

LACQUERED CAST IRON BODY WITH:								
MODEL NO.	WT Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	METAL DOME (-M)				
R1102, 3, 4-EU	11.50	2", 3", 4"	\$ 323.00	\$ 379.00				


Design and dimensions are subject to modification. Prices do not include applicable taxes.





ROOF DRAIN WITH PARABOLIC FLOW CONTROL WEIR

R1100-F

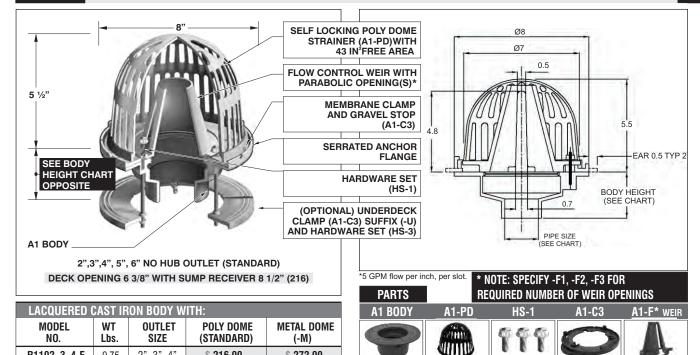

R1100, R	R1100, R1100-EU, R1100-F AND R1100-G OPTIONAL VARIATIONS CONTINUED FROM PAGE 120									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE					
-C	Secondary clamp (A1-C3)	\$ 108.00	-U	Underdeck clamp (A1-C3) (2", 3", 4" and 5" NH)	\$ 108.00					
-E	Adjustable extension	\$ 185.00	-W	Adjustable water dam (W-31)	\$ 86.00					
-EG	Galvanized adjustable extension	\$ 277.00	-W-1	Waterproofing flange (A1-W-1)	\$ 71.00					
-F1,-F2,-F3	Accuflow (parabolic weir)(A1-F1,A1-F2,or A1-F3)	\$ 79.00	-Z	Extended wide flange on body (13" Dia. x 1/8" thick)	\$ 881.00					
-G	Ballast guard (A1-BG)	\$ 268.00	Х	Inside caulk outlet (2", 3", 4")	No Add					
-JC	Ballast guard with secondary clamp	\$ 375.00	5	5" No hub outlet	\$ 185.00					
-M	Metal dome (A1-MD)	No Add	5T	5" threaded outlet	\$ 246.00					
P	Push on outlet	\$ 26.00	5X	5" Inside caulk outlet	\$ 185.00					
-R	2" External water dam (A1-WD)	\$ 72.00	6	6" No hub outlet (Not available with -U)	\$ 185.00					
T	Threaded outlet (2", 3", 4")	\$ 61.00	6P	6" Push on outlet* (Not available with -U)	\$ 210.00					

\$ 272.00

2", 3", 4"


\$ 216.00

9.75

R1102, 3, 4-F

R1100-G ROOF DRAIN WITH BALLAST GUARD FOR I.R.M.A. ROOFS

R1100-G

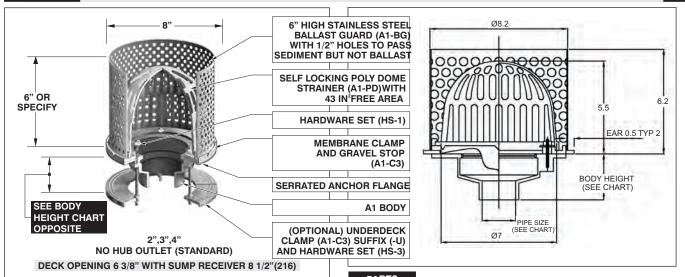

LACQUERED CAST IRON BODY WITH:								
MODEL No.	WT Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	METAL DOME (-M)				
R1102, 3, 4-G	8.00	2", 3", 4"	\$ 405.00	\$ 461.00				

Design and dimensions are subject to modification. Prices do not include applicable taxes.


PARTS A1 BODY A1-PD A1-C3 A1-BG THE

^{*} Specify POG-6 for 6" C.I. pipe and POG-6-PVC for 6" PVC pipe. 2", 3", 4" sizes use same gasket.



R1100-JC ROOF DRAIN WITH S.S. BALLAST GUARD FOR I.R.M.A. ROOFS

R1100-JC

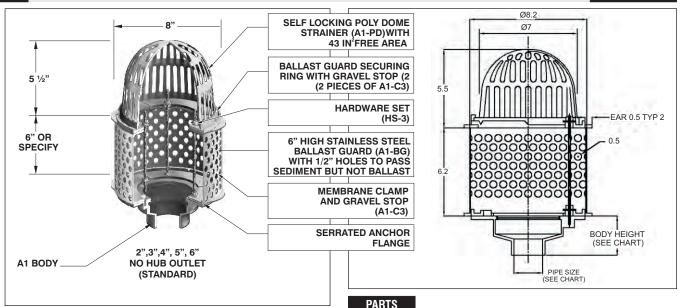

LACQUERED CAST IRON BODY WITH:					
MODEL NO.	WT Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	METAL DOME (-M)	
R1102, 3, 4-JC	10.50	2", 3", 4"	\$ 512.00	\$ 568.00	


17.1110				
A1 BODY	A1-PD	A1-C3	HS-3	A1-BG
•		X3	100000	

R110	0-JC, R1100-PR, R1100-PJ, and R1100-RS OPTIONAL VAR	IATIONS:		CONTIN	UE D
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (Metal dome only)(H-1029)	\$ 76.00	-30	PVC socket connection body*(2", 3", 4")	\$ 28.00
-11	Acid resistant epoxy (Excluding polydome)	\$ 247.00	-31	ABS socket connection body*(2", 3", 4")	\$ 28.00
-12	Galvanized metal dome	\$ 73.00	-81	Rough bronze dome(A1-MD-81)	\$ 242.00
-12A	Galvanized body and membrane clamp	\$ 113.00	-83	Stainless steel mesh screen over dome (A1-SSD)	\$ 342.00
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-90	Threaded side outlet (2",3",4") (N/A in -30,-31)	\$ 123.00
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub only)	\$1473.00	-B	Sump Receiver (A1-BP)	\$ 108.00
* Add	* Add NH to -90 for no hub side outlet - No Add				

NOTE: Underdeck clamp for A1-4X-7, A1-4P-7 and 5" NH outlet A1 bodies. (Part # A1-C3-4PO). Underdeck clamp not available with all 5" threaded and inside caulk and all 6" outlet bodies.

R1100-PR PROMENADE DECK DRAIN

R1100-PR

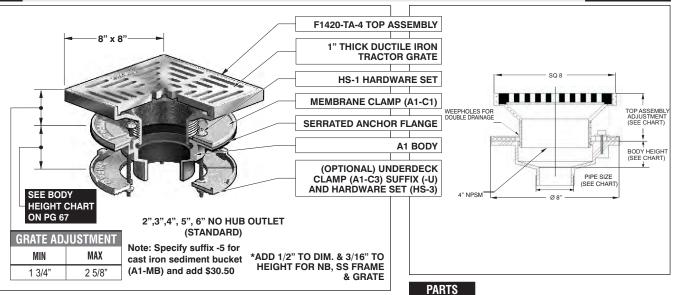

LACQUERED CAST IRON BODY WITH:							
MODEL NO.	WT Lbs.	OUTLET SIZE	DUCTILE IRON (-4)	NICKEL BRONZE (VENEER) (-1)	STAINLESS STEEL (VENEER) (-3)		
R1102, 3, 4-PR	15.50	2", 3", 4"	\$ 530.00	\$ 1106.00	\$ 1106.00		


A1 BODY A1-C1 HS-1 F1420-TA-4

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



R1100-PJ PROMENADE DECK DRAIN WITH S.S. BALLAST GUARD

R1100-PJ

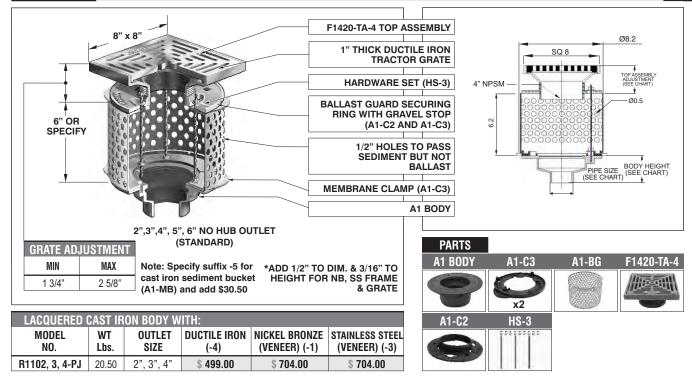


R1100-JC,	R1100-JC, R1100-PR, R1100-PJ, and R1100-RS OPTIONAL VARIATIONS(CONTINUED FROM PAGE 122):						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-C	Secondary clamp (A1-C3)	\$ 108.00	-U	Underdeck clamp (A1-C3) (2", 3", 4", 5" NH)	\$ 108.00		
-E	Adjustable extension	\$ 185.00	-W	Adjustable water dam (W-31)	\$ 86.00		
-EG	Galvanized adjustable extension	\$ 277.00	-W-1	Waterproofing flange (A1-W-1)	\$ 71.00		
-F1,-F2,-F3	Accuflow (parabolic weir) (R1100-JC ONLY)	\$ 79.00	-Z	Extended wide flange on body (13"Dia. x 1/8 thick)	\$ 881.00		
-G	Ballast guard (A1-BG)	\$ 268.00	χ	Inside caulk outlet	No Add		
-JC	Ballast guard with secondary clamp (not with R 1100-PJ)	\$ 375.00	5	5" No hub outlet	\$ 185.00		
-M	Metal dome	No Add	5T	5" threaded outlet	\$ 246.00		
P	Push on outlet	\$ 26.00	5X	5" Inside caulk outlet	\$ 185.00		
-R	2" External water dam (A1-WD)	\$ 72.00	6	6" No hub outlet (Not available with -U)	\$ 185.00		
T	Threaded outlet (2", 3", 4")	\$ 61.00	6P	6" Push on outlet* (Not available with -U)	\$ 210.00		

^{*} Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe 2", 3", 4" sizes use same gasket.

R1100-RS CONDENSATE RECEPTOR DRAIN

R1100-RS

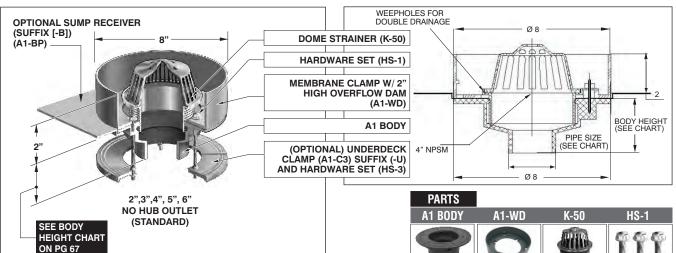

LACQUERED CAST IRON BODY WITH:						
MODEL NO.	WT Lbs.	OUTLET SIZE	CAST IRON DOME (-M)			
R1102, 3, 4-RS	9.00	2", 3", 4"	\$ 356.00			

Design and dimensions are subject to modification. Prices do not include applicable taxes.

R1100-RS OPTIONAL VARIATIONS:


SUFFIX DESCRIPTION LIST PRICE

-1 Nickel bronze dome strainer (part # K-1) \$ 186.00

-3 Stainless steel dome strainer (part # K-3) \$ 186.00


R1100-90 **ROOF DRAIN WITH SIDE OUTLET**

R1100-90

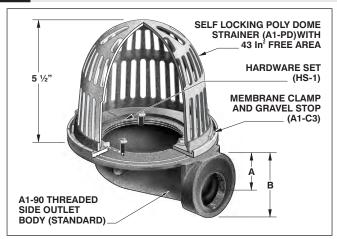



ADD SUFFIX - NH FOR OPTIONAL NO HUB OUTLET NO ADD.

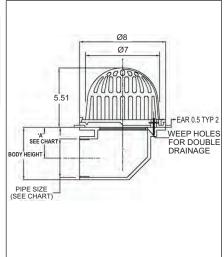


BODY HEIGHT						
PIPE SIZE*	A	В				
2" NH* or T	2 15/16"	3 7/8"				
3" NH* or T	3"	4 3/8"				
4" NH* or T	3 1/4"	6"				

LACQUERED CAST IRON BODY WITH:					
MODEL NO.	WT Lbs.	THREADED OUTLET SIZE	POLY DOME (STANDARD)	METAL DOME (-M)	
R1102, 3, 4-90	11.50	2", 3", 4"	\$ 260.00	\$ 316.00	

NOTE: Specify part number A1-C3-CO for underdeck clamp with cutaway side

3", 4" THREADED OUTLET A1-PD A1-C3 HS-1 71m umu)

R1150 COMBINED ROOF DRAIN AND SECONDARY OVERFLOW SYSTEM

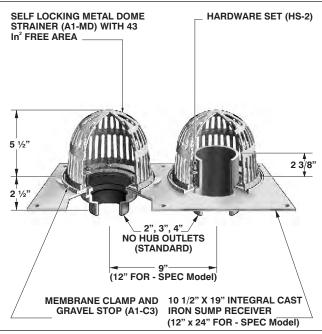

R1100-90 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE				
-6	Vandal proof (Metal dome only)(H-1029)	\$ 76.00				
-11	Acid resistant epoxy (Excluding polydome)	\$ 247.00				
-12	Galvanized metal dome	\$ 73.00				
-12A	Galvanized body and membrane clamp	\$ 113.00				
-13	Galvanized body, membrane clamp and dome	\$ 190.00				
-81	Rough bronze dome(A1-MD-81)	\$ 242.00				
-83	Stainless steel mesh screen over dome (A1-SSD)	\$ 342.00				
-B	Sump Receiver (A1-BP-90 for R1100-90 Series)	\$ 108.00				
-C	Secondary clamp (A1-C3)	\$ 108.00				
-E	Adjustable extension	\$ 185.00				
-EG	Galvanized adjustable extension	\$ 277.00				
-F1,-F2,-F3	Accuflow (parabolic weir)	\$ 79.00				
-G	Ballast guard (A1-BG)	\$ 268.00				
-JC	Ballast guard with secondary clamp (not with R 1100-PJ)	\$ 375.00				
-M	Metal dome	No Add				
-R	2" External water dam (A1-WD)	\$ 72.00				
-U	Underdeck clamp (A1-C3)	\$ 108.00				
-W	Adjustable water dam (W-31)	\$ 86.00				
-W-1	Waterproofing flange (A1-W-1)	\$ 71.00				
-Z	Extended wide flange on body (13"Dia. x 1/8 thick)	\$ 881.00				

LACQUERED CAST IRON BODY WITH: MODEL WT NO HUB **METAL DOMES** NO. Lhs. **OUTLET SIZE** (STANDARD) R1152, 3, 4 22.50 2", 3", 4" \$ 792.00

-Note: For the -SPEC model, dimensions are 24" long x 12" wide with 12" between center of outlets.

* R1270 Recommended when a 6" outlet is required.


R1150 (OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (Metal domes only)	\$ 155.00	-83	Stainless steel mesh screen over domes (A1-SSD)	\$ 419.00
-11	Acid resistant epoxy (Excluding polydomes)	\$ 574.00	-G	Ballast guards (A1-BG)	\$ 534.00
-12	Galvanized metal domes	\$ 145.00	►-SPEC	Loose set galvanized sheet metal sump receiver (R1150-BP)	No Add
-13	All galvanized	\$ 368.00	-U	Underdeck clamps (A1-C3) (Only with -SPEC)	\$ 215.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



LARGE SUMP ROOF DRAIN

R1200

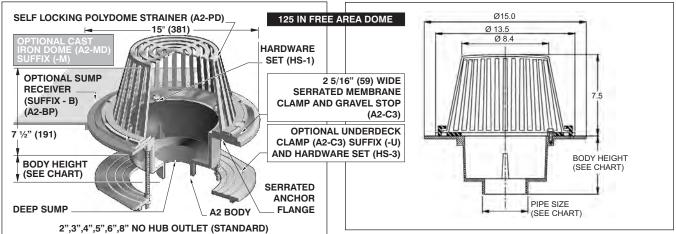

LACQUERED CAST IRON BODY WITH:					
MODEL NO.					
R1202, 3, 4	26.50	2", 3", 4",	\$285.00	\$343.00	
R1205, 6	27.75	5", 6"	\$404.00	\$463.00	
R1208	31.00	8"	\$404.00	\$463.00	

DOME RECEIVER, UNDERDECK CLAMP & EXTENSION RING GUIDE **BODY & OUTLET** DOME UNDERDECK **EXTENSION RING** CLAMP SIZE **RECEIVER**³ & HARDWARE **RECEIVER** A2-2"-6" A2-C3* A2-C3 A2-C3 & HS-3 A2-BP A2-BP-90 A2-90-2"-4" A2-C3* A2-C3-C0 A2-C3 & HS-3 A2-C3* A2-8NH A368-DC A368-DC & HS-3 A2-BP A7-8X A2-C3* A7-UDC-10 A7-UDC-10 & HS-3 A7-BP

PARTS

- * Requires HS-2 hardware except A7-C3 that uses HS-7 hardware set.
- * Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.









HS-1



BODY HEIGHT A2 BODY BASED ROOF DRAINS							
PIPE SIZE	NO HUB (Standard)	PUSH ON (P)	THREADED "T"	INSIDE CAULK (X)	PVC/ABS (-30/-31)		
2"	5 3/4"	5 1/2"	6 1/2"	6 1/2"	6 3/4"		
3"	5 3/4"	5 1/2"	6 5/8"	6 1/2"	7 1/2"		
4"	5 3/4"	5 1/2"	5 1/2"	6 1/2"	7 5/8"		
5"	5 3/4"	-	6 5/8"	6 3/4"	-		
6"	7 1/4"	5 5/8"	5 5/8"	6 1/2"	-		
8"	5 7/8"	-	-	See note*	-		



A2-90 BODY HEIGHT			
PIPE SIZE	"B" BODY Height	"A" DIMENSION Threaded Outlet	"A" DIMENSION No hub outlet
2"	5 3/4"	4"	7/8"
3"	5 3/4"	3 1/2"	7/8"
4"	5 3/4"	3 3/8"	7/8"


	·				
R1200 OP	TIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (Metal dome only)(H-1029)	\$ 76.00	-HC	Adj. ballast guard with secondary clamp	\$ 415.00
-11	Acid resistant epoxy (Excluding polydome)	\$ 296.00	-JC	Ballast guard with secondary clamp	\$ 415.00
-12	Galvanized metal dome	\$ 84.00	M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00
-12A	Galvanized body and membrane clamp	\$ 137.00	P	Push on outlet, (2",3",4",6") Specify POG-6 for C.I. pipe	
-12B	Galvanized metal dome and membrane clamp	\$ 137.00		and POG-6-PVC for PVC pipe 2", 3", 4" use same gasket.	\$ 29.00
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-R	2" external water dam (A2-WD)	\$ 88.00
-28	Stainless steel body (Type 304)	\$2403.00	T	Threaded outlet, (2",3",4",6")	\$ 61.00
-30	PVC socket connection body*(2", 3", 4")	\$ 28.00	-U	Underdeck clamp (A2-C3)	\$ 108.00
-31	ABS socket connection body*(2", 3", 4")	\$ 28.00	-U3	Underdeck clamp with cut away side (A2-C3-C0)	\$ 108.00
-81	Rough bronze dome (A2-MDL-81)	\$ 588.00	-V	Fixed extension, (2",3",4") (A2-V2, A2-V3, A2-V4)	\$ 185.00
-83	Stainless steel mesh screen over dome (A2-SSD)	\$ 419.00	-VG	Galvanized fixed extension, (2",3",4")	\$ 277.00
-90	Threaded side outlet (cast iron only) (2",3",4") (N/A in -30,-31)	\$ 148.00	-W	Adjustable water dam (5" high x 4"diameter) (W-31)	\$ 347.00
-90-NH	No hub side outlet (cast iron only) (2",3",4")(N/A in -30,-31)	\$ 148.00	-W-1	Water proofing flange (A2-W-1)	\$ 71.00
-B	Sump receiver (A2-BP)	\$ 108.00	-W2	2" internal water dam (2" high x 4" diameter) (A2-C3-W and W-31)	
-C	Secondary clamp (A2-C3)	\$ 108.00	-W3	3" internal water dam (3" high x 4" diameter) (A2-C3-W and W-31)	
-E	Adjustable extension (See page 108, point #7)	\$ 332.00	-W4	4" internal water dam (4" high x 4" diameter) (A2-C3-W and W-31)	\$ 270.00
-EG	Galvanized adjustable extension	\$ 442.00	Х	Inside caulk outlet, (2",3",4",6")	\$ 61.00
-F1,-F2,-F3	Accuflow (parabolic weir) (A2-F1, A2-F2, A2-F3)	\$ 139.00	-Z	Extended wide flange on body (20"Dia. x 1/4 thick)	\$ 642.00
-G	Ballast guard (A2-BG)	\$ 307.00			

Note: Deck opening - 10" (254) with sump receiver - 15 3/4" (400) Design and dimensions are subject to modification. Prices do not include applicable taxes.

* PVC/ABS Socket bodies available for 2", 3", 4" connection sizes with transition body only. Visit www.mifab.com for the most recent product information.

R1200-BUV LARGE SUMP ROOF DRAIN WITH 2" THROUGH 4" FIXED EXTENSION, SUMP RECEIVER AND DECK CLAMP

R1200-BUV

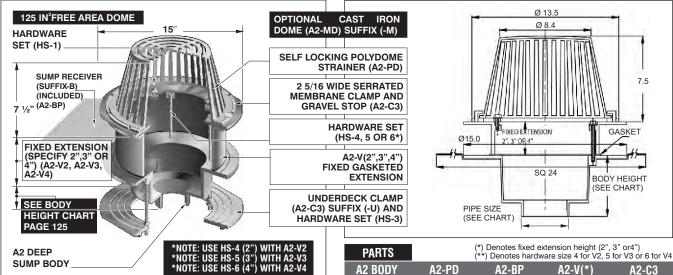

LACQUERED CAST IRON BODY WITH:						
MODEL NO.	WT Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	CAST IRON DOME (-M)		
R1202, 3, 4-BUV	41.50	2", 3", 4",	\$686.00	\$744.00		
R1205, 6-BUV	44.25	5", 6"	\$805.00	\$863.00		
R1208-BUV	46.50	8"	\$805.00	\$863.00		

PARTS	(*) Denotes fixed extension height (2", 3" or4") (**) Denotes hardware size 4 for V2, 5 for V3 or 6 for V4					
A2 BODY	A2-PD	A2-BP	A2-V(*)	A2-C3		
•			9			
	HS-1	HS-3	HS-(**)	A2-V-PG		
		000000000000000000000000000000000000000		0		


R1200-BUV, R1200-EU, R1200-F, AND R1200-G OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-6	Vandal proof (Metal dome only) (H-1029)	\$ 76.00	-30	PVC socket connection body*(2", 3", 4")	\$ 28.00		
-11	Acid resistant epoxy (Excluding polydome)	\$ 296.00	-31	ABS socket connection body*(2", 3", 4")	\$ 28.00		
-12	Galvanized metal dome	\$ 84.00	-81	Rough bronze dome (A2-MDL-81)	\$ 588.00		
-12A	Galvanized body and membrane clamp	\$ 137.00	-83	Stainless steel mesh screen over dome (A2-SSD)	\$ 419.00		
-12B	Galvanized metal dome and membrane clamp	\$ 137.00	-90	Threaded side outlet (cast iron only)(2",3",4") (N/A in -30,-31)	\$ 148.00		
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-90-NH		\$ 148.00		
-28	Stainless steel body (Type 304)	\$2403.00	-B	Sump receiver (A2-BP) (Incl. with BUV)	\$ 108.00		

^{*}See next page for more options

R1200-EU LARGE SUMP ROOF DRAIN WITH EXTENSION FOR 1 3/4" TO 7" INSULATION

R1200-EU

HS-3

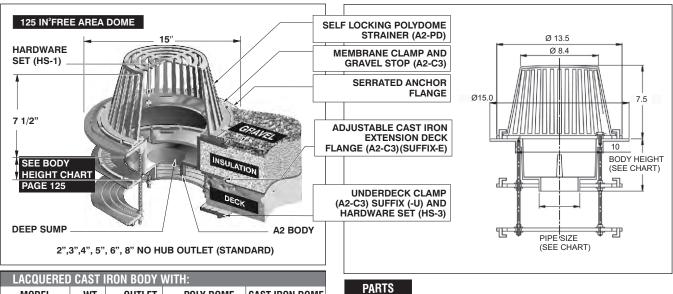

A2 BODY

LACQUERED CAST IRON BODY WITH:						
MODEL NO.	WT Lbs.	OUTLET Size	POLY DOME (STANDARD)	CAST IRON DOME (-M)		
R1202, 3, 4-EU	32.00	2", 3", 4",	\$725.00	\$783.00		
R1205, 6-EU	34.25	5", 6"	\$844.00	\$902.00		
R1208-EU	36.0	8"	\$844.00	\$902.00		

Design and dimensions are subject to modification. Prices do not include applicable taxes.

A2-C3


Visit www.mifab.com for the most recent product information.

A2-PD



R1200-F LARGE SUMP ROOF DRAIN WITH PARABOLIC FLOW CONTROL WEIR

R1200-I

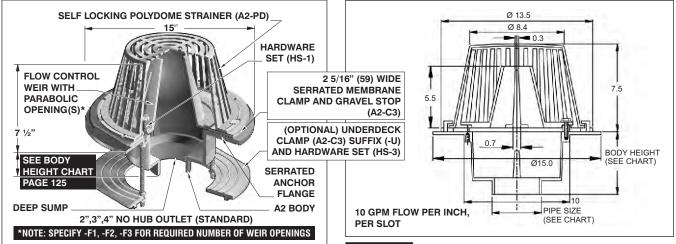

LACQUERED CAST IRON BODY WITH:						
MODEL NO.	WT Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	CAST IRON DOME (-M)		
R1202, 3, 4-F	26.00	2", 3", 4"	\$423.00	\$481.00		

PARTS				
A2 BODY	A2-PD	A2-C3	HS-1	A2-F* WEIR
9		0	G Garage	


(*) Denotes number of slots in weir (1, 2 or 3)

R1200-BUV, R1200-EU, R1200-F, AND R1200-G OPTIONAL VARIATIONS/ (CONTINUED FROM PAGE 126):							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-C	Secondary clamp (A2-C3)	\$ 108.00	-U	Underdeck clamp (A2-C3) (Incl. with BUV)	\$ 108.00		
-E	Adjustable extension (see page 108, point #7)	\$ 332.00	-U3	Underdeck clamp with cut away side (A2-C3-C0)	\$ 108.00		
-EG	Galvanized adjustable extension	\$ 442.00	-V	Fixed extension, (2",3",4") (A2-V2, A2-V3-A2-V4)	\$ 185.00		
-F1,-F2,-F3	Accuflow (parabolic weir) (A2-F1,A2-F2 or A2-F3)	\$ 139.00	-VG	Galvanized fixed extension, (2",3",4")	\$ 277.00		
-G	Ballast guard (A2-BG)	\$ 307.00	-W	Adjustable water dam (5" high x 4" diameter) (W-31)	\$ 347.00		
-HC	Adj. ballast guard with secondary clamp	\$ 415.00	-W-1	Water proofing flange (A2-W-1)	\$ 71.00		
-JC	Ballast guard with secondary clamp	\$ 415.00	-W2	2" internal water dam (A2-C3-W and W-31)	\$ 270.00		
M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00	-W3	3" internal water dam (A2-C3-W and W-31)	\$ 270.00		
P	Push on outlet, (2",3",4",6")*	\$ 29.00	-W4	4" internal water dam (A2-C3-W and W-31)	\$ 270.00		
-R	2" external water dam (A2-WD)	\$ 88.00	Х	Inside caulk outlet (2",3",4",6")	\$ 61.00		
T	Threaded outlet, (2",3",4",6")	\$ 61.00	-Z	Extended wide flange on body (20" Dia. x 1/4" thick)	\$ 642.00		

^{*} Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe 2", 3", 4" sizes use same gasket.

R1200-G LARGE SUMP ROOF DRAIN WITH BALLAST GUARD FOR I.R.M.A. ROOFS

R1200-G

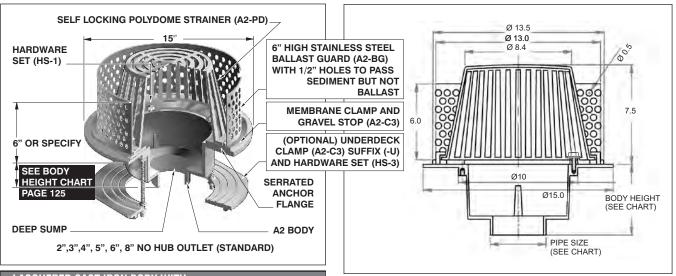

LACQUERED CAST IRON BODY WITH:				
MODEL NO.			OUTLET POLY DOME SIZE (STANDARD)	
R1202, 3, 4-G	21.00	2", 3", 4"	\$ 591.00	\$649.00
R1205, 6-G	23.00	5", 6"	\$ 711.00	\$769.00
R1208-G	25.00	8"	\$ 711.00	\$769.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.





R1200-HC LARGE SUMP ROOF DRAIN WITH ADJUSTABLE BALLAST GUARD FOR IRMA ROOFS

R1200-HC

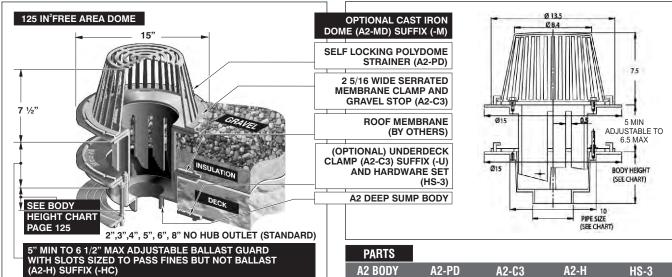

LACQUERED CAST IRON BODY WITH:						
MODEL NO.			POLY DOME (STANDARD)	CAST IRON DOME (-M)		
R1202, 3, 4-HC	44.50	2", 3", 4"	\$699.00	\$757.00		
R1205, 6-HC	46.50	5", 6"	\$819.00	\$877.00		
R1208-HC	9.00	8"	\$819.00	\$877.00		


PARTS				
A2 BODY	A2-PD	A2-C3	A2-H	HS-3
HS-1		<u>x2</u>	M	

R1200-H	R1200-HC, R1200-JC, R1200-PR AND R1200-PR15 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-6	Vandal proof (Metal dome only) (H-1029)	\$ 76.00	-30	PVC socket connection body*(2", 3", 4")	\$ 28.00	
-11	Acid resistant epoxy (Excluding polydome)	\$ 296.00	-31	ABS socket connection body*(2", 3", 4")	\$ 28.00	
-12	Galvanized metal dome	\$ 84.00	-81	Rough bronze dome (A2-MDL-81)	\$ 588.00	
-12A	Galvanized body and membrane clamp	\$ 137.00	-83	Stainless steel mesh screen over dome (A2-SSD)	\$ 419.00	
-12B	Galvanized metal dome and membrane clamp	\$ 137.00	-90	Threaded side outlet (cast iron only) (2,"3,"4") (N/A in 30,-31)	\$ 148.00	
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-90-NH	No hub side outlet (cast iron only) (2,"3,"4) (N/A in 30,-31)	\$ 148.00	
-28	Stainless steel body (Type 304)	\$ 2403.00	-B	Sump receiver (A2-BP)	\$ 108.00	

*See next page for more options

R1200-JC LARGE SUMP ROOF DRAIN WITH S.S. BALLAST GUARD FOR I.R.MA. ROOFS

R1200-JC

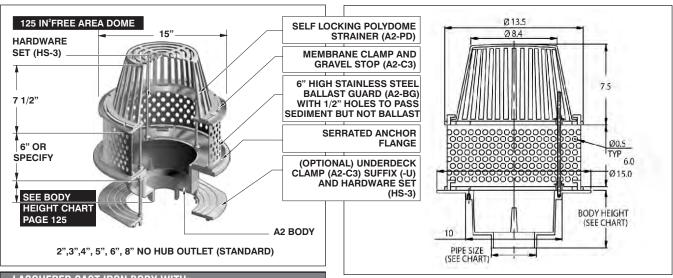

LACQUERED CAST IRON BODY WITH:							
MODEL NO.	WT Lbs.	OUTLET Size	POLY DOME (STANDARD)	CAST IRON DOME (-M)			
R1202, 3, 4-JC	28.00	2", 3", 4",	\$ 699.00	\$ 757.00			
R1205, 6-JC	30.00	5", 6"	\$ 819.00	\$ 877.00			
R1208-JC	32.00	8"	\$ 819.00	\$ 877.00			

Design and dimensions are subject to modification. Prices do not include applicable taxes.

PARTS

A2 BODY

A2-PD

A2-C3

A2-BG

HS-3


X2

X2



R1200-PR LARGE SUMP PROMENADE DECK DRAIN

R1200-PR

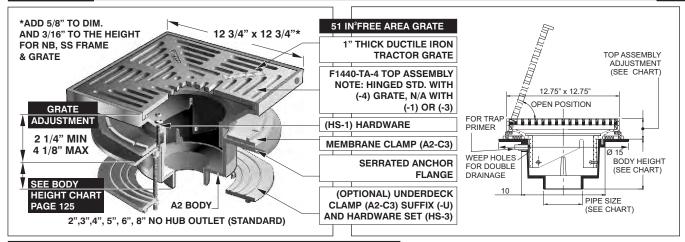

LACQUERED CAST IRON BODY WITH:								
MODEL NO.	WT Lbs.	OUTLET SIZE	DUCTILE IRON (-4)		DUCTILE IRON WITH STAINLESS STEEL (VENEER)(-3)			
R1202, 3, 4-PR	52.75	2", 3", 4"	\$ 875.00	\$1587.00	\$1587.00			
R1205, 6-PR	55.00	5", 6"	\$ 995.00	\$1706.00	\$1706.00			
R1208-PR	57.00	8"	\$ 995.00	\$1706.00	\$1706.00			


PARTS	(*) Denotes strainer	finish (-1, -3 o r- 4)
A2 BODY	F1440-TA-(*)	A2-C3	HS-1
9		0	

R1200-HC, R1200-JC, R1200-PR, AND R1200-PR15 OPTIONAL VARIATIONS CONTINUED FROM PAGE 128):					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-C	Secondary clamp (A2-C3)	\$ 108.00	-U	Underdeck clamp (A2-C3)	\$ 108.00
-E	Adjustable extension (see page 108, point #7)	\$ 332.00	-U3	Underdeck clamp with cut away side (A2-C3-C0)	\$ 108.00
-EG	Galvanized adjustable extension	\$ 442.00	-V	Fixed extension, (2",3",4")(A2-V2,A2-V3,A2-V4)	\$ 185.00
-F1,-F2,-F3	Accuflow (parabolic weir) (R1200-HC and R1200-JC only)	\$ 139.00	-VG	Galvanized fixed extension, (2",3",4")	\$ 277.00
-G	Ballast guard (A2-BG)	\$ 307.00	-W	Adjustable water dam (5" high x 4" diameter)	\$ 347.00
-HC	Adj. ballast guard with secondary clamp	\$ 415.00	-W-1	Water proofing flange (A2-W-1)	\$ 71.00
-JC	Ballast guard with secondary clamp	\$ 415.00	-W2	2" internal water dam (A2-C3-W and W-31)	\$ 270.00
M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00	-W3	3" internal water dam (A2-C3-W and W-31)	\$ 270.00
P	Push on outlet, (2",3",4",6")*	\$ 29.00	-W4	4" internal water dam (A2-C3-W and W-31)	\$ 270.00
-R	2" external water dam (A2-WD)	\$ 88.00	Х	Inside caulk outlet (2",3",4",6")	\$ 61.00
T	Threaded outlet, (2",3",4",6")	\$ 61.00	-Z	Extended wide flange on body (20" Dia .x 1/4 thick)	\$ 642.00
	·		-5	Cast iron sediment bucket (A2-MB)	\$ 135.00

^{*} Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe 2", 3", 4" sizes use same gasket.

R1200-PR15 LARGE SUMP PROMENADE DECK DRAIN WITH 15 SQUARE TOP

R1200-PR15

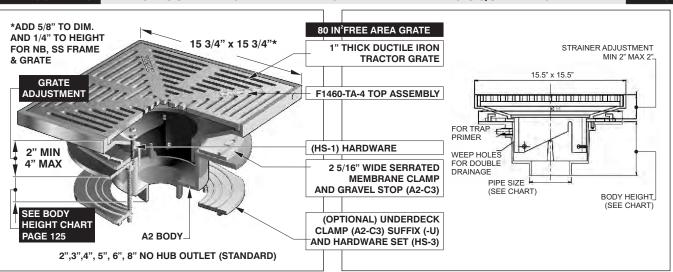


LACQUERED CAST IRON BODY WITH:								
MODEL No.	WT Lbs.	OUTLET SIZE	DUCTILE IRON(-4)	DUCTILE IRON WITH Nickel Bronze (Veneer)(-1)	DUCTILE IRON WITH STAINLESS STEEL (VENEER)(-3)			
R1202, 3, 4-PR15	69.00	2", 3", 4"	\$1231.00	\$2262.00	\$2262.00			
R1205, 6-PR15	71.00	5", 6"	\$1351.00	\$2382.00	\$2382.00			
R1208-PR15	73.00	8"	\$1351.00	\$2382.00	\$2382.00			

PARTS	(*) Denotes strainer finish (-1, -3 or- 4)					
A2 BODY	F1460-TA-(*)	A2-C3	HS-1			
9		0	fff			

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

R1200-R LARGE SUMP ROOF DRAIN WITH EXTERNAL 2" HIGH WATER DAM

R1200-R

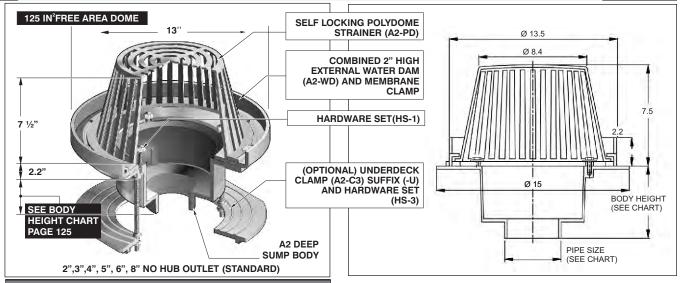


LACQUERE	LACQUERED CAST IRON BODY WITH:							
MODEL NO.	WT. Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	CAST IRON (-M)				
R1202, 3, 4-R	21.50	2", 3", 4",	\$373.00	\$ 431.00				
R1205, 6-R	24.00	5", 6"	\$493.00	\$ 551.00				
R1208-R	26.75	8"	\$493.00	\$ 551.00				

A2 BODY	A2-PD	A2-WD	HS-1	PARTS
9		0	Schwings (

R1200-R	AND R1200-RS OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (Metal dome only)(H-1029)	\$ 76.00	-E	Adjustable extension (See page 108, point #7)	\$ 332.00
-11	Acid resistant epoxy (Excluding polydome)	\$ 296.00	-EG	Galvanized adjustable extension	\$ 442.00
-12	Galvanized metal dome	\$ 84.00	-G	Ballast guard (A2-BG)	\$ 307.00
-12A	Galvanized body and membrane clamp	\$ 137.00	-HC	Adj. ballast guard with secondary clamp	\$ 415.00
-12B	Galvanized metal dome and membrane clamp	\$ 137.00	-JC	Ballast guard with secondary clamp	\$ 415.00
-13	Galvanized body, membrane clamp and dome	\$ 190.00	M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00
-28	Stainless steel body (Type 304)	\$2403.00	P	Push on outlet, (2",3",4",6") Specify POG-6 for C.I. pipe	
-30	PVC socket connection body*(2", 3", 4")	\$ 28.00		and POG-6-PVC for PVC pipe 2", 3", 4" use same gasket.	\$ 29.00
-31	ABS socket connection body*(2", 3", 4")	\$ 28.00	T	Threaded outlet, (2",3",4",6")	\$ 61.00
-81	Rough bronze dome (A2-MDL-81)	\$ 588.00	-U	Underdeck clamp (A2-C3)	\$ 108.00
-83	Stainless steel mesh screen over dome (A2-SSD)	\$ 419.00	-U3	Underdeck clamp with cut away side (A2-C3-C0)	\$ 108.00
-90	Threaded side outlet (cast iron only) (2",3",4") (N/A in -30,-31)	\$ 148.00	-W-1	Water proofing flange (A2-W-1)	\$ 71.00
-90-NH	No hub side outlet (cast iron only) (2",3",4")(N/A in -30,-31)	\$ 148.00	Х	Inside caulk outlet, (2",3",4",6")	\$ 61.00
-B	Sump receiver (A2-BP)	\$ 108.00	-Z	Extended wide flange on body (20"Dia. x 1/4 thick)	\$ 642.00
-C	Secondary clamp (A2-C3)	\$ 108.00			

R1200-RS LARGE SUMP ROOF DECK CONDENSATE RECEPTION DRAIN

R1200-RS

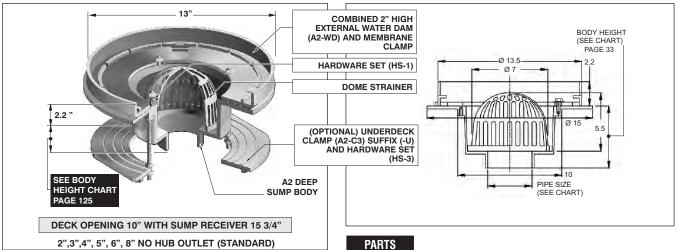

A2 BODY

 LACQUERED CAST IRON BODY WITH:

 MODEL NO.
 WT. Lbs.
 OUTLET SIZE
 POLY DOME (STANDARD)

 R1202, 3, 4-RS
 22.00
 2", 3", 4",
 \$595.00

 R1205, 6-RS
 23.00
 5", 6"
 \$715.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit www.mifab.com for the most recent product information.

A2-WD


A1-PD


Tim



R1200-SO EXTRA DEEP SUMP, DUAL OUTLET ROOF DRAIN

R1200-S0

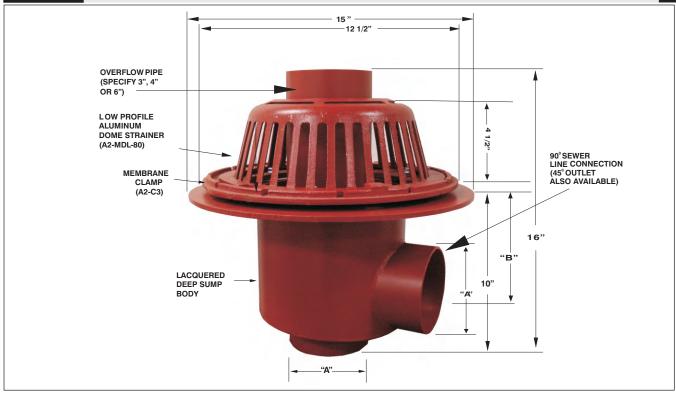

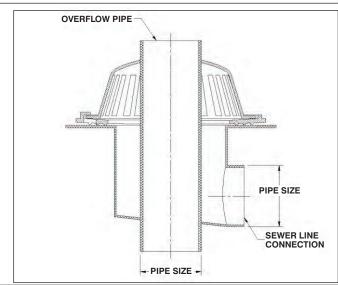


LACQUERED CAST IRON BODY WITH:								
MODEL NO.	WT Lbs.	"A" PIPE Size	"B"	LIST PRICE				
R1203-S0	60.00	3"	5 9/16"	\$1946.00				
R1204-S0	60.00	4"	5 9/16"	\$2235.00				
R1206-S0	60.00	6"	5"	\$2350.00				

R1200-S0 OPT	R1200-SO OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-6	Vandal proof (H-1029)	\$ 76.00					
-11	Acid resistant epoxy	\$ 908.00					
-12	Galvanized metal dome	\$ 84.00					
-12A	Galvanized body and membrane clamp	\$ 137.00					
-12B	Galvanized metal dome and membrane clamp	\$ 137.00					
-13	Galvanized body, membrane clamp and dome	\$ 908.00					
-45	45 Degree sewer line connection outlet	No Add					
-83	Stainless steel mesh screen over dome	\$ 419.00					
-B	Sump receiver (A2-BP)	\$ 108.00					
-DU	Fabricated, powder epoxy coated steel dome on overflow pipe 3", 4"	\$ 805.00					
-DU-6	Fabricated, powder epoxy coated steel dome on overflow pipe 6"	\$1230.00					
-G	Ballast guard (A2-BG)	\$ 307.00					
-MS	Stainless steel mesh screen on overflow pipe	\$ 249.00					
-0P	2" high overflow pipe	No Add					
-U	Underdeck clamp (A2-C3-C0)	\$ 108.00					
-V	Fixed extension (2", 3", 4") (A2-V2, A2-V3, A2-V4)	\$ 185.00					

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

R1200-W LARGE SUMP ROOF DRAIN WITH ADJUSTABLE INTERNAL STANDPIPE DAM


R1200-W

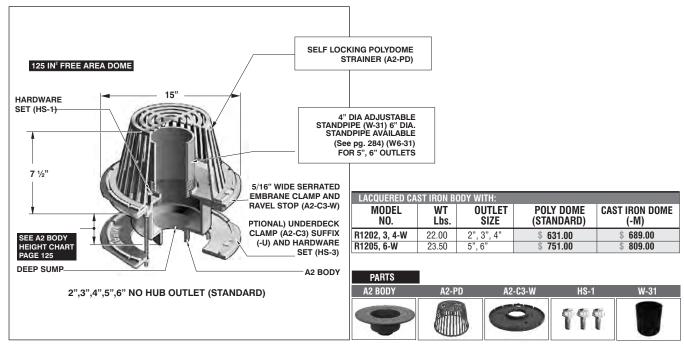

R1200-W	AND R1200-Z OPTIONAL VARIATIONS				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (Metal dome only) (H-1029)	\$ 76.00	-G	Ballast guard (A2-BG)	\$ 307.00
-11	Acid resistant epoxy (Excluding polydome)	\$ 296.00	-HC	Adj. ballast guard with secondary clamp	\$ 415.00
-12	Galvanized metal dome	\$ 84.00	-JC	Ballast guard with secondary clamp	\$ 415.00
-12A	Galvanized body and membrane clamp	\$ 137.00	M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00
-12B	Galvanized metal dome and membrane clamp	\$ 137.00	P	Push on outlet, (2",3",4",6") Specify POG-6 for C.I. pipe	\$ 29.00
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-R	2" external water dam (A2-WD) (R1200-Z only)	\$ 88.00
-28	Stainless steel body (Type 304)	\$2403.00	T	Threaded outlet, (2",3",4",6")	\$ 61.00
-30	PVC socket connection body* (2", 3", 4")	\$ 28.00	-U	Underdeck clamp (A2-C3)	\$ 108.00
-31	ABS socket connection body* (2", 3", 4")	\$ 28.00	-U3	Underdeck clamp with cut away side (A2-C3-C0)	\$ 108.00
-81	Rough bronze dome (A2-MDL-81)	\$ 588.00	-V	Fixed extension, (2",3",4") (A2-V2, A2-V3 or A2-V4)	\$ 185.00
-83	Stainless steel mesh screen over dome (A2-SSD)	\$ 419.00	-VG	Galvanized fixed extension, (2",3",4")	\$ 277.00
-90	Threaded side outlet (cast iron only), 2",3",4")(N/A in - 30,- 31)	\$ 148.00	-W	Adjustable water dam (5" high x 4" Diameter) (W-31) (R1200-Z only)	\$ 347.00
-90-NH	No hub side outlet (cast iron only), 2",3",4") (N/A in -30,-31)	\$ 148.00	-W-1	Water proofing flange (A2-W-1)	\$ 71.00
-B	Sump receiver (A2-BP) (A2-BP-90 for R1200-90 Series)	\$ 108.00	-W2	2" internal water dam (A2-C3-W and W-31)(R1200-Z only)	\$ 270.00
-C	Secondary clamp (A2-C3)	\$ 108.00	-W3	3" internal water dam (A2-C3-W and W-31)(R1200-Z only)	\$ 270.00
-E	Adjustable extension(see page 108, point #7)	\$ 332.00	-W4	4" internal water dam (A2-C3-W and W-31)(R1200-Z only)	\$ 270.00
-EG	Galvanized adjustable extension	\$ 442.00	X	Inside caulk outlet (2",3",4",6")	\$ 61.00
-F1F2F3	Accuflow (parabolic weir) (A2-F1 A2-F2 A2-F3)(R1200-7 only)	\$ 139.00	l -Z	Extended wide flange on body (20" dia. x 1/4"thick)(R1200-W only)	\$ 642.00

R1200-Z LARGE SUMP DEXOTEX ROOF DRAIN WITH WIDE DECK FLANGE FOR LIQUID MEMBRANE ROOF

R1200-Z

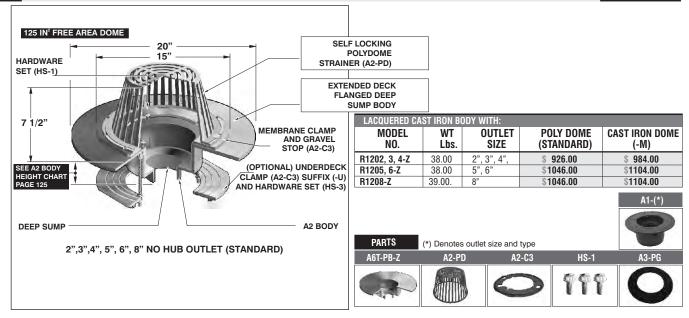


Design and dimensions are subject to modification. Prices do not include applicable taxes.



LARGE SUMP ROOF DRAIN WITH SIDE OUTLET

R1200-90

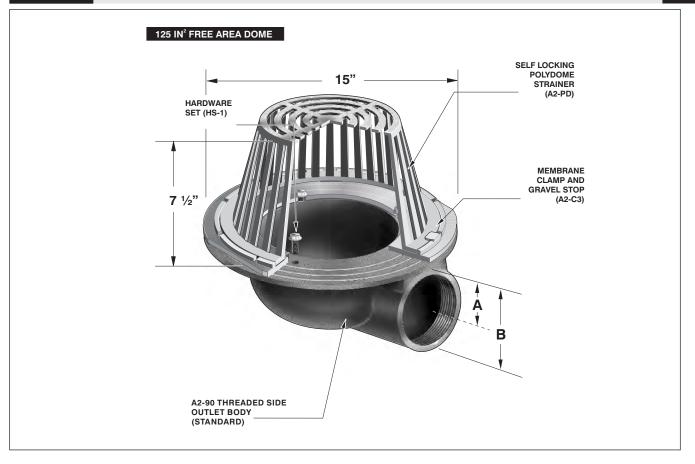

PARTS	A2-(*)T-90	A2-PD
	A2-C3	HS-1
		untrans-Q untrans-

* Specify 2", 3", or 4" THREADED SIDE OUTLET BODY



ADD SUFFIX - NH FOR OPTIONAL NO HUB OUTLET NO ADD

LACQUERED CAST IRON BODY WITH:						
MODEL NO.	WT Lbs.	OUTLET Size	POLY DOME (Standard)	CAST IRON (-M) DOME		
R1202, 3, 4-90	28.50	2", 3", 4"	\$433.00	\$491.00		


BODY HEIGHT						
PIPE	"B" BODY	"A" DIMENSION	"A" DIMENSION			
Size	Hight	Threaded outlet	No hub outlet			
2" (51)	5 3/4" (146)	4 3/8" (111)	3 5/8" (92)			
3" (76)	5 3/4" (146)	3 3/4" (95)	2 3/4" (70)			
4" (102)	5 3/4" (146)	3 1/4" (83)	3" (76)			

R1200-90	R1200-90 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-6	Vandal proof (Metal dome only)(H-1029)	\$ 76.00	-G	Ballast guard (A2-BG)	\$ 307.00	
-11	Acid resistant epoxy (Excluding polydome)	\$ 296.00	-HC	Adj. ballast guard with secondary clamp	\$ 415.00	
-12	Galvanized metal dome	\$ 84.00	-JC	Ballast guard with secondary clamp	\$ 415.00	
-12A	Galvanized body and membrane clamp	\$ 137.00	M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00	
-12B	Galvanized metal dome and membrane clamp	\$ 137.00	-R	2" external water dam (A2-WD)	\$ 88.00	
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-U3	Underdeck clamp with cut away side (A2-C3-C0)	\$ 108.00	
-28	Stainless steel body (Type 304)	\$2403.00	-V	Fixed extension, (2",3",4") (A2-V2, A2-V3, A2-V4)	\$ 185.00	
-81	Rough bronze dome (A2-MDL-81)	\$ 588.00	-VG	Galvanized fixed extension, (2",3",4")	\$ 277.00	
-83	Stainless steel mesh screen over dome (A2-SSD)	\$ 419.00	-W	Adjustable water dam (5" high x 4"diameter) (W-31)	\$ 347.00	
-B	Sump receiver (A2-BP)	\$ 108.00	-W-1	Water proofing flange (A2-W-1)	\$ 71.00	
-C	Secondary clamp (A2-C3)	\$ 108.00	-W2	2" internal water dam (2" high x 4" diameter) (A2-C3-W and W-31)		
-E	Adjustable extension (See page 108, point #7)	\$ 332.00	-W3	3" internal water dam (3" high x 4" diameter) (A2-C3-W and W-31)		
-EG	Galvanized adjustable extension	\$ 442.00	-W4	4" internal water dam (4" high x 4" diameter) (A2-C3-W and W-31)	\$ 270.00	
-F1,-F2,-F3	Accuflow (parabolic weir) (A2-F1, A2-F2, A2-F3)	\$ 139.00	-Z	Extended wide flange on body (20"Dia. x 1/4 thick)	\$ 642.00	

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

R1220 **MEDIUM SUMP ROOF DRAIN**

R1220

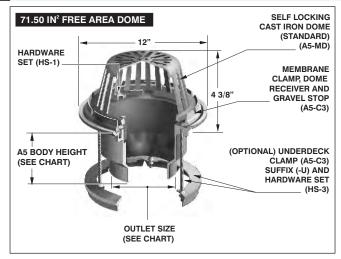




LACQUERED CAST IRON BODY WITH:						
MODEL	WT	CAST IRON DOME				
NO.	Lbs.	(NO HUB STANDARD)	(-M)			
R1222, 3, 4, 6	26.50	2", 3", 4",6"	\$238.00			

R1220-EU MEDIUM SUMP EXTENSION ROOF DRAIN FOR 1 3/4" TO 7" INSULATION

R1220-EU

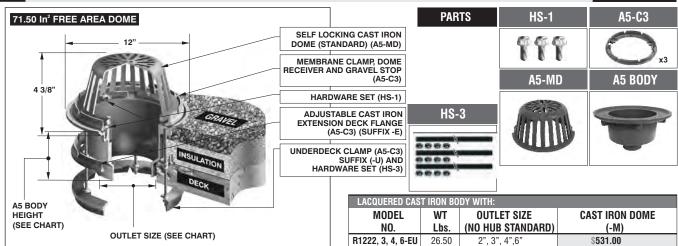

R1220, R1220-EU, R1220-G, R1220-JC, R1220-R AND R1220-RS OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (Metal dome only) (H-1029)	\$ 76.00	-83	Stainless steel mesh screen over dome	\$ 419.00
-11	Acid resistant epoxy	\$ 287.00	-B	Sump receiver (A5-BP)	\$ 108.00
-12	Galvanized metal dome	\$ 84.00	-C	Secondary clamp (A5-C3)	\$ 108.00
-12A	Galvanized body and membrane clamp	\$ 137.00	-E	Adjustable extension (See page 108, point #7)	\$ 185.00
-13	Galvanized body, membrane clamp and dome	\$ 190.00	-EG	Galvanized adjustable extension	\$ 277.00


See next page for more options

PARTS

R1220-G MEDIUM SUMP ROOF DRAIN WITH BALLAST GUARD FOR IRMA ROOFS

R1220-G

A5 BODY

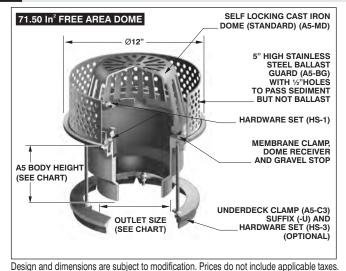

LACQUERED CAST IRON BODY WITH:								
MODEL	WT	OUTLET SIZE	CAST IRON DOME					
NO. Lbs.		(NO HUB STANDARD)	(-M)					
R1222, 3, 4, 6-G 32.00		2", 3", 4",6"	\$525.00					
A5 BODY HE	A5 BODY HEIGHT CHART							
PIPE SIZE		NO HUB (Standard)	INSIDE CAULK (X)					
2"		6 1/2"	6.575"					
3"		6 1/2"	6.575"					
4"		6 1/2"	6.575"					
6"		6 1/2"	6.575"					

Visit www.mifab.com for the most recent product information.

A5-C3

R1220-JC MEDIUM SUMP DRAIN WITH STAINLESS STEEL BALLAST GUARD

MEDIUM SUMP PROMENADE DECK DRAIN



71.50 IN ² FREE AREA DOME	F1440-TA-4 TOP ASSEMBLY WITH HINGED GRATE
12 3/4"	
in the second	
	A5 BODY HEIGHT
1" THICK DUCTILE IRON TRACTOR GRATE	(SEE CHART ON PAGE 134)
*Denotes Strainer finish (-1 -3 or -4))

Denotes Strainer finish (-1,-3 or -4)

A5 BODY







A5-C3



	10	5555
666	(E)	
-	N/A	
	6	
555		\sim
	6	

HS-3

PARTS	A2 RODA	F144U-IA-(*)
	9	
LACOUERE	D CAST IRON ROL	N WITH.

MODEL NO.	WT Lbs.	ON BODY W OUTLET SIZE	CAST IRON DOME (-M)
R1222,3,4,6-JC	21.00	2",3",4",6"	\$ 633.00


LACQUERED CAST IRON BODY WITH:								
MODEL	WT	OUTLET	DUCTILE IRON	NICKEL BRONZE	STAINLESS STEEL			
NO.	Lbs.	SIZE	(-4)	(VENEER)(-1)	(VENEER)(-3)			
R1222,3,4,6-PR	53.00	2",3",4",6"	\$ 617.00	\$ 1107.00	\$ 1107.00			

R1220, R12	R1220, R1220-EU, R1220-G, R1220-JC, R1220-PR, R1220-R AND R1220-RS OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE					
-G	Ballast guard (A5-BG)	\$ 287.00	-U3	Underdeck clamp with cut away side (A5-C3-U)	\$ 108.00					
-HC	Adjustable ballast guard with secondary clamp	\$ 395.00	-W-1	Water proofing flange (A5-W-1)	\$ 71.00					
-JC	Ballast guard with secondary clamp	\$ 395.00	Х	Inside caulk outlet (2",3",4",6")	\$ 61.00					
-R	2" external water dam (A5-WD)	\$ 80.00	-Z	Extended wide flange on body (20" dia. x 1/4" thick)	\$ 642.00					
-U	Underdeck clamp (A5-C3)	\$ 108.00	-5	Cast iron sediment bucket (A2-MB) for R1220-PR only	\$ 135.00					

MEDIUM SUMP ROOF DRAIN WITH INTEGRAL 2" WATER DAM

MEDIUM SUMP ROOF DECK CONDENSATE RECEPTOR DRAIN

R1220-F

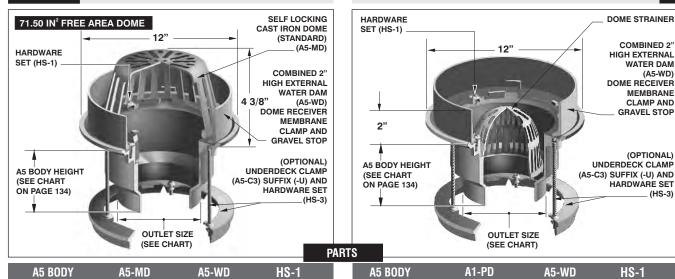

A5 BODY





\$ 318.00











(HS-3)

LACQUERED CAST IRON BODY WITH:										
MODEL	WT	OUTLET	CAST IRON DOME							
NO.	Lbs.	SIZE	(-M)							


Design and dimensions are subject to modification. Prices do not include applicable taxes.

LACQUERED CAST IRON BODY WITH: MODEL WT OUTLET **POLY DOME** (STANDARD) NO. Lbs. SIZE R1222,3,4,6-RS 28.00 2",3",4",6" \$425.00

Visit www.mifab.com for the most recent product information.

R1222,3,4,6-R 21.00 2",3",4",6"

R1250 **EXTRA DEEP SUMP ROOF DRAIN**

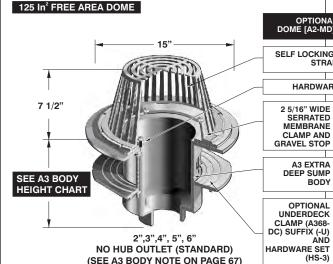

(SEE A3 BODY NOTE ON PAGE 67)

OPTIONAL CAST IRON DOME [A2-MD] SUFFIX (-M)

SELF LOCKING POLY DOME STRAINER (A2-PD)

2 5/16" WIDE SERRATED MEMBRANE CLAMP AND

A3 EXTRA DEEP SUMP

BODY

HARDWARE SET (HS-1)



PARTS

(*) Denotes outlet size (2, 3, 4 or 6)





A3T-PB




A3 BODY	A3 BODY HEIGHT									
PIPE SIZE	NO HUB (Standard)	PUSH ON (P)	THREADED "T"	INSIDE CAULK (X)	PVC / ABS (-30 / 31)					
2"	12" 3/4'	12 3/4"	11 1/2"	12"	12 1/8"					
3"	12" 3/4"	12 3/4"	11 7/8"	12"	12 3/8"					
4"	12" 3/4"	12 3/4"	11 7/8"	12"	12 3/8"					
5"	12"	-	11 7/8"	15 1/8"	-					
6"	12"	15 7/8"	•	-	-					

LACQUERED CAST IRON BODY WITH:								
MODEL	WT	OUTLET	POLY DOME	CAST IRON DOME				
NO.	Lbs.	SIZE	(STANDARD)	(-M)				
R1252,3,4	35.00	2",3",4"	\$1057.00	\$ 1115.00				
R1255,6	35.00	5",6"	\$1176.00	\$ 1235.00				

R1250 AN	ND R1260 OPTIONAL VARIATIONS:	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
SUFFIX	DESCRIPTION	R1250			R1250
-6	Vandal proof (metal dome only) (H-1029)	\$ 76.00	-M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00
-11	Acid resistant epoxy (excluding polydome)	\$296.00	P	Push on outlet (2",3",4")	\$ 29.00
-12	Galvanized metal dome	\$ 84.00	-R	2" external water dam (A2-WD)	\$ 88.00
-12B	Galvanized metal dome and membrane clamp	\$137.00	T	Threaded outlet (2",3",4")	\$ 61.00
-13	All galvanized	\$190.00	-U	Underdeck clamp (A368-DC)	\$108.00
-30	PVC Socket connection (2",3",4")	\$ 28.00	-V	Fixed extension, 2"-4"	\$185.00
-31	ABS Socket connection (2",3",4")	\$ 28.00	-VG	Galvanized fixed extension, (2",3",4")	\$277.00
-81	Rough bronze dome (A2-MDL-81)	\$588.00	-W	Adjustable water dam (5" high x 4" DIA.) (W-31)	\$347.00
-83	Stainless steel mesh screen over dome (A2-SSD)	\$419.00	-W-1	Water proofing flange (A2-W1)	\$ 71.00
-B	Sump Receiver (A2-BP)	\$108.00	-W2	2" internal water dam (W-31, 2" high)	\$270.00
-C	Secondary clamp (A2-C3)	\$108.00	-W3	3" internal water dam (W-31, 3" high)	\$270.00
-E	Adjustable extension (See page 108, #7)	\$332.00	-W4	4" internal water dam (W-31, 4" high)	\$270.00
-EG	Galvanized extension	\$442.00	-W6	Adjustable water dam, 6" DIA. (A2-C3-W6)	\$539.00
-G	Ballast guard (A2-BG)	\$307.00	Х	Inside caulk connection (2",3",4")	\$ 61.00
-HC	Adjustable ballast guard with secondary clamp	\$415.00	-Z	Extended wide flange on body (20" dia. x 1/4" thick)	\$642.00
-JC	Ballast guard with secondary clamp	\$415.00			

R1260 EXTRA LARGE SUMP, HIGH FLOW ROOF DRAIN

R1260

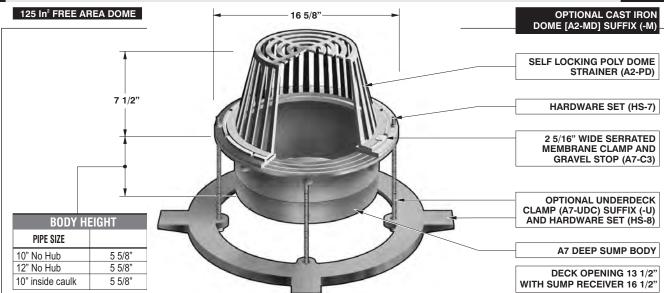

LACQUERED CAST IRON BODY WITH:								
MODEL NO.	WT Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	CAST IRON DOME (-M)				
R1261	29.50	10"	\$1682.00	\$1741.00				
R1262	29.50	12"	\$1808.00	\$1867.00				

BODY & OUTLET SIZE	DOME RECEIVER*	DECK CLAMP	EXTENSION RING & HARDWARE	SUMP Receiver
A7-10NH	A7-C3*	A7-UDC-10	A7-UDC-10 & HS-8	A7-BP
A7-10NH	A7-C3*	A7-UDC-12	A7-UDC-12 & HS-8	A7-BP
A7-10X	A7-C3*	A7-UDC-12	A7-UDC-12 & HS-8	A7-BP

DOME RECEIVER, CLAMP & EXTENSION RING GUIDE


Design and dimensions are subject to modification. Prices do not include applicable taxes.

^{*} USES HS-7 HARDWARE SET

Visit www.mifab.com for the most recent product information.



1270 COMBINED LARGE SUMP ROOF DRAIN AND SECONDARY OVERFLOW DRAIN

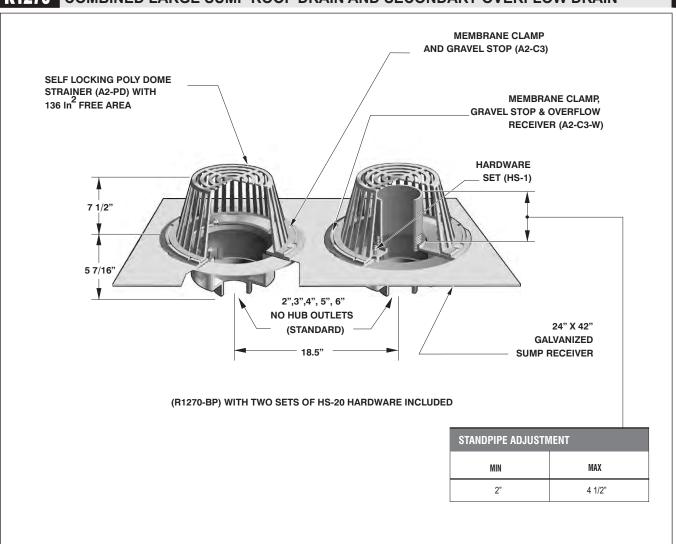

PARTS	A2 BODY	A2-PD	A2-C3	HS-1	W-31	A2-C3-W	R1270-BP
	X2	X2	0	TT X2		0	•

* A2-C3-W is standard with a 4" standpipe opening. For 6" outlets, specify A2-C3-W6 and W6-31.

LACQUERED CAST IRON BODY WITH:							
MODEL NO.	WT Lbs.	OUTLET SIZE	POLY DOME (STANDARD)	CAST IRON DOME (-M)			
R1272,3,4	38.00	2",3",4"	\$ 697.00	\$ 815.00			
R1275,6	42.00	5",6"	\$ 817.00	\$ 935.00			
R1278	46.00	8"	\$ 817.00	\$ 935.00			

R1270 OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-6	Vandal proof (metal domes only) (H-1029)	\$ 152.00	-A5	Medium sump bodies (deduct)	-\$ 110.00				
-11	Acid resistant epoxy (excluding polydome)	\$ 287.00	-E	Adjustable extension (A2-H)	\$1103.00				
-12	Galvanized metal domes	\$ 190.00	-G	Ballast guards (A2-BG)	\$ 614.00				
-12B	Galvanized metal domes and membrane clamps	\$ 331.00	-M-80	Low profile aluminum domes (A2-MDL-80)	\$ 120.00				
-13	All galvanized	\$ 368.00	NH	No hub outlets (2",3",4",6",8")	Standard				
-28	Stainless Steel Bodies (Type 304)	\$4807.00	Р	Push on outlets (2",3",4",6")*	\$ 59.00				
-30	PVC socket connection bodies* (2",3",4")	\$ 56.00	T	Threaded outlets (2",3",4",6")	\$ 120.00				
-31	ABS socket connection bodies* (2",3",4")	\$ 56.00	-U	Underdeck clamps	\$ 215.00				
-81	Rough bronze domes (A2-MDL-81)	\$1176.00	Х	Inside caulk outlets (2",3",4",6")	\$ 120.00				
-83	Stainless steel mesh screen over domes (A2-SSD)	\$ 838.00							

^{* 2&}quot;, 3", 4" outlet sizes only

Visit www.mifab.com for the most recent product information.

Design and dimensions are subject to modification. Prices do not include applicable taxes.

^{*} Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe 2", 3", 4" sizes use same gasket.




INTRODUCTION




MIFAB has taken the leadership role in providing superior siphonic solutions specifically engineered for the U.S., Canada and other international construction industries. The Siphonic principle has been understood for thousands of years based on mathematical calculations that were documented in the 16th century. These roof drainage techniques have been practiced worldwide for over three decades and provide a superior solution to conventional gravity based systems.

CONVENTIONAL & MIFAB SIPHONIX ROOF DRAINAGE COMPARED:

Conventional roof drainage relies on gravity and a sloped network of pipes designed to operate at atmospheric pressure, thus introducing a greater volume of air than water in the pipe system which creates inefciencies and excess costs in material and labor.

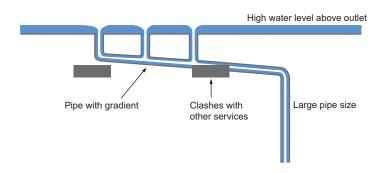

MIFAB Siphonix roof drains are a superior means of removing roof rainwater from buildings with low slope roofs, large or small. The elimination of air and less reliance on gravity means that design professionals and contractors can reduce costs, improve design efciency, protect the environment and save money in a multitude of ways.

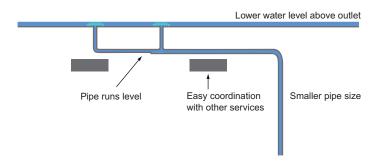

MIFAB's unique solution combines our familiar roof drain components with the MIFAB Siphonix air bafe. The bafe prevents the entry of air into the system to provide a superior means of removing roof rainwater from buildings with low slope roofs, large or small. Proper calculations provide optimum efciency. All calculations are configured and optimized by supplying engineers with the easiest, fastest and best system design software available.



KEY BENEFITS OF MIFAB SIPHONIX ROOF DRAINS



Opportunity to earn LEED points

Reduced site disturbance (SS Credit 5.1)

Controlled fow roof drainage (SS Credit 6.1)

Rainwater harvesting (WE Credit 3.1/3.2)

Innovation in design (ID Credit 1.1)

Material and Installation cost savings through reduced pipe size with less building excavation

Faster installation time

Increased ROI for the owner by producing more usable space.


MIFAB's proprietary design software ensures accurate layout and material usage. Controlled delivery of runof to a specifc building location for rainwater harvesting Enhanced coordination with other services (e.g. Concrete, HVAC) due to horizontal pipe installation at higher levels



Conventional roof drain: water drains into the sump and exits with annular fow under the infuence of gravity.
Up to 70% of the pipe volume can be flled with air!



MIFABSiphonix roof drain with low rainfall and the water level below the height of the air bafe: behaves just as a conventional roof drain.



MIFAB Siphonix roof drain working siphonically: air cannot enter the system, water completely flls the pipes.



Mifab expertise is "on call"

Increase the satisfaction your clients receive from you by having our staf assist You in the design process. We will guide you through an analysis that includes:

The type of pipe material used for each system installation.

The maximum design storm conditions anticipated for your area.

The size of the roof area[s] to be drained.

The height of the building and available routes through the building envelope from roof drains to downpipe locations.

Such analytical calculations can be complex but do not need to be intimidating When you work with our expert staf that can guide you through the use of the Right specialist software.

MIFAB'S ENGINEERING TEAM WILL DESIGN THE SIPHONIC ROOF DRAIN SYSTEM FOR YOU AT NO COST.




CALL TODAY TO DISCUSS YOUR
PROJECT CHALLENGE WITH OUR STAFF: 773.341.3001

Michael Whiteside, President mwhiteside@MIFAB.com

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

R1200-SR LARGE SUMP SIPHONIC ROOF DRAIN


R1200-SR

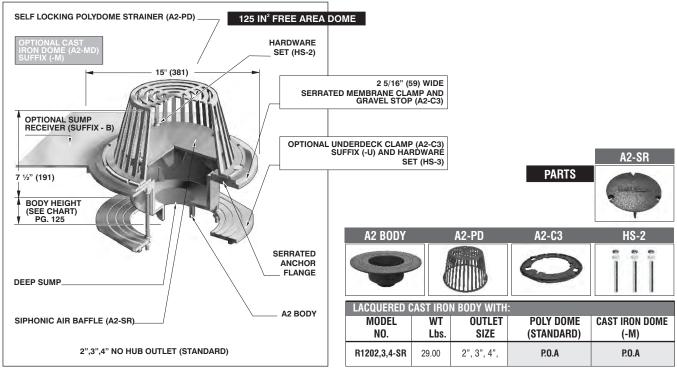

R1200-S	R1200-SR and R1200-R-SR OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE					
-6	Vandal proof (Metal dome only) (H-1029)	\$ 76.00	-EG	Galvanized adjustable extension	\$ 442.00					
-11	Acid resistant epoxy (Excluding polydome)	\$ 296.00	-G	Ballast guard (A2-BG)	\$ 307.00					
-12	Galvanized metal dome	\$ 84.00	-HC	Adj. ballast guard with secondary clamp	\$ 415.00					
-12A	Galvanized body and membrane clamp	\$ 137.00	-JC	Ballast guard with secondary clamp	\$ 415.00					
-12B	Galvanized metal dome and membrane clamp	\$ 137.00	M-80	Low aluminum dome (4 1/4" high) (A2-MDL-80)	\$ 61.00					
-13	Galvanized body, membrane clamp and dome	\$ 190.00	P	Push on outlet, (2",3",4",6")*	\$ 29.00					
-30	PVC socket connection body*(2", 3", 4")	\$ 28.00	T	Threaded outlet, (2",3",4",6")	\$ 61.00					
-31	ABS socket connection body*(2", 3", 4")	\$ 28.00	-U	Underdeck clamp (A2-C3)	\$ 108.00					
-81	Rough bronze dome (A2-MDL-81)	\$ 588.00	-U3	Underdeck clamp with cut away side (A2-C3-C0)	\$ 108.00					
-83	Stainless steel mesh screen over dome (A2-SSD)	\$ 419.00	-W-1	Water proofing flange (A2-W-1)	\$ 71.00					
-B	Sump receiver (A2-BP)	\$ 108.00	Х	Inside caulk outlet, (2",3",4",6")	\$ 61.00					
-C	Secondary clamp (A2-C3)	\$ 108.00	-Z	Extended wide flange on body (20" dia. x 1/4 thick)	\$ 642.00					
-E	Adjustable extension (See page 108, point #7)	\$ 332.00								

^{*} Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sized use same gasket.

LARGE SUMP SIPHONIC ROOF DRAIN WITH EXTERNAL 2" HIGH WATER DAM R1200-R-SR

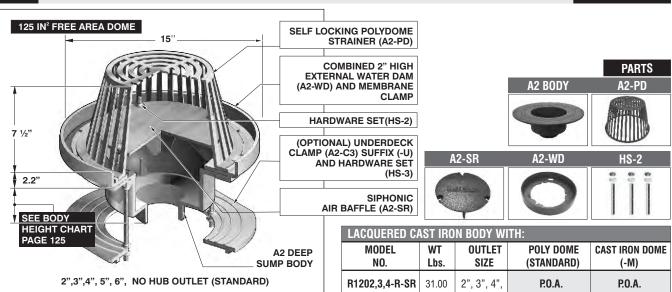


Design and dimensions are subject to modification. Prices do not include applicable taxes.



R1270-SR COMBINED LARGE SUMP SIPHONIC ROOF DRAIN AND SECONDARY OVERFLOW DRAIN

R1270-SR

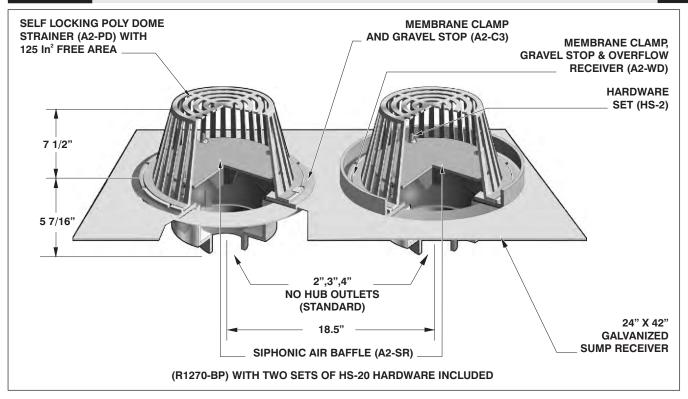

ADVANTAGES OF SIPHONIC ROOF DRAINS

Siphonic drainage is a fully engineered solution and is recognized as a highly efficient means of removing roof rainwater from commercial and municipal buildings, large or small. Construction costs can be dramatically reduced, environmental impact lowered and architectural freedom enhanced.


Construction costs can be reduced because of the following:

- 1) Reduced pipe size and fewer outlets saves time and material costs
- 2) Excavation costs can be greatly reduced because siphonic roof drain piping must be installed level (not sloped). This allows the roof drain piping to be installed up within the ceiling area.
- Reduced installation time because the non sloped pipe is easier to install and co-ordinate with other equipment / material in the ceiling area.

The owner can also obtain LEED points with the installation of siphonic roof drains due to the following:

- a) Reduced site disturbance (SS Credit 5.1)
- b) Controlled flow roof drainage (SS Credit 6.1)
- c) Rainwater harvesting (WE Credit 3.1/3.2)
- d) Innovation in design (ID Credit 1.1)

LACQUERED METAL DOMES BODY WITH:							
MODEL No.	WT Lbs.	OUTLET SIZE	POLY DOME (Standard)	CAST IRON DOME (-M)			
R1272,3,4-\$R	40.50	2",3",4"	P.O.A	P.O.A			

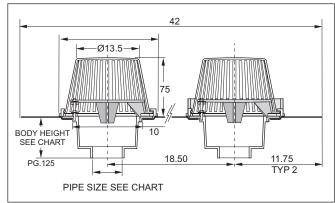

* Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.

		A2-WD	A2-SR	R1270-BP
		0		00
PARTS			X2	
A2 BODY	A2-PD	A2-C3	HS-2	W-31


R1270-S	R OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof (metal domes only) (H-1029)	\$ 152.00	-G	Ballast guards (A2-BG)	\$ 614.00
-11	Acid resistant epoxy (excluding polydome)	\$ 287.00	-M-80	Low profile aluminum domes (A2-MDL-80)	\$ 120.00
-12	Galvanized metal domes	\$ 190.00	NH	No hub outlets (2",3",4")	Standard
-13	All galvanized	\$ 368.00	P	Push on outlets (2",3",4")*	\$ 59.00
-30	PVC socket connection bodies* (2",3",4")	\$ 56.00	T	Threaded outlets (2",3",4")	\$ 120.00
-31	ABS socket connection bodies* (2",3",4")	\$ 56.00	-U	Underdeck clamps (A368-DC)	\$ 215.00
-81	Rough bronze domes (A2-MDL-81)	\$1176.00	Х	Inside caulk outlets (2",3",4")	\$ 120.00
-83	Stainless steel mesh screen over domes (A2-SSD)	\$ 838.00			


^{* 2&}quot;, 3", 4" outlet sizes only

Design and dimensions are subject to modification. Prices do not include applicable taxes.

R1300T SCUPPER DRAIN WITH ANGLE GRATE AND 90 DEGREE OUTLET

R1300T

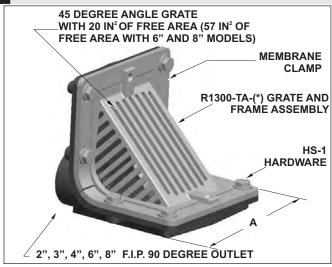

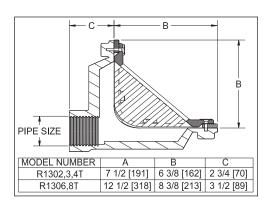



LACQUERED CAST IRON BODY WITH:							
MODEL NO.	WT Lbs.	OUTLET Size	CAST IRON (-50)	NICKEL BRONZE (VENEER) (-1)		ROUGH BRONZE (VENEER) (-2RB)	
R1302,3,4T	18.00	2", 3", 4"	\$ 423.00	\$ 656.00	\$ 571.00	\$ 551.00	
R1306,8T	19.00	6", 8"	\$ 731.00	\$1071.00	\$1071.00	\$ 857.00	

R1300T	OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-NH	No Hub outlet (No Add)	See MI-850, pg. 263	-13	All galvanized (6", 8")	\$ 230.00
-6	Vandal proof grate (TR25 Torx and pin)	\$ 76.00	-83	Stainless steel mesh screen over grate	\$ 303.00
-13	All galvanized (2",3",4")	\$144.00		_	

R1310 **SCUPPER DRAIN WITH ANGLE GRATE AND 45 DEGREE OUTLET**

R1310

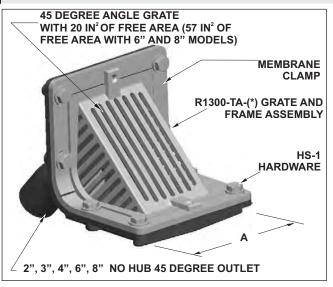





- (*) Denotes strainer finish (-1,-2,-2RB, or -50)
- (**) Denotes outlet size (2", 3", 4" or 6")

				LACQUERED CAST IRON BODY WITH:				
1	IODEL No.	WT Lbs.	OUTLET SIZE	CAST IRON (-50)	NICKEL BRONZE (VENEER) (-1)	POLISHED BRONZE (VENEER) (-2)	ROUGH BRONZE (VENEER) (-2RB)	
R1312	2, 3, 4	18.00	2", 3", 4",	\$423.00	\$ 656.00	\$ 571.00	\$551.00	
R1316	6, 8	19.00	6", 8"	\$731.00	\$1071.00	\$1071.00	\$857.00	

R1310	OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Vandal proof grate (TR25 Torx and pin)	\$ 76.00	-13	All galvanized (6", 8")	\$230.00
-13	All galvanized (2", 3", 4")	\$144.00	-83	Stainless steel mesh screen over grate	\$303.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.



R1320T SCUPPER DRAIN WITH FLAT GRATE AND 90 DEGREE OUTLET

R1320T



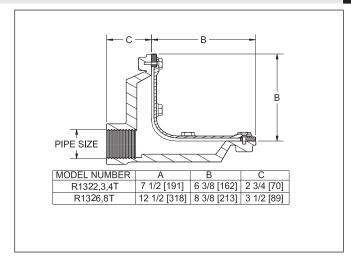



			LACQUERED CAST IRON BODY WITH:				
MODEL No.	WT Lbs.	OUTLET SIZE	CAST IRON (-5)	NICKEL BRONZE (VENEER) (-1)	POLISHED BRONZE (VENEER) (-2)	ROUGH BRONZE (VENEER) (-2RB)	
R1322,3,4T	18.00	2", 3", 4",	\$399.00	\$ 658.00	\$ 551.00	\$ 658.00	
R1326,8T	19.00	6", 8"	\$707.00	\$1073.00	\$ 966.00	\$1073.00	

R1320T	R1320T OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-NH	No Hub outlet (No Add)	See MI-850, pg. 263	-13	All galvanized (2", 3", 4")	\$144.00				
-6	Vandal proof grate (TR25 Torx and pin)	\$76.00	-13	All galvanized (6", 8")	\$230.00				
			-83	Stainless steel mesh screen over grate	\$303.00				

R1330 SCUPPER DRAIN WITH FLAT GRATE AND 45 DEGREE OUTLET

R1330

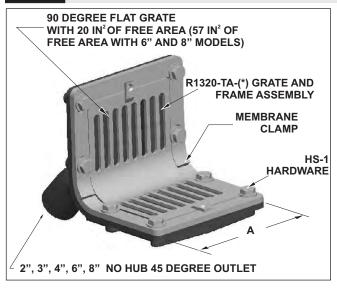

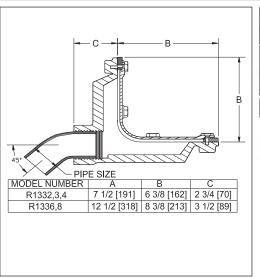




			LACQUERED CAST IRON BODY WITH:				
MODEL No.	WT Lbs.	OUTLET SIZE	CAST IRON (-50)	NICKEL BRONZE (VENEER) (-1)	POLISHED BRONZE (VENEER)(-2)	ROUGH BRONZE (VENEER)(-2RB)	
R1332, 3, 4	18.00	2", 3", 4",	\$ 399.00	\$ 658.00	\$ 551.00	\$ 658.00	
R1336, 8	19.00	6", 8"	\$ 707.00	\$1073.00	\$ 966.00	\$ 1073.00	


R1330 (R1330 OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE					
-6	Vandal proof grate (TR25 Torx and pin)	\$ 76.00	-13	All galvanized (6", 8")	\$230.00					
-13	All galvanized (2", 3", 4")	\$144.00	-83	Stainless steel mesh screen over grate	\$303.00					

Design and dimensions are subject to modification. Prices do not include applicable taxes.

R1400 BALCONY DRAIN WITH BOTTOM OUTLET

R1400

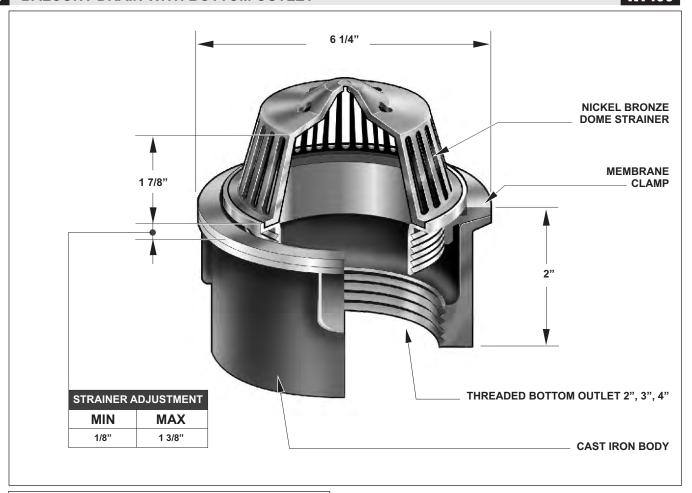

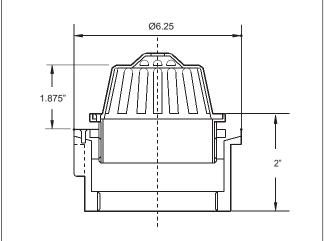

NOTE: Any F1100 Series strainer can be used in place of the K dome strainer. See pages 46 and 47 for selection and prices.

			PARTS
K-(*)	H-1013	R1400T-PC	R140(**)T-PB
		0	0

(*) Denotes strainer finish (-1,-2,-2RB, -3, or -50) (**) Denotes outlet size (2", 3" or 4")


				LACQUERED CAST IRON BODY WITH MEMBRANE CLAMP AND:					
MODEL NO.	WT Lbs.	OUTLET SIZE	CAST IRON (-50) DOME	ROUGH BRONZE (-2RB) DOME	POLISHED BRONZE (-2) DOME	NICKEL BRONZE FOR STAINLESS STEEL (-1) OR (-3) DOME			
R1402, 3	8.00	2", 3"	\$175.00	\$226.00	\$285.00	\$356.00			
R1404	8.00	4"	\$432.00	\$483.00	\$507.00	\$579.00			


R1400	R1400 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-6	Vandal proof dome (TR25 Torx and pin)	\$ 76.00	-HM-2RB	High dome Rough Bronze	\$ 45.00				
-13	Galvanized body and membrane clamp (2", 3", 4")	\$129.00	-HM-PB	High dome Polished Bronze	\$ 57.00				
-14	Flat grate (5-1)	No add	-HM-NB	High dome Nickel Bronze	\$ 63.00				
			-83	Stainless steel mesh screen over dome	\$285.00				

Design and dimensions are subject to modification. Prices do not include applicable taxes.



R1410 BALCONY DRAIN WITH 45 DEGREE OUTLET

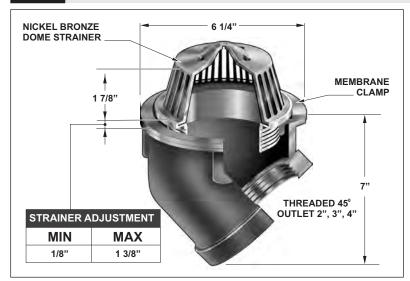

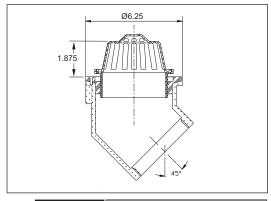

PARTS H-1013 K-(*) (*) Denotes strainer finish (-1, -2, -2RB) (**) Denotes outlet size (2", 3" or 4")


LACQUERED CAST IRON BODY WITH MEMBRANE CLAMP AND:									
MODEL NO.	WT Lbs.	OUTLET SIZE	ROUGH BRONZE Dome (-2RB)	POLISHED BRONZE DOME (-2)	NICKEL BRONZE OR S.S. DOME (-1) OR (-3)	CAST IRON DOME (-50)			
R1412	8.00	2"	\$ 436.00	\$ 487.00	\$ 526.00	\$ 348.00			
R1413,4	8.00	3", 4"	\$ 436.00	\$ 487.00	\$ 526.00	\$ 348.00			




R1410 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-6	Vandal proof dome (TR25 Torx and pin)	\$ 76.00	-HM-PB	High dome Polished Bronze	\$ 57.00			
-13	Galvanized body and membrane clamp	\$129.00	-HM-NB	High dome Nickel Bronze	\$ 63.00			
-14	Flat strainer (5-1)	No Add	-83	Stainless steel mesh screen over dome	\$ 285.00			
-HM-2RB	High dome Rough Bronze	\$ 45.00						

BALCONY DRAIN WITH 90 DEGREE OUTLET

R1420

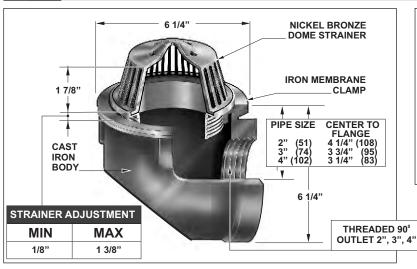

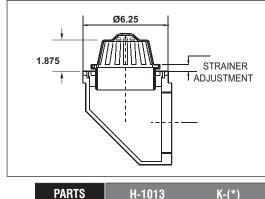

(*) Denotes strainer finish (-1, -2, -2RB) (**) Denotes outlet size (2", 3" or 4")





LACQUERED CAST IRON BODY WITH MEMBRANE CLAMP AND:									
MODEL No.	WT Lbs.	OUTLET SIZE	ROUGH BRONZE Dome (-2RB)	POLISHED BRONZE Dome (-2)	NICKEL BRONZE OR S.S. Dome (-1) or (-3)	CAST IRON DOME (-50)			
R1422	8.00	2"	\$ 436.00	\$ 487.00	\$ 526.00	\$ 348.00			
R1423,4	8.00	3",4"	\$ 436.00	\$ 487.00	\$ 526.00	\$ 348.00			


K14001-PC	K142(^^)I-PB
0	


R1420 (R1420 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-6	Vandal proof dome (TR25 Torx and pin)	\$ 76.00	-HM-PB	High dome Polished Bronze	\$ 57.00				
-13	Galvanized body and membrane clamp	\$ 129.00	-HM-NB	High dome Nickel Bronze	\$ 63.00				
-14	Flat strainer (5-1)	No Add	-83	Stainless steel mesh screen over dome	\$ 285.00				
-HM-2RB	High dome Rough Bronze	\$ 45.00							

Design and dimensions are subject to modification. Prices do not include applicable taxes.

R1510 4" x 3" RECTANGULAR DOWNSPOUT BOOT

R1510

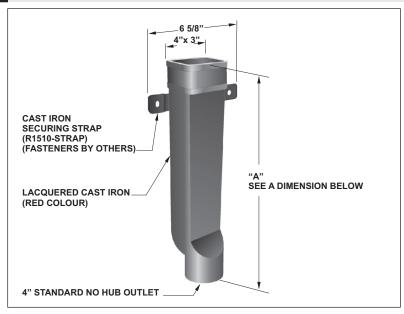

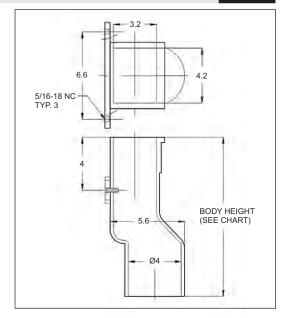



MODEL No.	WT Lbs.	BODY Size	"A" Length	NO HUB Pipe Size	LIST PRICE
R1510-12	15.00	4" x 3"	12"	4"	\$ 457.00
R1510-18	18.00	4" x 3"	18"	4"	\$ 599.00
R1510-24	22.00	4" x 3"	24"	4"	\$ 1070.00

R1510 (R1510 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-13	All galvanized	\$ 456.00					
-CA	Cleanout access with plug	\$ 485.00					

R1520 5" x 4" RECTANGULAR DOWNSPOUT BOOT

R1520

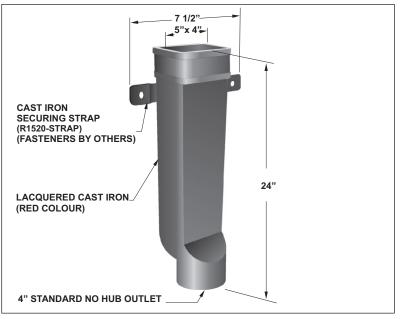

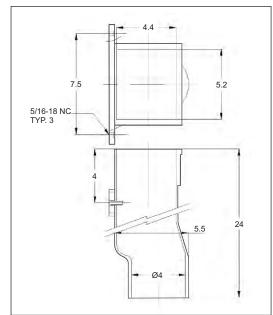

MODE	L	WT	BODY	"A"	NO HUB	LIST
No.		Lbs.	Size	Length	Pipe Size	PRICE
R152	0	22.00	5" x 4"	24"	4"	\$ 1002.00


R1520 C	R1520 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-13	All galvanized	\$ 456.00					
-CA	Cleanout access with plug	\$ 485.00					


Design and dimensions are subject to modification. Prices do not include applicable taxes.



R1530 4" ROUND DOWNSPOUT BOOT



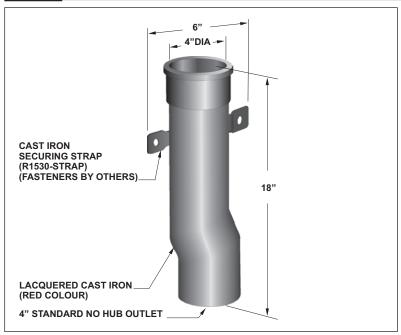

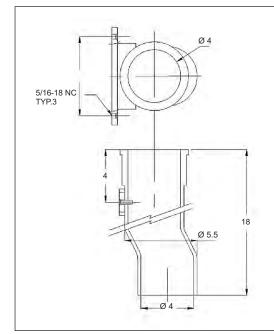



MODEL	WT	BODY	"A"	NO HUB	LIST
No.	Lbs.	SIZE	LENGTH	Pipe Size	PRICE
R1530	15.00	4" dia.	18"	4"	\$ 1002.00

R1530 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE				
-13	All galvanized	\$ 456.00				
-CA	Cleanout access with plug	\$ 485.00				

R1640 PARAPET SCUPPER SLEEVE

R1640

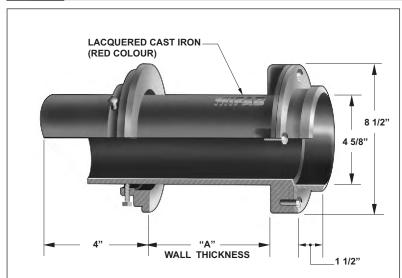

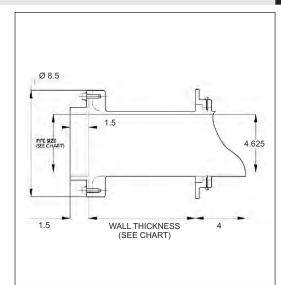

MODE NO.	L .	WT Lbs.	NO HUB Pipe Size	"A" WALL Thickness	LIST PRICE
R1640)-8	26.00	4"	8"	\$ 643.00
R1640)-11	29.00	4"	11"	\$ 749.00
R1640)-13	31.00	4"	13"	\$ 877.00
R1640)-17	35.00	4"	17"	\$ 939.00
R1640)-22	40.00	4"	22"	\$ 962.00

R1640 (R1640 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-13	All galvanized	\$ 456.00					

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

R1810 UNIVERSAL MEMBRANE CLAMP AND DOME RECEIVER

R1810



NOTE: Will also bolt directly onto roof drains from the following manufacturers: Josam, J.R. Smith, Wade, Watts & Zurn, and will accept MIFAB's greater free area (125in²) high profile polydome (A2-PD) or low profile aluminum dome (A2-MDL-80). Use with HS-9 hardware set. Use HS-2 hardware with MIFAB A2 bodies

MODEL	WT	DESCRIPTION	LIST
NO.	Lbs.		PRICE
R1810	8.75	Universal Membrane Clamp Includes HS-9 Hardware	\$ 111.00

R1810 (OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-PN	Poly dome	\$ 61.00	-HS-2	Regular 3 holt hardware	\$ 12.00

R1850 VENT STACK FLASHING SLEEVE

R1850

NOTE: The R1854 is made out of lacquered cast iron material. All other sizes are made from fabricated, 14 gauge galvanized steel that is powder, epoxy coated with an electro-static application.

MODEL No.	PIPE Size	BODY Height	"C"	"D"	"K"	WEIHT Lbs.	LIST Price
R1851.5	1 1/2"	8"	6 1/2"	2 5/8"	3"	12	\$ 238.00
R1852	2"	8 1/8"	6 1/2"	3 1/8"	3"	11	\$ 238.00
R1853	3"	8 1/8"	8 1/2"	4 1/4"	3 1/8"	13	\$ 386.00
R1854	4"	8 1/2"	8 1/2"	5 1/4"	3 1/8"	18	\$ 386.00
R1855	5"	8 1/2"	9 1/2"	6 1/2"	2 1/2"	20	\$ 704.00
R1856	6"	8 1/8"	10 1/2"	7 1/2"	3 1/8"	26	\$ 704.00
R1858	8"	8 3/4"	14 1/2"	9 3/4"	2 3/4"	52	\$ 821.00
R1850-10	10"	8 3/4"	16 1/2"	11 5/8"	2 3/4"	45	\$ 858.00
R1850-12	12"	8 3/4"	18 1/2"	13 5/8"	2 3/4"	60	\$1369.00

R1850 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE			
-13	Galvanized cast iron (R1854 only)	\$273.00			


-13 Galvanized cast iron (R1854 only)


Design and dimensions are subject to modification. Prices do not include applicable taxes.



R1900 VERTICAL EXPANSION JOINT



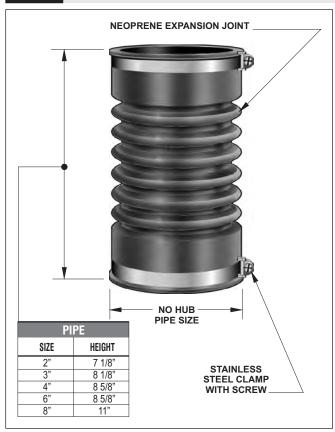


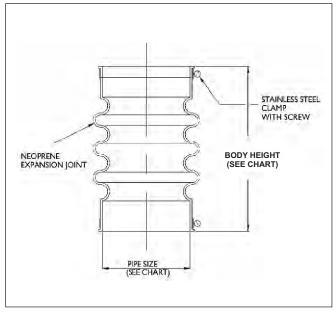

VERTICAL EXPANSION JOINT									
MODEL NO.	WT Lbs.	NO HUB CONNECTION SIZE	LIST Price						
R1902	2.00	2"	\$ 174.00						
R1903	2.50	3"	\$ 197.00						
R1904	3.00	4"	\$ 221.00						
R1906	5.00	6"	\$ 579.00						
R1908	7.00	8"	\$ 811.00						


R1930 VANDAL PROOF CAST IRON VENT CAP

R1930

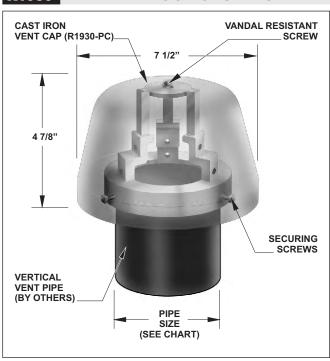

LACQUERED CAST IRON BODY WITH:								
MODEL NO.	WT Lbs.	OUTLET SIZE	CAST IRON					
R1932	10.00	2"	\$ 479.00					
R1933	10.00	3"	\$ 479.00					
R1934	10.00	4"	\$ 479.00					
R1936	7.00	6"	\$ 607.00					
D	100	116 11 B.						

Design and dimensions are subject to modification. Prices do not include applicable taxes.

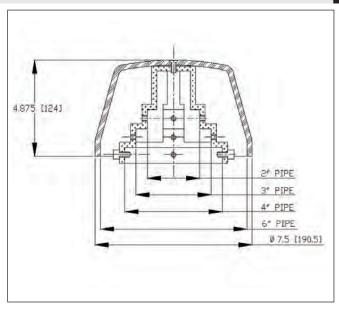


NOTE: Universal body assembly fits over 2", 3" or 4" vertical vent pipe. One size serves all applications.


For 6" vertical vent pipe, discard internal "step" piece and use the three securing screws to assemble the cast iron vent cap to the top of 6" vent pipe.

R1930 C	R1930 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE			
-13	All galvanized	\$144.00			

R1940 **DOWNSPOUT NOZZLE**


R1940

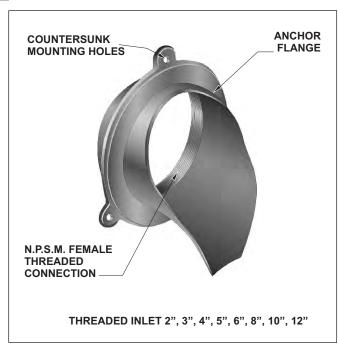

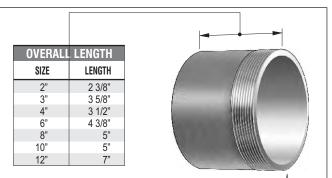

NOTE: For no hub connection, use MI-850 no hub to male threaded adapter.

MI-850		<u> </u>
MODEL NO.	SIZE NPT X NO HUB	LIST PRICE
MI-850-2	2"	\$ 68.00
MI-850-3	3"	\$ 86.00
MI-850-4	4"	\$ 118.00
MI-850-6	6"	\$ 185.00
MI-850-8	8"	\$ 413.00
MI-850-10	10"	\$ 510.00
MI-850-12	12"	\$ 591.00

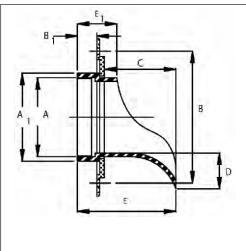

ANCHOR FLANGE PARTS (-1 = NB, -3 = SS)R1942-PC-1,3 \$ 207.00 (FOR R1942-1, R1942-3) R1943-PC-1,3 \$ 207.00 (FOR R1943-1, R1943-3) R1944-PC-1,3 \$ 207.00 (FOR R1944-1, R1944-3) R1946-PC-1,3 \$ 390.00 (FOR R1946-1, R1946-3) R1948-PC-1 \$ 519.00 (FOR R1948-1) R1950-PC-1 \$ 693.00 (FOR R1950-1) R1952-PC-1 \$ 907.00 (FOR R1952-1)



(Optional 16 gauge removable steel rodent screen, Suffix -83)

MODEL NO.	A, THREAD Size (NPS)	A1	В	B1	С	D	E	E1
R1942	2"	3.9"	6.40"	1.0"	4.5"	2.0"	5.75"	2.1"
R1943	3"	3.9"	6.40"	1.0"	4.5"	2.0"	5.75"	2.1"
R1944	4"	4.9"	7.40"	1.15"	4.0"	2.0"	5.50"	2.1"
R1945	5"	7.1"	9.40"	1.15"	4.5"	2.5"	5.75"	2.1"
R1946	6"	7.1"	9.40"	1.15"	4.5"	2.5"	5.75"	2.1"
R1948	8"	9.1"	11.40"	1.15"	4.5"	2.5"	5.75"	2.65"
R1950	10"	11.2"	13.40"	1.35"	4.5"	2.5"	5.75"	2.65"
R1952	12"	13.13"	14.63"	1.35"	4.5"	2.5"	6.56"	2.65"

MODEL No.	WT Lbs.	THREADED Outlet size	ROUGHT BRONZE (-2RB)	POLISHED BRONZE (-2)	NICKEL BRONZE (-1) Or Stainless Steel (-3)
R1942,3,4	4.00	2",3",4"	\$ 433.00	\$ 433.00	\$ 433.00
R1945,6	7.00	5", 6"	\$ 836.00	\$ 836.00	\$ 836.00
R1948	10.00	8 "	\$ 911.00	\$ 911.00	\$ 911.00 (-1 only)
R1950	14.00	10"	\$1341.00	\$1341.00	\$1341.00 (-1 only)
R1952	19.00	12"	\$1768.00	\$1768.00	\$1768.00 (-1 only)

R1940 C	R1940 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-83	16 gauge removable steel rodent screen	\$ 268.00					
-84	-84 Hinged,16 gauge removable rodent screen						


Note: The R1942 model in all finishes is available only as the R1943 model with the MI-800-2 (3" x 2") eccentric reducer bushing (See page 263).

Design and dimensions are subject to modification. Prices do not include applicable taxes.




R1940-SJ DOWNSPOUT NOZZLE WITH SLIP JOINT INLET


R1940-SJ

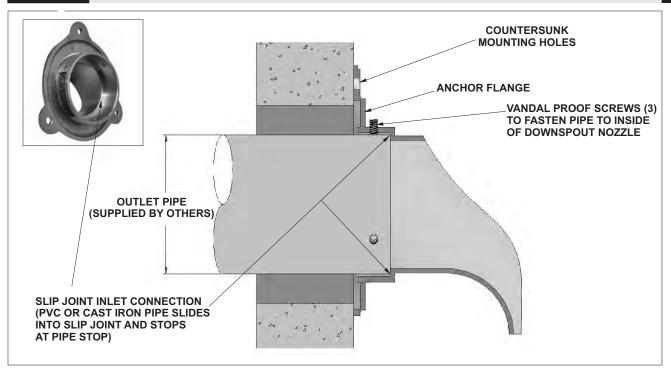

The (slip joint inlet downspout nozzle) performs the same function as the R1940 downspout nozzle. The difference between the two is the method of connecting the pipe to the inlet. With the R1940-SJ, the inlet is machined out. This allows cast iron or PVC pipe to extend past the face of the finished wall and rest against the pipe stop. The pipe is secured to the inside of the R1940-SJ via three vandal proof screws.

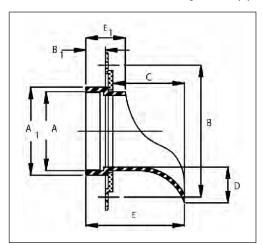

ANCHOR FLANGE PARTS
(-1=NB, -3=SS)
R1942-PC-SJ-1,3 \$ 207.00
(FOR R1942-SJ-1, R1942-SJ-3)
R1943-PC-SJ-1,3 \$ 207.00
(FOR R1943-SJ-1, R1943-SJ-3)
R1944-PC-SJ-1,3 \$ 207.00
(FOR R1944-SJ-1, R1944-SJ-3)
R1946-PC-SJ-1,3 \$ 390.00
(FOR R1946-SJ-1, R1946-SJ-3)
R1948-PC-SJ-1 \$ 519.00
(FOR R1948-SJ-1)
R1950-PC-SJ-1 \$ 693.00
(FOR R1950-SJ-1)
R1952-PC-SJ-1 \$ 907.00
(FOR R1952-SJ-1)

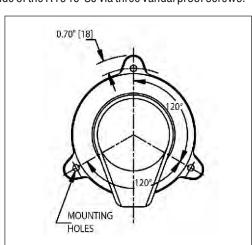



MODEL No.	SLIP JOINT PIPE SIZE	A1	В	B1	С	D	E	E1
R1942-SJ	2"	3.9"	6.40"	1.0"	4.5"	2.0"	5.75"	2.1"
R1943-SJ	3"	3.9"	6.40"	1.0"	4.5"	2.0"	5.75"	2.1"
R1944-SJ	4"	4.9"	7.40"	1.15"	4.0"	2.0"	5.50"	2.1"
R1946-SJ	6"	7.1"	9.40"	1.15"	4.5"	2.5"	5.75"	2.1"
R1948-SJ	8"	9.1"	11.40"	1.15"	4.5"	2.5"	5.75"	2.65"
R1950-SJ	10"	11.2"	13.40"	1.35"	4.5"	2.5"	5.75"	2.65"
R1952-SJ	12"	13.13"	14.63"	1.35"	4.5"	2.5"	6.56"	2.65"

MODEL No.	WT Lbs.	SLIP JOINT Outlet size	ROUGH BRONZE (-2RB)	POLISHED BRONZE (-2)	NICKEL BRONZE (-1) Or Stainless Steel (-3)
R1942,3,4-SJ	4.00	2",3",4"	\$ 433.00	\$ 433.00	\$ 433.00
R1946-SJ	7.00	6"	\$ 836.00	\$ 836.00	\$ 836.00
R1948-SJ	10.00	8 "	\$ 911.00	\$ 911.00	\$ 911.00 (-1 only)
R1950-SJ	14.00	10"	\$1341.00	\$1341.00	\$1341.00 (-1 only)
R1952-SJ	19.00	12"	\$1768.00	\$1768.00	\$1768.00 (-1 only)

Design and dimensions are subject to modification. Prices do not include applicable taxes.


FABRICATED STAINLESS STEEL DOWNSPOUT WITH HINGED COVER

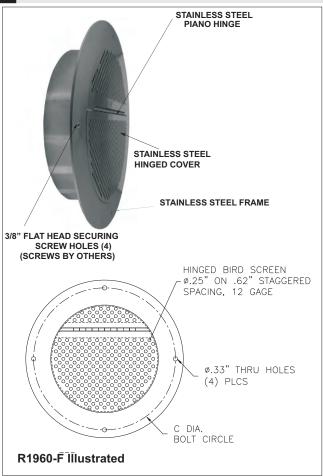

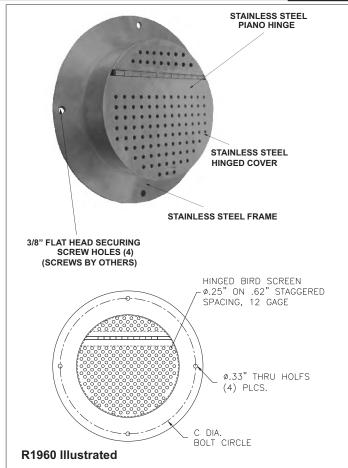

2 ½" (64) Ø C Ø - 10 GAGE STAINLESS SIEEL Flush Mount Design (Suffix -F)

Note: The R1960 and R1960-F models are made to receive PVC, ABS or cast iron pipe inside the "B" dimension. The R1960 models "sleeve" over the pipe sticking out from the wall. The R1960-F models "sleeve" over the pipe that is flush to the wall.




MODEL NO.	A PIPE SIZE	В	С	Free Area (Square Inches)	LIST PRICE
R1963	3"	4 1/4"	7 3/4"	1	\$ 1553.00
R1964	4"	5 1/4"	8 3/4"	2	\$ 1553.00
R1966	6"	7 3/8"	10 7/8"	6	\$ 1640.00
R1968	8"	9 3/8"	12 7/8"	10	\$ 1720.00
R1960-10	10"	11 1/2"	15"	18	\$ 1821.00
R1960-12	12"	13 1/2"	17"	26	\$ 1930.00
R1960-15	15"	16 5/8"	20 1/8"	40	\$ 1942.00

R1960 OPTIONAL VARIATIONS:					
SUFFIX	LIST PRICE				
-6	Vandal proof secured top	\$ 80.00			
-49	Chrome plated	\$ 43.00			
-F	Flush mount design	No Add			
-NH	No hub outlet	No Add			

CAD details PIPE SIZE NO HUB illustrating -NH No Hub outlet R1960-NH

2 ½" (64)

2 3/4" (70)




Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



RIFAB

CLEANOUTS AND ACCESS COVERS

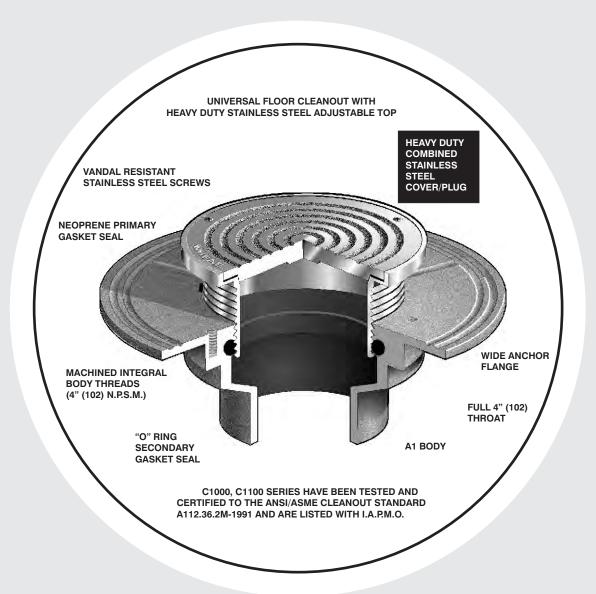

Design and dimensions are subject to modification. Prices do not include applicable taxes.




MIFAB Cleanout Features

MIFAB Floor cleanouts feature a wide flange cleanout body with an adjustable stainless steel or nickel bronze combined access cover and gasketed plug with O-ring test seal. A floor cleanout is an Emergency Access to a plugged drain line. It makes sense for the cleanout to be designed for immediate access without the need to use special tools and/or clear debris from the plug to gain access. It is also important to ensure the cleanout has been resealed after the cleaning of the drain line to eliminate sewer gas escape. It is preferable that the cleanout design will provide visual assurance that the cleanout has been resealed.

THE CONVENTIONAL SYSTEM

The conventional floor cleanout is usually comprised of an unsealed access cover secured to a housing or frame by up to four (4) screws. Removal of these screws provides access to an opening that more often than not is fouled by construction debris that has entered under the housing, which supports the cover or has entered between the unsealed cover and frame. After removal of the debris, the maintenance person is faced with the removal of a cast iron, brass or plastic threaded plug that has likely seized in place because of dissimilar metals, rust and dirt. The removal of this plug is usually accomplished by breaking (chiselling) it out. Finally, there is an open access, usually less than the four (4) inch opening required by code.

After removal of the blockage there is a very good chance that the non-gasketed cover will be replaced because a replacement plug has been almost impossible to source. This does not provide any visual evidence that a plug is not in place and there is the danger of the escape of sewer gas.

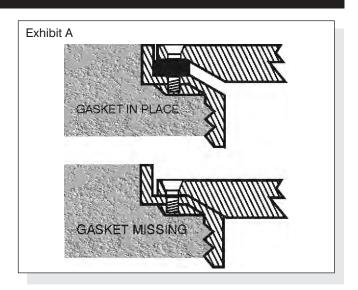

THE MIFAB SYSTEM

The MIFAB design of combined gasketed access cover and cleanout plug grants immediate emergency access with the removal of the combined cover/plug by unscrewing three vandal-resistant stainless steel screws. This provides access to a full four (4) inch opening as required by most codes. Replacement of the cover with neoprene gasket glued to the underside provides visual evidence that the cleanout has been properly resealed. If for any reason the gasket has been displaced then the cover will sit low in the frame and it will be obvious that the cleanout has not been properly resealed providing visual evidence of the danger of escaping sewer gas. (See Exhibit A)



CLEANOUTS CLEANOUT FUNCTION AND SELECTION GUIDE

CLEANOUTS

Cleanouts provide access to drainage piping for cleaning out purposes. Since there are a variety of sizes, shapes and materials available, certain considerations must be made when selecting the right cleanout for installation. MIFAB offers many options that may be incorporated together for the perfect solution in all types of construction.

SELECTION OF TOP

The first factor in selecting a top is to decide what shape would be most compatible with the area surrounding it. In most cases a round top is most easily orientated to the floor because it does not conflict with designs, nor does it require alignment to adjacent walls. For floors that are finished of material in a square or straight-line pattern, a square top is available, allowing alignment with tile and adjacent walls. Areas with

finished floors, such as offices, hospitals, restaurants and modern manufacturing areas will require finished floor cleanouts. A regularly secured scoriated top is recommended in most cases. Finishes include nickel bronze and stainless steel. The type of traffic that the cleanout top must withstand should be considered. For all loads, the stainless steel top can be used. A scoriated top will service most finished floors. They feature a corrosion-resistant, non-skid finish that will not discolor and will look attractive with almost any surroundings. Vandal-proof screws are available to prevent theft or damage to the inner components of the cleanout. Specify suffix (-6) for Vandal-proof screws. Areas with unfinished floors or areas with possible heavy load traffic such as boiler rooms, warehouses and heavy manufacturing facilities, a ductile iron top should be specified. In areas where the cleanout is concealed, various access covers are available to allow access to the cleanout. A carpet marker should be specified in floors where a minimum showing of metal is desired to indicate the placement of the cleanout. Specify suffix (-RC) for stainless steel carpet marker


SUGGESTED CLEANOUT SPECIFICATIONS

Cleanouts connected to the drainage system shall be of the same size as pipe up to 4" (25) and not less than 4" (25) on larger sizes (and/or as required by local code*). Cleanouts shall be installed in the building drain as near as practicable to the inner face of the wall through which the drain passes. Where a building trap is inside the building, the cleanout shall be installed at the foot of each vertical sanitary or storm stack; at the end of drainage lines and at all changes of direction of 45 degrees or more. Cleanouts in horizontal drainage lines shall be at the intervals of no more than fifty feet on pipe up to 4" (25) in size and not more than one hundred feet on larger sizes (and/or as required by local code*).

*Check to see if it is necessary to modify above paragraphs to meet local code

*Cleanouts provide an emergency access to the drainage system. Ordinarily they are only opened where there is a blockage in the system when they are likely to release a head of sewage when opened. For this reason, the following general clause should be included. Whenever possible, cleanouts shall be installed so as to provide access from the finished floor. This applies at all floor levels. When cleanouts are located in membrane floors, they shall be supplied with wide anchor flange and clamp devices. Cleanouts in finished areas shall have adjustable round (square) satin stainless steel or nickel bronze tops with scoriated covers to match flooring as specified below.

Suffixes with (-R) have round tops and suffixes with (-S) have square tops. Select applicable catalog number. Polished stainless steel tops that will not oxidize and are heavy duty should be specified by adding suffix (-3)

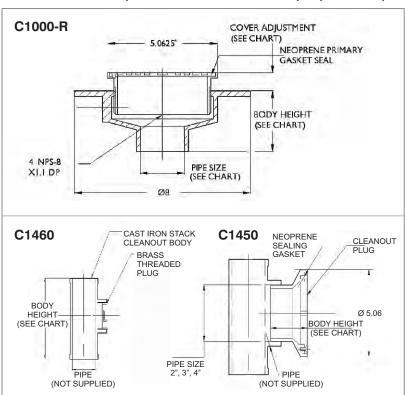

FINISHED FLOORS (ALL TRAFFIC) C1000-R(S)-3 - non-membrane, C1000-C-R(S)-3 - membrane. Lino tile areas: C1100-T(TS) - non-membrane, C1100-C-T(TS) - membrane. Ceramic and terrazzo areas: C1100-U(US) - non-membrane, C1100-C-U(US) - membrane.

CARPETED FLOOR AREAS C1100-RC - non-membrane, C1100-C-RC - membrane. UNFINISHED OR OUTSIDE AREAS C1100-XR ductile iron top, non-membrane C1100-C-XR ductile iron top, membrane line cleanouts

ALL EXPOSED OR ACCESSIBLE AREAS C1450
CONCEALED TILE OR MASONRY C1450-RD-3
ALL OTHER CONCEALED AREAS C1450 with applicable access doors specified under access doors

STACK CLEANOUTS, EXPOSED OR ACCESSIBLE AREAS C1450

CONCEALED TILES OR MASONRY AREAS C1460-RD-3

ALL OTHER CONCEALED AREAS C1460 with applicable access door specified under access doors. *Author's suggestions to specifier () denotes optional square covers


Design and dimensions are subject to modification. Prices do not include applicable taxes.




C1000-R FLOOR CLEANOUT WITH STAINLESS STEEL ROUND TOP

C1000-R

COVER ADJUSTMENT (SEE CHART)

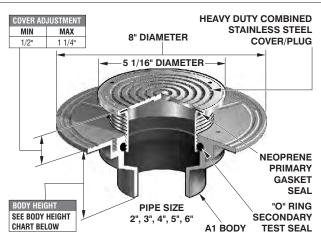

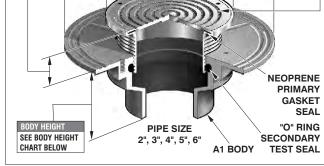

THREADED

(T)

2 1/4"

2 5/8"

2 5/8"

2 5/8"

C1000 MEETS ANSI CLEANOUT STANDARD A112.36.2M-1991

PUSH ON

(P)

3 3/8'

3 3/8'

3 3/8'

6 7/8"

A1 BODY HEIGHT

SIZE

3"

4"

5"

6"

NO HUB

(STANDARD)

3"

3

3"

3 1/2"

5.0625 NEOPRENE PRIMARY GASKET SEAL BODY HEIGHT (SEE CHART) 4" NPSM Ø 8'

PARTS

ANSI/ASME RATING			
COVER	LOAD RATING		
5" DIA. SS	5000-7499 lbs		



C1000-R FL0	C1000-R FLOOR CLEANOUT WITH STAINLESS STEEL ROUND TOP						
MODEL NUMBER	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH STAINLESS STEEL (-3)			
C1002-R-3	6.30	5" Round	2"	\$236.00			
C1003-R-3	5.75	5" Round	3"	\$236.00			
C1004-R-3	5.50	5" Round	4"	\$236.00			
C1005,6-R-3	7.50	5" Round	5", 6"	\$466.00			

C10	C1000-R AND C1100-R OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-6	Security screws (TR25 Torx & pin) (H-1039A)	\$ 25.00	-C	Membrane clamp (A1-C1)	\$ 54.00
-11	Acid resistant epoxy coating	\$ 204.00	-NH	No hub outlet	Standard
-13	All galvanized	\$ 130.00	Р	Push on outlet (2", 3", 4")*	\$ 25.00
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub Only)	\$1473.00	T	Threaded outlet (2", 3", 4")	\$ 61.00
-30	PVC socket connection body* (2", 3", 4")	\$ 28.00	Х	Inside caulk outlet (2", 3", 4")	No Add
-31	ABS socket connection body* (2", 3", 4")	\$ 28.00	-Z	Extended wide flange on body (13" dia. x 1/8" thick)	\$881.00
-34	T-cone plug and gasket (2", 3", 4") (C1440 Series)	\$ 65.00			

ABS

(-31)

2 5/8"

3 1/4"

3 1/2"

(-30)

*2", 3", 4" socket connections only *Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.

C1100-R

FLOOR CLEANOUT WITH NICKEL BRONZE ROUND TOP

INSIDE

CAULK (X)


3 3/4"

3 3/4"

3 3/4"

6 7/8"

C1100-R

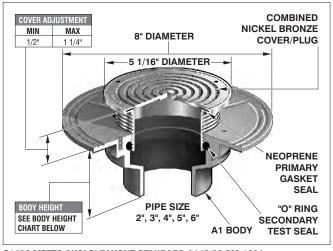

C1100 MEETS ANSI CLEANOUT STANDARD A112.36.2M-1991

	ER ADJUSTMENT CHART)
5.0625"	NEOPRENE PRIMARY GASKET SEAL
	SODY HEIGHT SEE CHART)
4" NPSM PIPE SIZE (SEE CHART)	<u>*</u>

ANSI/ASME RATING				
COVER	LOAD RATING			
5" DIA. NB	2000-4999 lbs			
5" DIA. SS	5000-7499 lbs			
5" DIA. DI	OVER 10,000 lbs			



*Specify -1, -3 or XR-4


C1100-R FLOOR	C1100-R FLOOR CLEANOUT WITH NICKEL BRONZE ROUND TOP					
MODEL	WT.	COVER	OUTLET	LACQUERED CAST IRON BODY WITH:		
NUMBER	Lbs	SIZE	SIZE	NICKEL BRONZE (-1)	STAINLESS STEEL (-3)	DUCTILE IRON (-4)
C1102-R	6.30	5" Round	2"	\$236.00	\$236.00	\$198.00
C1103-R	5.75	5" Round	3"	\$236.00	\$236.00	\$198.00
C1104-R	5.50	5" Round	4"	\$236.00	\$236.00	\$198.00
C1105,6-R	7.50	5" Round	5", 6"	\$466.00	\$466.00	\$428.00


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



C1100-RC FLOOR CLEANOUT WITH ROUND TOP AND CARPET MARKER

C1100-RC

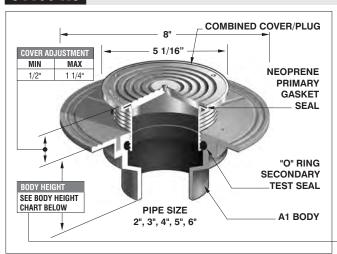

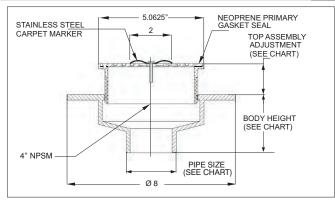

PARTS A1 BODY RC-1 **ANSI/ASME RATING LOAD RATING** 2000-4999 lbs

C1100 MEETS ANSI CLEANOUT STANDARD A112.36.2M-1991

C1100-RC FLOOR CLEANOUT WITH ROUND TOP AND CARPET MARKER						
MODEL Number	WT. Lbs	COVER SIZE	OUTLET SIZE	LAQ. CAST IRON BODY W/NICKEL BRONZE (-1)		
C1102-RC	6.30	5" Round	2"	\$246.00		
C1103-RC	5.75	5" Round	3"	\$246.00		
C1104-RC	5.50	5" Round	4"	\$246.00		
C1105,6-RC 7.50 5" Round 5", 6" \$477.00						
Add for large m	Add for large marker -F 5 1/2" Dia. SS marker flange \$188.00					

A1 BOD	A1 BODY HEIGHT						
PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC ABS (-30) (-31)		
2"	3"	3 3/8"	2 1/4"	3 3/4"	2 5/8"		
3"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/4"		
4"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/3"		
5"	3"	-	2 5/8"	6 7/8"	-		
6"	3 1/2"	6 7/8"	-	-	-		

C1100-R	C1100-RC AND C1100-RFC OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-6	Security screws (TR25 Torx and Pin) (H-1039A)	\$ 25.00	-C	Membrane clamp (A1-C1)	\$ 54.00	
-11	Acid resistant epoxy coating	\$ 204.00	-NH	No hub outlet	Standard	
-13	All galvanized	\$ 130.00	Р	Push on outlet (2", 3", 4")*	\$ 25.00	
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub Only)	\$1473.00	T	Threaded outlet (2", 3", 4")	\$ 61.00	
-30	PVC socket connection body* (2", 3", 4")	\$ 28.00	Χ	Inside caulk outlet (2", 3", 4")	No Add	
-31	ABS socket connection body* (2", 3", 4")	\$ 28.00	-Z	Extended wide flange on body (13" Dia. x 1/8" thick)	\$881.00	
-34	T-cone plug and gasket (2", 3", 4")(C1440 Series)	\$ 65.00				


COVER


5" DIA. NB

*2", 3", 4" socket connections only *Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.

FLOOR CLEANOUT WITH ROUND TOP AND CLAMPING FLANGE

C1100-RFC

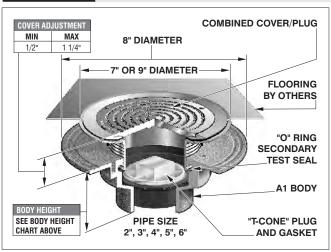

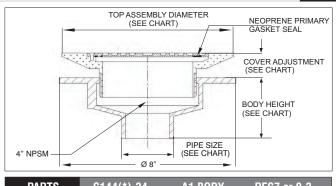

PARTS	C144(*)-34	A1 BODY	RFC7 or 9-3
*2, 3 0	4	9	
IOF		ANIOL/A	DATING

C1100-RFC FLOOR CLEANOUT WITH ROUND TOP AND CLAMPING FLANGE					
MODEL Number					
INUIVIDEN	LD2	SIZE	SIZE	NICKEL BRUNZE (-1) /" DIA UNLY	STAINLESS STEEL (-3)
C1102,3,4-RFC7	7.50	7" Round	2", 3", 4"	\$ 444.00	\$ 444.00
C1105,6-RFC7	8.50	7" Round	5", 6"	\$ 675.00	\$ 675.00
C1102,3,4-RFC9	8.50	9" Round	2", 3", 4"	-	\$ 565.00
C1105,6-RFC9	9.50	9" Round	5", 6"	-	\$ 795.00

ANSI/ASME RATING		
COVER	LOAD RATING	
SS	5000-7499 lbs	
NB	2000-4999 lbs	
C1100 MEETS ANSI		
CLEANOUT STANDARD		
A112.36.2M-1991		

Design and dimensions are subject to modification. Prices do not include applicable taxes.

C1100-S



C1100-S FLOOR CLEANOUT WITH SQUARE TOP

5 1/16" SQUARE COMBINED COVER/PLUG COVER ADJUSTMENT MIN MAX 8" DIAMETER 1 1/4" 1/2" **NEOPRENE PRIMARY** GASKET **SEAL** "O" RING PIPE SIZE SECONDARY SEE BODY HEIGHT 2", 3", 4", 5", 6" A1 BODY **TEST SEAL**

NOTE: $6" \times 6" \times 6" \times 6"$ NB(-1) and SS (-3) covers also available. Add \$123.00 and add 6 before S in model number to order.

C1100 MEETS ANSI CLEANOUT STANDARD A112.36.2M-1991

C1100-S FLOOR CLEANOUT WITH SQUARE TOP						
MODEL	WT.	COVER		LACQUERED CAST IRON BODY		
NUMBER	Lbs	SIZE	SIZE	WITH NB (-1) OR SS (-3)		
C1102-S	7.25	5" x 5"	2"	\$276.00		
C1103-S	7.00	5" x 5"	3"	\$276.00		
C1104-S	6.90	5" x 5"	4"	\$276.00		
C1105,6-S	8.50	5" x 5"	5", 6"	\$506.00		

SQUARE 5" X 5" (SEE CHART) NEOPRENE PRIMARY GASKET SEAL BODY HEIGHT (SEE CHART) PIPE SIZE (SEE CHART)

ØB

ANSI/ASME RATING				
COVER LOAD RATING				
5",6" SQ. NB	2000-4999 lbs			
5",6" SQ. SS 5000-7499 lbs				
*Specify 6S-1 or 6S-3 for 6" x 6" part				

A1 BODY

S-1 or -3

A1 BOD	A1 BODY HEIGHT							
PIPE SIZE	NO HUB Standard	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30)			
2 "	3"	3 3/8"	2 1/4"	3 3/4"	2 5/8"			
3"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/4"			
4"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/2"			
5"	3"	-	2 5/8"	6 7/8"	-			
6"	3 1/2"	6 7/8"	-	-	-			


A R T S


C1100	C1100-S AND C1100-T OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-6	Security screws (TR25 Torx & pin) (H-1039A)	\$ 25.00	-34	T-cone plug and gasket (2", 3", 4")(C1440 Series)	\$ 65.00			
-11	Acid resistant epoxy coating	\$ 204.00	-C	Membrane clamp (A1-C1)	\$ 54.00			
-13	All galvanized	\$ 130.00	-NH	No hub outlet	Standard			
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub Only)	\$1473.00	Р	Push on outlet (2", 3", 4")*	\$ 25.00			
-30	PVC socket connection body* (2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00			
-31	PVC socket connection body* (2", 3", 4")	\$ 28.00	Χ	Inside caulk outlet (2", 3", 4")	No Add			
			-Z	Extended wide flange on body (13" Dia. x 1/8" thick)	\$881.00			

NOTE: 6" x 6" NB(-1) and SS (-3) covers also available. Add \$123.00 and add 6 before S in model number to order. Specify POG-6 for C.l. pipe and POG-6-PVC for 6" PVC pipe. 2", 3", 4" sizes use same gasket.

C1100-T FLOOR CLEANOUT WITH ROUND TOP AND TILE RECESS

C1100-T

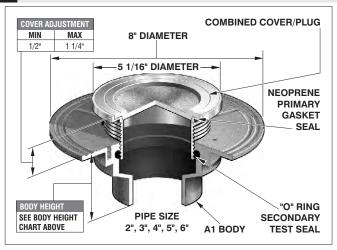

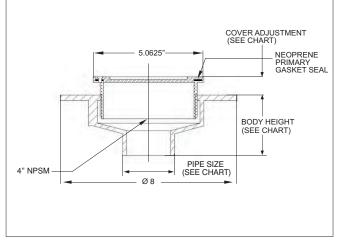

C1100-T FL0	C1100-T FLOOR CLEANOUT WITH ROUND TOP AND TILE RECESS						
MODEL NUMBER	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NB (-1) OR SS (-3)			
C1102-T	7.25	5" round	2"	\$236.00			
C1103-T	7.00	5" round	3"	\$236.00			
C1104-T	6.90	5" round	4"	\$236.00			
C1105,6-T	8.50	5" round	5", 6"	\$466.00			

ANSI/ASM	IE RATING					
COVER	LOAD RATING					
5" DIA. NB	2000-4999 lbs					
5" DIA. SS	5" DIA. SS 5000-7499 lbs					
C1100 MEE	C1100 MEETS ANSI CLEANOUT STANDARD					
CLEANOUT STANDARD						
A112.36.2N	A112.36.2M-1991					


PARTS	
A1 BODY	T-1 or -3
9	


Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1100-TS FLOOR CLEANOUT WITH SQUARE TOP AND TILE RECESS

C1100-TS

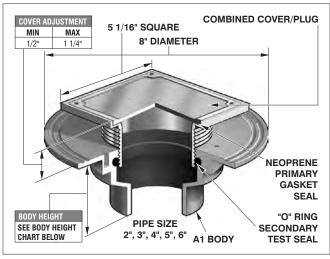

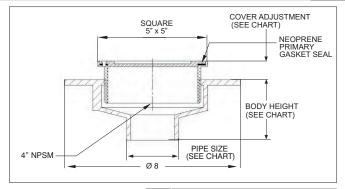

ANSI/ASME RATING					
COVER	LOAD RATING				
5" x 5" NB	2000-4999 lbs				
5" x 5" SS	5000-7499 lbs				



C1100 MEETS ANSI CLEANOUT STANDARD A112.36.2M-1991

C1100-TS FLOOR CLEANOUT W/SQUARE TOP & TILE RECESS							
MODEL NUMBER	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NB (-1) OR SS (-3)			
C1102-TS	6.50	5" x 5"	2"	\$276.00			
C1103-TS	6.00	5" x 5"	3"	\$276.00			
C1104-TS	6.50	5" x 5"	4"	\$276.00			
C1105,6-TS	8.00	5" x 5"	5", 6"	\$506.00			


ı	A1 BODY HEIGHT									
	PIPE Size	NO HUB (Standard)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC ABS (-30) (-31)				
Ī	2"	3"	3 3/8"	2 1/4"	3 3/4"	2 5/8"				
	3"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/4"				
	4"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/2"				
Ī	5"	3"	-	2 5/8"	6 7/8"	-				
	6"	3 1/2"	6 7/8"	-	-	-				


C110	C1100-TS AND C1100-UR OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-6	Security screws (TR25 Torx & pin) (H-1039A)	\$ 25.00	-34	T-cone plug and gasket (2", 3", 4") (C1440 SERIES)	\$ 65.00		
-11	Acid resistant epoxy coating	\$ 204.00	-C	Membrane clamp (A1-C1)	\$ 54.00		
-13	All galvanized	\$ 130.00	-NH	No hub outlet	Standard		
-28	Stainless steel body (Type 304, 2", 3", 4" No Hub Only)	\$1473.00	Р	Push on outlet (2", 3", 4")*	\$ 25.00		
-30	PVC socket connection body*(2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00		
-31	ABS socket connection body*(2", 3", 4")	\$ 28.00	Χ	Inside caulk outlet (2", 3", 4")	No Add		
			-Z	Extended wide flange on body (13" Dia. x 1/8" thick)	\$881.00		

Specify POG-6 for C.I. pipe and POG-6-PVC for 6" PVC pipe. 2", 3", 4" sizes use same gasket.

C1100-UR FLOOR CLEANOUT WITH ROUND TOP AND TERRAZZO RECESS

C1100-UR

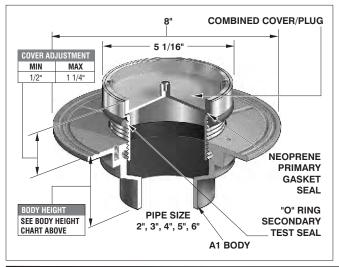

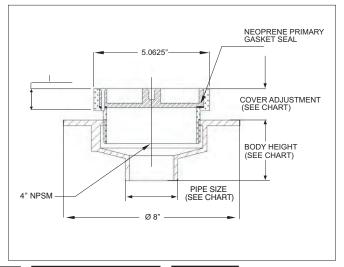

C1100-UR F	C1100-UR FLOOR CLEANOUT WITH ROUND TOP AND TERRAZZO RECESS						
MODEL NUMBER	WT. Lbs	COVER DIAMETER	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NB (-1) OR SS (-3)			
C1102-UR	7.00	5" round	2"	\$ 338.00			
C1103-UR	6.50	5" round	3"	\$ 338.00			
C1104-UR	7.00	5" round	4"	\$ 338.00			
C1105,6-UR	8.25	5" round	5", 6"	\$ 569.00			

ANSI/ASME RATING							
COVER	COVER LOAD RATING						
5" DIA. NB							
5" DIA SS 5000-7499 lbs							
	C1100 MEETS ANSI						
CLEANOUT STANDARD							
A112.36.2N	1-1991						





Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1100-US FLOOR CLEANOUT WITH SQUARE TOP AND TERRAZZO RECESS

C1100-US

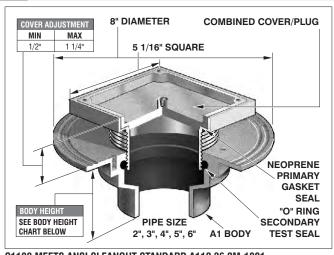

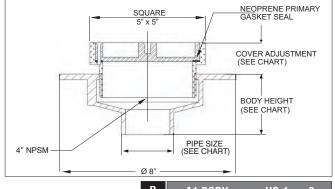

ANSI/ASME RATING				
COVER	LOAD RATING			
5" x 5" NB	2000-4999 lbs			
5" x 5" SS	5000-7499 lbs			



C1100 ME	: 18 ANSI CI	LEANUUI 8	STANDAKD I	A112.36.2IVI-1991

C1100-US FLOOR CLEANOUT WITH SQUARE TOP AND TERRAZZO RECESS						
MODEL NUMBER	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NB (-1) OR SS (-3)		
C1102-US	8.75	5" x 5"	2"	\$396.00		
C1103-US	8.00	5" x 5"	3"	\$396.00		
C1104-US	8.75	5" x 5"	4"	\$396.00		
C1105,6-US	10.00	5" x 5"	5", 6"	\$626.00		


AIBUD	THEIGHT				
PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC ABS (-30) (-31)
2"	3"	3 3/8"	2 1/4"	3 3/4"	2 5/8"
3"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/4"
4"	3"	3 3/8"	2 5/8"	3 3/4"	3 1/2"
5"	3"	-	2 5/8"	6 7/8"	-
6"	3 1/2"	6 7/8"	-	-	-


C1100-	C1100-US, C1100-XR AND C1100-XS SERIES OPTIONAL VARIATIONS					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-6	Security screws (TR25 Torx & pin) (H-1039A)	\$ 25.00	-34	T-cone plug and gasket (2", 3", 4") (C1440 Series)	\$ 65.00	
-11	Acid resistant epoxy coating	\$ 204.00	-C	Membrane clamp (A1-C1)	\$ 54.00	
-13	All galvanized	\$ 130.00	-NH	No hub outlet	Standard	
-28	Stainless steel body (Type 304) (2", 3", 4" No Hub Only)	\$1473.00	Р	Push on outlet (2", 3", 4")*	\$ 25.00	
-30	PVC socket connection body* (2", 3", 4")	\$ 28.00	T	Threaded outlet (2", 3", 4")	\$ 61.00	
-31	PVC socket connection body* (2", 3", 4")	\$ 28.00	Χ	Inside caulk outlet (2", 3", 4")	No Add	
			-Z	Extended wide flange on body (13" Dia. x 1/8" thick)	\$881.00	

Specify POG-6 for C.I. pipe and POG-6-PVC for 6" PVC pipe. 2", 3", 4" sizes use same gasket.

C1100-XR FLOOR CLEANOUT WITH HEAVY DUTY ROUND TOP

C1100-XR

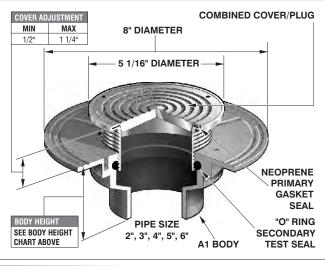

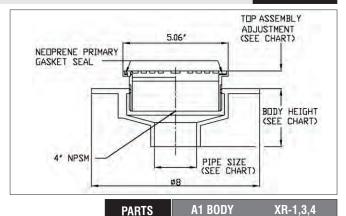

C1100 MEETS Ansi Cleanout Standard A112.36.2M-1991

AI DODI	AIL
9	ansa .
	1

	EV
	7
#	
	THESE

C1100-R FLOOR CLEANOUT WITH NICKEL BRONZE ROUND TOP						
MODEL	WT.	COVER	OUTLET	LACQUERED CAST I		
NUMBER	Lbs	SIZE	SIZE	DUCTILE IRON (-4)	NB (-1) OR SS (-3)	
C1102-XR	6.75	5" Round	2"	\$198.00	\$294.00	
C1103-XR	6.25	5" Round	3"	\$198.00	\$294.00	
C1104-XR	6.75	5" Round	4"	\$198.00	\$294.00	
C1105,6-XR	8.00	5" Round	5", 6"	\$428.00	\$525.00	


ANSI/ASME RATING				
COVER	LOAD RATING			
5" DIA. NB	5000-7499 lbs			
5" DIA. SS	5000-7499 lbs			
5" DIA. DI	OVER 10,000 lbs			

Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1100-XS FLOOR CLEANOUT WITH HEAVY DUTY SQUARE TOP

C1100-XS

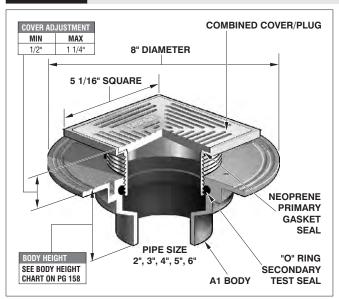

5.06" SQUARE	TOP ASSEMBLY ADJUSTMENT (SEE CHART)
	BODY HEIGHT (SEE CHART)
PIPE (SEE	SIZE CHART)
	PIPE

SEE PAGE 160 FOR C1100-XS OPTIONAL VARIATIONS


C1100-XS FLOOR CLEANOUT WITH HEAVY DUTY SQUARE TOP							
MODEL NUMBER	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NB (-1) OR SS (-3)			
C1102-XS	7.25	5" x 5"	2"	\$396.00			
C1103-XS	6.75	5" x 5"	3"	\$396.00			
C1104-XS	7.25	5" x 5"	4"	\$396.00			
C1105,6-XS	8.50	5" x 5"	5", 6"	\$626.00			

ANSI/ASME RATING			
COVER	LOAD RATING		
5" x 5" NB	2000-4999 lbs		
5" x 5" SS	5000-7499 lbs		
C1100 SERIES MEETS ANSI			
C1100 SERIES MEETS ANSI CLEANOUT STANDARD A112.36.2M-1991			
A112.36.2M-1991			




C1200-C-R ISOLATION FLOOR CLEANOUT WITH ROUND TOP

C1200-C-R

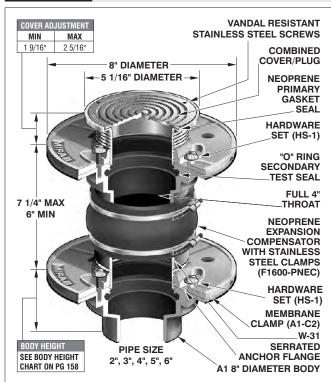





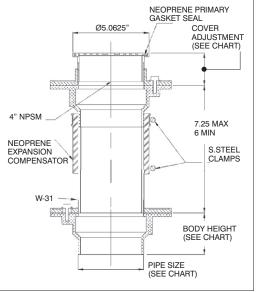







C1100 MEETS ANSI CLEANOUT STANDARD A112.36.2M-1991 SEE PAGE 162 FOR C1200-C-R OPTIONAL VARIATIONS

C1200-C-R ISOLATION FLOOR CLEANOUT WITH ROUND TOP					
MODEL	WT.	COVER	OUTLET	LACQUERED CAST I	IRON BODY WITH:
NUMBER	Lbs	SIZE	SIZE	DUCTILE IRON (-4)	NB (-1) OR SS (-3)
C1202-C-R	16.75	5" Round	2"	\$ 522.00	\$ 555.00
C1203-C-R	16.00	5" Round	3"	\$ 522.00	\$ 555.00
C1204-C-R	16.75	5" Round	4"	\$ 522.00	\$ 555.00
C1205,6-C-R	18.00	5" Round	5", 6"	\$ 751.00	\$ 786.00

ANSI/ASME RATING				
COVER	LOAD RATING			
5" DIA. NB	2000-4999 lbs			
5" DIA SS	5000-7499 lbs			
5" DIA DI	OVER 10,000 lbs			

Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1200-C ISOLATION FLOOR CLEANOUT MODEL VARIATIONS

C1200-C

C1200-C-RC FLOOR CLEANOUT WITH ROUND TOP AND CARPET MARKER					
MODEL	WT.	COVER	OUTLET	LACQUERED CAST IRON BODY WITH	
NUMBER	Lbs	SIZE	SIZE	NICKEL BRONZE (-1)	
C1202-C-RC	16.75	5" Round	2"	\$ 565.00	
C1203-C-RC	16.00	5" Round	3"	\$ 565.00	
C1204-C-RC	16.75	5" Round	4"	\$ 565.00	
C1205,6-C-RC	16.75	5" Round	5", 6"	\$ 795.00	

C1200-C-S FL	C1200-C-S FLOOR CLEANOUT WITH SQUARE TOP						
MODEL NUMBER	WT. Lbs	COVER Size	OUTLET Size	LACQUERED CAST IRON BODY WITH NICKEL BRONZE (-1) OR STAINLESS STEEL (-3)			
C1202-C-S	17.50	5" x 5"	2"	\$ 595.00			
C1203-C-S	16.75	5" x 5"	3"	\$ 595.00			
C1204-C-S	17.50	5" x 5"	4"	\$ 595.00			
C1205,6-C-S	17.75	5" x 5"	5", 6"	\$ 825.00			

C1200-C-T FLOOR CLEANOUT WITH ROUND TOP AND TILE RECESS					
MODEL Number	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NICKEL BRONZE (-1) OR STAINLESS STEEL (-3)	
C1202-C-T	16.75	5" Round	2"	\$ 555.00	
C1203-C-T	16.75	5" Round	3"	\$ 555.00	
C1204-C-T	16.75	5" Round	4"	\$ 555.00	
C1205,6-C-T	16.75	5" Round	5", 6"	\$ 786.00	

C1200-C-TS FLOOR CLEANOUT WITH SQUARE TOP AND TILE RECESS					
MODEL NUMBER	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NICKEL BRONZE (-1) OR STAINLESS STEEL (-3)	
C1202-C-TS	17.25	5" x 5"	2"	\$ 595.00	
C1203-C-TS	16.75	5" x 5"	3"	\$ 595.00	
C1204-C-TS	17.25	5" x 5"	4"	\$ 595.00	
C1205,6-C-TS	17.75	5" x 5"	5", 6"	\$ 825.00	

C1200-C-UR FLOOR CLEANOUT WITH ROUND TOP AND TERRAZZO RECESS					
MODEL Number	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NICKEL BRONZE (-1) OR STAINLESS STEEL (-3)	
	rn9		SIZE	NICKEL BRUNZE (-1) UN STAINLESS STEEL (-3)	
C1202-C-UR	17.25	5" Round	2"	\$657.00	
C1203-C-UR	17.00	5" Round	3"	\$657.00	
C1204-C-UR	17.50	5" Round	4"	\$657.00	
C1205,6-C-UR	17.75	5" Round	5", 6"	\$887.00	

C1200-C-US FLOOR CLEANOUT WITH SQUARE TOP AND TERRAZZO RECESS					
MODEL Number	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST IRON BODY WITH NICKEL BRONZE (-1) OR STAINLESS STEEL (-3)	
C1202-C-US	19.25	5" x 5"	2"	\$715.00	
C1203-C-US	18.75	5" x 5"	3"	\$715.00	
C1204-C-US	19.25	5" x 5"	4"	\$715.00	
C1205,6-C-US	19.75	5" x 5"	5", 6"	\$946.00	

C1200-C-XR FLOOR CLEANOUT WITH HEAVY DUTY ROUND TOP					
MODEL NUMBER	WT. Lbs	COVER SIZE	OUTLET SIZE	LACQUERED CAST DUCTILE IRON (-4)	IRON BODY WITH: NB (-1) OR SS (-3)
C1202-C-XR	16.75	5" Round	2"	\$ 517.00	\$ 614.00
C1203-C-XR	16.25	5" Round	3"	\$ 517.00	\$ 614.00
C1204-C-XR	16.75	5" Round	4"	\$ 517.00	\$ 614.00
C1205,6-C-XR	16.75	5" Round	5", 6"	\$ 748.00	\$ 843.00

*Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.



C1200-RC



*Add \$123.00 per outlet size for 6" x 6" NB (-1) or SS (-3) top





C1200-TS



C1200-UR



C1200-US



C1200-XR


C1200	C1200-C OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-4	Ductile iron top assembly	See above	-30	PVC socket connection body* (2",3",4")	\$ 28.00		
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 25.00	-31	ABS socket connection body* (2",3",4")	\$ 28.00		
-11	Acid resistant epoxy coating	\$ 417.00	-34	T-cone plug and gasket (C1440 Series)	\$ 65.00		
-13	All galvanized	\$ 417.00	NH	No hub outlet (2", 3", 4")	Standard		
-28	All 304 Stainless steel bodies (2",3",4" No Hub Only)	\$2945.00	P	Push on outlet (2", 3", 4")*	\$ 25.00		
			T	Threaded outlet (2", 3", 4")	\$ 61.00		
			Χ	Inside caulk outlet (2", 3", 4")	No Add		


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



C1222,3,4 FERRULE CLEANOUT WITH ADJUSTABLE TOP & SECONDARY PLUG

C1222,3,4

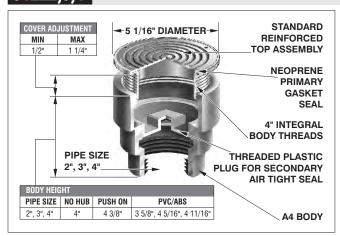

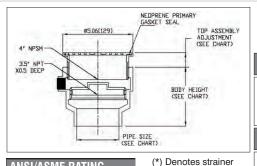



A4 BODY

ANSI/ASME RATING			
COVER	LOAD RATING		
5" DIA. NB	2000-4999 lbs		
5" DIA. SS	5000-7499 lbs		
5" DIA. DI	OVER 10,000 lbs		






C1222,3,4 FERRULE CLEANOUT WITH ADJUSTABLE TOP AND SECONDARY PLUG						
MODEL Number	WT. Lbs	DESCRIPTION	NO HUB OUTLET SIZE	LACQUERED CAST IRON BODY WITH: Ductile Iron (-4) NB (-1) OR SS (-3)		
C1222,3,4-R	5.65	5" Round top	2", 3", 4"	\$279.00	\$390.00	
C1222,3,4-RC	5.65	5" Round top with SS carpet marker	2", 3", 4"	\$309.00	\$419.00	
C1222,3,4-RFC7	6.50	7" Round top with clamping flange	2", 3", 4"	-	\$576.00*	
C1222,3,4-S	5.65	5" square top	2", 3", 4"	-	\$490.00	
C1222,3,4-T	5.65	5" Round top with tile recess	2", 3", 4"	-	\$390.00	
C1222,3,4-TS	5.65	5" Square top with tile recess	2", 3", 4"	-	\$490.00	
C1222,3,4-UR	5.65	5" Round top with terrazzo recess	2", 3", 4"	-	\$490.00	
C1222,3,4-US	5.65	5" Square top with terrazzo recess	2", 3", 4"	-	\$490.00	
C1222,3,4-XR	5.65	5" Heavy duty round top	2", 3", 4"	\$279.00	\$458.00	
C1222,3,4-XS	5.65	5" Heavy duty square top	2", 3", 4"	-	\$559.00	


*RFC9 IN STAINLESS STEEL ONLY; \$783.00 LIST PRICE FOR 2", 3", 4"; \$1152.00 LIST PRICE FOR 6" SIZE

C1222,3,4 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-6	Security screws (TR25 Torx & pin) (H-1039A)	\$ 25.00	-31	ABS socket connection body*	\$ 28.00	
-11	Acid resistant epoxy coating	\$204.00	-34B	Brass closure plug (A4-34B)	\$103.00	
-13	All galvanized	\$130.00	Р	Push on outlet (2", 3", 4")	\$ 25.00	
-30	PVC socket connection body*	\$ 28.00		*2", 3", 4" socket connections only		

C1226,8 FERRULE CLEANOUT WITH ADJUSTABLE TOP & SECONDARY PLUG

C1226,8

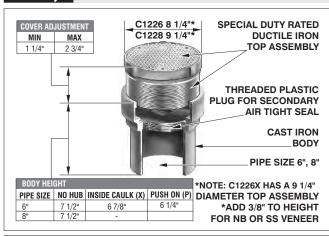



(***) Denotes cover diameter (6" or 8")



C122(*)(**)-PB



PARTS

C1226,8 FERRULE CLEANOUT WITH ADJUSTABLE TOP AND SECONDARY PLUG					
MODEL Number	WT. Lbs	OUTLET Size	LACQUERED CAST DUCTILE IRON (-4)	RON BODY WITH: NB (-1) OR SS (-3)	
C1226	20.00	6"	\$457.00	\$611.00	
C1228	25.00	8"	\$607.00	\$733.00	

(****) Denotes	PANIS	
RY PLUG	ANSI/ASME RATING	
Y WITH:	COVER	LOAD RATING
OR SS (-3)	6", 8" DIAMETER NB	OVER 10,000 lbs
611.00	6", 8" DIAMETER SS	OVER 10,000 lbs
733.00	6", 8" DIAMETER DI	OVER 10,000 lbs

C1226,8 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 62.00	-34B	Brass closure plug (C122 (6 or 8)-PP-81)	\$328.00		
-11	Acid resistant epoxy coating	\$204.00	Р	Push on outlet (6" only)	No Add		
-13	All galvanized	\$130.00	Χ	Inside caulk outlet (6" only)	No Add		


*2", 3", 4" socket connections only *Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe. 2", 3", 4" sizes use same gasket.


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



C1230 LINE OR FLOOR CLEANOUT

C1230

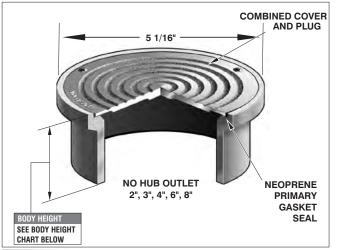

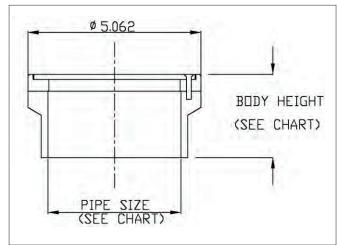

C1230 LINE 0				
MODEL	WT.	DESCRIPTION	LIST	ADD FOR NICKEL
NUMBER	Lbs		PRICE	BRONZE COVER (-1)
C1232-4	4.75	2" C.I. body with ductile iron cover	\$ 84.00	-
C1233-4	4.75	3" C.I. body with ductile iron cover	\$ 84.00	-
C1234-4	5.25	4" C.I. body with ductile iron cover	\$ 84.00	-
C1234P-4	6.00	4" C.I. body push on outlet body with D.I. cover	\$ 84.00	-
C1236-4	6.00	6" C.I. body with ductile iron cover	\$351.00	-
C1238-4	7.00	8" C.I. body with ductile iron cover	\$591.00	-
C1232-1	4.75	2" NB body with NB cover	\$141.00	-
C1233-1	4.75	3" NB body with NB cover	\$141.00	-
C1234-1	5.25	4" NB body with NB cover	\$141.00	-
C1232-30	4.75	2" PVC body with ductile iron cover	\$ 84.00	\$ 59.00
C1233-30	3.25	3" PVC body with ductile iron cover	\$ 84.00	\$ 59.00
C1234-30	3.50	4" PVC body with ductile iron cover	\$ 84.00	\$ 59.00
C1232-31	3.25	2" ABS body with ductile iron cover	\$ 84.00	\$ 59.00
C1233-31	3.25	3" ABS body with ductile iron cover	\$ 84.00	\$ 59.00
C1234-31	3.50	4" ABS body with ductile iron cover	\$ 84.00	\$ 59.00

BODY HEIGHT					
NB/CI	PVC/ABS				
2 3/16"	2 5/8"				
2 3/16"	2 5/8"				
3 1/2"	N/A				
	NB/CI 2 3/16" 2 3/16"				





ANSI/ASME RATING					
COVER	LOAD RATING				
5" DIAMETER NB	2000 - 4999 lbs				
5" DIAMETER DI	OVER 10,000 lbs				

C12	C1230 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-6	Security screws (TR25 Torx & pin) (H-1039A)	\$ 25.00				
-11	Acid resistant epoxy coating	\$ 92.00				
-13	All galvanized	\$ 92.00				
-34	T-cone plug and gasket (C1440 Series)	\$ 65.00				
Р	Push on outlet (2", 3", 4")	\$ 25.00				

C1230-WF FLOOR CLEANOUT FOR WOOD FLOOR INSTALLATIONS

C1230-WF

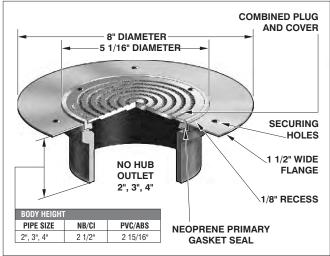

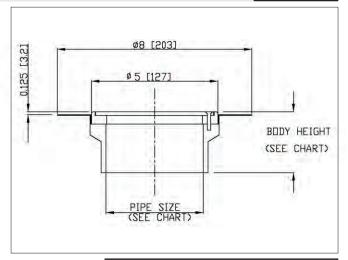

C1230-WF FLOOR CLEANOUT FOR WOOD FLOOR INSTALLATIONS								
MODEL NUMBER	WT. Lbs	DESCRIPTION	LIST PRICE	ADD FOR NICKEL BRONZE COVER (-1)				
C1232,3-WF-4	4.75	2",3" C.I. body w/ductile iron cover	\$162.00	-				
C1234-WF-4	5.25	4" C.I. body with ductile iron cover	\$162.00	-				
C1232,3-WF-30	3.25	2",3" PVC body w/ductile iron cover	\$162.00	\$59.00				
C1234-WF-30	3.50	4" PVC body w/ductile iron cover	\$162.00	\$59.00				
C1232,3-WF-31	3.25	2",3" ABS body w/ductile iron cover	\$162.00	\$59.00				
C1234-WF-31	3.50	4" ABS body with ductile iron cover	\$162.00	\$59.00				


ANSI/ASME RATING	
COVER	LOAD RATING
5" DIAMETER NB	2000 - 4999 lbs
5" DIAMETER DI	OVER 10,000 lbs


C12	C1230-WF OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-6	Security screws (TR25 Torx and pin)(H-1039A)	\$ 25.00				
-11	Acid resistant epoxy coating	\$ 92.00				
-13	All galvanized	\$ 92.00				

Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1300 SCORIATED ACCESS COVERS

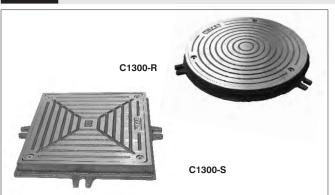

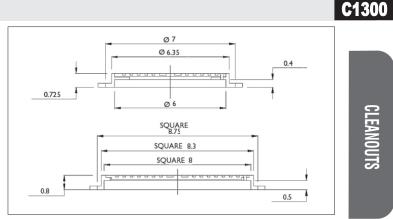



C1300 SCORIATED ACCESS COVERS				
MODEL NUMBER	WT. Lbs	DESCRIPTION	NICKEL Bronze (-1)	DUCTILE IRON (-4)
C1300-R6	9.00	6" Round scoriated access cover	\$204.00	-
C1300-R9	10.00	9" Round scoriated access cover	\$547.00	-
C1300-S7	11.00	7" x 7" scoriated access cover	\$290.00	-
C1300-S9	12.00	9" x 9" scoriated access cover	\$382.00	\$145.00
C1300-S12	12.00	12" x 12" scoriated access cover	\$637.00	\$278.00

C1300 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIS	ST PRICE	
-6	Security screws (TR25 Torx and pin)(H-1039A)	\$	32.00	

C1300-UR/US ACCESS COVER RECESSED FOR TERRAZZO



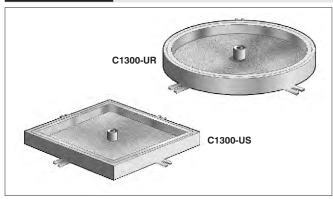

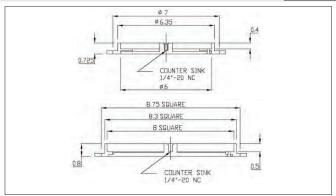


C1300-UR OR US ACCESS COVER RECESSED FOR TERRAZZO				
MODEL NUMBER	WT. Lbs	DESCRIPTION	NICKEL Bronze (-1)	
C1300-UR	9.00	9" Round terrazzo recessed access cover	\$550.00	
C1300-US	11.00	8" x 8" terrazzo recessed access cover	\$602.00	

C1300-UR & US OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE	
-6	Security screws (TR25 Torx and pin)(H-1039A)	\$ 32.00	

C1310 FLOOR ACCESS COVER

C1310



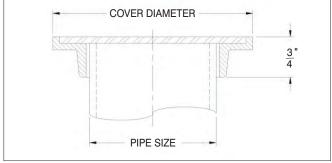

C1310 FLOOR ACCESS COVER					
MODEL Number	WT. Lbs	DESCRIPTION	PIPE SIZE	NICKEL Bronze (-1)	
C1312	4.00	3 5/8" Diameter scoriated access cover	2"	\$331.00	
C1313	4.00	5 1/8" Diameter scoriated access cover	3"	\$467.00	
C1314	5.00	5 7/8" Diameter scoriated access cover	4"	\$526.00	
C1316	8.00	8" Diameter scoriated access cover	6"	\$773.00	


NOTE: If a cleanout is required, use MIFAB C1230


Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1300-MF HEAVY DUTY CLEANOUT ACCESS HOUSING WITH ANCHOR FLANGE

C1300-MF

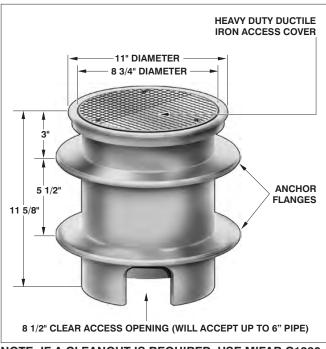

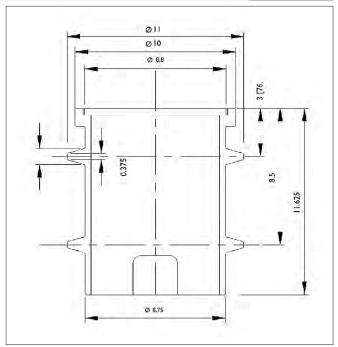


NOTE: IF A CLEANOUT IS REQUIRED, USE MIFAB C1230 (See page 164)


C1300-MF HEAVY DUTY CLEANOUT ACCESS HOUSING WITH ANCHOR FLANGE				
MODEL Number	WT. Lbs	DESCRIPTION	DUCTILE IRON (-4)	STAINLESS STEEL (VENEER) (-3)
C1300-MF	40.00	Heavy duty cleanout access housing	\$742.00	\$1317.00

C1300-MF OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE		
-6	Security screws (TR30 Torx and pin)	\$ 32.00		
-11	Acid resistant epoxy coating	\$347.00		
-13	All galvanized	\$347.00		

C1400 NICKEL BRONZE SMOOTH WALL ACCESS COVER

C1400

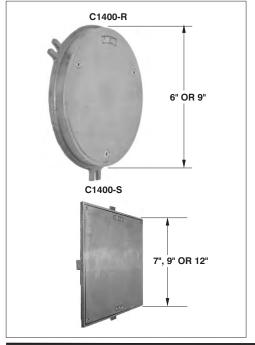

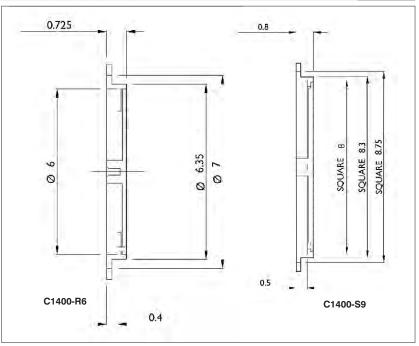

C1400 NICKEL	C1400 NICKEL BRONZE SMOOTH WALL ACCESS COVER				
MODEL NUMBER	WT. Lbs	COVER Size	LIST PRICE		
C1400-R6-1	9.00	6" Round	\$313.00		
C1400-R9-1	10.00	9" Round	\$313.00		
C1400-S7-1	11.00	7" x 7"	\$270.00		
C1400-S9-1	12.00	9" x 9"	\$355.00		
C1400-S12-1	16.00	12" x 12"	\$414.00		


C1400 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRIC		
		\$542.00		
-6	Security screws (TR25 Torx and pin)(H-1039A)	\$ 32.00		


Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1400-RD STAINLESS STEEL ROUND SMOOTH ACCESS COVER WITH SCREW

C1400-RD

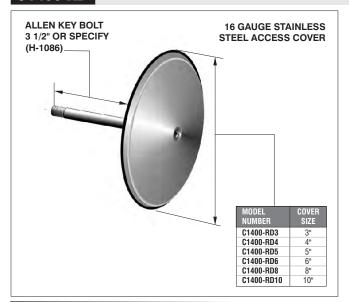

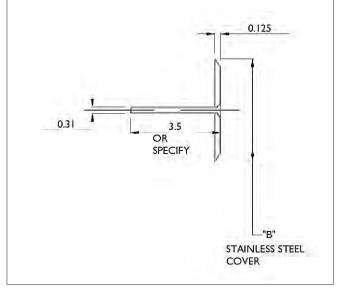


C1400-RD STA	C1400-RD STAINLESS STEEL ROUND SMOOTH ACCESS COVER W/SCREW			
MODEL NUMBER	WT. Lbs	COVER DIAMETER	LIST Price	
C1400-RD3	0.50	3"	\$ 62.00	
C1400-RD4	0.50	4"	\$ 62.00	
C1400-RD5	0.50	5"	\$ 62.00	
C1400-RD6	0.50	6"	\$ 87.00	
C1400-RD8	0.50	8"	\$175.00	
C1400-RD10	1.00	10"	\$259.00	


C1400-I	C1400-RD OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE		
-6	Security screw (H-1086A)	\$56.00		
-87	Screw longer than 3 1/2", per inch	\$11.00		

C1430

C1430 BRONZE CLEANOUT PLUG ONLY C1430-RD ROUND STAINLESS STEEL SMOOTH ACCESS COVER WITH BRONZE CLEANOUT PLUG & SCREW

C1430

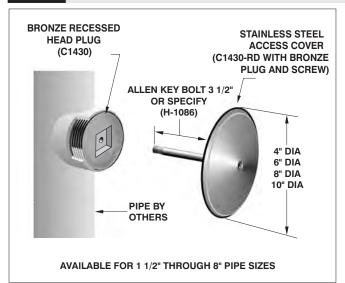

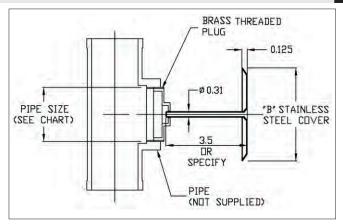

C1430-RD OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE		
-6	Security screw (H-1086A)	\$56.00		
-87	Screw longer than 3 1/2", per inch	\$11.00		

C1430 BRONZE CLEANOUT PLUG ONLY								
C1430-RD ROUND STAINLESS STEEL SMOOTH ACCESS COVER WITH BRONZE CLEANOUT PLUG AND SCREW								
ח עח-טנווט	UUNU STAIN	ILESS STEEL	SWIDDIN ACCESS	COVER WITH BRUI	NZE GLEANUU	I PLUG AND S	UNEW	
MODEL	WT.	PIPE	LIST	MODEL	WT.	PIPE	COVER	LIST
NUMBER	Lbs	SIZE	PRICE	NUMBER	Lbs	SIZE	DIAMETER	PRICE
C1432	0.25	2"	\$ 41.00	C1432-RD4	0.75	2"	Δ"	\$ 95.00
		2		01.102.112.			-	1
C1433	0.50	3"	\$123.00	C1433-RD4	1.25	3"	4"	\$164.00
C1434	0.50	4"	\$123.00	C1434-RD6	1.25	4"	6"	\$190.00
C1435	0.75	5"	\$123.00	C1435-RD6	1.50	5"	6"	\$190.00
C1436	0.85	6"	\$284.00	C1436-RD8	1.75	6"	8"	\$413.00
C1438	1.25	8"	\$284.00	C1438-RD10	2.25	8"	10"	\$497.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1440 EXPANDABLE LINE CLEANOUT


C1440



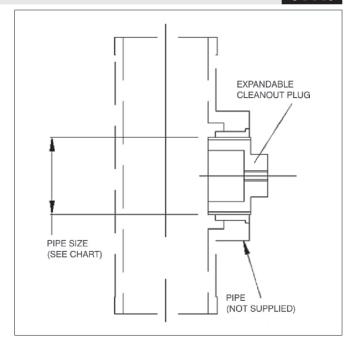

C1440 EXPANDABLE LINE CLEANOUT							
MODEL NUMBER	WT. Lbs	PIPE SIZE	LIST Price				
C1441.5	0.50	1 1/2"	\$65.00				
C1442	0.50	2"	\$65.00				
C1443	0.75	3"	\$65.00				
C1444	1.00	4"	\$65.00				

C1440-R EXPANDABLE LINE CLEANOUT WITH ROUND NICKEL BRONZE WALL ACCESS PANEL

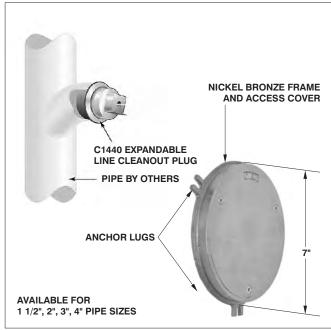

NICKEL BRONZE FRAME AND ACCESS COVER C1440 EXPANDABLE LINE CLEANOUT PLUG
PIPE BY OTHERS
ANCHOR LUGS 7"
AVAILABLE FOR 1 1/2", 2", 3", 4" PIPE SIZES

C1440-R EXPANDABLE LINE CLEANOUT WITH ROUND NICKEL BRONZE WALL ACCESS PANEL						
MODEL NUMBER	WT. Lbs	PIPE SIZE	COVER DIAMETER	LIST PRICE		
C1441.5-R6-1	10.50	1 1/2"	6"	\$377.00		
C1442-R6-1	10.50	2"	6"	\$377.00		
C1443-R6-1	10.75	3"	6"	\$377.00		
C1444-R6-1	11.00	4"	6"	\$377.00		

	/ -	CLEANOUT PL		1
	4	8, 2	QUARE 8.	75 SQUAR
	-		8.3" SQUARE	i -
PIPE SIZE — (SEE CHART)	1			
	\ -		I I	
	V PIPE	THERS)	MICKEL B ACCESS C	OVER


C1440-R OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE					
-3	Stainless steel access cover	\$ 542.00					
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 32.00					
-95	Client logo	\$ 601.00					


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



EXPANDABLE LINE CLEANOUT W/ROUND STAINLESS STEEL SMOOTH ACCESS COVER & SCREW

C1440-RD

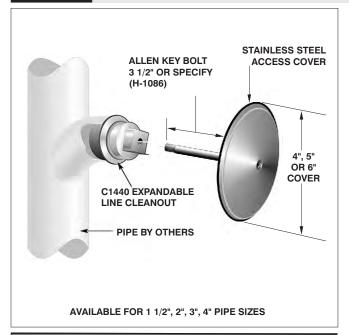


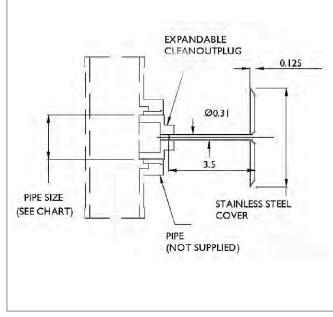

C1440-RD EXPANDABLE LINE CLEANOUT WITH ROUND STAINLESS STEEL SMOOTH ACCESS COVER AND SCREW						
MODEL Number	WT. Lbs	PIPE SIZE	COVER DIAMETER	LIST PRICE		
C1441.5-RD4	1.50	1 1/2"	4"	\$ 87.00		
C1442-RD4	1.50	2"	4"	\$ 87.00		
C1443-RD5	1.75	3"	5"	\$126.00		
C1444-RD6	2.00	4"	6"	\$152.00		


C1440-RD OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE				
-6	Security screw (H-1086A)	\$ 56.00				
-87	Longer screw over 3 1/2", per inch	\$ 11.00				
-95	Client logo	\$601.00				

EXPANDABLE LINE CLEANOUT WITH SQUARE NICKEL BRONZE WALL ACCESS PANEL

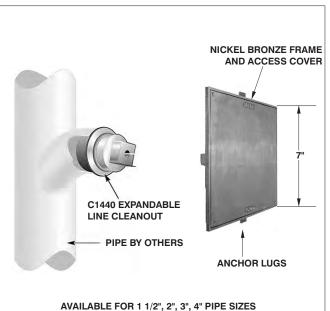

	AND ACCESS COVER
C1440 EXPANDABLE LINE CLEANOUT PIPE BY OTHERS	ANCHOR LUGS
AVAILABLE FOR 1 1/2", 2", 3",	4" PIPE SIZES

C1440-S EXPANDABLE LINE CLEANOUT WITH SQUARE NICKEL BRONZE WALL ACCESS PANEL						
MODEL NUMBER	WT. Lbs	PIPE SIZE	COVER SIZE	LIST PRICE		
C1441.5-S7-1	12.50	1 1/2"	7" x 7"	\$334.00		
C1442-S7-1	12.50	2"	7" x 7"	\$334.00		
C1443-S7-1	12.75	3"	7" x 7"	\$334.00		
C1444-S7-1	13.00	4"	7" x 7"	\$334.00		

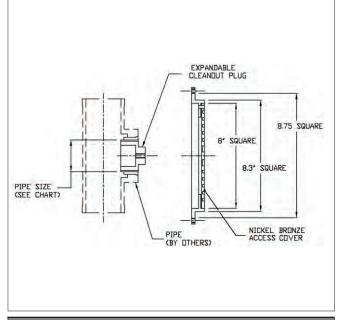



C1440-S OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE					
-3	Stainless steel access cover	\$ 601.00					
-6	Security screws (TR25 Torx and Pin) (H-1039A)	\$ 32.00					
-95	Client logo	\$ 601.00					

Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1450 LINE CLEANOUT C1450

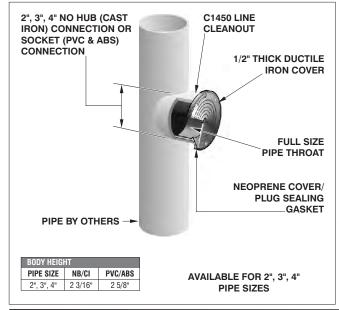

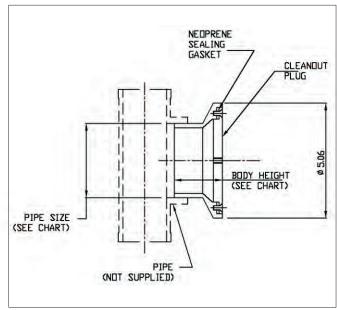

C1450 LINE CLEANOUT							
MODEL	WT.	DESCRIPTION	LIST	ADD FOR NICKEL			
NUMBER	Lbs		PRICE	BRONZE COVER (-1)			
C1452,3-1	4.75	2",3" NB body with NB cover	\$139.00	-			
C1454-1	5.25	4" NB body with NB cover	\$139.00	-			
C1452-4	4.25	2" C.I. body w/ductile iron cover	\$ 84.00	-			
C1453-4	4.75	3" C.I. body w/ductile iron cover	\$ 84.00	-			
C1454-4	5.25	4" C.I. body w/ductile iron cover	\$ 84.00	-			
C1452,3-30	3.25	2",3" PVC body w/ductile iron cover	\$ 84.00	\$ 59.00			
C1454-30	3.50	4" PVC body w/ductile iron cover	\$ 84.00	\$ 59.00			
C1452,3-31	3.25	2",3" ABS body w/ductile iron cover	\$ 84.00	\$ 59.00			
C1454-31	3.50	4" ABS body w/ductile iron cover	\$ 84.00	\$ 59.00			

C14	C1450 OPTIONAL VARIATIONS:		
SUFFIX	DESCRIPTION	LIST PRICE	
-6	Security screws (TR25 Torx and Pin)(H-1039A)	\$ 32.00	
-95	Client logo	\$601.00	


CLEANOUT

C1450-R LINE CLEANOUT WITH ROUND NICKEL BRONZE WALL ACCESS PANEL

C1450-R

COVER DIAMETER (SEE CHART)

> NICKEL BRONZE ACCESS COVER

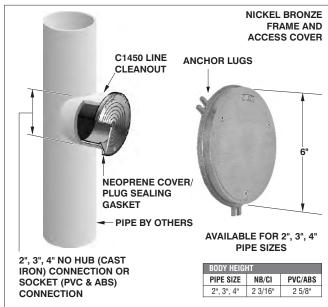

PIPE SIZE		NEOPRENE SEALING GASKET
	PIPE SIZE (SEE CHART)	

C1450-R LINE CLEANOUT WITH ROUND NICKEL BRONZE WALL ACCESS PANEL					
MODEL	WT.	PIPE	COVER	LIST	
NUMBER	Lbs	SIZE	DIAMETER	PRICE	
C1452,3-R6-1	10.75	2", 3"	6"	\$396.00	
C1454-R6-1	11.25	4"	6"	\$396.00	


Design and dimensions are sub	iect to modification. Prices	do not include applicable taxes.


G145U-F	C145U-K UPTIUNAL VAKIATIUNS:				
SUFFIX	DESCRIPTION	LIST PRICE			
-3	Stainless steel access cover	\$542.00			
-6	Security screws (TR25 Torx and Pin) (H-1039A)	\$ 32.00			
-30	PVC socket connection	No Add			
-31	ABS socket connection	No Add			



C1450-RD LINE CLEANOUT WITH ROUND STAINLESS STEEL SMOOTH ACCESS COVER

C1450-RD

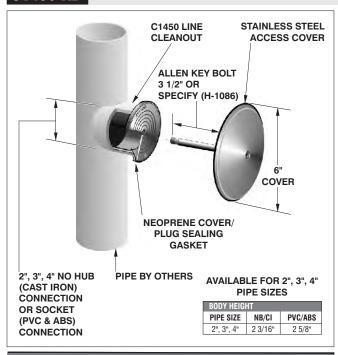

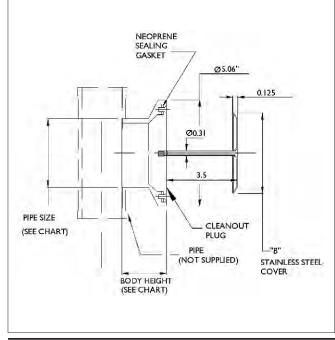


C1450-RD LINE CLEANOUT WITH ROUND STAINLESS STEEL SMOOTH ACCESS COVER				
MODEL NUMBER	WT. Lbs	PIPE SIZE	COVER DIAMETER	LIST PRICE
C1452-RD6	5.75	2"	6"	\$102.00
C1453-RD6	6.00	3"	6"	\$102.00
C1454-RD6	6.25	4"	6"	\$184.00

C1450-F	C1450-RD OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE			
-6	Security screw (H-1086A)	\$ 32.00			
-30	PVC socket connection	No Add			
-31	ABS socket connection	No Add			
-87	Longer screw over 3 1/2", per inch	\$ 25.00			
-95	Client logo	\$ 601.00			


C1450-S LINE CLEANOUT WITH SQUARE NICKEL BRONZE ACCESS COVER

C1450-S

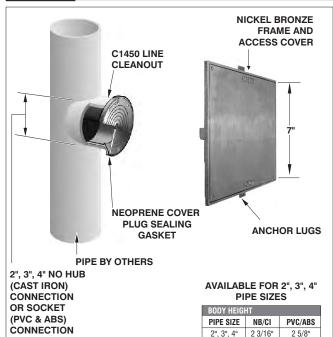

C1450-S LINE CLEANOUT WITH SQUARE NICKEL BRONZE ACCESS COVER				
MODEL NUMBER	WT. Lbs	PIPE SIZE	COVER SIZE	LIST PRICE
C1452,3-S7-1	10.75	2", 3"	7" x 7"	\$375.00
C1454-S7-1	11.25	4"	7" x 7"	\$461.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.

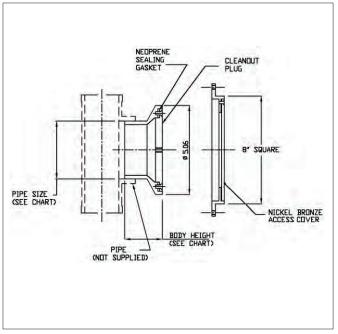


C1450-S	C1450-S OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE			
-3	Stainless steel access cover	\$ 601.00			
-6	Security screws (TR25 Torx and pin) (H-1039A)	\$ 32.00			
-30	PVC socket connection	No Add			
-31	ABS socket connection	No Add			
-95	Client logo	\$ 601.00			



C1460 CAST IRON STACK CLEANOUT WITH PLUG

C1460

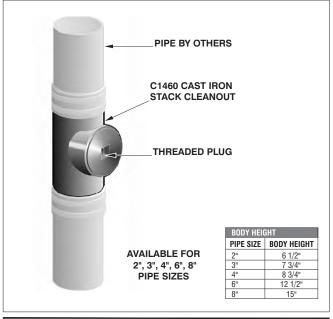


	CAST IRON STACK CLEANOUT BODY
	BRASS THREADED PLUG
11	
BODY HEIGHT (SEE CHART)	
1	
	PIPE SIZE (SEE CHART)

C1460 CAST IRON STACK CLEANOUT WITH PLUG					
MODEL NUMBER	WT. Lbs	PIPE SIZE	LIST PRICE		
C1462	3.50	2"	\$ 218.00		
C1463	5.50	3"	\$ 260.00		
C1464	7.50	4"	\$ 394.00		
C1466	21.50	6"	\$1083.00		
C1468	25.00	8"	\$1370.00		

C1460 OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE	
-6	Security screws (TR25 Torx and Pin) (H-1039A)	\$ 210.00	

C1460-R CAST IRON STACK CLEANOUT W/PLUG & ROUND NICKEL BRONZE ACCESS COVER

C1460-R

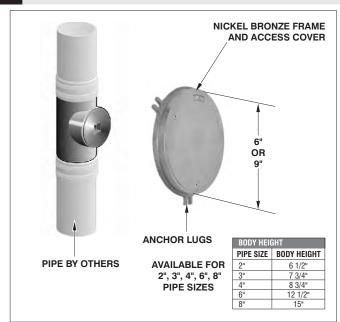

C1460-R CAST PLUG AND ROU				?
MODEL Number	WT. Lbs	PIPE SIZE	COVER Diameter	LIST PRICE
C1462-R6-1	9.00	2"	6"	\$ 311.00
C1463-R6-1	11.00	3"	6"	\$ 311.00
C1464-R6-1	13.00	4"	6"	\$ 311.00
C1466-R9-1	27.00	6"	9"	\$ 901.00
C1468-R9-1	31.00	8"	9"	\$1211.00

	CAS CLE	ST IRON STACK ANOUT BODY
	/ /	BRASS THREADED PLUG
BODY HEIGHT (SEE CHART)		COVER SIZE (SEE CHART)
	pos size	
	PIPE SIZE (SEE CHART)	NICKEL BRONZE ACCESS COVER


C1460-R	OPTIONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PRICE
-3	Stainless steel access cover	\$ 542.00
-6	Security screws (TR25 Torx and Pin) (H-1039A)	\$ 32.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1460-RD CAST IRON STACK CLEANOUT W/PLUG & ROUND STAINLESS STEEL SMOOTH ACCESS COVER & SCREW

C1460-RD

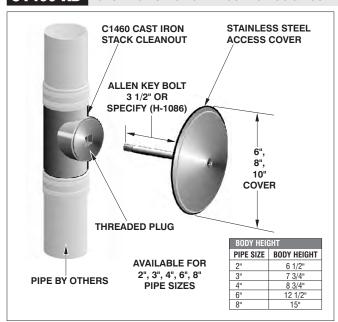

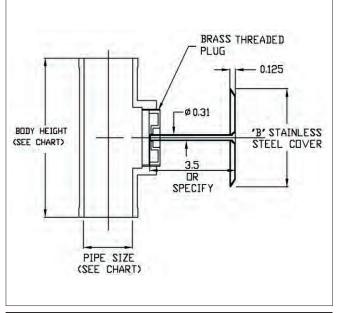


C1460-RD CA					G
MODEL NUMBER	WT. Lbs	PIPE SIZE	BODY HEIGHT	COVER DIAMETER	LIST PRICE
C1462-RD5	4.00	2"	6 1/2"	5"	\$ 280.00
C1463-RD5	6.00	3"	7 3/4"	5"	\$ 323.00
C1464-RD6	8.00	4"	8 3/4"	6"	\$ 482.00
C1466-RD8	22.00	6"	12 1/2"	8"	\$1259.00
C1468-RD10	26.00	8"	15"	10"	\$1546.00

C1460-F	D OPTIONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PRICE
-6	Security screw (H-1086A)	\$ 56.00
-87	Longer screw over 3 1/2", per inch	\$ 11.00

C1460-S CAST IRON STACK CLEANOUT W/PLUG & SQUARE NICKEL BRONZE ACCESS COVER

C1460-S

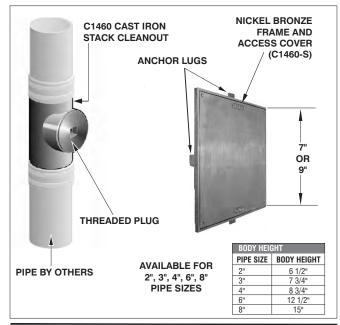

		BRASS THREADED PLUG
BODY HEIGHT (SEE CHART) —		COVER SIZE (SEE CHART)
1301-	PIPE SIZE (SEE CHART)	NICKEL BRONZE ACCESS COVER

C1460-S CAST PLUG AND SQU				:R
MODEL NUMBER	WT. Lbs	PIPE SIZE	COVER SIZE	LIST PRICE
C1462-S7-1	9.00	2"	7" x 7"	\$ 511.00
C1463-S7-1	11.00	3"	7" x 7"	\$ 555.00
C1464-S7-1	13.00	4"	7" x 7"	\$ 788.00
C1466-S9-1	27.00	6"	9" x 9"	\$1574.00

C1460-S	OPTIONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PRICE
-3	Stainless steel access cover	\$ 601.00
-6	Security screws (TR25 Torx and Pin)	\$ 32.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.



C1470 CAST IRON STACK CLEANOUT





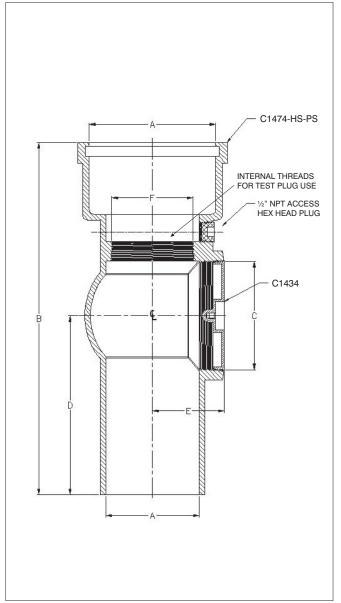

Function: The C1470 Series is used in concealed drainage lines where access to the piping is required via a cleanout that permits testing of the piping above the plug through the use of internal threads inside of the tee.

C1470 CAS	T IRON ST <i>i</i>	ACK CLE	ANOUT WIT	TH TEST PL	.UG	
MODEL	"A"		"C"		"E"	LIST
NUMBER	PIPE SIZE	"B"	PLUG SIZE	"D"	SIZE	PRICE
C1474	4"	14 3/4"	4"	7 1/2"	3"	\$441.00
C1476	6"	17"	6"	8 1/2"	5"	\$882.00


C1470 (OPTIONAL VARIATIONS:	
SUFFIX	DESCRIPTION	LIST PRICE
-13	All galvanized	\$ 441.00
-34B	Brass test plug	\$ 103.00
-NH	No Hub inlet connection	No Add
Х	Inside caulk inlet connection (with no hub outlet connection)	No Add

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.


C1500



C1500 DECK CLEANOUT

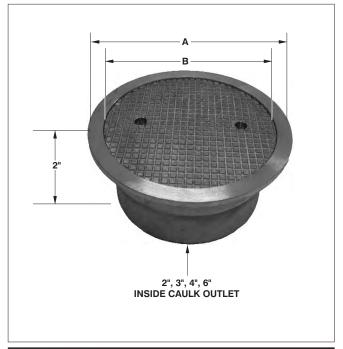

C1500 DEC	K CLEA	NOUT	
MODEL Number	WT. Lbs	DESCRIPTION	NICKEL Bronze (-1)
C1502X	3.00	2" round deck cleanout	\$339.00
C1503X	4.00	3" round deck cleanout	\$473.00
C1504X	6.00	4" round deck cleanout	\$526.00
C1506X	12.00	6" round deck cleanout	\$868.00

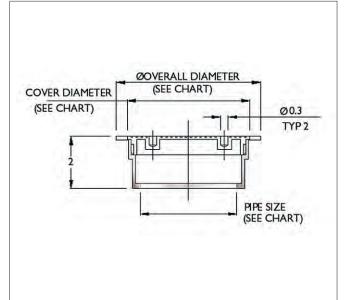


H-1042 "T"
WRENCH
TOOL

OVERALL & COVER DIAMETER			
PIPE SIZE	OVERALL (A)	COVER (B)	
2" I.C.	4 3/4"	2 3/4"	
3" I.C.	6"	3 1/2"	
4" I.C.	7 3/8"	4 1/2"	
6" I.C.	9 3/8"	7 7/8"	

C1500 OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE	
H-1042	"T" wrench tool	\$ 87.00	

C1600 DEEP SEAL TRAP WITH FLOOR CLEANOUT



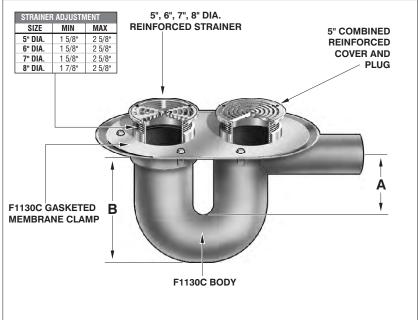

C1600 DEEP SEAL TRAP WITH FLOOR CLEANOUT				
MODEL	WT.	DESCRIPTION	DUCTILE IRON	NICKEL BRONZE (-1)
NUMBER	Lbs		COVER (-4)	STAINLESS STEEL (COVER) (-3)
C1602	43.00	Deep seal trap and cleanout	\$695.00	\$1111.00
C1603	45.00	Deep seal trap and cleanout	\$834.00	\$1528.00
C1603 C1604	45.00 47.00	Deep seal trap and cleanout Deep seal trap and cleanout	\$834.00 \$972.00	\$1528.00 \$1806.00



ANSI/ASME RATING SEE F1100 CHART ON PG. 33 FOR RATINGS

MODEL	PIPE		
NUMBER	SIZE	Α	В
C1602	2" no hub	5 3/8"	13 1/2"
C1603	3" no hub	6"	13 1/2"
C1604	4" no hub	6 1/4"	13 1/2"

C1600 OPTIONAL VARIATIONS:		
SUFFIX	DESCRIPTION	LIST PRICE
-13	All galvanized	\$579.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



ACCESS DOORS



See Access Door Price Book AD-2012-CAD for List Prices and discount structure of the Access Doors. All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover. Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.





INTERCEPTORS

REMOVABLE INTERNAL COMPONENTS

MIFAB's single baffle system is removable. Others offer fixed baffles and internal parts that once corroded, compromise the entire interceptor. All of MIFAB's internal parts are removable. This allows for easier maintenance because nothing is fixed and all parts can be removed for maximum access to the inside for cleaning.

POWDER EPOXY COATING

MIFAB's interceptors are manufactured with a powder coated, electrostatically applied cathodic epoxy coating as a standard feature for no additional charge. This ensures maximum wearing and resistance to corrosive cleaning agents.

FEET ON BOTTOM

MIFAB's MI-G and MI-G-L grease interceptors have 1/2" feet on the bottom to elevate the interceptor from the wet ground to prevent corrosion.

SINGLE BOLT


MIFAB's smaller interceptors (up to 25 GPM) have a single 5/8" diameter bolt to secure the lid to the body. Larger interceptors have four large bolts. Others offer screws/wing nuts that become stripped, rusted out, filled with grease/dirt and/or lost. They are also time consuming to remove. MIFAB's lids are easy to remove with the single bolt design, allowing for regular cleaning of the interceptor.

LID

All of MIFAB's interceptors are manufactured with a powder coated, electrostatically applied cathodic epoxy coating as a standard feature. They all have a non-skid tread plate pattern for maximum safety and are recessed into the frame to provide either in ground or above ground installation with the same interceptor.

SEWER GAS STOPPER

MIFAB's grease interceptors are manufactured with a "sewer gas stopper" that is sealed on the top and both sides and extends into the static water level to eliminate the possibility of sewer gas entering the grease trap and kitchen area.



(MI-G ILLUSTRATED)

DEEP SEAL TRAP

MIFAB's deep seal trap is covered by the lid. This permits easier roughing-in for the contractor since the interceptor is a perfect rectangle instead of a seven sided shape that requires extra work and time to install. It is also easier to clean out the deep seal trap with a MIFAB interceptor because one only needs to remove the lid and access is available to the body and the deep seal trap at the same time.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



INTRODUCTION

Grease Interceptors

Grease, which also includes fats and oils, has historically caused problems in plumbing drainage systems. Grease easily adheres to the inner surface of most commonly used drainage piping material and over time will form into a hard crust as tough as baked clay. The rougher the inner surface of the pipe, the easier this adherence will occur. Grease is also a problem for sewage treatment plants as it taxes the bacterial process used to break down these complex compounds. The purpose of a grease interceptor is to trap and store the suspended grease from the water passing through it. They are usually connected to kitchen sinks, floor drains, and any other plumbing fixtures in restaurants, hotels and institutions that discharge grease laden waste water. MIFAB's grease interceptors operate on the principle of separation by flotation. As our environmental laws have become more restrictive and maintenance costs have increased, public sewer departments have responded by tightening the list of materials allowed to flow into their systems. Severe fines may be levied on those users found to be in violation. Grease that is removed from the drainage system as close as possible to its source and before it becomes contaminated with other material, can be sold to rendering companies and recycled into a variety of products. It can therefore become an economic asset rather than liability.

Sizino

Reliable performance of any grease interceptor is dependant on its being correctly sized to handle the anticipated drainage load from the fixtures it serves. Each MIFAB interceptor is flow and capacity rated for easy selection when sizing requirements have been established and met. Sizing is based on fixture drainage period, service required and volume of wastewater to be handled. These factors combine to establish the anticipated flow rate and the size of the interceptor required. The flow control fitting that is provided with every MIFAB grease interceptor sized 50 GPM and smaller, is installed in the fixture drain line ahead of the interceptor and controls the flow of drainage to the interceptor's rated capacity. This is especially important when the drainage load exceeds that for which the interceptor is sized to handle. The following sizing formula is based on the P.D.I. G-101 (Plumbing and Drainage Institute) requirements:

- 1. Calculate the volume in cubic inches of all the fixtures to be served by the Grease Interceptor. (length x width x depth = capacity)

 2. * Eg: 15" x 10" x 24" = 3600 cubic inches. Since a three compartment sink is serving the grease interceptor, multiply the single compartment cubic inch capacity by three to obtain the total capacity in cubic inches. (10,800 in2). Divide this number by 231 to
- compartment cubic inch capacity by three to obtain the total capacity in cubic inches. (10,800 in2). Divide this number by 231 to convert the volume to US gallons. * Eg: Cubic capacity of 10,800 in2÷231=46.75 gallons; multiplied by 75% = 35.06 U.S.G. Use MIFAB® model number MI-G-6 which has a rated flow capacity of 35 G.P.M.
- 3. These capacities are based on a one minute drain-down time with the interceptor adjacent to the fixture(s). If a two minute drain-down time is acceptable, then divide the capacity by two.
- **4.** The flow control fitting, supplied with the interceptor, must be in position at all times. If this is removed, or not provided, the interceptor will not function to P.D.I. standards.
- 5. If an interceptor is to be installed with the top level at the finished floor, an extension type may be required. In that instance, the "C" dimension is required, (center line of inlet/outlet to top of the finished floor) and must be specified at time of ordering.

Fixture Unit Sizing Method

The majority of plumbing codes list the drainage fixture-unit values for plumbing fixtures. For fixtures not listed, the codes provide drainage fixture-unit values based on drain outlet or trap size. Drainage fixture-unit values are converted to GPM discharge rates on the basis of one drainage fixture-unit equaling 7.5 GPM fixture discharge rate. The drainage fixture-unit sizing for grease interceptors is included for those that prefer this approach as an alternative to the conventional (volume) sizing. The following table provides the suggested PDI size grease interceptor based on drainage fixture-unit sizing method.

Fixture Outlet or Size (inches)	Drainage Trap Fixture-unit Value	GPM Discharge Equivalent	Suggested GPM Flow Rate Interceptor	MIFAB Model Number	
1-1/4"	1	7.5	10	MI-G-2	
1-1/2"	2	15.0	15	MI-G-3	
2"	3	22.0	25	MI-G-5	
2-1/2"	4	30.0	35	MI-G-6	
3"	5	37.5	50	MI-G-7	
4"	6	45.0	50	MI-G-7	

The following factors may require an increase in the size of the grease interceptor: location, presence of detergents in the waste water, ratio of grease to water, specific gravity weight of the grease filtrates, speed of incoming water flow, presence of large particles mixed with the grease laden water, and percentage of maximum flow capacity. The interceptor should be installed as close as possible to the source of grease to prevent pipes draining into the grease interceptor from becoming clogged as grease-laden water cools before entering the grease interceptor.

MAINTENANCE & GENERAL CONSIDERATIONS

To obtain optimum operating efficiency of a properly sized and installed PDI certified grease interceptor, a regular schedule of maintenance must be adhered to. All PDI certified grease interceptors are furnished with manufacturer's operating and maintenance instructions, which must be followed to insure efficient satisfactory operation.

CLEANING

All grease interceptors must be cleaned regularly. The frequency of grease removal is dependent upon the capacity of the interceptor and the quantity of grease in the waste water. Grease removal intervals may therefore vary from once a week to once in several weeks. When the grease removal interval has been determined for a specific installation, regular cleaning at that interval is necessary to maintain the rated efficiency of the interceptor. After the accumulated grease and waste material has been removed, the interceptor should be thoroughly checked to make certain that inlet, outlet and air relief ports are clear of obstructions.

DISPOSITION OF INTERCEPTED MATERIALS

Grease and other waste matter that has been removed from the interceptor should not be introduced into any drain, sewer, or natural body of water. This waste matter should be placed in proper containers for disposal. Where recovery of grease is desired, it can be handled in a manner suitable to the authorities.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.



MIFAB INTERCEPTOR SELECTION GUIDE

There are three main types of interceptors: grease, oil and solids. Each of them requires different considerations for sizing, operation and maintenance. The information provided will help the specifier select the correct interceptor for the application. A detailed explanation of the major components and features of each type of interceptor is also provided.

Grease Interceptors

Grease, which also includes fats and oils, has historically caused problems in plumbing drainage systems. Grease easily adheres to the inner surface of most commonly used drainage piping material and over time will form into a hard crust as tough as baked clay. The rougher the inner surface of the pipe, the easier this adherence will occur. Grease is also a problem for sewage treatment plants as it taxes the bacterial process used to break down these complex compounds.

The purpose of a grease interceptor is to trap and store the suspended grease from the water passing through it. They are usually connected to kitchen sinks, floor drains, and any other plumbing fixtures in restaurants, hotels and institutions that discharge grease laden waste water. MIFAB's grease interceptors operate on the principle of separation by flotation.

As our environmental laws have become more restrictive and maintenance costs have increased, public sewer departments have responded by tightening the list of materials allowed to flow into their systems. Severe fines may be levied on those users found to be in violation. Grease that is removed from the drainage system as close as possible to its source and before it becomes contaminated with other material, can be sold to rendering companies and recycled into a variety of products. It can therefore become an economic asset rather than liability.

The specifying engineer should consider the following when specifying grease interceptors: construction / operation, flow control fitting, extensions, cover shrouds and draw-off valves, sizing, installation and maintenance.

Construction / Operation

All of MIFAB's grease, oil and solids interceptors are manufactured with 10 gauge hot rolled steel that is welded together and coated with an electro-statically applied baked epoxy finish. The cover sealing gasket is manufactured with low durometer closed-cell neoprene with self-adhesive backing. The gasket is custom fitted to the interceptor body top rim ledge where it is an integral part of the body. Because of the gasket's thickness and density, it provides an ideal sealing environment for the lid. All of MIFAB's interceptors are supplied with the same gasket. All grease interceptors are supplied with a baffle system engineered to improve the grease/oil separation process. The baffle system is strategically located to direct inflow for maximum efficiency of the interceptor. Flow entering the interceptor is directed to the bottom by the baffle to avoid any disturbance of the previously accumulated surface layer of grease / oil in the device. The baffle also serves to reduce the velocity and surge of inflow, providing sufficient retention time for effective separation of the grease. The grease rises to the surface for manual or draw-off removal and the baffle is easy to remove for cleaning. The waste water is now relieved of over 90% of the fats, oils and greases and continues to flow through the interceptor into the drainage system. Many MIFAB grease interceptors bear the PDI (Plumbing and Drainage Institute) seal. This seal on MIFAB's grease interceptors proves that the designs and ratings marked on the interceptor have met or surpassed all standards established by PDI. All of MIFAB's PDI approved grease interceptors are supplied with external, vented flow control fittings to ensure maximum performance. A detailed description of flow control fittings is on page 122(c).

Design and dimensions are subject to modification. Prices do not include applicable taxes.




MIFAB FLOW CONTROL FITTING GUIDE

FLOW CONTROL FITTING APPLICATION: Flow control fittings are furnished at no extra cost with all MIFAB® MI-G, MI-G-L, MI-G-SD MI-G-SDH and MI-G-L-SDH grease interceptors. They are essential to achieve maximum efficiency.

FLOW CONTROL FITTING DESCRIPTION: Flow control fittings insure 90% or more grease retention efficiency of the interceptor. When consideration isn't given to the flow rate of the waste water to be handled, the actual flow rate through the interceptor usually exceeds its rated maximum. With such flow rate, the interceptor would be overloaded. Retention time within the unit would not be sufficient for maximum separation. The result would be low efficiency, and pollutants left in the waste water would pass through the interceptor, making the installation less than effective. When the flow is controlled by use of a MIFAB® flow control fitting so that it can never exceed the maximum rating of the interceptor, and the interceptor is cleaned on a regular basis, the maximum pollutant retention efficiency will be achieved and maintained.

All flow control fittings are built with an air intake and should be connected to the vent stack or vent not lower than the flow level of the highest drain serviced or terminated in a return bend at the same elevation outside of the building. A vented flow control fitting improves the efficiency of the grease interceptor by introducing air into the body of the interceptor. As the air bubbles rise to the surface, they are coated with grease. This process brings grease to the surface faster, and, as a result, increases the efficiency.

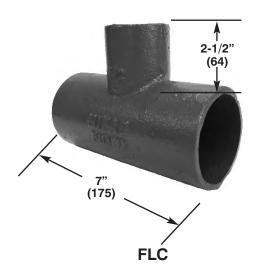



(DIMENSION) DENOTES MILLIMETRES

MODEL NO.	FOR USE WITH MIFAB® INTERCEPTOR	NO HUB PIPE CONNECTION SIZE	ORFICE SIZE	VENT CONNECTION SIZE
FLC-0	MI-G-0	2"(50)	.375" (9)	2"(50)
FLC-1	MI-G-1	2"(50)	.500" (13)	2"(50)
FLC-2	MI-G-2	2" (50)	.656" (16)	2"(50)
FLC-3	MI-G-3	2" (50)	.750" (19)	2"(50)
FLC-4	MI-G-4	3"(75)	1.000" (25)	2"(50)
FLC-5	MI-G-5	3" (75)	1.250" (31)	2"(50)
FLC-6	MI-G-6	3" (75)	1.250" (31)	2"(50)
FLC-7	MI-G-7	3" (75)	2.000" (50)	2"(50)

MODEL NO.	FOR USE WITH MIFAB® INTERCEPTOR	I.PS PIPE CONNECTION SIZE	ORFICE SIZE	VENT CONNECTION SIZE
FLC-T-0	MI-G-0	2"(50)	.375" (9)	2"(50)
FLC-T-1	MI-G-1	2"(50)	.500" (13)	2"(50)
FLC-T-2	MI-G-2	2" (50)	.656" (16)	2"(50)
FLC-T-3	MI-G-3	2" (50)	.750" (19)	2"(50)
FLC-T-4	MI-G-4	3" (75)	1.000" (25)	2"(50)
FLC-T-5	MI-G-5	3" (75)	1.250" (31)	2"(50)
FLC-T-6	MI-G-6	3" (75)	1.250" (31)	2"(50)
FLC-T-7	MI-G-7	3" (75)	2.000" (50)	2"(50)




MIFAB INTERCEPTOR SELECTION GUIDE (Cont'd)

Extensions

Extensions should be specified on grease and oil interceptors when the interceptor is buried into the ground. vertical adjustment of the interceptor is necessary to meet the drainage piping, and/or floor level access is required. Extension heights range from four inches to any maximum practical for serviceability. Extensions in excess of 20" are not recommended. One must consider the slope of the drainage piping from the fixtures to the inlet of the interceptor. Typically, one should allow a slope of /" per foot in the drainage pipe. Therefore, there will be many installations, especially with large interceptors, where the sloped drainage pipe ends up below the inlet connection. An extension is added to the top of the interceptor so that the inlet can be lowered to meet the incoming drainage pipe and the lid of the interceptor can be extended to floor level. MIFAB offers three different kinds of extensions: integral, bolt on and cover shrouds. An integral extension is specified by expanding the "C" dimension on the interceptor. The "C" dimension is from the middle of the inlet and outlet to the top of the interceptor. One would specify a "C" dimension to meet the job requirements and the interceptor will be manufactured to that specification. The extension is incorporated into the production of the interceptor to produce a seamless, integral interceptor. A second method of providing an extension is a bolt on design. In this example, a top is manufactured out of the same material as the body. The extension is secured to the body by means of "C lock" devices bearing against its base flange, compressing the sealing gasket to complete the union. The regular lid is bolted to the extension top in the same manner as it would be to the body of a standard interceptor.

Cover Shrouds

In installations where the exact extension dimension required is unknown or where little notice has been provided to the installer advising of the need for an extension; integral and bolt on extensions are impractical due to the time necessary for their fabrication. MIFAB's nationwide network of manufacturer's representatives stock cover shrouds for immediate shipment to jobsites when these situations occur. The cover shroud is adjustable and is recessed into the slab to house the interceptor. Cover shrouds incorporate either standard or draw-off grease interceptors mounted on adjustable elevation cradles in either open or closed bottom housings with non-skid floor level lids. Cover shrouds are particularly important where below floor level installation of draw-off grease interceptors is required, because such models cannot be installed independently with tops at the finished floor level. Specify MIFAB MI-CS Series for use with the MI-G Series grease interceptors and MIFAB MI-CSD Series for use with the MI-G-SD and MI-G-SDH semi-automatic draw off grease interceptors.

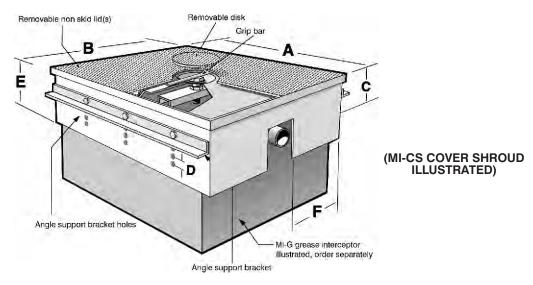


Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB INTERCEPTOR SELECTION GUIDE (Cont'd)

Draw-off valve

All of MIFAB's semi-automatic grease interceptors are manufactured with draw-off valves and are preferred in areas where excessive amounts of grease accumulates because they make the cleaning process easier. The draw-off valve is a gate valve that is connected to the outlet of the interceptor via a pipe nipple. When the accumulated grease is ready to be drawn off, the pipe cap on the top of the interceptor is removed and the draw-off hose is attached with a hose clamp. After warming the interceptor with hot water from the fixture to liquefy the accumulated grease, the draw-off valve is closed to block water escaping through the outlet. Water from the fixture enters at a low flow rate to elevate the liquefied grease into the draw-off pyramid and through the hose to the disposal container. When clear water appears at the hose outlet, the draw-off valve is opened to drop the water level in the interceptor for normal operation. This method of cleaning is more sanitary that the typical manual method. Specify MIFAB Series MI-G-SD, MI-G-SDH and MI-G-L-SDH Series of semi-automatic grease interceptors.

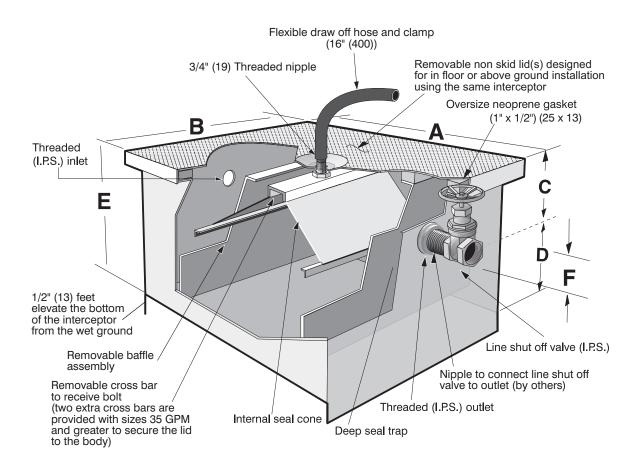

(MI-G-SDH SEMI-AUTOMATIC GREASE INTERCEPTOR ILLUSTRATED)



HLA SERIES HIGH LEVEL ALARM





ALARM CONTROL BOX

The purpose of the High Level Alarm is to monitor and send an audible and visual alarm when the interceptor's grease or oil capacity is approximately 75% full.

High level alarm systems can be installed on any MIFAB grease or oil interceptors to allow the customer to monitor grease and oil levels. This allows the interceptor to be maintained when required.

The -HLA option includes an alarm control box that is weatherproof rated NEMA 4/4X, 6' 120VAC power cord, 360° viewable alarm light, 85db @ 10' solid tone alarm, and a silence and test button that is to be mounted to the nearest structure. It also includes a float switch that is made from 316 stainless steel and is mounted inside the interceptor for oil or grease level detection and is connected to the alarm control box.





LEAK DETECTION

monitored.





ALARM CONTROL BOX

through the first wall of a double wall interceptor.

The Leak Detection system can only be used in a double wall construction. It is typically used in high risk applications where the seal of the interceptor needs to be

The purpose of the Leak Detection system is to monitor any leaks that may occur

The Leak Detection option includes an alarm control box that is weatherproof rated NEMA 4/4X, 6' 120VAC power cord, 360° viewable alarm light, 85db @ 10' solid tone alarm, and a silence and test button that is to be mounted to the nearest structure. It also includes a pressure switch that is made from 316 stainless steel and is mounted inside the interceptor for oil or grease level detection and is connected to the alarm control box.



LEAK DETECTION SWITCH

DS OPTION ENZYME DOSING SYSTEM





The purpose of the Enzyme Dosing system is to release grease and bacteria eating enzymes into the grease interceptor to consume the accumulated grease.

is ideal for grease interceptors that are located in high volume kitchens.

The Enzyme Dosing system can be ordered with any MIFAB grease interceptor. It

The Enzyme Dosing system includes a 120V fully automatic dosing pump with a programmable 24 hour timer and dosage run time. The system also includes 15' of Poly tubing.

DOSING PUMP

DS OPTI	DS OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE								
-1ENZ	Bacterial enzyme liquid (1 gallon bucket)	P.O.A.								
-5ENZ	Bacterial enzyme liquid (5 gallon bucket)	P.O.A.								
-BB	Timer battery backup	P.O.A.								

Design and dimensions are subject to modification. Prices do not include applicable taxes.



Installation Diagrams

Figures A2.5.1 through A2.5.5 are included to illustrate various grease interceptor installations normally encountered in domestic, commercial and institutional systems. These figures will serve as a guide to practical application of grease interceptors.




Fig. A2.5.1 Interceptor Serving Trapped and Vented Sink - Flow Control Air Intake Intersects Vent




Fig. A2.5.2 Interceptor Serving Sink - Flow Control Air Intake Terminates in a Return Bend Above Flood Level




Fig. A2.5.3 Interceptor Serving Dishwasher - Flow Control Air Intake Terminates Above Flood Level




Fig. A2.5.4 Interceptor Serving Two Individually Trapped and Vented Sinks - Flow Control Air Intake Intersects Vent




Fig. A2.5.5 Interceptor Serving Trapped and Vented Sinks - Flow Control Air Intakes Intersect Vent

INSTALLATION CONSIDERATIONS

Install interceptor as close as practical to fixture or fixtures being served, see figures A2.5.1 through A2.5.5. The interceptor may be set on the floor, partially recessed in the floor, with top flush with the floor, or fully recessed below the floor to suit piping and structural conditions.

Anticipate sufficient clearance for removal of interceptor cover for cleaning. Avoid installation wherein long runs of pipe (exceeding 25 feet (7500)) are necessary to reach interceptor. This precaution will preclude the possibility of pipeline becoming clogged with congealed grease that will collect before reaching the grease interceptor.

Do not install grease interceptor in waste line from garbage grinder. Garbage grinder waste must by-pass interceptor, for rapid accumulation of solid matter will greatly reduce grease interceptor efficiency preventing operation in compliance with rated capacity.

FLOW CONTROL

The flow control fitting furnished with PDI certified interceptors must be installed ahead of interceptor in the waste line beyond the last connection from the fixture and as close as possible to the underside of lowest fixture. When waste of two or more sinks or fixtures are combined to be served by one interceptor, a single flow control fitting should be used. Air intake for flow control may terminate under sink drain board as high as possible to prevent overflow or terminate in a return bend at the same height and on outside of building. When fixture is individually trapped and back-vented, air intake mayintersect vent stack. All installation recommendations subject to approval of code authority.

VENTING

Grease interceptors must have a vented waste, sized in accordance with code requirements for venting traps to retain water seal and prevent siphoning.

MULTIPLE FIXTURE INSTALLATION

One interceptor to serve multiple fixtures is recommended only where fixtures are located close together. In such installations, each fixture should be individually trapped and back-vented.

MAINTENANCE

GENERAL CONSIDERATIONS

To obtain optimum operating efficiency of a properly sized and installed PDI certified grease interceptor, aregular schedule of maintenance must be adhered to. All PDI certified grease interceptors are furnished with manufacturer's operating and maintenance instructions, which must be followed to insure efficient satisfactory operation.

CLEANING

All grease interceptors must be cleaned regularly. The frequency of grease removal is dependent upon the capacity of the interceptor and the quantity of grease in the waste water. Grease removal intervals may therefore vary from once a week to once in several weeks. When the grease removal interval has been determined for a specific installation, regular cleaning at that interval is necessary to maintain the rated efficiency of the interceptor. After the accumulated grease and waste material has been removed, the interceptor should be thoroughly checked to make certain that inlet, outlet and air relief ports are clear of obstructions.

DISPOSITION OF INTERCEPTED MATERIALS

Grease and other waste matter that has been removed from the interceptor should not be introduced into any drain, sewer, or natural body of water. This waste matter should be placed in proper containers for disposal. Where recovery of grease is desired, it can be handled in a manner suitable to the authorities.

Visit www.mifab.com for the most recent product information.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB INTERCEPTOR SELECTION GUIDE (Cont'd)

Dishwashers


A separate grease interceptor is recommended for each commercial dishwasher. The size of the interceptor is determined by the GPM discharge rate of the dishwasher as specified by the manufacturer.

Floor Drains

Many local plumbing inspectors require that grease laden wastewater flowing into floor drains must flow through a grease interceptor before draining into the sanitary sewer system. In these instances, the flow control fitting must be installed underground, before the inlet to the interceptor, to moderate the flow from the floor drains and to ensure maximum performance. Consideration should be given to providing access to the flow control fitting in these installations for proper cleaning and maintenance. The MIFAB MI-CSD extended cover shroud is best used in these situations because it is long enough to house the grease interceptor and the flow control fitting beside the inlet. A hole can be cut into the lid of the cover shroud to allow the vent piping to connect to the top of the flow control fitting.

Solids interceptors

The interception and retention of solids cannot be overlooked. Materials such as lint, hair, grindings, ceramic waste, plaster, dental wastes, aquarium and other small gravel, jewels and precious metals are a few solids that should pass through a solids interceptor before entering the waste drain line. Deleterious solids should be intercepted to prevent clogging of the drainage lines and valuable materials require interception for retrieval. MIFAB manufactures a complete line of solids interceptors designed to handle any waterborne solids. Most often these interceptors replace the standard traps of the fixtures they serve. The solids interceptor with a low inlet and high outlet becomes the fixture trap. Solids interceptors are manufactured with easily removable strainers or sediment baskets that serve to retain the intercepted solids while allowing water to flow through. It is good engineering practice to specify a solids interceptor immediately before a grease interceptor so that all debris and solid wastes are caught in the solids interceptor before they enter the grease interceptor. This will ensure that the grease interceptor is not filled as quickly with solid wastes that will only impair its efficiency. In addition, most foul odors from grease interceptors are from rotting solids, not from the grease itself. Proper separation of these solids will reduce the odor problem typically experienced with grease interceptors filled with rotting solids. See MIFAB's MI-SOLID, MI-LINT, MI-HAIR and MI-FISH Series of solids interceptors.

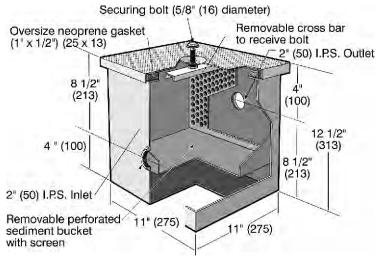

(MI-SOLID-M ILLUSTRATED)



MIFAB OIL INTERCEPTOR SELECTION GUIDE

APPLICATION:

MIFAB® oil interceptors are designed for use in drain lines where oils, sediment and other volatile liquids are found. These drain lines may be from areas in parking garages, machine shops, service stations, aircraft hangars, industrial and manufacturing facilities.

DESIGN:

MIFAB® oil interceptors are designed to protect against water pollution by preventing oils and sediment in waste water from entering drain lines. The design allows intercepted oils to be drawn-off automatically for storage continuously during operation. Sediment should be removed from the interceptor at regular intervals.

SIZING:

- 1. Determine maximum volume of waste water in G.P.M. or L.P.M., by summing volumes of all discharging fixtures that may enter the drain lines at one time.
- 2. Select oil interceptor with flow rating equal to peak volume in G.P.M. or L.P.M. (see table on shop drawing.) Provide storage tank capable of handling the volume.

TYPICAL CODE REGULATIONS

Vehicle servicing. When an oil interceptor is installed in an automobile, truck, bus, or tractor garage or in a service station or repair shop with facilities for motor or transmission overhauling, it must have a minimum static water depth of 24 inches (600) below the invert of the interceptor outlet and a minimum static water capacity of 6 cubic feet.

This regulation applies to facilities where not more than three vehicles are serviced. For each additional vehicle up to and including ten, 1 cubic foot of static capacity shall be added. For each vehicle over ten, an additional 0.25 cubic foot shall be added.

Vehicle storage and servicing. Where motor vehicles are serviced and stored, an oil interceptor shall be installed with a static water capacity of 1 cubic foot for every 100 square feet of area to be drained. The oil interceptor shall have a minimum static water level of 6 cubic feet.

Mechanical car washing . In facilities designed especially for mechanical washing of motor vehicles, a sand and gravel interceptor shall be installed to receive the waste water from all washing facilities. A minimum static water level of 2.5 feet and a minimum static water capacity of 50 cubic feet shall be maintained.

Where motor cleaning services are rendered at mechanical car washing facilities, an oil interceptor shall be installed in that section of the drainage system which receives waste water from this operation.


Vehicle storage. In motor vehicle storage facilities, a combination interceptor-drain shall be installed with a static water level of 1 gallon for every 100 square feet of area to be drained.

Manual car washing. In a one-car washing facility, a combination interceptor-drain shall be installed with a minimum static water capacity of 30 gallons.

OIL DRAW-OFF

Oil draw-off funnel is adjustable to the gravity height of oil and gallon per minute flow. It leads in to oil discharge pipe, from which suitable disposal of oil can be made in the most economical way.

After interceptor is installed, establish operating water level by running water through interceptor at maximum flow rate expected. Adjust vertical draw-off pipe 1/8" (3) to 1/4" (6) above water line. Periodic checking of this level after interceptor is in operation will assure proper functioning of the oil draw-off. If drawn off oil contains any water, raise vertical draw-off pipe until only oil flows from interceptor.

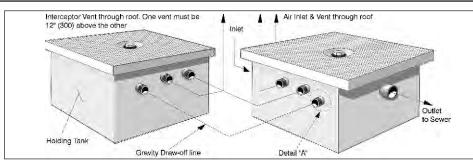

GRAVITY OIL DRAW-OFF

DRAW-OFF CONNECTIONS

Connect to Holding Tank which must be vented

SUPPLIED AS STANDARD PART

OPTIONAL: Manual oil draw-off with hand operated valve.

Detail "A'

Connecting piping by others

Adjustable Sloove

N.B. Operate manual draw off on y when flow has stepped through interceptor.

(Dimension) Denotes Millimetres

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-G and MI-G-L (Low Rough in) Series 4 to 50 US G.P.M PDI Sized GREASE INTERCEPTOR

SECURING BOLT(S) (5/8") REMOVABLE NON SKID LID(S) MJ (NO HUB) (PEDESTRIAN LOAD ONLY) INLÈT **OVERSIZE** NEOPRENE **GASKET** (SEE PAGE 286 FOR REPLACE-**REMOVABLE** MENT **CROSS BAR** GASKET) 1/2" LEGS **REMOVABLE ELEVATE THE** ASSEMBLY **BOTTOM OF THE** INTERCEPTOR

ACID RESISTANT EPOXY

COATED 10 GAUGE STEEL BODY

NOTE: MI-G and MI-G-L Series of grease interceptors are shipped with an external vented flow control fitting packed within interceptor.







FLC (No Hub) Flow Control Fitting (See page 287)

MIFAB is a recognized industry leader in the field of interceptor design and production.

As such, we offer a variety of specialized options and site-specific applications too numerous to list in this price guide. For features such as sacrificial anode packs, all stainless steel construction and a variety of other special features, please see our Engineering Catalog or consult your local MIFAB representative.

MODEL No.	US GPM	CAP. LBS.	LIQUID Holding Cap. (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN	NO. OF LIDS	NO. OF Bolts
MI-G-0	4	8	4.43	16.75	11.25	2.5	8.5	11.0	2	1	1
MI-G-1	7	14	6.00	17.75	13.75	3.5	8.5	12.0	2	1	1
MI-G-2	10	20	9.74	21.25	15.75	3.5	9.5	13.0	2	1	1
MI-G-3	1 5	30	13.59	23.75	15.75	3.5	11.5	15.0	2	1	1
MI-G-4	20	40	16.18	23.75	15.75	3.5	14.0	17.5	3	1	1 1
MI-G-5	25	50	23.34	27.75	18.75	3.5	14.0	17.5	3	1	1 1
MI-G-6	35	70	41.31	31.25	23.75	5.5	16.5	22.0	3	1	2 cross bars
MI-G-7	50	100	46.82	31.25	23.75	5.5	18.5	24.0	3	1	2 cross bars

FROM THE WET

MJ (NO-HUB)

GROUND

OUTLET

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts above to determine the actual body length & width.

								-		
MODEL NO.	US GPM	LIST PRICE	SEDIMENT BUCKET "-SB" (Add)	BOLT ON EXTENSION (PER 6") (Add)	ADDITIONAL "-C" UP TO "6" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR FLANGE "-FL" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" 10,000 Lbs. LIVE LOAD.(Add)	TILE RECESS "-TL" (Add)
MI-G-0	4	\$1,358.00	\$692.00	\$ 823.00	\$ 823.00	\$ 65.00	\$ 679.00	\$ 835.00	\$ 795.00	\$ 835.00
MI-G-1	7	\$1,358.00	\$692.00	\$823.00	\$ 823.00	\$ 65.00	\$ 679.00	\$ 835.00	\$ 795.00	\$ 835.00
MI-G-2	10	\$1,492.00	\$692.00	\$ 686.00	\$ 686.00	\$ 65.00	\$ 679.00	\$ 835.00	\$ 840.00	\$ 882.00
MI-G-3	15	\$1,622.00	\$692.00	\$ 688.00	\$ 688.00	\$ 65.00	\$ 679.00	\$ 835.00	\$ 866.00	\$ 909.00
MI-G-4	20	\$2,045.00	\$692.00	\$ 748.00	\$ 748.00	\$ 85.00	\$ 679.00	\$ 835.00	\$ 945.00	\$ 992.00
MI-G-5	25	\$2,508.00	\$888.00	\$ 769.00	\$ 769.00	\$ 114.00	\$ 679.00	\$ 835.00	\$1,155.00	\$1,213.00
MI-G-6	35	\$2,940.00	\$888.00	\$ 830.00	\$ 830.00	\$ 154.00	\$ 679.00	\$ 835.00	\$1,365.00	\$1,433.00
MI-G-7	50	\$3,193.00	\$888.00	\$842.00	\$ 842.00	\$ 174.00	\$ 679.00	\$ 835.00	\$1,522.00	\$1,598.00

NOTE: Add Suffix "-T" for threaded inlet, outlet & external flow control (No Add). Suffix-DP for dosing pump - Add (\$3,245.00 all Models). Suffix-HLA, high level alarm - Add (\$8,127.00 all Models) Suffix-AL, aluminum lid - (MI-G-0 to MI-G-3, \$936.00), (MI-G-4 to MI-G-7, \$1,310.00)

MI-G-L

AIR RELIEF BY-


DEEP SEAL TRAP

SEWER GAS

STOPPER


PASS

LOW ROUGH-IN SERIES









Effluent Sample Box (SUFFIX - SMPB)



MODEL No.	US GPM	CAP. LBS.	LIQUID Holding Cap. (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN	NO. OF LIDS	NO. OF Bolts
MI-G-L-20	20	40	16.76	34	24	4	7	11	3	1	4
MI-G-L-35	35	70	24.76	42	28	4	7	11	3	2	8
MI-G-L-50	50	100	29.33	46	30	4	7	11	3	2	8


MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	SEDIMENT BUCKET "-SB" (Add)	ANCHOR FLANGE "-FL" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" 10,000 Lbs. LIVE LOAD (Add)
MI-G-L-20	20	\$ 3,104.00	150	\$ 692.00	\$ 679.00	\$ 835.00	\$ 1,654.00
MI-G-L-35	35	\$ 3,503.00	200	\$ 692.00	\$ 679.00	\$ 835.00	\$ 1,764.00
MI-G-L-50	50	\$ 4,552.00	225	\$ 692.00	\$ 679.00	\$ 835.00	\$ 2,426.00

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the same.



XL-MI-G THE PERFORMERS: 75 TO 750 G.P.M. LARGE CAPACITY GREASE INTERCEPTOR



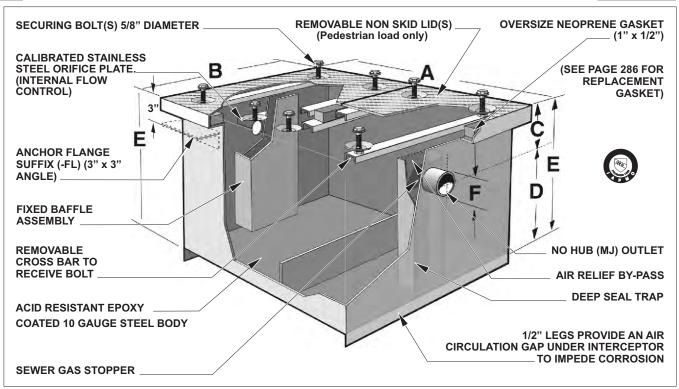

MIFAB is a recognized industry leader in the field of interceptor design and production.

As such, we offer a variety of specialized options and site-specific applications too numerous to list in this price guide. For features such as sacrificial anode packs, all stainless steel construction and a variety of other special features, please see our Engineering Catalog or consult your local MIFAB representative.

MODEL No.	US GPM	CAP. LBS.	LIQUID HOLDING Capacity (U.S.G.)	A IN	B IN	C IN	D In	E IN	F IN	NO. OF Lids	NO. OF Bolts
XL-MI-G-0	75	150	108.05	42	28	6	26	32	4	2	8
XL-MI-G-1	100	200	192.73	55	37	8	26	34	4	2	8
XL-MI-G-2	125	250	226.91	58	38	8	28	36	4	3	12
XL-MI-G-3	150	300	264.61	61	39	8	30	38	4	3	12
XL-MI-G-4	200	400	395.64	70	44	10	34	44	4	6	24
XL-MI-G-5	250	500	501.00	75	46	10	38	48	4	6	24
XL-MI-G-6	300	600	579.87	77	49	12	40	52	4	6	24
XL-MI-G-7	350	700	612.18	80	51	12	40	52	6	6	24
XL-MI-G-8	400	800	805.09	84	56	14	44	58	6	8	32
XL-MI-G-9	500	1000	1172.34	92	61	14	54	68	6	8	32
XL-MI-G-10	600	1200	1807.79	102	74	14	62	76	8	9	36
XL-MI-G-11	750	1500	2580.71	108	76	14	66	80	8	9	36

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts below to determine the actual body length & width.

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C"dimensions are always the same. NOTE: Suffix - DP for dosing pump -Add (\$3,245.00 all Models) Suffix - HLA - for high level alarm - Add (\$8,127.00 all Models) Suffix - AL, aluminum lid(s) - Add (\$3,606 all other Models).


MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	SEDIMENT BUCKET "-SB" (Add)	BOLT ON EXTENSION (PER 6") (Add)	ADDITIONAL "C" UP TO "10" (Add)	PER "1" OF "C" DIM. OVER "10" (Add)	ANCHOR FLANGE "-FL" (Add)	FLANGE & MEMBRANE CLAMP "-FLM"	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs LIVE LOAD (Add)
XL-MI-G-0	75	\$ 5,047.00	350	\$ 1,001.00	\$ 2,256.00	\$ 957.00	\$ 200.00	\$ 679.00	\$ 835.00	\$ 3,555.00
XL-MI-G-1	100	\$ 7,539.00	520	\$ 1,159.00	\$ 2,536.00	\$ 891.00	\$ 235.00	\$ 880.00	\$1,066.00	\$ 3,841.00
XL-MI-G-2	125	\$ 9,248.00	600	\$ 1,364.00	\$ 2,682.00	\$ 897.00	\$ 252.00	\$ 880.00	\$1,066.00	\$ 3,841.00
XL-MI-G-3	150	\$10,127.00	700	\$ 2,000.00	\$ 2,821.00	\$ 897.00	\$ 273.00	\$ 880.00	\$1,066.00	\$ 3,915.00
XL-MI-G-4	200	\$12,167.00	1050	\$ 2,735.00	\$ 5,078.00	\$ 1,064.00	\$ 300.00	\$ 880.00	\$1,066.00	\$ 4,204.00
XL-MI-G-5	250	\$14,060.00	1160	\$ 3,578.00	\$ 6,307.00	\$ 1,065.00	\$ 348.00	\$ 880.00	\$1,066.00	\$ 4,292.00
XL-MI-G-6	300	\$14,728.00	1240	\$ 4,414.00	\$ 7,540.00	\$ 1,065.00	\$ 374.00	\$ 880.00	\$1,066.00	\$ 4,494.00
XL-MI-G-7	350	\$20,323.00	1360	\$ 5,257.00	\$ 8,760.00	\$ 1,065.00	\$ 388.00	\$ 880.00	\$1,066.00	\$ 4,929.00
XL-MI-G-8	400	\$22,630.00	1540	\$ 6,306.00	\$10,216.00	\$ 1,065.00	\$ 417.00	\$ 880.00	\$1,066.00	\$ 5,217.00
XL-MI-G-9	500	\$26,833.00	2150	\$ 7,985.00	\$13,166.00	\$ 1,368.00	\$ 555.00	\$ 880.00	\$1,066.00	\$ 5,435.00
XL-MI-G-10	600	\$29,817.00	3000	\$ 9,702.00	\$15,049.00	\$ 1,577.00	\$ 607.00	\$1,030.00	\$1,183.00	\$ 6,064.00
XL-MI-G-11	750	\$39,921.00	3280	\$12,394.00	\$17,786.00	\$ 1,760.00	\$ 728.00	\$1,153.00	\$1,304.00	\$ 6,670.00

NOTE: Add SUFFIX "-T" for threaded inlet & outlet, (No Add).



MI-G-SS 4 TO 50 G.P.M. STAINLESS STEEL GREASE INTERCEPTOR

MI-G-SS

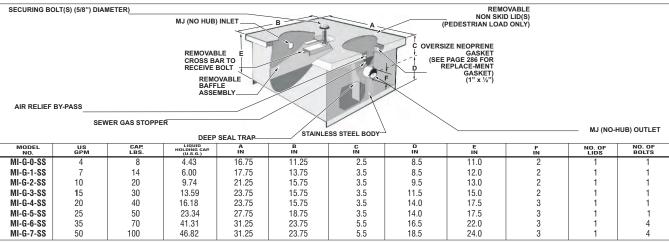


NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts above to determine the actual body length & width.

MODEL NO.	US GPM	LIST PRICE	SEDIMENT BUCKET "-SB" (Add)	BOLT ON EXTENSION (PER 6") (Add)	ADDITIONAL "-C" UP TO "6" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)		HEAVY DUTY REINFORCED LID "-HD" 10,000 Lbs. LIVE LOAD.(Add)	TILE RECESS "-TL" (Add)
MI-G-0-SS	4	\$ 2,701.00	\$1,378.00	\$ 1,544.00	\$ 4,410.00	\$ 132.00	\$1,323.00	\$1,654.00	\$1,654.00	\$1,654.00
MI-G-1-SS	7	\$ 2,701.00	\$1,378.00	\$ 1,544.00	\$ 4,410.00	\$ 132.00	\$1,323.00	\$1,654.00	\$1,654.00	\$1,654.00
MI-G-2-SS	10	\$ 2,977.00	\$1,378.00	\$ 1,544.00	\$ 4,410.00	\$ 132.00	\$1,323.00	\$1,654.00	\$1,764.00	\$1,764.00
MI-G-3-SS	15	\$ 3,197.00	\$1,378.00	\$ 1,544.00	\$ 4,410.00	\$ 132.00	\$1,323.00	\$1,654.00	\$1,819.00	\$1,819.00
MI-G-4-SS	20	\$ 4,079.00	\$1,378.00	\$ 1,544.00	\$ 5,512.00	\$ 166.00	\$1,323.00	\$1,654.00	\$1,984.00	\$1,984.00
MI-G-5-SS	25	\$ 4,961.00	\$1,764.00	\$ 1,544.00	\$ 6,615.00	\$ 220.00	\$1,323.00	\$1,654.00	\$2,426.00	\$2,426.00
MI-G-6-SS	35	\$ 5,754.00	\$1,764.00	\$ 1,654.00	\$ 7,718.00	\$ 309.00	\$1,323.00	\$1,654.00	\$2,866.00	\$2,866.00
MI-G-7-SS	50	\$ 6,615.00	\$1,764.00	\$ 1,654.00	\$ 7,744.00	\$ 331.00	\$1,323.00	\$1,654.00	\$3,087.00	\$3,087.00

NOTE: Add Suffix "-T" for threaded inlet, outlet & external flow control (No Add). Suffix-DP for dosing pump - Add (\$3,245.00 all Models). Suffix-HLA, high level alarm - Add (\$8,127.00 all Models). Suffix-AL, aluminum lid - (MI-G-0-SS to MI-G-3-SS, \$936.00), (MI-G-4-SS to MI-G-7-SS, \$1,310.00)

MI-G-SD 7 TO 75 G.P.M. GREASE INTERCEPTOR

MI-G-SD

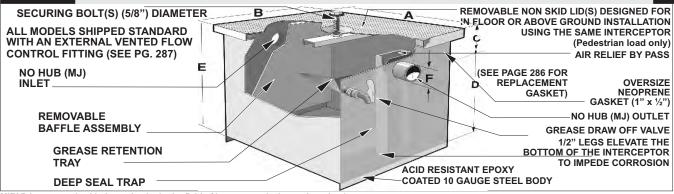

MIFAB is a recognized industry leader in the field of interceptor design and production.

As such, we offer a variety of specialized options and site-specific applications too numerous to list in this price guide. For features such as sacrificial anode packs, all stainless steel construction and a variety of other special features, please see our Engineering Catalog or consult your local MIFAB representative.

MODEL NO.	US GPM	CAP. LBS.	LIQUID Holding Cap. (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN	NO. OF LIDS	NO. OF BOLTS
MI-G-SD-1	7	14	6.00	17.75	13.75	3.5	8.5	12.0	2	1	1
MI-G-SD-2	10	20	9.74	21.25	15.75	3.5	9.5	13.0	2	1	1
MI-G-SD-3	1 5	30	13.59	23.75	15.75	3.5	11.5	15.0	2	1	1
MI-G-SD-4	20	40	16.18	23.75	15.75	3.5	14.0	17.5	3	1	1
MI-G-SD-5	25	50	23.34	27.75	18.75	3.5	14.0	17.5	3	1	1
MI-G-SD-6	35	70	41.31	31.25	23.75	5.5	16.5	22.0	3	1	4
MI-G-SD-7	50	100	46.82	31.25	23.75	5.5	18.5	24.0	3	1	4
MI-G-SD-8	75	150	108.05	42	28	6	26	32	4	2	8

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts above to determine the actual body length & width.

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the same.

Suffix-DP for dosing pump - \$3,245.00. Suffix-HLA, high level alarm - \$8,127.00 Suffix-AL, aluminum lid - (MI-SD-1 to MI-G-4 - \$936.00) (MI-G-SD-5 to MI-G-SD-8 - \$1,310.00)

				J	-,,	(+ .,/
MODEL NO.	US GPM	LIST PRICE	SHIPPING Weight LBS.	SEDIMENT BUCKET "-SB"(Add)	TILE RECESS "-TL" (Add)	ADD FOR Cover Shroud (MI-CSD) (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & Membrane Clamp "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs Live Load) (Add)
MI-G-SD-1	7	\$ 3,258.00	65	\$726.00	\$ 1,261.00	\$ 1,577.00	\$ 712.00	\$ 875.00	\$ 835.00
MI-G-SD-2	10	\$ 3,507.00	85	\$726.00	\$ 1,261.00	\$ 1,632.00	\$ 712.00	\$ 875.00	\$ 882.00
MI-G-SD-3	15	\$ 3,758.00	100	\$726.00	\$ 1,473.00	\$ 2,104.00	\$ 712.00	\$ 875.00	\$ 909.00
MI-G-SD-4	20	\$ 4,011.00	105	\$726.00	\$ 1,473.00	\$ 2,365.00	\$ 712.00	\$ 875.00	\$ 992.00
MI-G-SD-5	25	\$ 4,556.00	140	\$726.00	\$ 1,685.00	\$ 2,408.00	\$ 712.00	\$ 875.00	\$1,213.00
MI-G-SD-6	35	\$ 5,512.00	205	\$931.00	\$ 1,892.00	\$ 4,875.00	\$ 712.00	\$ 875.00	\$1,433.00
MI-G-SD-7	50	\$ 6,139.00	215	\$931.00	\$ 2,426.00	\$ 5,045.00	\$ 712.00	\$ 875.00	\$1,598.00
MI-G-SD-8	75	\$10.523.00	355	\$931.00	\$ 3 153 00	\$ 5 973 00	\$ 712.00	\$ 875.00	\$3,666,00


NOTE: Add SUFFIX "-T" for threaded inlet & outlet.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-G-SDH (With Draw-off Hose) SEMI AUTOMATIC 7 TO 50 G.P.M. GREASE INTERCEPTOR

MI-G-SDH

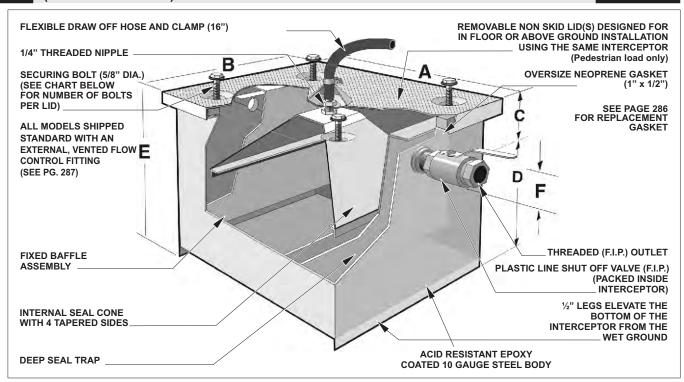

MODEL No.	US GPM	CAP. LBS.	LIQUID HOLDING Capacity (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN	NO. OF LIDS	NO. OF Bolts
MI-G-SDH-1	7	14	8.44	20.25	16.25	3.5	8.5	12	2	1	10
MI-G-SDH-2	10	20	13.00	23.75	18.25	3.5	9.5	13	2	1	12
MI-G-SDH-3	15	30	18.28	26.75	18.25	3.5	11.5	15	2	1	14
MI-G-SDH-4	20	40	21.33	26.25	18.25	3.5	14	17.5	3	1	14
MI-G-SDH-5	25	50	29.43	30.25	21.25	3.5	14	17.5	3	1	16
MI-G-SDH-6	35	70	50.00	33.75	26.25	5.5	16.5	22	3	1	18
MI-G-SDH-7	50	100	56.67	33.75	26.25	5.5	18.5	24	3	1	18

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts below to determine the actual body length & width. **NOTE: Suffix-DP** for dosing pump - Add (\$3,245.00 all Models). **Suffix-HLA**, high level alarm - Add (\$8,127.00 all Models). **Suffix-AL**, aluminum lid - Add (MI-G-SDH-1 to MI-G-SDH-3, \$936.00), (MI-G-SDH-4 to MI-G-SDH-7, \$1,310.00).

MODEL No.	US GPM	LIST PRICE	SHIPPING Weight LBS.	ADD FOR Cover Shroud (MI-CSD) (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & Membrane Clamp "-Flm" (Add)
MI-G-SDH-1	7	\$ 3,872.00	75	\$1,577.00	\$ 712.00	\$875.00
MI-G-SDH-2	10	\$ 4,017.00	95	\$1,632.00	\$ 712.00	\$875.00
MI-G-SDH-3	15	\$ 4,156.00	115	\$2,104.00	\$ 712.00	\$875.00
MI-G-SDH-4	20	\$ 4,607.00	125	\$2,365.00	\$ 712.00	\$875.00
MI-G-SDH-5	25	\$ 5,102.00	155	\$2,408.00	\$ 712.00	\$875.00
MI-G-SDH-6	35	\$ 5,562.00	220	\$4,875.00	\$ 712.00	\$875.00
MI-G-SDH-7	50	\$ 5,831.00	235	\$5,045.00	\$ 712.00	\$875.00

By quotation only. C	By quotation only. Contact MIFAB for details														
MODEL No.	US GPM	CAP. LBS.	LIQUID HOLDING Capacity (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN	NO. OF LIDS	NO. OF Bolts				
MI-G-L-SDH-20	20	40	20.13	36.5	26.5	4	7	11	3	1	18				
MI-G-L-SDH-35	35	70	28.84	44.5	30.5	4	7	11	3	1	18				
MI-G-L-SDH-50	50	100	33.77	48.5	32.5	4	7	11	3	1	18				

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the same.

MODEL NO.	US GPM	LIST PRICE	SHIPPING Weight LBS.	ANCHOR Flange "-Fl" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)
MI-G-L-SDH-20	20	\$5,676.00	160	\$ 712.00	\$ 875.00
MI-G-L-SDH-35	35	\$6,545.00	210	\$ 712.00	\$ 875.00
MI-G-L-SDH-50	50	\$7,195.00	250	\$ 712.00	\$ 875.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.




MI-CS COVER SHROUDS for 4 to 100 US G.P.M PDI GREASE INTERCEPTORS

MI-CS

The shroud provides support for the interceptor and adjustability of the inlet and outlet dimensions to match drainage piping where necessary. The shroud can be set in the slab at the time of pouring. The shroud is secured and suspended in the slab by its anchoring flanges. The interceptor is easily accessible for cleaning and inspection simply by removing the cover that sits flush with the floor.

MI-CS FOR MI-G SERIES GREASE INTERCEPTORS

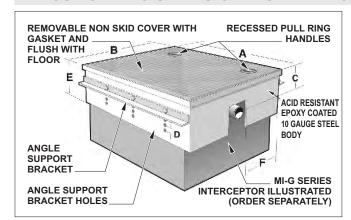

MODEL No.	USE WITH INTERCEPTOR	A IN	B IN	C IN	D IN	E IN	F IN
MI-CS-4	MI-G-0	21.75	16.25	5	1.00	11.75	4.25
MI-CS-7	MI-G-1	22.75	18.75	6	1.00	11.75	5.50
MI-CS-10	MI-G-2	26.25	20.75	6	1.00	11.75	6.25
MI-CS-15	MI-G-3	28.75	20.75	6	1.00	11.75	6.25
MI-CS-20	MI-G-4	28.75	20.75	6	1.25	14.75	6.25
MI-CS-25	MI-G-5	32.75	23.75	6	1.25	14.75	7.00
MI-CS-35	MI-G-6	36.25	28.75	8	1.25	14.75	8.75
MI-CS-50	MI-G-7	36.25	28.75	8	1.25	14.75	8.75
MI-CS-75*	XL-MI-G-0	47	33	8	1.25	14.75	9.50
MI-CS-100*	XL-MI-G-1	60	42	8	1.25	14.75	9.50

NOTE: *75 & 100 GPM require 2 lids.

	MODEL NO.	LIST PRICE	SHIPPPING WEIGHT LBS.	TILE RECESS "-TL" (ADD)	ANCHOR Flange "-Fl" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs LIVE LOAD (Add))
ĺ	MI-CS-4	\$1,473.00	90	\$ 1,261.00	\$ 712.00	\$ 875.00	\$ 835.00
	MI-CS-7	\$1,473.00	105	\$ 1,261.00	\$ 712.00	\$ 875.00	\$ 835.00
	MI-CS-10	\$1,528.00	120	\$ 1,474.00	\$ 712.00	\$ 875.00	\$ 882.00
	MI-CS-15	\$2,001.00	130	\$ 1,404.00	\$ 712.00	\$ 875.00	\$ 909.00
	MI-CS-20	\$2,207.00	140	\$ 1,605.00	\$ 712.00	\$ 875.00	\$ 992.00
	MI-CS-25	\$2,316.00	165	\$ 1,802.00	\$ 712.00	\$ 875.00	\$1,213.00
	MI-CS-35	\$4,633.00	200	\$ 2,310.00	\$ 712.00	\$ 875.00	\$1,433.00
	MI-CS-50	\$4,851.00	200	\$ 2,668.00	\$ 712.00	\$ 875.00	\$1,598.00
	MI-CS-75*	\$5,045.00	265	\$ 2,911.00	\$ 881.00	\$1,066.00	\$3,666.00
	MI-CS-100*	\$5,256.00	375	\$ 3,396.00	\$ 881.00	\$1,066.00	\$3,841.00


MI-CS Series supplied with one interior & one exterior angle support bracket per side. Interior angle bracket to support interceptor (purchased separately), exterior angle bracket to form anchor flange.

NOTE: The "C" dimension is with the support brackets in the top set of holes. Increase this dimension by "D" for each set of holes the support brackets are moved down, to a maximum of five sets.

NOTE: *75 & 100 GPM requires 2 lids. **NOTE:** Suffix -AL, aluminum lid - Add (MI-CS-4 to MI-CS-15, \$2,140.00, MI-CS-20 to MI-CS-100, \$1,376.00).

MI-CSD FOR MI-G-SD(H) SERIES DRAW-OFF GREASE INTERCEPTORS

MI-CSD

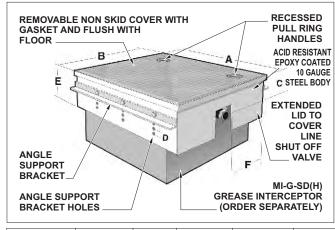

MODEL NO.	USE WITH Interceptor	A IN	B IN	C IN	D IN	E IN	F IN
MI-CSD-7	MI-G-SD(H)-1	32.75	18.75	6	1.00	11.75	5.50
MI-CSD-10	MI-G-SD(H)-2	36.25	20.75	6	1.00	11.75	6.25
MI-CSD-15	MI-G-SD(H)-3	38.75	20.75	6	1.00	11.75	6.25
MI-CSD-20	MI-G-SD(H)-4	38.75	20.75	6	1.25	14.75	6.25
MI-CSD-25	MI-G-SD(H)-5	42.75	23.75	6	1.25	14.75	7.00
MI-CSD-35	MI-G-SD(H)-6	46.25	28.75	8	1.25	14.75	8.75
MI-CSD-50	MI-G-SD(H)-7	46.25	28.75	8	1.25	14.75	8.75
MI-CSD-75*	MI-G-SD(H)-8	57.00	33	8	1.25	14.75	9.50

NOTE: *75 & 100 GPM requires 2 lids.

MODEL NO.	LIST Price	SHIPPING WEIGHT LBS.	ANCHOR Flange "-Fl" (Add)	TITLE RECESS "-TL" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (ADD)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs LIVE LOAD) (Add)
MI-CSD-7	\$1,577.00	130	\$ 712.00	\$1,261.00	\$875.00	\$ 835.00
MI-CSD-10	\$1,632.00	150	\$ 712.00	\$1,261.00	\$875.00	\$ 882.00
MI-CSD-15	\$2,104.00	150	\$ 712.00	\$1,474.00	\$875.00	\$ 902.00
MI-CSD-20	\$2,365.00	170	\$ 712.00	\$1,474.00	\$875.00	\$ 992.00
MI-CSD-25	\$2,408.00	200	\$ 712.00	\$1,685.00	\$875.00	\$1,213.00
MI-CSD-35	\$4,875.00	235	\$ 712.00	\$1,892.00	\$875.00	\$1,433.00
MI-CSD-50	\$5,045.00	235	\$ 712.00	\$2,426.00	\$875.00	\$1,598.00
MI-CSD-75*	\$5.458.00	405	\$ 881.00	\$2.911.00	\$1.066.00	\$3,666.00

NOTE: *75 GPM requires 2 lids. **NOTE: Suffix -AL**, aluminum lid - Add (MI-CSD-7 to MI-CSD-20, \$1,442.00, MI-CSD-25 to MI-CSD-75, \$2,163.00).

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit **www.mifab.com** for the most rec


MI-CS Series supplied with one interior & one exterior angle support bracket per side. Interior angle bracket to support Interceptor (purchased separately), exterior angle bracket to form anchor flange.

NOTE: The "C" dimension is with the support brackets in the top set of holes. Increase this dimension by "D" for each set of holes the support brackets are moved down, to a maximum of five sets.



10 to 500 US G.P.M. OIL INTERCEPTOR

MI-O

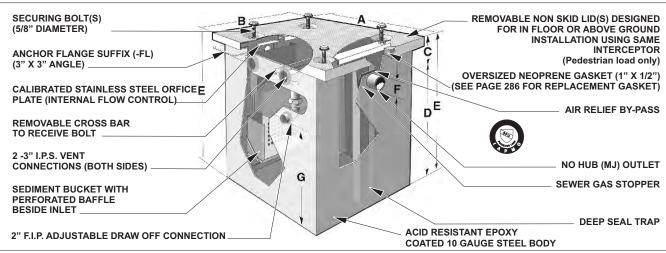

NOTE: Optional holding tank (SUFFIX-HT) may be required. Holding tank is same size as interceptor. Check with local code authorities. MIFAB is a recognized industry leader in the field of interceptor design and production. As such, we offer a variety of specialized options and site-specific applications too numerous to list in this price guide. For features such as sacrificial anode packs, all stainless steel construction and a variety of other special features, please see our Engineering Catalog or consult your local MIFAB representative.

Optional high level alarm: SUFFIX "-HLA" available Add (\$8,127.00 all Models). Optional aluminum lids, Suffix - AL, Add (MI-O-A to MI-O-3, \$1,202.00, MI-O-4 to MI-O-8, \$2,163.00, MI-O-9 to MI-O-14, \$3,606.00).

MODEL No.	US GPM	LIQUID HOLDING Capacity (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN	G IN	NO. OF LIDS	NO. OF Bolts
MI-O-A	10	9.73	21.25	15.75	3.5	9.5	13	2	4	1	1
MI-O-B	15	13.59	23.75	15.75	3.5	11.5	15	2	6	1	1
MI-O-C	20	20.07	23.75	15.75	3.5	14	17.5	3	8	1	1
MI-0-1	25	55.15	28	22	6	26	32	3	19	1	4
MI-0-2	35	74.67	34	24	6	26	32	3	19	1	4
MI-0-3	50	80.76	34	24	6	28	34	3	21	1	4
MI-0-4	75	165.68	48	34	8	28	36	4	21	2	8
MI-0-5	100	245.21	51	36	8	28	36	4	21	2	8
MI-0-6	125	195.17	53	36	8	28	36	4	21	2	8
MI-0-7	150	214.30	58	36	10	28	38	4	21	3	12
MI-0-8	200	308.57	68	38	10	32	42	4	25	6	24
MI-0-9	250	426.39	74	40	12	38	50	4	31	6	24
MI-0-10	300	549.71	78	44	12	40	52	4	33	6	24
MI-0-11	350	621.30	80	46	12	40	52	6	33	6	24
MI-0-12	400	664.52	82	48	12	42	54	6	35	6	24
MI-0-13	450	690.91	84	50	12	42	54	6	35	6	24
MI-0-14	500	781.82	86	52	12	46	58	6	39	6	24

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts below to determine the actual body length & width.

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C"dimensions are always the same.


MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	BOLT ON EXTENSION (PER 6") (Add)	ADDL. "C" UP TO 6" "-C" (Add) UP TO 10" "-C" FOR MI-0-4 and larger	PER "1" OF "C" DIM. OVER "6" (Add) OVER 10" FOR MI-O-4 and larger	ANCHOR Flange "-Fl" (Add)	FLANGE & Membrane Clamp "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs LIVE LOAD) (Add)	HOLDING Tank "-HT" (Add)
MI-O-A	10	\$ 2,799.00	99	\$ 1,544.00	\$ 808.00	\$63.00	\$ 827.00	\$ 891.00	\$ 1,399.00	\$ 2,952.00
MI-O-B	15	\$ 2,915.00	115	\$ 1,544.00	\$ 808.00	\$63.00	\$ 827.00	\$ 891.00	\$ 1,553.00	\$ 2,952.00
MI-O-C	20	\$ 3,188.00	123	\$ 1,654.00	\$ 849.00	\$63.00	\$ 827.00	\$ 891.00	\$ 1,707.00	\$ 3,211.00
MI-0-1	25	\$ 3,799.00	240	\$ 1,575.00	\$ 849.00	\$63.00	\$ 827.00	\$ 891.00	\$ 1,811.00	\$ 3,211.00
MI-0-2	35	\$ 4,350.00	275	\$ 1,764.00	\$ 881.00	\$63.00	\$ 827.00	\$ 891.00	\$ 1,865.00	\$ 3,418.00
MI-0-3	50	\$ 4,783.00	285	\$ 1,764.00	\$ 881.00	\$63.00	\$ 827.00	\$ 891.00	\$ 1,865.00	\$ 3,418.00
MI-0-4	75	\$ 8,097.00	475	\$ 1,874.00	\$ 931.00	\$63.00	\$1034.00	\$ 1,066.00	\$ 1,865.00	\$ 3,573.00
MI-0-5	100	\$ 9,609.00	515	\$ 2,205.00	\$ 1,139.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 2,175.00	\$ 4,556.00
MI-0-6	125	\$11,220.00	530	\$ 2,205.00	\$ 1,139.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 2,484.00	\$ 5,178.00
MI-0-7	150	\$12,300.00	580	\$ 2,205.00	\$ 1,139.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 2,796.00	\$ 6,213.00
MI-0-8	200	\$14,900.00	700	\$ 2,426.00	\$ 1,243.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 3,314.00	\$ 7,456.00
MI-0-9	250	\$16,945.00	1065	\$ 2,426.00	\$ 1,346.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 4,349.00	\$ 8,490.00
MI-0-10	300	\$16,945.00	1190	\$ 2,426.00	\$ 1,346.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 5,384.00	\$ 9,940.00
MI-0-11	350	\$18,499.00	1285	\$ 2,426.00	\$ 1,346.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 6,420.00	\$12,427.00
MI-0-12	400	\$20,052.00	1360	\$ 2,426.00	\$ 1,346.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 7,248.00	\$13,669.00
MI-0-13	450	\$22,455.00	1405	\$ 2,426.00	\$ 1,346.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 8,283.00	\$14,287.00
MI-0-14	500	\$24,857.00	1515	\$ 2,426.00	\$ 1,346.00	\$93.00	\$1034.00	\$ 1,066.00	\$ 8,954.00	\$14,703.00

NOTE: Add SUFFIX "-T" for threaded inlet & outlet, (No Add).

*See MI-O-HU Series for integral holding tank series oil interceptors



10 to 500 US G.P.M. OIL INTERCEPTOR WITH INTEGRAL OIL STORAGE TANK

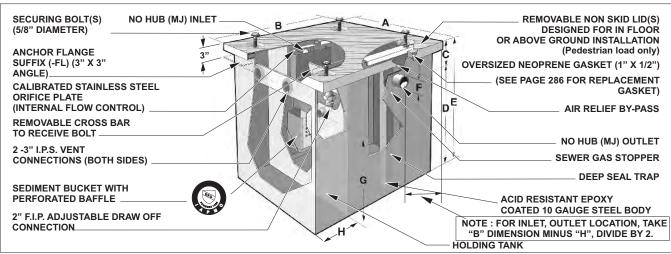

MIFAB is a recognized industry leader in the field of interceptor design and production.

As such, we offer a variety of specialized options and site-specific applications too numerous to list in this price guide. For features such as sacrificial anode packs, all stainless steel construction and a variety of other special features, please see our Engineering Catalog or consult your local MIFAB representative.

Optional high level alarm: Suffix "-HLA" available Add (\$8,127.00 all Models) Optional aluminum lid(s), Suffix - AL, Add (MI-O-HU-A to MI-O-HU-3, \$2,163.00, MI-O-HU-4 to MI-O-HU-8, \$3,004.00, MI-O-HU-9 to MI-O-HU-14, \$4,807.00)

ΨZ, 103.00, IVII-	2, 163.00, MI-O-HO-4 to MI-O-HO-8, \$3,004.00, MI-O-HO-9 to MI-O-HO-14, \$4,8															
MODEL	US	INTERCEPTOR LIQUID HOLDING CAPACITY	A	В	C	D	E	F	G	H		<u>Ol</u> ding tank		TOTAL	NO. 0F	NO. 0F
NO.	GPM	(U.S.G.)	IN	IN	IN	IN	IN	IN	IN	IN	CU. of liquid		U.S.G of liquid	OPERATING Lbs.	LIDS	BOLTS
MI-O-HU-A	10	10.66	24	26	4	9	13	2	4	10	1.2	74.93	8.98	326.12	1	4
MI-O-HU-B	15	15.06	26	26.50	4	11	15	2	6	10	1.64	102.40	12.27	400.08	1	4
MI-O-HU-C	20	18.08	26	26.50	4	13.50	17.5	3	8	10	1.92	119.88	14.36	457.50	1	4
MI-0-HU-1	25	63.12	29	46	4.5	25.5	30	3	20	21.5	8.69	542.60	65.00	1466.71	2	8
MI-0-HU-2	35	100.23	37	44.5	5	26	31	3	20.5	15.5	8.16	509.51	61.04	1880.36	4	16
MI-0-HU-3	50	163.07	43	65.5	6	26	32	3	20.5	26.0	15.65	977.19	117.06	3087.07	4	16
MI-O-HU-4	75	201.89	49	65	9.5	26.5	36	4	20.5	22.5	16.27	1015.90	121.70	3513.86	4	16
MI-O-HU-5	100	302.91	58	90	9.5	26.5	36	4	20.5	37	31.78	1984.34	237.71	5866.90	4	16
MI-O-HU-6	125	344.42	62	90	12	28	40	4	22	37	35.97	2245.97	269.06	6580.28	9	36
MI-0-HU-7	150	356.85	66	76	14	30	44	4	24	28	31.11	1942.51	232.70	6536.30	9	36
MI-O-HU-8	200	452.72	73.25	90	17	30.5	48	4	24.5	36.5	46.39	2896.59	347.00	8803.22	9	36
MI-0-HU-9	250	588.97	73.25	90	15.5	35.5	51	4	29.5	31	46.65	2912.83	348.94	9997.11	9	36
MI-0-HU-10	300	814.82	94.875	86	15.5	36.5	52	6	29.5	23.5	46.16	2882.23	345.28	12312.77	9	36
MI-0-HU-11	350	1066.06	100.875	94	16.5	43.5	60	6	36.5	30.5	76.01	4746.06	568.55	16624.95	9	36
MI-0-HU-12	400	1109.11	107.875	91	17	43	60	6	36	28.5	75.17	4693.61	562.27	17052.63	9	36
MI-0-HU-13	450	1113.05	118.875	83	17	43	60	6	36	26.0	75.70	4726.71	566.24	17236.29	9	36
MI-0-HU-14	500	1240.03	118.875	83	20	46	66	6	39	24.0	74.75	4667.39	559.13	18483.51	9	36

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" (13) on all sides, deduct 1" (25) from the stated dimensions in the charts below to determine the actual body length & width.

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the same.

MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	BOLT ON Extension (Per 6") (Add)	ADDL. "C" UP TO 6" "-C" (Add) UP TO 10" "-C" FOR MI-O-HU-4 and larger	PER "1" OF "C" DIM. OVER "6" (Add) OVER 10" FOR MI-O-HU-4 and larger	ANCHOR Flange "-Fl" (Add)	FLANGE & Membrane Clamp "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs LIVE LOAD) (Add)	DOUBLE WALL (Add) DESIGN
MI-O-HU-A	10	\$ 4,837.00	170	\$ 4,532.00	\$ 4,532.00	\$189.00	\$1,230.00	\$1,479.00	\$ 5,467.00	\$ 5,512.00
MI-O-HU-B	15	\$ 6,637.00	183	\$ 4,587.00	\$ 4,587.00	\$228.00	\$1,230.00	\$1,479.00	\$ 5,808.00	\$ 7,718.00
MI-O-HU-C	20	\$ 8,026.00	197	\$ 4,725.00	\$ 4,725.00	\$259.00	\$1,331.00	\$1,479.00	\$ 6,150.00	\$ 8,820.00
MI-0-HU-1	25	\$ 8,712.00	420	\$ 4,852.00	\$ 4,852.00	\$284.00	\$1,390.00	\$1,648.00	\$ 6,489.00	\$ 9,922.00
MI-0-HU-2	35	\$10,576.00	545	\$ 5,033.00	\$ 5,033.00	\$308.00	\$1,446.00	\$1,707.00	\$ 6,834.00	\$ 12,128.00
MI-O-HU-3	50	\$14,250.00	780	\$ 6,014.00	\$ 6,014.00	\$363.00	\$1,479.00	\$1,954.00	\$ 6,938.00	\$ 16,538.00
MI-0-HU-4	75	\$16,458.00	890	\$ 2,256.00	\$ 2,256.00	\$148.00	\$1,077.00	\$1,955.00	\$ 5,040.00	\$ 28,665.00
MI-O-HU-5	100	\$17,845.00	1,500	\$ 2,354.00	\$ 2,354.00	\$158.00	\$1,206.00	\$2,186.00	\$ 6,934.00	\$ 31,972.00
MI-O-HU-6	125	\$20,820.00	1,615	\$ 2,448.00	\$ 2,448.00	\$170.00	\$1,445.00	\$2,448.00	\$ 7,607.00	\$ 36,382.00
MI-0-HU-7	150	\$22,100.00	1,740	\$ 2,543.00	\$ 2,543.00	\$182.00	\$1,683.00	\$2,709.00	\$ 8,904.00	\$ 39,690.00
MI-O-HU-8	200	\$31,223.00	2,340	\$ 3,638.00	\$ 3,638.00	\$191.00	\$1,805.00	\$3,168.00	\$10,154.00	\$ 55,125.00
MI-0-HU-9	250	\$36,156.00	2,400	\$ 4,731.00	\$ 4,731.00	\$208.00	\$2,411.00	\$4,108.00	\$14,018.00	\$ 63,945.00
MI-0-HU-10	300	\$40,941.00	2,860	\$ 5,751.00	\$ 5,751.00	\$235.00	\$2,726.00	\$4,607.00	\$17,995.00	\$ 72,765.00
MI-0-HU-11	350	\$45,694.00	3,300	\$ 6,813.00	\$ 6,813.00	\$264.00	\$3,039.00	\$5,106.00	\$21,218.00	\$ 81,585.00
MI-0-HU-12	400	\$52,631.00	3,420	\$ 7,947.00	\$ 7,947.00	\$290.00	\$3,227.00	\$5,424.00	\$24,437.00	\$ 93,712.00
MI-0-HU-13	450	\$60,124.00	3,540	\$ 9,275.00	\$ 9,275.00	\$304.00	\$3,418.00	\$5,749.00	\$27,924.00	\$108,045.00
MI-0-HU-14	500	\$66,385.00	3,760	\$10,609.00	\$10,609.00	\$314.00	\$3,610.00	\$6,607.00	\$29,849.00	\$119,070.00

NOTE: Add Suffix "-T" for threaded inlet & outlet, (No Add).


*See MI-O-HU Series for integral holding tank series Oil interceptors from MIFAB.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-OS MI-OS OIL/SEDIMENT INTERCEPTOR

MI-OS



	NO.	CAI	? FRE	E 0	F	IN I	IN	l ì	N	ĪN	IN	I IN		HOLDING CAP.	
	1101	LBS	. ARE	A GRA	TES	IN	IIV	1	IN	IN	III	IN		USG	CU. FT.
Γ	MI-0S-1	12	2 4) 1		24.375	12.5	4.	.5	10.5	15.0	2		12	1.6
	MI-0S-2	60) 13	2	2	24.375	24.5	7.6	325	17.625	25.25	4		40	6.13
	MI-0S-3	100	26	2 3	3	36.625	24.375	1	1	22	33	4		77	10.25
	MI-0S-4	200	39	3 4	1	48.750	24.375	1	1	22	33	4		103	15.8
L	MI-0S-5	300	52	8	3	48.750	48.675	1	1	22	33	4	1	93.33	29.7
	MODEL No.			ST ICE		SHIPPING Weight LBS.	ADDITIO "C" UP "6" "C"	TO		PER "1" OF "C" DIM R "6" "C" (<i>I</i>	FL	CHOR Ange ' (Add)		FLANG Membr Amp "Fl	
	MI-0S-1 MI-0S-2		\$ 2,6 \$ 7,4			140 300	\$ 726 \$1,088			\$ 63.00 \$ 84.00	1 7 -	22.00 31.00	\$		
	MI-0S-3		\$10,5			445	\$1,502			\$124.00	1 : 1	39.00		1,243.	
	MI-0S-4		\$13,0			560	\$2,226			\$187.00	1 ' '	49.00		1,604.	
	MI-0S-5		\$19,0	62.00		560	\$2,536	.00		\$266.00	\$1,5	96.00	\$	2,350.	.00

Note: GPM flow rate is based on pipe size

MI-HAIR

LAVATORY MOUNTED HAIR & SEDIMENT INTERCEPTOR


SLUDGE GRATE

MODEL

MI-HAIR



NO. (Cast Iron) LBS. (-49) (Add) "-SSB" (ADD) "-2" (Add) MI-HAIR \$598.00 6 \$1.102.00 \$237.00 \$372.00
--

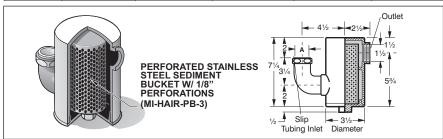

MI-SOLID-S SUSPENDED SEDIMENT and SOLIDS INTERCEPTOR


MI-SOLID-S




MODEL NO.	US GPM	CAPACITY (U.S.G.)	LIST PRICE		STAINLESS STEEL BODY "-SS" (ADD)	REPLACEMENT BUCKET "-SB" (ADD)	STAINLESS STEEL MESH ON BUCKET "-SSM" (ADD)
MI-SOLID-S	15	2.22	\$ 723.00	23	\$ 372.00	\$ 477.00	\$ 203.00
MI-SOLID-LB	15	2.22	\$ 723.00	23	\$ 372.00	\$ 477.00	\$ 203.00
MI-SOLID-M	20	5.00	\$2,072.00	50	-	\$ 607.00	\$ 333.00
MI-SOLID-L	30	6.28	\$2,475.00	70	-	\$ 958.00	\$ 461.00

F.I.P. = Female iron pipe (Threaded Connection)

MI-SOLID-M








Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-SOLID-SA SIDE ACCESS SOLIDS INTERCEPTOR

MI-SOLID-SA

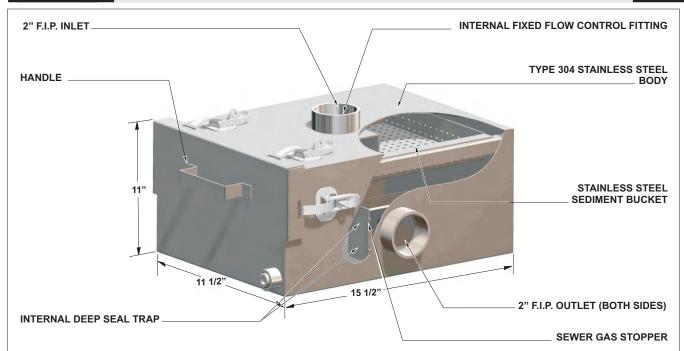


MODEL NO	CAPACITY GPM	SHIPPING WEIGHT LBS	LIST Price
MI-SOLID-SA	35	22	\$4,552.00

MI-SOL	MI-SOLID-SA AND MI-SOLID-TA OPTIONAL VARIATIONS:										
SUFFIX	DESCRIPTION	LIST PRICE									
-RB	Replacement bucket	\$ 2,159.00									
-SSM	Stainless steel mesh on bucket	\$ 799.00									
-6	Vandal proof	\$ 320.00									
-RL	Recessed lid (MI-SOLID-TA only)	\$ 364.00									

MI-SOLID-TA TOP ACCESS SOLIDS INTERCEPTOR

MI-SOLID-TA

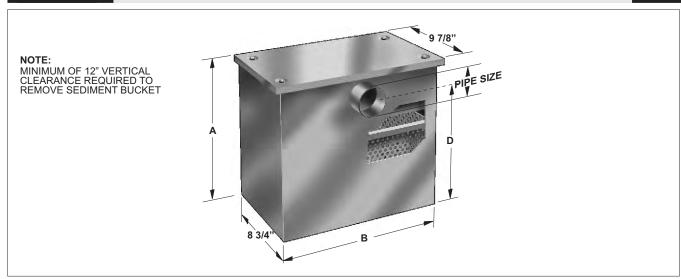


MODEL NO	US GPM	WEIGHT LBS	LIST PRICE EPOXY COATED MILD STEEL	LIST PRICE STAINLESS STEEL "-304 SS"
MI-SOLID-TA-0	4	23	\$3,027.00	\$4,691.00
MI-SOLID-TA-1	7	30	\$3,333.00	\$5,166.00
MI-SOLID-TA-2	10	40	\$3,542.00	\$5,489.00
MI-SOLID-TA-3	15	50	\$3,611.00	\$5,595.00
MI-SOLID-TA-4	20	60	\$3,839.00	\$5,950.00
MI-SOLID-TA-5	25	80	\$4,286.00	\$5,553.00
MI-SOLID-TA-6	35	90	\$4,790.00	\$7,425.00
MI-SOLID-TA-7	50	100	\$5,139.00	\$7,964.00
MI-SOLID-TA-8	75	110	\$6,291.00	\$9,750.00

MODEL No.	PIPE SIZE	A IN	B IN	C IN	D IN
MI-SOLID-TA-0	2"	11"	9 7/8"	2.5"	8 1/2"
MI-SOLID-TA-1	2"	12"	11 7/8"	3.5"	8 1/2"
MI-SOLID-TA-2	2"	13"	14"	3.5"	9 1/2"
MI-SOLID-TA-3	2"	15"	16 3/4"	3.5"	11 1/2"
MI-SOLID-TA-4	3"	17 1/2"	17 1/4"	3.5"	14"
MI-SOLID-TA-5	3"	17 1/2"	19 7/8"	3.5"	14"
MI-SOLID-TA-6	3"	22"	22 1/2"	5.5"	16 1/2"
MI-SOLID-TA-7	3"	24"	22 1/2"	5.5"	18 1/2"
MI-SOLID-TA-8	4"	32"	22 1/2"	6"	26"

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-SAND SAND AND GRIT INTERCEPTORS

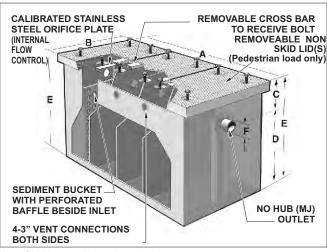

MODEL NO.	LIQUID HOLDING Cap. USG	A IN	B IN	C IN	D IN	E IN	F IN).OF BOLTS
MI-SAND-1	323	60	36	22	38	60	4	3	12
MI-SAND-2	405	72	36	22	38	60	4	3	12
MI-SAND-3	540	96	36	22	38	60	6	4	16
MI-SAND-4	608	108	36	22	38	60	6	5	20
MI-SAND-5	700	120	36	22	38	60	6	5	20
MI-SAND-6	810	144	36	22	38	60	8	6	24
MI-SAND-7	1013	180	36	22	38	60	8	8	32

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts about to determine the actual body length & width

Note: GPM flow rate is based on pipe size

MODEL NO.	LIQUID HOLDING Cap. USG	LIST PRICE	SHIPPING WEIGHT LBS.	BOLT ON EXTENSION (PER 6") (Add)	ADDITIONAL "C" UP TO "6" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & Membrane Clamp "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs. LIVE LOAD) (Add)
MI-SAND-1	323	\$17,898.00	1020	\$1,322.00	\$1,322.00	\$ 120.00	\$ 813.00	\$ 970.00	\$2,745.00
MI-SAND-2	405	\$19,016.00	1100	\$1,322.00	\$1,322.00	\$ 120.00	\$ 813.00	\$ 970.00	\$3,255.00
MI-SAND-3	540	\$20,144.00	1310	\$1,322.00	\$1,322.00	\$ 120.00	\$ 813.00	\$ 970.00	\$4,271.00
MI-SAND-4	608	\$22,373.00	1400	\$1,322.00	\$1,322.00	\$ 204.00	\$ 813.00	\$ 970.00	\$4,780.00
MI-SAND-5	700	\$24,610.00	1575	\$1,322.00	\$1,322.00	\$ 204.00	\$ 813.00	\$ 970.00	\$5,289.00
MI-SAND-6	810	\$26,847.00	1770	\$1,424.00	\$1,424.00	\$ 327.00	\$ 813.00	\$ 970.00	\$5,797.00
MI-SAND-7	1013	\$31,320.00	1900	\$1,424.00	\$1,424.00	\$ 327.00	\$ 813.00	\$ 970.00	\$7,033.00

NOTE: Add SUFFIX "-T" for threaded inlet & outlet, (No Add). Suffix - AL for aluminum lid, Add (\$3,606.00 each Model)

MI-SD SEDIMENT DRAIN INTERCEPTOR



D

IN

10.5

12.5

17.625

23

22

22

27

27

27

29

IN IN GRATES

15

20

25.25

33 3 1

32 3 2

32

38

38

38

44

3 4

4 6

4 9

4 9

IN

4.5

7.5

7.625

10

10

10

11

11


11

15

NO. OF

1

12

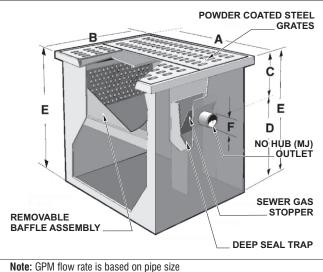

3	NO.	USG	USG
	MI-SD-1	3.5	12
	MI-SD-2	6.5	23
	MI-SD-3	22	77
	MI-SD-4	30	105
	MI-SD-5	55	193
	MI-SD-6	100	350
	MI-SD-7	140	438
J)	MI-SD-8	214	665
J) T	MI-SD-9	330	910
	MI-SD-10	374	1155
S R	NOTE: The the intercep sides, dedu determine to	tor. Sir ct 1" fr	nce the

MODEL

STATIC

CAP.

CAP

12 14

16

20.5

20.5

24.375

48.625

48.625

72.625

96.625

60.50

20.75

27.0

27.0

24.5

24.5

30.5

36.5

36.5

36.5

B" dimensions represent the largest dimension of the lid overhangs the body by 1/2" on all n the stated dimensions in the charts above to body length & width.

NOTE: For solid cover, specify -SC. This product a no hub inlet connection (same size as outlet) (No Add).


MODEL NO.	LIQUID HOLDING Cap. USG	LIST Price	SHIPPING Weight LBS.	ADDITIONAL "C" UP TO "6" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)
MI-SD-1	3.5	\$ 2,880.00	64	\$ 401.00	\$ 97.00	\$ 479.00	\$ 639.00
MI-SD-2	6.5	\$ 3,039.00	116	\$ 430.00	\$ 133.00	\$ 516.00	\$ 721.00
MI-SD-3	22	\$ 6,397.00	185	\$ 565.00	\$ 133.00	\$ 639.00	\$ 964.00
MI-SD-4	30	\$ 6,712.00	215	\$ 565.00	\$ 133.00	\$ 672.00	\$ 994.00
MI-SD-5	55	\$ 8,642.00	225	\$ 721.00	\$ 163.00	\$ 856.00	\$1,200.00
MI-SD-6	100	\$12,158.00	420	\$1,121.00	\$ 243.00	\$1,043.00	\$1,521.00
MI-SD-7	140	\$13,746.00	515	\$1,365.00	\$ 291.00	\$1,122.00	\$1,759.00
MI-SD-8	214	\$15,675.00	760	\$1,606.00	\$ 309.00	\$1,279.00	\$2,093.00
MI-SD-9	330	\$17,585.00	855	\$2,093.00	\$ 400.00	\$1,521.00	\$2,244.00
MI-SD-10	374	\$22,376.00	1135	\$3,124.00	\$ 565.00	\$1,759.00	\$2,559.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



HELIPORT FUEL SPILL INTERCEPTORS

MI-HEL

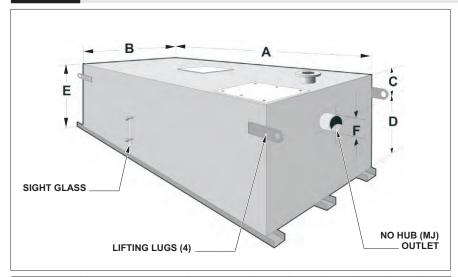

The MIFAB® MI-HEL heliport fuel spill interceptor is designed for use where there is the potential of an aircraft fuel leak entering the storm sewer system, (such as a roof top helipad), where the regular roof drains are connected to a municipal storm sewer system. The MI-HEL is constructed from high strength 1/4" plate steel and features: outlet vent connection. internal vent connection. gasketed access covers with stainless steel bolts, 2" fuel drain connection, 1" fresh water inlet supply connection with gate valve, back flow preventer, automatic water level controlling float valve, external sight glass level indicator with drain cocks, 2" interceptor drain plugs, channel support rails and body corner lifting lugs. The unit is regularly furnished with a two part epoxy interior and exterior coating.


MODEL NO.	STATIC V Cap. USG	/OLUME Cu. Ft.	FUEL Retention Cap. USG	A IN	B IN	C IN	D IN	E IN	F IN
MI-HEL-1	135	18.0	35	90	36	12	36	48	6
MI-HEL-2	175	23.3	65	126	48	12	36	48	6
MI-HEL-3	200	26.6	90	132	63	12	36	48	6
MI-HEL-4	300	40.0	195	192	92	12	36	48	6
MI-HEL-5	350	46.6	220	213	96	12	36	48	6
MI-HEL-6	400	52.48	250	240	96	12	36	48	6

MODEL NO.	FUEL CAP. USG	LIST PRICE	SHIPPING WEIGHT LBS.
MI-HEL-1	35	P.O.A.	1,984
MI-HEL-2	65	P.O.A.	2,975
MI-HEL-3	90	P.O.A.	3,524
MI-HEL-4	195	P.O.A.	6,200
MI-HEL-5	220	P.O.A.	6,800
MI-HEL-6	250	P.O.A.	7,200

NOTE: Add SUFFIX "-TO" for top outlet, (No Add)

MI-SAND/OIL SAND AND OIL INTERCEPTOR

MI-SAND/OIL

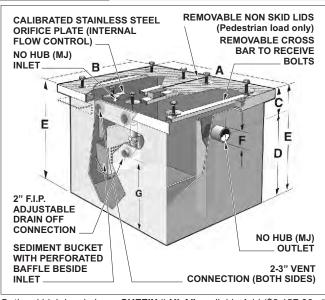

MODEL NO.	LIQUID HOLDING Cap. USG	A IN	B IN	C IN	D IN	E IN	F IN	G IN	(O.)f Bolts
MI-SO-0	108.9	42	28	6	26	32	4	19	2	8
MI-S0-1	192.7	55	37	8	26	34	4	19	2	8
MI-S0-2	226.9	58	38	8	28	36	4	21	3	12
MI-S0-3	264.6	61	39	8	28	36	4	23	3	12
MI-SO-4	395.6	70	44	10	34	44	4	27	6	24
MI-S0-5	500.6	75	46	10	38	48	4	31	6	24
MI-SO-6	579.7	77	49	12	40	52	6	32	6	24
MI-S0-7*	612.2	80	51	12	40	52	6	36	8	24
MI-SO-8*	785.9	84	56	14	44	58	6	46	8	32
MI-SO-9*	1172.3	92	61	14	54	68	6	46	8	32
MI-SO-10*	1807.8	102	74	14	62	76	8	53	9	36
MI-S0-11*	2105.3	108	76	14	66	80	8	57	9	36

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts above to determine the actual body length & width

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the same

Optional high level alarm. SUFFIX "-HLA" available Add (\$8,127.00 all Models). Optional aluminum lid, Suffix - AL, Add (\$4,807.00 each Model).

MODEL NO.	LIQUID HOLDING Cap. USG	LIST PRICE	SHIPPING WEIGHT LBS.	BOLT ON EXTENSION (PER 6") (Add)	ADDITIONAL "C" UP TO 6" "-C" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs. LIVE LOAD) (Add)
MI-SO-0	109	\$17,898.00	545	\$1,322.00	\$1,322.00	\$ 120.00	\$ 813.00	\$ 970.00	\$2,745.00
MI-S0-1	193	\$19,016.00	625	\$1,322.00	\$1,322.00	\$ 120.00	\$ 813.00	\$ 970.00	\$3,255.00
MI-S0-2	227	\$20,144.00	725	\$1,573.00	\$1,322.00	\$ 120.00	\$ 813.00	\$ 970.00	\$4,271.00
MI-SO-3	265	\$22,373.00	1075	\$1,913.00	\$1,322.00	\$ 204.00	\$ 813.00	\$ 970.00	\$4,780.00
MI-S0-4	396	\$24,610.00	1185	\$2,184.00	\$1,322.00	\$ 204.00	\$ 813.00	\$ 970.00	\$5,289.00
MI-S0-5	580	\$26,847.00	1265	\$2,641.00	\$1,424.00	\$ 327.00	\$ 813.00	\$ 970.00	\$5,797.00
MI-SO-6	612	\$31,320.00	1385	\$2,915.00	\$1,424.00	\$ 327.00	\$ 813.00	\$ 970.00	\$7,033.00


NOTE: Add SUFFIX "-T" for threaded inlet & outlet, (No Add).

MI-SO-7 and larger "Call for Quote"



II-FISH FISH SCALE INTERCEPTOR

MI-FISH

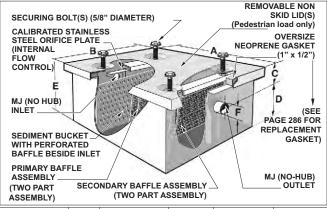

MODEL NO.	INTERCEPTOR LIQUID HOLDING CAPACITY (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN).OF BOLTS
MI-FISH-1	34.29	29.5	20	3	17	20	2	1	4
MI-FISH-2	40.74	29.5	20.5	4	20	24	3	1	4
MI-FISH-3	80.18	33.5	26	4	26	30	3	2	4
MI-FISH-4	114.03	37.5	30	4	28	32	3	2	8
MI-FISH-5	155.64	55.5	26	6	30	36	4	2	8
MI-FISH-6	213.80	67.5	28	8	32	40	6	3	12
MI-FISH-7	302.26	67.5	28	10	44	54	6	3	12
MI-FISH-8	404.91	67.5	30	12	54	66	6	3	12
MI-FISH-9	506.42	67.5	40	10	50	60	6	3	12
MI-FISH-10	868.65	91.5	40	8	54	62	6	4	16
MI-FISH-11	1017.35	98	50	12	54	66	6	4	16
MI-FISH-12	1536.00	98	50	12	80	92	6	4	16


MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	TILE RECESS "-TL" (Add)	ADDITIONAL "C" UP TO "6" "-C" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & Membrane Clamp "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Live Load Lbs. (Add))	REPLACEMENT BAFFLE "-RSSB" (Add)
MI-FISH-1	34	\$ 6,472.00	215	\$ 1,685.00	\$ 970.00	\$ 64.00	\$ 740.00	\$1,055.00	\$ 1,844.00	\$ 520.00
MI-FISH-2	40	\$ 7,047.00	245	\$ 2,420.00	\$1,055.00	\$ 64.00	\$ 740.00	\$1,055.00	\$ 1,892.00	\$ 595.00
MI-FISH-3	80	\$ 7,609.00	370	\$ 3,153.00	\$1,116.00	\$ 94.00	\$ 842.00	\$1,104.00	\$ 1,892.00	\$ 671.00
MI-FISH-4	111	\$ 8,802.00	445	\$ 3,681.00	\$1,116.00	\$ 94.00	\$ 842.00	\$1,104.00	\$ 2,207.00	\$ 984.00
MI-FISH-5	155	\$ 9,837.00	550	\$ 3,918.00	\$1,176.00	\$ 94.00	\$ 842.00	\$1,104.00	\$ 2,838.00	\$ 1,113.00
MI-FISH-6	213	\$10,874.00	750	\$ 4,414.00	\$1,176.00	\$ 94.00	\$ 842.00	\$1,104.00	\$ 3,366.00	\$ 1,243.00
MI-FISH-7	302	\$12,634.00	910	\$ 5,464.00	\$1,370.00	\$ 94.00	\$ 842.00	\$1,104.00	\$ 5,464.00	\$ 1,449.00
MI-FISH-8	405	\$14,495.00	1080	\$ 6,519.00	\$1,370.00	\$ 94.00	\$ 842.00	\$1,104.00	\$ 7,356.00	\$ 1,503.00
MI-FISH-9	506	\$16,255.00	1175	\$ 7,992.00	\$1,370.00	\$ 94.00	\$ 842.00	\$1,104.00	\$ 9,035.00	\$ 1,657.00
MI-FISH-10	750	\$19,332.00	1550	\$12,394.00	\$1,370.00	\$ 339.00	\$ 842.00	\$1,104.00	\$14,310.00	\$ 1,819.00
MI-FISH-11	1017	\$21,435.00	1900	\$14,710.00	\$1,474.00	\$ 339.00	\$ 842.00	\$1,104.00	\$16,808.00	\$ 2,062.00
MI-FISH-12	1536	\$24,165.00	2325	\$19,962.00	\$2,000.00	\$ 339.00	\$ 842.00	\$1,104.00	\$19,962.00	\$ 2,426.00

NOTE: Add SUFFIX "-T" for THREADED INLET & OUTLET, (No Add). Suffix - AL, aluminum lid, Add (\$2,403.00 all Models).

MI-LINT LINT

LINT INTERCEPTOR

MI-LINT

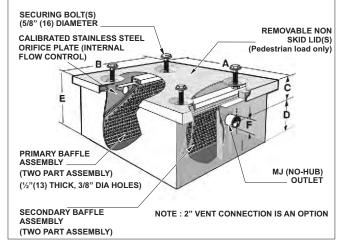

MODEL No.	INTERCEPTOR LIQUID HOLDING CAPACITY (U.S.G.)	A IN	B IN	C IN	D IN	E IN	F IN).OF BOLTS
MI-LINT-1	34.29	29.5	20	3	17	20	2	1	4
MI-LINT-2	40.74	29.5	20.5	4	20	24	3	1	4
MI-LINT-3	80.18	33.5	26	4	26	30	3	2	4
MI-LINT-4	114.03	37.5	30	4	28	32	3	2	8
MI-LINT-5	155.64	55.5	26	6	30	36	4	2	8
MI-LINT-6	213.80	67.5	28	8	32	40	6	3	12
MI-LINT-7	302.26	67.5	28	10	44	54	6	3	12
MI-LINT-8	404.91	67.5	30	12	54	66	6	3	12
MI-LINT-9	506.42	67.5	40	10	50	60	6	3	12
MI-LINT-10	868.65	91.5	40	8	54	62	6	4	16
MI-LINT-11	1017.35	98	50	12	54	66	6	4	16
MI-LINT-12	1536.00	98	50	12	80	92	6	4	16

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts above to determine the actual body length & width.


MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	SEDIMENT BUCKET "-SB" (Add)	BOLT ON EXTENSION (PER 6") (Add)	ADDITIONAL "C" UP TO "6" "-C" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs. LIVE LOAD) (Add)	REPLACEMENT BAFFLE STAINLESS "-RSSB" (Add)
MI-LINT-1	34	\$ 6,472.00	225	\$ 946.00	\$ 970.00	\$ 970.00	\$ 64.00	\$740.00	\$1,055.00	\$ 1,844.00	\$ 520.00
MI-LINT-2	40	\$ 7,047.00	260	\$ 946.00	\$1,055.00	\$1,055.00	\$ 64.00	\$740.00	\$1,055.00	\$ 1,892.00	\$ 595.00
MI-LINT-3	80	\$ 7,609.00	385	\$ 1,055.00	\$1,116.00		\$ 94.00	\$842.00	\$1,104.00	\$ 1,892.00	\$ 671.00
MI-LINT-4	111	\$ 8,802.00	475	\$ 1,157.00	\$1,116.00		\$ 94.00	\$842.00	\$1,104.00	\$ 2,207.00	\$ 984.00
MI-LINT-5	155	\$ 9,837.00	575	\$ 2,001.00	\$1,176.00	1 : 7	\$ 94.00	\$842.00	\$1,104.00	\$ 2,838.00	\$1,113.00
MI-LINT-6	213	\$10,874.00	785	\$ 2,734.00	\$1,176.00		\$ 94.00	\$842.00	\$1,104.00	\$ 3,366.00	\$1,243.00
MI-LINT-7	302	\$12,634.00	960	\$ 4,414.00	\$1,370.00		\$ 94.00	\$842.00	\$1,104.00	\$ 5,464.00	\$1,449.00
MI-LINT-8	405	\$14,495.00	1150	\$ 6,306.00	\$1,370.00	\$1,370.00	\$ 94.00	\$842.00	\$1,104.00	\$ 7,356.00	\$1,503.00
MI-LINT-9	506	\$16,255.00	1265	\$ 7,143.00	\$1,370.00	\$1,370.00	\$ 94.00	\$842.00	\$1,104.00	\$ 9,035.00	\$1,657.00
MI-LINT-10	750	\$24,255.00	1655	\$ 9,009.00	\$1,370.00	\$1,370.00	\$339.00	\$842.00	\$1,104.00	\$14,310.00	\$1,819.00
MI-LINT-11	1017	\$30,319.00	2050	\$11,557.00	\$1,474.00	1 : 7	\$339.00	\$842.00	\$1,104.00	\$16,808.00	\$2,062.00
MI-LINT-12	1536	\$36,382.00	2520	\$13,663.00	\$2,001.00	\$2,001.00	\$339.00	\$842.00	\$1,104.00	\$19,962.00	\$2,426.00

NOTE: Suffix - AL, aluminum lid, Add (\$2,403.00 all Models)



MI-RICE RICE INTERCEPTOR

MI-RICE

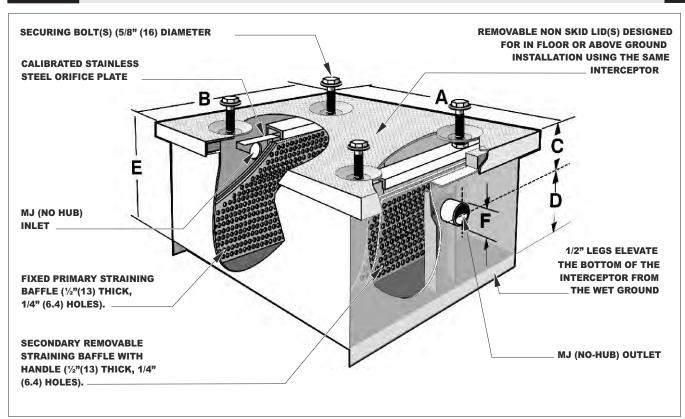

MODEL NO.	US GPM	A IN	B IN	C IN	D IN	E IN	F IN	_).OF BOLTS
MI-RICE-1	34	29.5	20	3	17	20	2	1	4
MI-RICE-2	40	29.5	20.5	4	20	24	3	1	4
MI-RICE-3	80	33.5	26	4	26	30	3	2	4
MI-RICE-4	111	37.5	30	4	28	32	3	2	8
MI-RICE-5	155	55.5	26	6	30	36	4	2	8
MI-RICE-6	213	67.5	28	8	32	40	6	3	12
MI-RICE-7	302	67.5	28	10	44	54	6	3	12
MI-RICE-8	405	67.5	30	12	54	66	6	3	12
MI-RICE-9	506	67.5	40	10	50	60	6	3	12
MI-RICE-10	750	91.5	40	8	54	62	6	4	16
MI-RICE-11	1017	98	50	12	54	66	6	4	16
MI-RICE-12	1536	98	50	12	80	92	6	4	16

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor (lid). Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts above to determine the actual body length & width.


MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	SEDIMENT BUCKET "-SB" (Add)	BOLT ON Extension (PER 3") (Add)	ADDITIONAL "C" UP TO "6" "-C" (Add)	PER "1" OF "C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)		REPLACEMENT BAFFLE STAINLESS "-RSSB" (Add)
MI-RICE-1	34	\$ 6,472.00	225	\$ 946.00	\$ 970.00	\$ 970.00	\$ 64.00	\$740.00	\$1,055.00	\$ 1,844.00	\$ 520.00
MI-RICE-2	40	\$ 7,047.00	260	\$ 946.00	\$1,055.00	\$1,055.00	\$ 64.00	\$740.00	\$1,055.00	\$ 1,892.00	\$ 595.00
MI-RICE-3	80	\$ 7,609.00	385	\$ 1,055.00	\$1,116.00	\$1,116.00	\$ 94.00	\$842.00	\$1,104.00	\$ 1,892.00	\$ 671.00
MI-RICE-4	111	\$ 8,802.00	475	\$ 1,157.00	\$1,116.00	\$1,116.00	\$ 94.00	\$842.00	\$1,104.00	\$ 2,207.00	\$ 984.00
MI-RICE-5	155	\$ 9,837.00	575	\$ 2,001.00	\$1,176.00	\$1,176.00	\$ 94.00	\$842.00	\$1,104.00	\$ 2,838.00	\$1,113.00
MI-RICE-6	213	\$10,874.00	785	\$ 2,734.00	\$1,176.00	\$1,176.00	\$ 94.00	\$842.00	\$1,104.00	\$ 3,366.00	\$1,243.00
MI-RICE-7	302	\$12,634.00	960	\$ 4,414.00	\$1,370.00	\$1,370.00	\$ 94.00	\$842.00	\$1,104.00	\$ 5,464.00	\$1,449.00
MI-RICE-8	405	\$14,495.00	1150	\$ 6,306.00	\$1,370.00	\$1,370.00	\$ 94.00	\$842.00	\$1,104.00	\$ 7,356.00	\$1,503.00
MI-RICE-9	506	\$16,255.00	1265	\$ 7,143.00	\$1,370.00	\$1,370.00	\$ 94.00	\$842.00	\$1,104.00	\$ 9,035.00	\$1,657.00
MI-RICE-10	750	\$24,255.00	1655	\$ 9,459.00	\$1,370.00	\$1,370.00	\$339.00	\$842.00	\$1,104.00	\$14,310.00	\$1,819.00
MI-RICE-11	1017	\$30,319.00	2050	\$11,557.00	\$1,474.00	\$1,474.00	\$339.00	\$842.00	\$1,104.00	\$16,808.00	\$2,062.00
MI-RICE-12	1536	\$36,382.00	2520	\$13,663.00	\$2,001.00	\$2,001.00	\$339.00	\$842.00	\$1,104.00	\$19,962.00	\$2,426.00

NOTE: SUFFIX "-TL" lid recessed for tile P.O.A. Suffix - AL, aluminum lid, Add (\$2,403.00 all Models)



AUTOMATIC RECOVER GREASE INTERCEPTOR

MI-G-AD

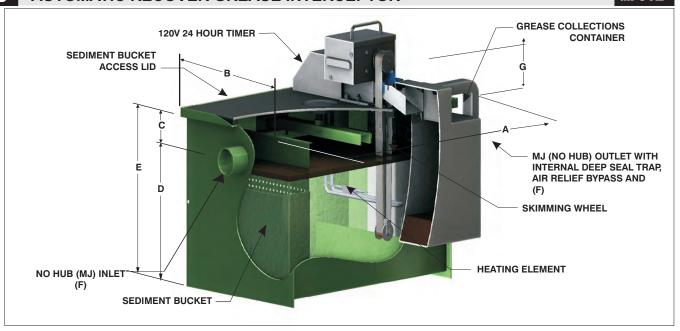

The MI-G-AD Series is an automatic recovery grease interceptor that is self cleaning and requires minimal maintenance. The unit intercepts solids with an internal sediment bucket and extracts free floating oil and grease from the unit automatically into a separate holding compartment.

The MI-G-AD Series should be used in large restaurants, kitchens, institutions, industrial facilities such as food processing and packaging plants where fats, oil and grease (FOG) drains into the wastewater.

The MI-G-AD includes an epoxy coated body, also available in stainless steel (-SS Suffix) with a deep seal trap with sewer gas stopper, air relief bypass, dual lid for easy access to the internal sediment bucket, grease and oil collection container, 24 hour timer with heating element and automatic skimming wheel.

MI-G-AD										
US GPM	CAP.	A	B	C	D IN	E IN	F	G	NO. OF LIDS	
									_	
									2	
							_		2 2	
25	50	27.75	18.75	3.5	14.0	17.5	3	6.75		
35	70	31.25	23.75	5.5	16.5	22.0	3	6.75	2	
50	100	31.25	23.75	5.5	18.5	24.0	3	6.75	2	
D									1	
US	CAP.	A	В	C	D	E	F	G	NO. OF	
GPM	LBS.	IN	IN	IN	IN	IN	IN	IN	LIDS	
20	40	34	24	4	7	11	3	6.75	2	
35	70	42	28	4	7	11	3	6.75	2	
50	100	46	30	4	7	11	3	6.75	2 2	
L-AD										
US GPM	CAP. LBS.	A IN	B IN	C IN	D IN	E IN	F IN	G IN	NO. OF LIDS	
75	150	42	28	6	26	32	4	14	2	
100	200	55	37	8	26	34	4	14	2	
				8	28	36	4	14	3	
	US GPM 15 20 25 35 50 US GPM 20 35 50 US GPM 75 100	US CAP. GPM LBS. 15 30 20 40 25 50 35 70 50 100 US CAP. GPM LBS. 20 40 35 70 50 100 L-AD US CAP. GPM LBS. 75 150 100 200	US CAP. A LBS. IN 15 30 23.75 20 40 23.75 25 50 27.75 35 70 31.25 50 100 31.25 US CAP. A GPM LBS. IN 20 40 34 35 70 42 50 100 46 L-AD US CAP. A GPM LBS. IN 20 40 34 35 70 42 50 100 46 L-AD US CAP. A GPM LBS. IN 20 50 100 55	US CAP. A B IN IN 15 30 23.75 15.75 20 40 23.75 15.75 25 50 27.75 18.75 35 70 31.25 23.75 50 100 31.25 23.75 D US CAP. A B GPM LBS. IN IN 20 40 34 24 35 70 42 28 50 100 46 30 L-AD US CAP. A B GPM LBS. IN IN 20 40 34 24 35 70 42 28 50 100 46 30	US CAP. A B C C C C CAP. C C C C C C C C C C C C C C C C C C C	GPM LBS. IN IN IN IN 15 30 23.75 15.75 3.5 11.5 20 40 23.75 15.75 3.5 14.0 25 50 27.75 18.75 3.5 14.0 35 70 31.25 23.75 5.5 16.5 50 100 31.25 23.75 5.5 18.5 D US GAP. A B C D B 10 42 28 4 7 50 100 46 30 4 7 L-AD US GPM LBS. IN IN IN IN IN 75 150 42 28 6 26 100 200 55 37 8 26	US CAP. A B C D E COMPAN CAP. A COMPAN CAP.	US CAP. A B C D E F 20 40 23.75 15.75 3.5 11.5 15.0 2 20 40 23.75 15.75 3.5 14.0 17.5 3 25 50 27.75 18.75 3.5 14.0 17.5 3 35 70 31.25 23.75 5.5 16.5 22.0 3 50 100 31.25 23.75 5.5 18.5 24.0 3 US CAP. A B C D E F GPM LBS. IN IN IN IN IN IN IN 20 40 34 24 4 7 11 3 35 70 42 28 4 7 11 3 50 100 46 30 4 7 11 3 L-AD US CAP. A B C D E F GPM LBS. IN	US CAP. A B C D E F G G IN	

MODEL NO.	US GPM	LIST PRICE	SHIPPING Weight LBS	STAINLESS STEEL "-SS" (Add)
MI-G-AD-3	15	P.O.A	95	P.O.A
MI-G-AD-4	20	P.O.A	100	P.O.A
MI-G-AD-5	25	P.O.A.	125	P.O.A
MI-G-AD-6	35	P.O.A	185	P.O.A
MI-G-AD-7	50	P.O.A	195	P.O.A


MODEL No.	US GPM	LIST PRICE	SHIPPING Weight LBS	STAINLESS STEEL "-SS" (Add)
XL-MI-G-AD-0	75	P.O.A	350	P.O.A
XL-MI-G-AD-1	100	P.O.A	520	P.O.A
XL-MI-G-AD-2	125	P.O.A.	600	P.O.A
XL-MI-G-AD-3	150	P.O.A	700	P.O.A
MI-G-L-AD-20	20	P.O.A	150	P.O.A
MI-G-L-AD-35	35	P.O.A	200	P.O.A
MI-G-L-AD-50	50	P.O.A	225	P.O.A

Design and dimensions are subject to modification. Prices do not include applicable taxes.



I-E-G 4 TO 50 US G.P.M. ELECTRONIC GREASE INTERCEPTOR

MI-E-G

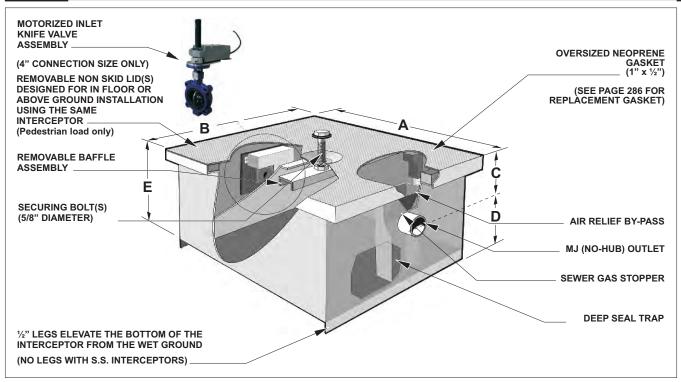

MIFAB's electronic grease interceptor monitors the grease level within the interceptor. A control panel built into a standard electrical box consists of a multi-level LED display that alerts the operator to the current grease level. A green light on the control panel indicates normal operating conditions. At 50% grease storage capacity, the green light will change to yellow. At 75% grease storage capacity, the yellow light changes to red, the alarm will sound, and the inlet will be closed by a motorized valve. The closed inlet prevents additional grease from entering the interceptor and from discharging into the piping system. The operator must remove the lid of the interceptor and remove the accumulated grease and clean off the grease sensing probe to ensure that the motorized valve opens and regular operation can resume. A back-up battery ensures continued operation during short power failures and closes for safety during extended failures. The control panel and internal controls are pre-wired by MIFAB. 115 volt main to 24 volt transformer and low voltage wiring from the control panel to probe inside of the interceptor to be provided by others.

$\label{eq:MIFAB} \textbf{MIFAB} \ \textbf{is a recognized industry leader in the field of interceptor design and production}.$

As such, we offer a variety of specialized options and site-specific applications too numerous to list in this price guide. For features such as sacrificial anode packs, all stainless steel construction and a variety of other special features, please see our Engineering Catalog or consult your local MIFAB representative. **Suffix -AL** for aluminum lid, Add (MI-E-G-0 to MI-E-G-3, \$936.00), (MI-E-G-4 to MI-E-G-7, \$1,310.00). NOTE: **Suffix -DP** for dosing pump - Add (\$3,245.00, all Models).

MODEL NO.	US GPM	CAP. LBS.	LIQUID HOLDING Capacity (U.S.G.)	A IN	B IN	C In	D IN	E IN	F IN	NO. OF LIDS	NO. OF BOLTS
MI-E-G-0	4	8	4.43	16.75	11.25	7.5	8.5	16.0	2	1	1
MI-E-G-1	7	14	6.00	17.75	13.75	7.5	8.5	16.0	2	1	1
MI-E-G-2	10	20	9.74	21.25	15.75	7.5	9.5	17.0	2	1	1
MI-E-G-3	15	30	13.59	23.75	15.75	7.5	11.5	19.0	2	1	1
MI-E-G-4	20	40	16.18	23.75	15.75	7.5	14.0	21.5	3	1	1
MI-E-G-5	25	50	23.34	27.75	18.75	7.5	14.0	21.5	3	1	1
MI-E-G-6	35	70	41.31	31.25	23.75	7.5	16.5	24.0	3	2	4
MI-E-G-7	50	100	46.82	31.25	23.75	7.5	16.5	26.0	3	2	4

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. since the lid overhangs the body by 1/2" (13) on all sides, deduct 1" (25) from the stated dimensions in the charts below to determine the actual body length & width.


NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. inlet & outlet "C" dimensions are always the same.

MODEL NO.	US GPM	LIST PRIC	SHIPPING WEIGHT LBS.	SEDIMENT BUCKET "-SB" (Add)	BOLT ON EXTENSION (PER 3") (Add)	ADDITIONAL "-C" UP TO 6" (Add)	PER "1" OF "-C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & Membrane Clamp "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" Live Load (10,000 lbs) (Add)
MI-E-G-0	4	\$ 9,860.00	75	\$692.00	\$823.00	\$823.00	\$ 65.00	\$679.00	\$ 835.00	\$ 835.00
MI-E-G-1	7	\$10,533.00	85	\$692.00	\$823.00	\$823.00	\$ 65.00	\$679.00	\$ 835.00	\$ 835.00
MI-E-G-2	10	\$10,957.00	105	\$692.00	\$686.00	\$686.00	\$ 65.00	\$679.00	\$ 835.00	\$ 882.00
MI-E-G-3	15	\$12,318.00	120	\$692.00	\$688.00	\$688.00	\$ 65.00	\$679.00	\$ 835.00	\$ 909.00
MI-E-G-4	20	\$13,254.00	125	\$692.00	\$748.00	\$748.00	\$ 85.00	\$679.00	\$ 835.00	\$ 992.00
MI-E-G-5	25	\$13,889.00	150	\$888.00	\$769.00	\$769.00	\$114.00	\$679.00	\$ 835.00	\$1,213.00
MI-E-G-6	35	\$15,249.00	210	\$888.00	\$830.00	\$830.00	\$114.00	\$679.00	\$ 835.00	\$1,433.00
MI-E-G-7	50	\$17,558.00	220	\$888.00	\$842.00	\$842.00	\$174.00	\$679.00	\$ 835.00	\$1,598.00

NOTE: Add SUFFIX "-T" for threaded inlet & external flow control.



10 TO 500 US G.P.M. ELECTRONIC OIL INTERCEPTORS

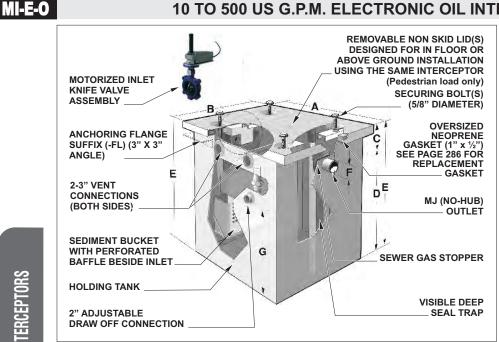

MIFAB's electronic oil interceptor monitors the oil level within the interceptor. A control panel built into a standard electrical box consists of a multi-level LED display that alerts the operator to the current oil level. A green light on the control panel indicates normal operating conditions. At 50% oil storage capacity, the green light will change to yellow. At 75% oil storage capacity, the yellow light changes to red, the alarm will sound, and the inlet will be closed by a motorized valve. The closed inlet prevents additional oil from entering the interceptor and from discharging into the piping system. The operator must remove the lid of the interceptor and remove the accumulated oil and clean off the oil sensing probe to ensure that the motorized valve opens and regular operation can resume. A back-up battery ensures continued operation during short power failures and closes for safety during extended failures. The control panel and internal controls are pre-wired by MIFAB. 115 volt main to 24 volt transformer and low voltage wiring from the control panel to probe inside of the interceptor to be provided by others.

MODEL No.	US GPM	A IN	B IN	C IN	D IN	E IN	F IN	G IN	LIQUID H USG	IOLDING CAP. Cu. Ft.	NO. OF LIDS	NO. OF Bolts
MI-E-O-A	10	21.25	15.75	3.5	9.5	13	2	4	9.73	1.00	1	1
MI-E-O-B	15	23.75	15.75	3.5	11.5	15	2	6	13.59	1.20	1	1
MI-E-O-C	20	23.75	15.75	3.5	14	17.5	3	8	20.07	1.35	1	1
MI-E-0-1	25	28	22	6	26	32	3	19	55.15	6.25	1	4
MI-E-0-2	35	34	24	6	26	32	3	19	74.67	8.40	1	4
MI-E-0-3	50	34	24	6	28	34	3	21	80.76	9.10	1	4
MI-E-0-4	75	48	34	8	28	36	4	21	165.68	19.98	2	8
MI-E-0-5	100	51	36	8	28	36	4	21	245.21	22.76	2	8
MI-E-0-6	125	53	36	8	28	36	4	21	195.17	24.73	2	8
MI-E-0-7	150	58	36	10	28	38	4	21	214.30	28.60	3	12
MI-E-0-8	200	68	38	10	32	42	4	25	308.57	42.88	6	24
MI-E-0-9	250	74	40	12	38	50	4	31	426.39	53.44	6	24
MI-E-0-10	300	78	44	12	40	52	4	33	549.71	64.30	6	24
MI-E-0-11	350	80	46	12	40	52	6	33	621.30	69.25	6	24
MI-E-0-12	400	82	48	12	42	54	6	35	664.52	78.38	6	24
MI-E-0-13	450	84	50	12	42	54	6	35	690.91	83.95	6	24
MI-E-0-14	500	86	52	12	46	58	6	39	781.82	98.92	6	24

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" on all sides, deduct 1" from the stated dimensions in the charts below to determine the actual body length & width.

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the same.

MODEL NO.	US GPM	LIST PRIC	SHIPPING WEIGHT LBS.	BOLT ON Extension (PER 6") (Add)	ADDITIONAL "-C" UP TO 6" (Add)	PER "1" OF "-C" DIM. OVER "6" (Add)	ANCHOR Flange "-Fl" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs. LIVE LOAD) (Add)	HOLDING TANK "-HT" (Add)
MI-E-O-A	10	\$11,992.00	124	\$1,553.00	\$ 808.00	\$63.00	\$ 827.00	\$ 890.00	\$1,399.00	\$ 2,952.00
MI-E-O-B	15	\$13,431.00	140	\$1,553.00	\$ 808.00	\$63.00	\$ 827.00	\$ 890.00	\$1,553.00	\$ 2,952.00
MI-E-O-C	20	\$14,538.00	148	\$1,707.00	\$ 849.00	\$63.00	\$ 827.00	\$ 890.00	\$1,707.00	\$ 3,211.00
MI-E-0-1	25	\$15,090.00	265	\$1,707.00	\$ 849.00	\$63.00	\$ 827.00	\$ 890.00	\$1,811.00	\$ 3,211.00
MI-E-0-2	35	\$16,595.00	300	\$1,865.00	\$ 881.00	\$63.00	\$ 827.00	\$ 890.00	\$1,865.00	\$ 3,418.00
MI-E-0-3	50	\$19,516.00	310	\$1,865.00	\$ 881.00	\$63.00	\$ 827.00	\$ 890.00	\$1,865.00	\$ 3,418.00
MI-E-0-4	75	\$27,853.00	500	\$1,865.00	\$ 931.00	\$63.00	\$1,034.00	\$1,066.00	\$1,865.00	\$ 3,573.00
MI-E-0-5	100	\$29,516.00	540	\$2,175.00	\$1,139.00	\$93.00	\$1,034.00	\$1,066.00	\$2,175.00	\$ 4,556.00
MI-E-0-6	125	\$33,081.00	555	\$2,175.00	\$1,139.00	\$93.00	\$1,034.00	\$1,066.00	\$2,484.00	\$ 5,178.00
MI-E-0-7	150	\$34,617.00	605	\$2,175.00	\$1,139.00	\$93.00	\$1,034.00	\$1,066.00	\$2,796.00	\$ 6,213.00
MI-E-0-8	200	\$45,549.00	725	\$2,646.00	\$1,243.00	\$93.00	\$1,034.00	\$1,066.00	\$3,314.00	\$ 7,456.00
MI-E-0-9	250	\$51,463.00	1090	\$2,646.00	\$1,346.00	\$93.00	\$1,034.00	\$1,066.00	\$4,349.00	\$ 8,490.00
MI-E-0-10	300	\$57,198.00	1215	\$2,646.00	\$1,346.00	\$93.00	\$1,034.00	\$1,066.00	\$5,384.00	\$ 9,940.00
MI-E-0-11	350	\$62,894.00	1310	\$2,646.00	\$1,346.00	\$93.00	\$1,034.00	\$1,066.00	\$6,420.00	\$12,427.00
MI-E-0-12	400	\$71,209.00	1385	\$2,646.00	\$1,346.00	\$93.00	\$1,034.00	\$1,066.00	\$7,248.00	\$13,669.00
MI-E-0-13	450	\$80,191.00	1430	\$2,646.00	\$1,346.00	\$93.00	\$1,034.00	\$1,066.00	\$8,283.00	\$14,287.00
MI-E-0-14	500	\$87,696.00	1540	\$2,646.00	\$1,346.00	\$93.00	\$1,034.00	\$1,066.00	\$8,954.00	\$14,703.00

NOTE: Add Suffix "-T" for threaded inlet & outlet, (No Add).


*See MI-O-HU Series for integral holding tank series Oil Interceptors from MIFAB.

Add Suffix - AL, Add (MI-O-A to MI-O-3, \$1,202.00, MI-O-4 to MI-O-8, \$2,163.00, MI-O-9 to MI-O-14, \$3,606.00). Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-E-O-HU 10 TO 500 US G.P.M. ELECTRONIC OIL INTERCEPTORS WITH INTEGRAL OIL STORAGE TANK

MI-E-O-HU

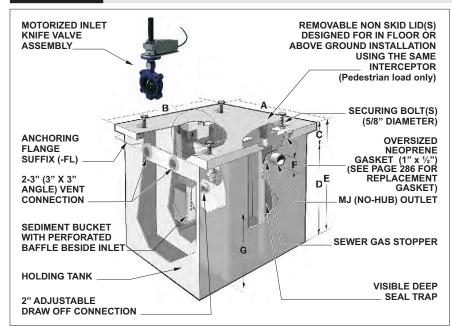

MIFAB's electronic oil interceptor monitors the oil level within the interceptor. A control panel built into a standard electrical box consists of a multi-level LED display that alerts the operator to the current oil level. A green light on the control panel indicates normal operating conditions. At 50% oil storage capacity, the green light will change to yellow. At 75% oil storage capacity, the yellow light changes to red, the alarm will sound, and the inlet will be closed by a motorized valve. The closed inlet prevents additional oil from entering the interceptor and from discharging into the piping system. The operator must remove the lid of the interceptor and remove the accumulated oil and clean off the oil sensing probe to ensure that the motorized valve opens and regular operation can resume. A back-up battery ensures continued operation during short power failures and closes for safety during extended failures. The control panel and internal controls are pre-wired by MIFAB. 115 volt main to 24 volt transformer and low voltage wiring from the control panel to probe inside of the interceptor to be provided by others.

MODEL	US	Α	В	С	D	Е	F	G	Н	INTERCEPTOR LIQUID	НС	LDING TANK C	AP.	TOTAL	NO. OF	NO. OF
NO.	GPM	IN	IN	IN	IN	IN	IN	IN	IN	HOLDING CAPACITY (U S.G.).	CU. FT.	Lbs. of liquid	U.S.G of liquid	OPERATING Lbs.	LIDS	BOLTS
MI-E-O-HU-A	10	24	26	4	9	13	2	4	10	10.66	1.2	74.93	8.98	326.12	1	4
MI-E-O-HU-B	15	26	26.50	4	11	15	2	6	10	15.06	1.64	102.40	12.27	400.08	1	4
MI-E-O-HU-C	20	26	26.50	4	13.50	17.5	3	8	10	18.08	1.92	119.88	14.36	457.50	1	4
MI-E-O-HU-1	25	29	46	4.5	25.5	30	3	20	21.5	63.12	8.69	542.60	65.00	1466.71	2	8
MI-E-O-HU-2	35	37	44.5	5	26	31	3	20.5	15.5	100.23	8.16	509.51	61.04	1880.36	4	16
MI-E-O-HU-3	50	43	65.5	6	26	32	3	20.5	26.0	163.07	15.65	977.19	117.06	3087.07	4	16
MI-E-O-HU-4	75	49	65	9.5	26.5	36	4	20.5	22.5	201.89	16.27	1015.90	121.70	3513.86	4	16
MI-E-O-HU-5	100	58	90	9.5	26.5	36	4	20.5	37	302.91	31.78	1984.34	237.71	5866.90	4	16
MI-E-O-HU-6	125	62	90	12	28	40	4	22	37	344.42	35.97	2245.97	269.06	6580.28	9	36
MI-E-O-HU-7	150	66	76	14	30	44	4	24	28	356.85	31.11	1942.51	232.70	6536.30	9	36
MI-E-O-HU-8	200	73.25	90	17	30.5	48	4	24.5	36.5	452.72	46.39	2896.59	347.00	8803.22	9	36
MI-E-O-HU-9	250	73.25	90	15.5	35.5	51	4	29.5	31	588.97	46.65	2912.83	348.94	9997.11	9	36
MI-E-0-HU-10	300	94.875	86	15.5	36.5	52	6	29.5	23.5	814.82	46.16	2882.23	345.28	12312.77	9	36
MI-E-0-HU-11	350	100.875	94	16.5	43.5	60	6	36.5	30.5	1066.06	76.01	4746.06	568.55	16624.95	9	36
MI-E-0-HU-12	400	107.875	91	17	43	60	6	36	28.5	1109.11	75.17	4693.61	562.27	17052.63	9	36
MI-E-0-HU-13	450	118.875	83	17	43	60	6	36	26	1113.05	75.70	4726.71	566.24	17236.29	9	36
MI-E-0-HU-14	500	118.875	83	20	46	66	6	39	24	1240.03	74.75	4667.39	559.13	18483.51	9	36

NOTE: The "A" and "B" dimensions represent the largest dimension of the interceptor. Since the lid overhangs the body by 1/2" (13) on all sides, deduct 1" (25) from the stated dimensions in the charts above to determine the actual body length & width.

NOTE: The "C" dimension is from the center of the inlet/outlet (invert) to the top of the interceptor. Inlet & outlet "C" dimensions are always the same.

MODEL NO.	US GPM	LIST PRICE	SHIPPING WEIGHT LBS.	BOLT ON EXTENSION (PER 6") (Add)	ADDITIONAL "-C" UP TO 6" "-C" (Add)	PER "1" OF "-C" DIM. OVER "6" (Add)	ANCHOR FLANGE "-FL" (Add)	FLANGE & MEMBRANE CLAMP "-FLM" (Add)	HEAVY DUTY REINFORCED LID "-HD" (10,000 Lbs. LIVE LOAD) (Add)
MI-E-O-HU-A	10	\$13,925.00	211	\$ 4,532.00	\$ 4,532.00	\$189.00	\$1,230.00	\$1,479.00	\$ 5,467.00
MI-E-O-HU-B	15	\$16,081.00	223	\$ 4,587.00	\$ 4,587.00	\$228.00	\$1,230.00	\$1,479.00	\$ 5,808.00
MI-E-O-HU-C	20	\$17,746.00	235	\$ 4,725.00	\$ 4,725.00	\$259.00	\$1,331.00	\$1,479.00	\$ 6,150.00
MI-E-O-HU-1	25	\$18,569.00	445	\$ 4,852.00	\$ 4,852.00	\$284.00	\$1,390.00	\$1,648.00	\$ 6,489.00
MI-E-O-HU-2	35	\$20,816.00	570	\$ 5,033.00	\$ 5,033.00	\$308.00	\$1,446.00	\$1,707.00	\$ 6,834.00
MI-E-O-HU-3	50	\$25,206.00	805	\$ 6,014.00	\$ 6,014.00	\$364.00	\$1,479.00	\$1,954.00	\$ 6,938.00
MI-E-O-HU-4	75	\$37,718.00	915	\$ 2,256.00	\$ 2,256.00	\$148.00	\$1,077.00	\$1,955.00	\$ 5,040.00
MI-E-O-HU-5	100	\$40,228.00	1525	\$ 2,354.00	\$ 2,354.00	\$158.00	\$1,206.00	\$2,186.00	\$ 6,934.00
MI-E-O-HU-6	125	\$45,532.00	1640	\$ 2,448.00	\$ 2,448.00	\$170.00	\$1,445.00	\$2,448.00	\$ 7,607.00
MI-E-O-HU-7	150	\$47,852.00	1565	\$ 2,543.00	\$ 2,543.00	\$182.00	\$1,683.00	\$2,709.00	\$ 8,904.00
MI-E-O-HU-8	200	\$64,243.00	2365	\$ 3,638.00	\$ 3,638.00	\$191.00	\$1,805.00	\$3,168.00	\$10,154.00
MI-E-O-HU-9	250	\$73,157.00	2425	\$ 4,731.00	\$ 4,731.00	\$208.00	\$2,411.00	\$4,108.00	\$14,018.00
MI-E-0-HU-10	300	\$81,736.00	2885	\$ 5,751.00	\$ 5,751.00	\$235.00	\$2,726.00	\$4,607.00	\$17,995.00
MI-E-0-HU-11	350	\$90,295.00	3325	\$ 6,813.00	\$ 6,813.00	\$264.00	\$3,039.00	\$5,106.00	\$21,218.00
MI-E-0-HU-12	400	\$102,753.00	3445	\$ 7,947.00	\$ 7,947.00	\$290.00	\$3,227.00	\$5,424.00	\$24,437.00
MI-E-0-HU-13	450	\$116,234.00	3565	\$ 9,275.00	\$ 9,275.00	\$304.00	\$3,418.00	\$5,475.00	\$27,924.00
MI-E-0-HU-14	500	\$127,479.00	3785	\$10,609.00	\$10,609.00	\$314.00	\$3,610.00	\$6,076.00	\$29,849.00

NOTE: Add Suffix "-T" for threaded inlet & outlet, (No Add).

*See MI-O-HU Series for integral holding tank series Oil Interceptors from MIFAB.

Add **Suffix - AL**, Add (MI-E-O-HU-A to MI-E-O-HU-3, \$2,163.00, MI-E-O-HU-4 to MI-E-O-HU-8, \$3,004.00, MI-E-O-HU-9 to MI-E-O-HU-14, \$4,807.00). Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit **www.mifab.com** for the most recent product information.

MI-G-BO BOLT ON (FIXED) EXTENSIONS FOR MI-G GREASE INTERCEPTORS

MI-G-BO



(Shipped with sealing gasket and lockdown

MODEL NO.	USE WITH	US GPM	LIST PRICE	A IN	B IN	E IN	NO. BOLTS
MI-G-BO-4-6	MI-G-4	20	\$ 748.00	23.75	15.75	6	1
MI-G-B0-4-12	MI-G-4	20	\$1,495.00	23.75	15.75	12	1
MI-G-BO-5-6	MI-G-5	25	\$ 769.00	27.75	18.75	6	1
MI-G-B0-5-12	MI-G-5	25	\$1,537.00	27.75	18.75	12	1
MI-G-BO-6-6	MI-G-6	35	\$ 830.00	31.25	23.25	6	4
MI-G-B0-6-12	MI-G-6	35	\$1,658.00	31.25	23.25	12	4
MI-G-B0-7-6	MI-G-7	50	\$ 842.00	31.25	23.25	6	4
MI-G-B0-7-12	MI-G-7	50	\$1,684.00	31.25	23.25	12	4

Note: All bolt on extensions are made with 10 gauge, powder epoxy coated steel.

XL-MI-G-BO BOLT ON (FIXED) EXTENSIONS FOR XL-MI-G GREASE INTERCEPTORS





(Shipped with sealing gasket and lockdown

MODEL NO.	USE WITH	US GPM	LIST PRICE	A IN	B IN	E IN	NO. BOLTS	
XL-MI-G-BO-0-6	XL-MI-G-0	75	\$ 2,256.00	42	28	6	8	
XL-MI-G-BO-1-6	XL-MI-G-1	100	\$ 2,536.00	55	37	6	8	
XL-MI-G-BO-2-6	XL-MI-G-2	125	\$ 2,682.00	58	38	6	12	
XL-MI-G-BO-3-6	XL-MI-G-3	150	\$ 2,821.00	61	39	6	12	
XL-MI-G-BO-4-6	XL-MI-G-4	200	\$ 5,078.00	70	44	6	24	
XL-MI-G-BO-5-6	XL-MI-G-5	250	\$ 6,307.00	75	46	6	24	
XL-MI-G-BO-6-6	XL-MI-G-6	300	\$ 7,540.00	77	49	6	24	
XL-MI-G-BO-7-6	XL-MI-G-7	350	\$ 8,760.00	80	51	6	24	
XL-MI-G-BO-8-6	XL-MI-G-8	400	\$10,216.00	84	56	6	32	
XL-MI-G-BO-9-6	XL-MI-G-9	500	\$13,166.00	92	61	6	32	
XL-MI-G-BO-10-6	XL-MI-G-10	600	\$15,049.00	102	74	6	36	
XL-MI-G-BO-11-6	XL-MI-G-11	750	\$17.786.00	108	76	6	36	

NOTE: Remove lid of existing interceptor to install extension. To determine height of bolt on extension, measure from top of neoprene gasket to desired ground level. Then, add 1/2" to that dimension to allow for bolt on to settle into interceptor.

MI-O-BO BOLT ON (FIXED)EXTENSIONS FOR MI-O(-HU) OIL INTERCEPTORS

MODEL NO.	USE WITH	LIST PRICE
MI-0-B0-A-6	MI-O-A	\$ 1,544.00
MI-0-B0-B-6	MI-O-B	\$ 1,544.00
MI-0-B0-C-6	MI-O-C	\$ 1,654.00
MI-0-B0-1-6	MI-0-1	\$ 1,654.00
MI-0-B0-2-6	MI-0-2	\$ 1,764.00
MI-0-B0-3-6	MI-0-3	\$ 1,764.00
MI-0-B0-4-6	MI-0-4	\$ 1,874.00
MI-0-B0-5-6	MI-0-5	\$ 2,205.00
MI-0-B0-6-6	MI-0-6	\$ 2,205.00
MI-0-B0-7-6	MI-0-7	\$ 2,205.00
MI-0-B0-8-6	MI-0-8	\$ 2,426.00
MI-0-B0-9-6	MI-0-9	\$ 2,646.00
MI-0-B0-10-6	MI-0-10	\$ 2.646.00
MI-0-B0-11-6	MI-0-11	\$ 2,646.00
MI-0-B0-12-6	MI-0-12	\$ 2,646.00
MI-0-B0-13-6	MI-0-13	\$ 2,646.00
MI-0-B0-14-6	MI-0-14	\$ 2,646.00

MI-O-HU-BO			
MODEL	USE	US	LIST
NO.	WITH	GPM	PRICE
MI-O-HU-BO-A-6	MI-O-HU-A	10	\$ 4,532.00
MI-O-HU-BO-B-6	MI-O-HU-B	15	\$ 4,587.00
MI-O-HU-BO-C-6	MI-O-HU-C	20	\$ 4,725.00
MI-0-HU-B0-1-6	MI-0-HU-1	25	\$ 4,852.00
MI-0-HU-B0-2-6	MI-0-HU-2	35	\$ 5,033.00
MI-O-HU-BO-3-6	MI-O-HU-3	50	\$ 6,014.00
MI-0-HU-B0-4-6	MI-O-HU-4	75	\$ 2,256.00
MI-O-HU-BO-5-6	MI-O-HU-5	100	\$ 2,354.00
MI-O-HU-BO-6-6	MI-O-HU-6	125	\$ 2,448.00
MI-0-HU-B0-7-6	MI-O-HU-7	150	\$ 2,543.00
MI-O-HU-BO-8-6	MI-O-HU-8	200	\$ 3,638.00
MI-O-HU-BO-9-6	MI-O-HU-9	250	\$ 4,731.00
MI-0-HU-B0-10-6	MI-0-HU-10	300	\$ 5,751.00
MI-0-HU-B0-11-6	MI-0-HU-11	350	\$ 6,813.00
MI-0-HU-B0-12-6	MI-0-HU-12	400	\$ 7,947.00
MI-0-HU-B0-13-6	MI-0-HU-13	450	\$ 9,275.00
MI-0-HU-B0-14-6	MI-0-HU-14	500	\$10,609.00

REPLACEMENT LIDS FOR MI-G GREASE INTERCEPTORS

MI-G-LID



MODEL NO.	US GPM	A IN	B IN	LIST PRICE EA.	NO. OF LIDS	NO. OF BOLTS
MI-G-0-LID	4	10.75	16.25	\$ 509.00	1	1
MI-G-1-LID	7	13.25	17.75	\$ 509.00	1	1
MI-G-2-LID	10	15.75	21.25	\$ 558.00	1	1
MI-G-3-LID	15	15.75	23.75	\$ 667.00	1	1
MI-G-4-LID	20	15.75	23.75	\$ 667.00	1	1
MI-G-5-LID	25	18.75	27.75	\$ 667.00	1	1
MI-G-6-LID	35	23.25	30.75	\$1,031.00	1	4
MI-G-7-LID	50	23.25	30.75	\$1,031.00	1	4

SUFFIX - AL for replacement aluminum lids, Add (MI-G-0-LID to MI-G-3-LID - \$859.00, MI-G-4-LID to MI-G-7-LID -\$1,203.00).



LAB®

FIXTURE CARRIERS

STRUCTURAL FEET

The feet are heavy duty cast ductile iron and invertible. No distinction is necessary between right and left hand. Each foot wraps around the specially formed edge of the carrier body extending only 7/8" (22) beyond the faceplate. This wrap around design allows for better seating with a continuous adjustment slot that covers the full mounting range. Slots at the top and bottom provide additional means to install the feet. The 18" (460) height covers most mounting requirements for both standard and ADA water closets.

EXTENSION

The extension includes a test cap and N.P.T. (tapered) threads. It is made of ABS plastic. The standard length is 8" (200) long and covers a 1" (25) minimum to 6 1/4" (160) maximum range. After system testing, the extension is easily cut off to meet the installation requirements.

HARDWARE

The hardware is cadmium plated, with chrome plated MIFAB cap nuts.

FITTING GASKET

The gasket is elastomer and is designed with a raised bead to provide a positive watertight seal between the fitting and carrier body. It is held in place at the fitting opening, eliminating awkward handling when attaching the carrier body to the fitting.

CARRIER FACEPLATE

The faceplate is lacquered cast iron, heavy duty and invertible for use with siphon jet or blowout water closets.

Breakaway tabs and elongated mounting slots accommodate the full range of standard and wheelchair roughing-in heights. It slides into the groove in the structural feet to form a rigid assembly.



OPTIONAL ANCHOR FOOT

The anchor foot is heavy-duty lacquered cast iron, which provides three-point support. Adjustable threaded rod attaches the foot to the fitting. A single anchor bolt secures the foot to the floor. (Specify suffix -3)

Design and dimensions are subject to modification. Prices do not include applicable taxes.




FIXTURE CARRIER SELECTION AND CONSIDERATION INFORMATION

APPLICATION	TYPES	RECOMMENDED CARRIER
Commercial construction Off the floor Water Closet	Horizontal or vertical Fixed or Adjustable	MC-10, MC-10-EXT, MC-12, MC-13 MC-14, MC-15.
Light commercial or residential Off the floor Water Closet	Fixed Vertical	MC-14-3, MC-21, MC-25
Off the floor lavatories (mounted on structural support legs constructed behind the finished wall) Wash Sinks, Surgical Scrub Sinks	Plate type Exposed Arm Concealed Arm Wheelchair	MC-30, MC-31, MC-32, MC-33 MC-40, MC-56, MC-41, MC-51, MC-53, MC-53, MC-54 MC-42 MC-60 Series
Off the Floor Urinals		MC-30 Series
Off the Floor Drinking Fountains and Water Coolers		MC-30, MC-31, MC-33 Series
Penal Fixtures	Stack mounted fixtures	MC-26, MC-27, MC-28


CLOSET CARRIER NIPPLE VARIATIONS



CONCEALED ARM CARRIERS

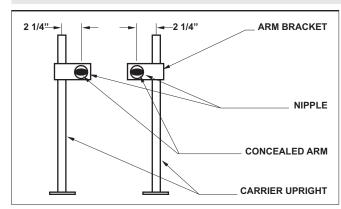

The center of the concealed arm nipple is 2 1/4" offset from center line of the uprights. It is imperative that this offset be accommodated when locating the position of the upright before it is lag bolted to the floor slab!

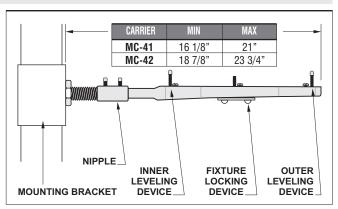

NOTE: Minimum and maximum dimensions are front of mounting bracket to the end of the concealed arm. The outermost leveler position is 3/4" from the end of the arm

Design and dimensions are subject to modification. Prices do not include applicable taxes.



Fixture Carrier Selection Guide

ADVANTAGES OF OFF-THE-FLOOR PLUMBING FIXTURES

Off-the-floor plumbing fixtures are easily the most widely used plumbing fixture in commercial building today. As the name implies, no part of the fixture touches the floor of the installation. The fixture is mounted to steel studs protruding through the wall from a carrier support in the pipe chase. This carrier support is anchored to the chase floor and receives the fixture load. The advantages of off-the-floor fixtures, as opposed to floor mounted fixtures, are numerous. The most obvious advantages - installation, maintenance, sanitation and aesthetics - are presented here.

1. INSTALLATION

The installation of floor mounted fixtures can be costly and time-consuming to the job. Floor mounted fixtures require slab penetration and sleeving at each location. The resulting waste piping is run under the slab, thus creating a need in multi-story buildings to provide a false ceiling for concealment purposes. The piping assembly also requires special consideration as it is usually accomplished piece by piece during installation. By comparison, the off-thefloor fixture installation does not involve slab penetration in the toilet room. Since all piping is behind the wall, there is no need for ceiling modification. And off-the-floor support systems are fairly modular in design, allowing for prefabrication, on or off site, before installation. All this contributes to substantial savings in time and cost.

2. MAINTENANCE

Both floor mounted and off-the-floor plumbing installations may have similar mechanical service requirements; however, due to their inherent characteristics, the off-the-floor installations are generally considered easier to service and maintain.

3. SANITATION

The most important consideration of toilet room design is sanitation, the ability to maintain a clean environment. The floor mounted fixture installation directly opposes this consideration. The base of the fixture magnetically attracts dirt that is difficult, if not impossible, to remove. Floor deterioration in the area of fixture contact also contributes to unsanitary conditions. The clearance that the off-the-floor fixture installation provides immediately resolves the problems of floor mounted design. Complete sanitation is easily maintained with normal cleaning.

4. AESTHETICS


Aesthetic appeal is an important consideration in deciding upon fixtures. The clean, smooth lines of off-the-floor fixtures complement today's contemporary toilet room designs.

Design and dimensions are subject to modification. Prices do not include applicable taxes.


TYPES OF WATER CLOSETS

There are two types of water closets commonly used in commercial installations: siphon jet and blowout. The MIFAB closet carrier can be used to mount either type.

SIPHON JET WATER CLOSETS use siphonic flushing action to evacuate the bowl. This is a quiet and economical type of flushing action that provides quick, efficient results. The large water surface area of the bowl, for better sanitation, is another desirable feature of the siphon jet water closet. The siphon jet closet mounts to the carrier with four mounting studs.

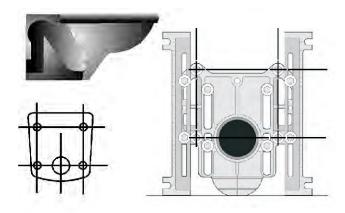

BLOWOUT WATER CLOSETS use a direct jet stream for bowl evacuation. This type of flushing action is rapid and forceful and primarily used in heavy duty installations such as stadiums and terminals. Due to this powerful flushing, the blowout water closet is noisier in operation than the siphon jet. The blowout closet mounts to the wall with three mounting studs. NOTE: It is highly unadvisable to mount Blow-out type water closets in a "Back to Back" type installation.

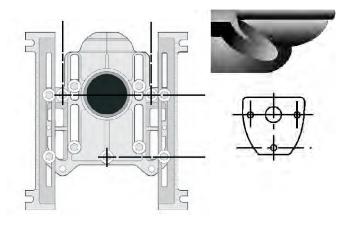




Fixture Carrier Selection Guide (Cont'd.)

FIXTURE CARRIERS

PLATE TYPE CARRIERS


The MIFAB plate type floor mounted fixture carriers have been developed to accommodate the majority of hanger plate supported fixtures such as urinals, plate type lavatories and water coolers for support independent of the wall. The MIFAB universal backing plate provides adjustment for a wide variety of fixtures from most manufacturers.

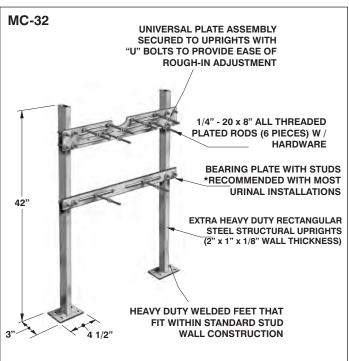


Carriers are provided with complete installation instructions for customer convenience.

CONCEALED ARM CARRIERS

MIFAB concealed arm lavatory carriers can be used with any lavatory fixture that has been drilled for concealed arm supports. This concealed arm support consists of ductile iron arms with leveling and locking hardware. These arm assemblies are available in two lengths to accommodate standard and wheelchair fixtures. After carrier installation and completion of wall construction, final adjustment can be made to the arm and sleeve assembly. Then the fixture is slid over the arms. Level and locking are accomplished through openings in the fixture itself. Installation is then complete.

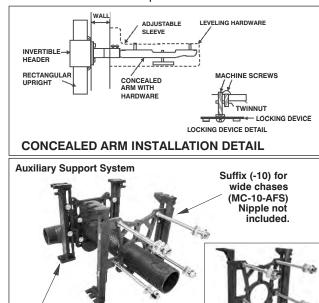

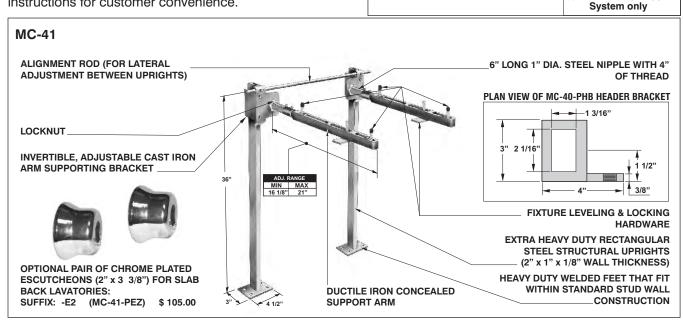

Typical MC-10 carrier (not included) with -10 system

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit www.mifab.com for the most recent product information.

(-10) Auxiliary Support



Fixture Carrier Suggested Specifications

WALL HUNG CLOSET CARRIERS

Wall Hung Water Closets shall be supported independently of the wall by MIFAB Series MC-1(*) carrier fittings with ductile iron adjustable foot supports. Where space permits, waste piping shall be run horizontally above the floor and MIFAB Series MC-10 series single or double carrier fittings shall be used.

Connection to the stack in a horizontal run shall be a TY or a MC-13 carrier fitting. Where pipe space is limited, or where single fixtures are installed use MIFAB MC-14 Series. Where fixtures are located on common waste/vent stacks use MIFAB Series MC-15 series carrier fittings.

* Series number denotes horizontal, vertical adjustable or vertical fixed water closet carrier.

WALL HUNG URINALS


Wall Hung Urinals shall be supported independently of the wall by MIFAB Series MC-32 Series Urinal Carrier with two supporting plates, heavy-duty rectangular steel uprights with integral welded feet.

WALL HUNG LAVATORIES

Wall Hung Lavatories shall be supported independently of the wall by MIF AB Series MC -40 Series Lavatory Carrier with heavy duty rectangular steel uprights with integral welded feet. Wherever possible, fixtures shall be supplied with access for concealed arm supports and MIFAB Series MC-41 with cast ductile iron arms shall be used. Supply chrome plated escutcheons on slab type lavatories. Where fixtures are not available with access for concealed arms, fixtures shall be supported by MIFAB Series MC-31 or MC-32 for plate supported lavatories, or MC-40 for exposed arms.

WHEEL CHAIR LAVATORIES

Wheel chair lavatories shall be supported independently of the wall by MIF AB Series MC-42 Lavatory Carrier with extended cast ductile iron concealed arms and heavy duty rectangular steel uprights with integral welded feet.

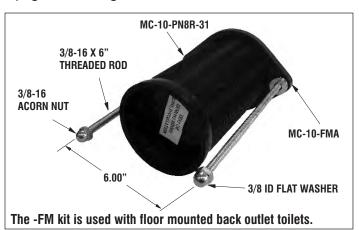







Design and dimensions are subject to modification. Prices do not include applicable taxes.



TYPICAL CLOSET CARRIER LAYOUT


ANSI Standard A-112.19.2, Vitreous China Plumbing Fixtures, paragraph 5.1.3.3 states that a "Physically Handicapped" water closet is a siphon jet design that is positioned 18" from the finished floor to the top of the rim.

The closet carrier layout detailed below has the following common installation dimensions:

- * Waste piping is pitched at 1/4" per foot
- * Centerline of the regular water closet outlets to the finished floor is 5 1/4"
- * Regular water closet rim to the finished floor is 15 1/4"
- * Centerline of the physically handicapped water closet outlet to the finished floor is 8 1/4"
- * Physically handicapped water closet rim to the finished floor is 18"

The regular water closets are supported by MIFAB's MC-10-27-37 long barrel carrier fittings that are produced with a 37" long barrel. This can save the installer time and material by not having to purchase and cut waste pipe to install between standard "short barrel" carrier fittings (MC-10 Series) that are 13" long.


Note that physically handicapped water closets can also be installed onto the MC-13, vertical, adjustable carrier by positioning the centerline of the 4" female threaded nipple connection in the faceplate 8-1/4" from the finished floor.

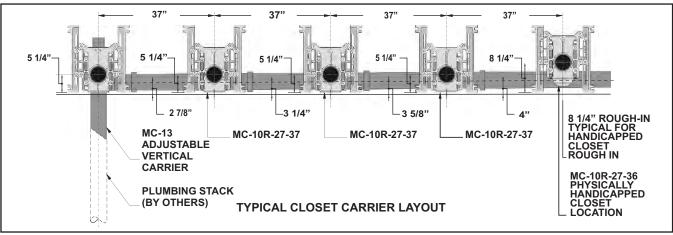


Up to a maximum of ten fixtures may be installed on either side of the stack fitting provided that the waste drain piping is pitched 1/8" per foot.

ADJUSTMENT RANGE OF MIFAB'S MC-10 AND MC-13 SERIES CARRIER FITTINGS

Lowest fixture outlet and drain line position

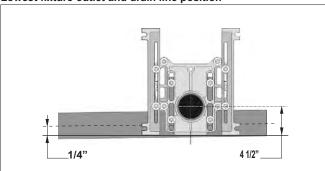

Highest fixture outlet and drain line position

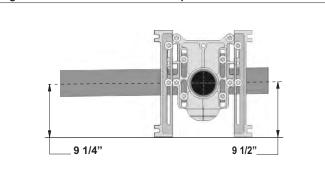

CENTER LINE OF FIXTURE OUTLET HEIGHT FROM	CENTERLINE DRAIN LINE POSITION FROM THE FINISHED FLOOR				
FINISHED FLOOR	MINIMUM	MAXIMUM			
4 1/2"	4 1/2"	1/4"			
4 3/4"	4 1/2"	1/2"			
5"	4 3/4"	3/4"			
5 1/2"	5 1/4"	1 1/4"			
6"	5 3/4"	1 3/4"			
6 1/2"	6 1/4"	2 1/4"			
7"	6 3/4"	2 3/4"			
7 1/2"	7 1/4"	3 1/4"			
8"	7 3/4"	3 3/4"			
8 1/4"	8"	4"			
8 1/2"	8 1/4"	4 1/4"			
8 3/4"	8 1/2"	4 1/2"			
9"	8 3/4"	4 3/4"			
9 1/2"	9 1/4"	5 1/4"			

Note: For all rough-in heights, the closet carrier fitting has a 4" vertical adjustment range. This is to ensure that there is enough drainage pitch on long runs.

Design and dimensions are subject to modification. Prices do not include applicable taxes.




HORIZONTAL AND VERTICAL ADJUSTABLE / FIXED CLOSET CARRIER MINIMUM SPACE REQUIREMENTS

Dimensions shown are minimum assuming carrier face plate and foot are built in wall and minimum length shortened coupling is used.


Dimensions shown are minimum assuming carrier fitting, face plate foot and rear anchor foot are located in pipe chase.

HORIZONTAL ADJUSTABLE CARRIERS

IN WALL

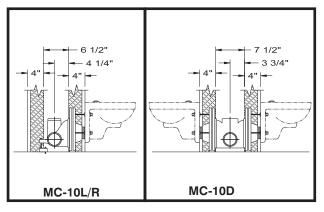


IN PIPE CHASE

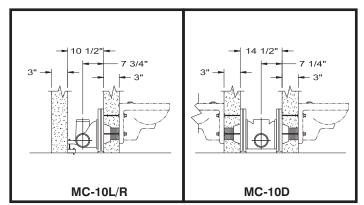


VERTICAL ADJUSTABLE CARRIERS

IN WALL

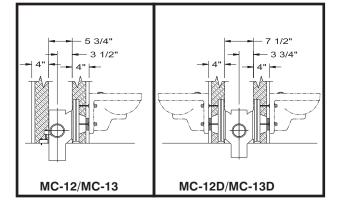


IN PIPE CHASE

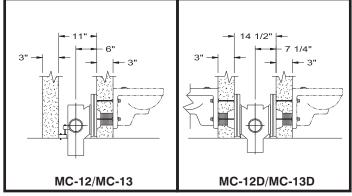


VERTICAL FIXED OFFSET CARRIERS

IN WALL

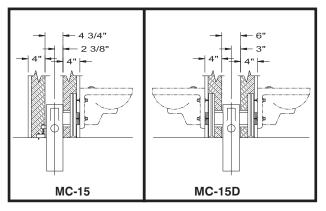

IN PIPE CHASE

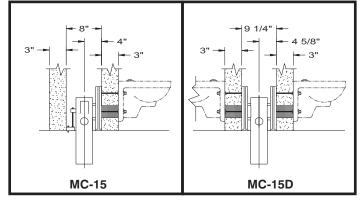

Design and dimensions are subject to modification. Prices do not include applicable taxes.


Visit www.mifab.com for the most recent product information.

Toll Free 1-800-387-3880, Fax 773-341-3049




HORIZONTAL ADJUSTABLE WATER CLOSET CARRIER (FOR SIPHON JET AND BLOWOUT TOILETS)

MC-10

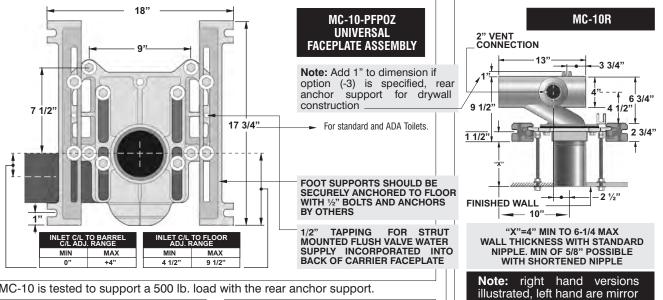

*MC-10 is tested to support a 500 lb. load with the rear anchor support.



SUPPORT STRUT AND CUSHION CLAMP BY OTHERS 1 1/4" 1 1/2<u>"</u> | 3 5/8 FINISHED WALL **→** 4.50"

Note: 8" tapered thread ABS nipple shipped standard with MC-10 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206)

"X"=4" MIN TO 6-1/4 MAX WALL THICKNESS WITH STANDARD NIPPLE. MIN. OF 5/8" POSSIBLE WITH SHORTENED NIPPLE

MC-10 DESCRIPTION MODEL WEIGHT (Lbs.) LIST PRICE NO. MC-10L Single left hand 66.00 700.00 MC-10R Single right hand 66.00 700.00 MC-10D Double - back to back 117.00 \$1212.00 Add for: -HS Hub and spigot connection (single) \$26.00

	2 3/4"
)	14 1/2"
	- "X"
,	FINISHED WALL

MC-10D

image

2" VENT CONNECTION

	(double) #50.00								
MC-10 OPTIONAL VARIATIONS:									
	LIST PRICE LIST PRICE								
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE		
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add		
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add		
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00		
-10	Auxiliary support, recommended	\$468.00	\$937.00	-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00		
	with nipple lengths over 12" (MC-10-AFS)			-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00		
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00		
-13	All galvanized	\$455.00	\$905.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00		
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	\$235.00	-FM	Floor mount back outlet fixture support	No Add	No Add		
-17	Test plug for custom cast iron nipples	\$ 72.00	\$145.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00		
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HDX	1,000 Lb. rated extra heavy duty	\$ 688.00	\$1313.00		
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add		
-22	Less fitting	\$351.00	\$514.00		12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	No Add		
				-PFAB	Prefabricated carriers	No Add	No Add		

\$50.00

(double)

* H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") Design and dimensions are subject to modification. Prices do not include applicable taxes.

MC-10D-HDX

2" VENT CONNECTION

14 1/2

-HDX

SUPPORT

2 3/4"

2 3/4"

-HDX SUPPORT


4 1/2"





MC-10-MDY 1 0001 BS EVE

1,000LBS. EXTRA HEAVY DUTY HORIZONTAL ADJUSTABLE WATER CLOSET CARRIER

MC-10-HDX

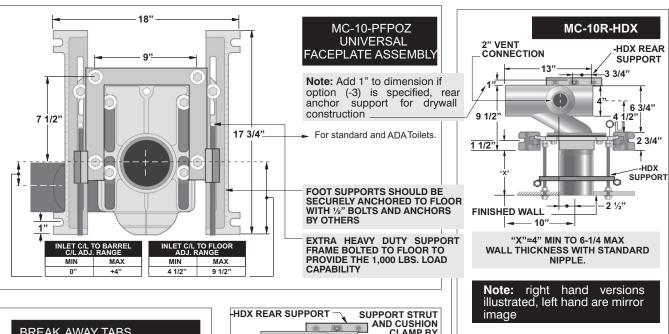





Note: 8" tapered thread ABS nipple shipped standard with MC-10 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-Cl) and tapered thread ABS with adjustable horn (-AH). (See page 206).

"X"=4" MIN TO 6-1/4 MAX					
WALL THICKNESS WITH STANDARD					
NIPPLE.					

MC-10-HDX			
MODEL No.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-10L-HDX	Single left hand	85.00	\$1388.00
MC-10R-HDX	Single right hand	85.00	\$1388.00
MC-10D-HDX	Double - back to back	160.00	\$2524.00
Add for	LIC Hard and and and	andian (alma)	-\


Add for: -HS Hub and spigot connection (single) \$28.00 (double) \$50.00

MC-10-	MC-10-HDX OPTIONAL VARIATIONS:								
LIST PRICE LIST			LIST PRICE			LIST PRICE	LIST PRICE		
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE		
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-AH8	8" ABS nipple with adjustable horn	No Add	No Add		
-1	Finishing / Tiling frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH12*	12" ABS nipple with adjustable horn*	No Add	No Add		
-12	12" tapered thread ABS nipple*	No Add	No Add	-CI-4	4" rolling thread cast iron nipple	\$ 30.00	\$ 60.00		
-13	All galvanized	\$ 468.00	\$ 937.00	-CI-6	6" rolling thread cast iron nipple	\$ 30.00	\$ 60.00		
-14	Vandal proof finished trim (MC-10-PFH-14)	\$ 118.00	\$ 235.00	-CI-8	8" rolling thread cast iron nipple	\$ 30.00	\$ 60.00		
-17	Test plug for custom cast iron nipples	\$ 72.00	\$ 145.00	-CI-12*	12" rolling thread cast iron nipple*	\$ 261.00	\$ 523.00		
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-CI-24	24" rolling thread cast iron nipple	\$ 697.00	\$1394.00		
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-0R8	8" rolling thread ABS nipple	No Add	No Add		
-22	Less fitting	\$ 351.00	\$ 514.00	-0R12*	12" rolling thread ABS nipple*	No Add	No Add		
				-PFAB	Prefabricated carriers	No Add	No Add		


^{*} H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00 Design and dimensions are subject to modification. Prices do not include applicable taxes.



MC-10-EXT HORIZONTAL ADJUSTABLE WATER CLOSET CARRIER FOR ADA HEIGHT WATER CLOSETS IN MIDDLE OF BATTERY (FOR SIPHON JET AND BLOWOUT TOILETS)

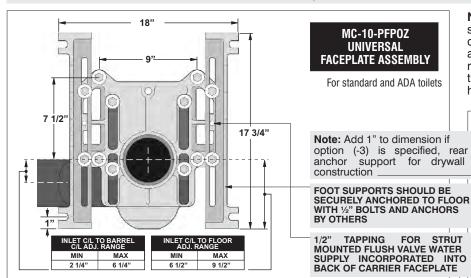



Note: 8" tapered thread ABS nipple shipped standard with MC-10 Series The universal faceplate carriers. assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).

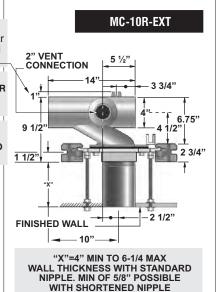

Note: right hand versions illustrated, left hand are mirror

image

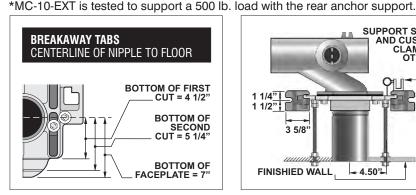



MC-10-EXT			
MODEL No.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-10L-EXT MC-10R-EXT MC-10D-EXT	Single left hand Single right hand Double - back to back	66.00 66.00 117.00	\$ 954.00 \$ 954.00 \$1785.00



MC-10-EXT. OPTIONAL VARIATIONS:							
		LIST PRICE	LIST PRICE			LIST PRICE	LIST PRICE
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00
-10	Auxiliary support, recommended	\$468.00	\$937.00	-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00
	with nipple lengths over 12" (MC-10-AFS)			-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00
-13	All galvanized	\$455.00	\$905.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	\$235.00	-FM	Floor mount back outlet fixture support	No Add	No Add
-17	Test plug for custom cast iron nipples	\$ 72.00	\$145.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HDX	1,000 Lb. rated extra heavy duty	\$ 688.00	\$1313.00
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add
-22	Less fitting	\$605.00	\$1087.00	-0R12*	12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	No Add
				-PFAB	Prefabricated carriers	No Add	No Add

* H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00 Design and dimensions are subject to modification. Prices do not include applicable taxes.

14 1/2"

10"

1 1/2"

¹4 1/4"


BOTTOM OF FIRST CUT = 4 1/2'

> BOTTOM OF SECOND CUT = 5 1/4"


BOTTOM OF FACEPLATE = 7"



HORIZONTAL ADJUSTABLE WATER CLOSET CARRIER WITH AUX.2" INLET (FOR SIPHON JET AND BLOWOUT TOILETS)

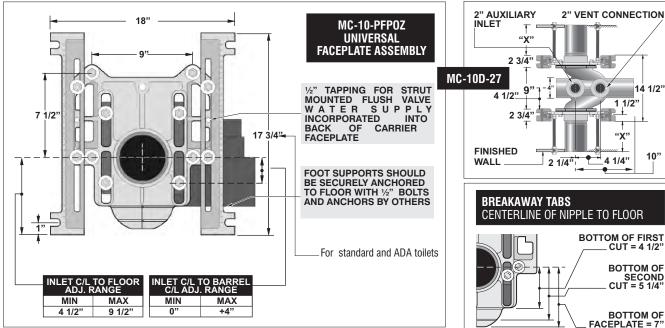



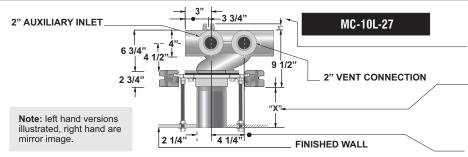

Note: Add 1" to dimension if option (-3) is specified, rear anchor support for drywall construction

"X"=4" MIN TO 6-1/4 MAX WALL THICKNESS WITH STANDARD NIPPLE. MIN OF 5/8" POSSIBLE WITH SHORTENED NIPPLE

5 1/2" DIMENSION BETWEEN AUXILIARY INLET AND VENT IS IDEAL FOR A STANDARD WYE AND 1/8th BEND CONNECTION

Note: 8" tapered thread ABS nipple shipped standard with MC-10 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).

MC-10-27			
MODEL No.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-10L-27 MC-10R-27 MC-10D-27	Single left hand Single right hand Double - back to back	66.00 66.00 117.00	\$ 929.00 \$ 929.00 \$1,441.00

\$28.00 Add for: -HS Hub and spigot connection (single) (double) \$50.00



MC-1	MC-10-27 OPTIONAL VARIATIONS:						
		LIST PRICE	LIST PRICE			LIST PRICE	LIST PRICE
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00
-10	Auxiliary support, recommended	\$468.00	\$937.00	-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00
	with nipple lengths over 12" (MC-10-AFS)			-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00
-13	All galvanized	\$455.00	\$905.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	\$235.00	-FM	Floor mount back outlet fixture support	No Add	No Add
-17	Test plug for custom cast iron nipples	\$ 72.00	\$145.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HDX	1,000 Lb. rated extra heavy duty	\$ 688.00	\$1313.00
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00		8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add
-22	Less fitting	\$580.00	\$743.00		12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	No Add
				-PFAB	Prefabricated carriers	No Add	No Add


* H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00




MC-10-27-37

HORIZONTAL ADJUSTABLE WATER CLOSET CARRIER WITH AUX.2" INLET & 37" LONG BARREL (FOR SIPHON JET AND BLOWOUT TOILETS)


MC-10-27-37

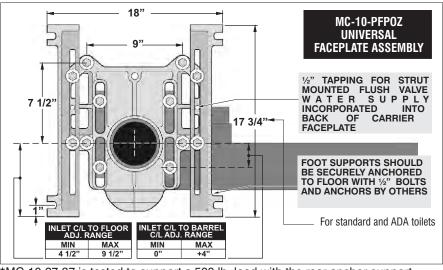

Note: 8" tapered thread ABS nipple shipped standard with MC-10 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).



*MC-10-27-37 is tested to support a 500 lb. load with the rear anchor support.

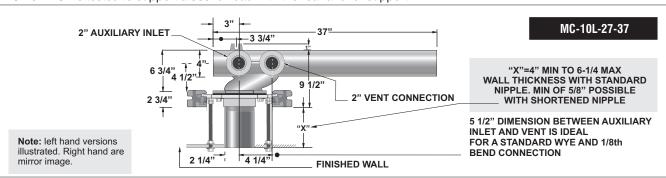



MC-10-27-37			
MODEL NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-10L-27-37	Single left hand	85.00	\$ 1013.00
MC-10R-27-37	Single right hand	85.00	\$ 1013.00
MC-10D-27-37	Double - back to back	135.00	\$1,758.00
Add for:	-HS Hub and spigot con	\$ 147.00	

(double)

\$ 366.00

"X"	"2" AUXILIARY INLET
2 3/4" 14 9" 1-4" 1 1/2" 1 1/2"	1/2"
2 3/4" "X"	2" VENT CONNECTION
FINISHED 2 1/4" 4 1/4"	MC-10D-27-37

	(4042.6)							
MC-1	MC-10-27-37 OPTIONAL VARIATIONS:							
		LIST PRICE	LIST PRICE			LIST PRICE	LIST PRICE	
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE	
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add	
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add	
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00	
-10	Auxiliary support, recommended	\$468.00	\$937.00	-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00	
	with nipple lengths over 12" (MC-10-AFS)			-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00	
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00	
-13	All galvanized	\$455.00	\$905.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00	
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	\$235.00	-FM	Floor mount back outlet fixture support	No Add	No Add	
-17	Test plug for custom cast iron nipples	\$ 72.00	\$145.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00	
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HDX	1,000 Lb. rated extra heavy duty	\$ 688.00	\$1313.00	
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add	
-22	Less fitting	\$664.00	\$1060.00		12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	No Add	
				-PFAB	Prefabricated carriers	No Add	No Add	


* H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00




DETERMINING LEFT AND RIGHT HAND HORIZONTAL CARRIER SYSTEM Direction to flow to stack Direction to flow to stack STACK MC-10R-PF MC-13-2-PF MC-10L-PF MC-10L-PF MC-10R-PF From the left = Left handed carriers From the right = Right handed carriers

From the perspective of facing the vertical stack, if the stack is to the left of you, a left handed carrier is required. If the stack is to the right of you, a right handed carrier is required.

DETERMINING LEFT AND RIGHT HAND VERTICAL CARRIER SYSTEM

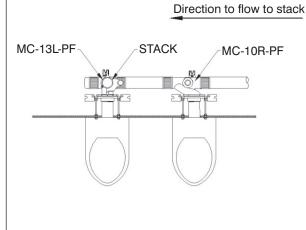

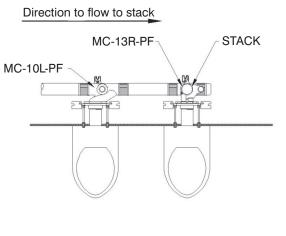



From the perspective of facing the vertical stack, if the open inlet is to the left of you, you have a left handed carrier. If the open inlet is to the right of you, you have a right handed carrier.



VERTICAL ADJUSTABLE WATER CLOSET CARRIER (FOR SIPHON JET AND BLOWOUT TOILETS)

MC-12

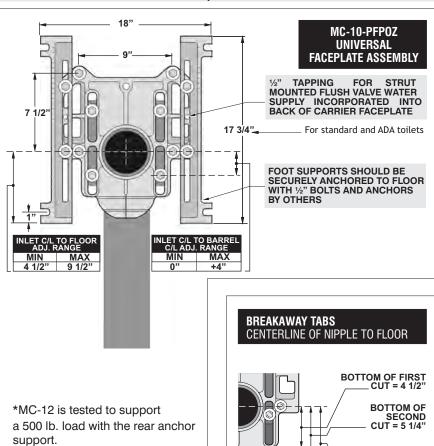

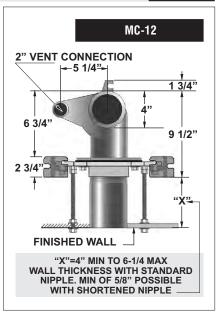


Note: 8" tapered thread ABS nipple shipped standard with MC-10 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron

BOTTOM OF FACEPLATE = 7"

Function: To be used as a stand alone carrier. No side inlets.

(-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).

MC-12			
MODEL NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-12 MC-12D	Single Double - back to back	75.00 125.00	\$ 998.00 \$1591.00
Add for:	-HS Hub and spigot con	(double)	\$ 86.00 \$ 104.00

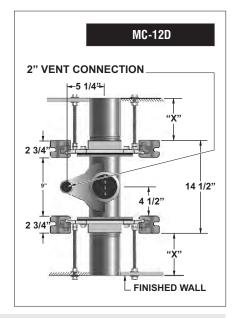

*NOTE: MC-14 fixed vertical or MC-15 vertical offset recommended for most applications


MC-1	MC-12 OPTIONAL VARIATIONS:							
		LIST PRICE	LIST PRICE				LIST PRICE	
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE	
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add	
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add	
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00	
-10	Auxiliary support, recommended	\$468.00	\$937.00	-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00	
	with nipple lengths over 12" (MC-10-AFS)			-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00	
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00	
-13	All galvanized	\$522.00	\$1042.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00	
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	\$235.00	-FM	Floor mount back outlet fixture support	No Add	No Add	
-17	Test plug for custom cast iron nipples	\$ 72.00	\$145.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00	
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HDX	1,000 Lb. rated extra heavy duty	\$ 688.00	\$1313.00	
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add	
-22	Less fitting	\$649.00	\$893.00	-0R12*	12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	No Add	
				-PFAB	Prefabricated carriers	No Add	No Add	


^{*} H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00




VERTICAL ADJUSTABLE HUB AND SPIGOT WATER CLOSET CARRIER (FOR SIPHON JET AND BLOWOUT TOILETS)


MC-12-HS

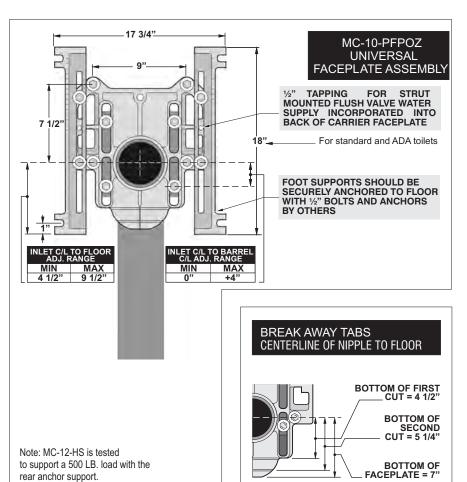



MC-12-HS			
MODEL No.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-12-HS MC-12D-HS	Single left hand Double - back to back	75.00 125.00	\$1084.00 \$1695.00

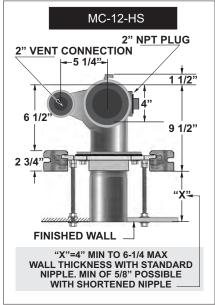

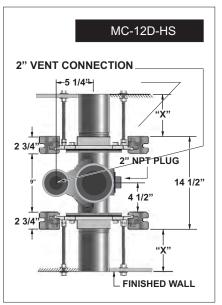

*NOTE: MC-14 fixed vertical or MC-15 vertical offset recommended for most applications

MC-12-	MC-12-HS OPTIONAL VARIATIONS:						
		LIST PRICE	LIST PRICE	RICE		LIST PRICE	LIST PRICE
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-31	Two 2" auxiliary inlets	\$ 462.00	\$ 489.00
-1	Finishing / Tiling frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-39	41 1/4" long fitting	\$ 601.00	\$1202.00
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-AH8	8" ABS nipple with adjustable horn	No Add	No Add
-10	Auxiliary support, recommended	\$ 468.00	\$ 937.00	-AH12*	12" ABS nipple with adjustable horn*	No Add	No Add
	with nipple lengths over 12" (MC-10-AFS)		-CI-4	4" rolling thread cast iron nipple	\$ 30.00	\$ 60.00
-12	12" tapered thread ABS nipple*	No Add	No Add	-CI-6	6" rolling thread cast iron nipple	\$ 30.00	\$ 60.00
-13	All galvanized	\$ 522.00	\$1042.00	-CI-8	8" rolling thread cast iron nipple	\$ 30.00	\$ 60.00
-14	Vandal proof finished trim (MC-10-PFH-14	\$ 118.00	\$ 235.00	-CI-12*	12" rolling thread cast iron nipple*	\$ 261.00	\$ 523.00
-17	Test plug for custom cast iron nipples	\$ 72.00	\$ 145.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HD-750	750 lb rated heavy duty	\$ 572.00	\$1101.00
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-HDX	1,000 lb. rated extra heavy duty	\$ 688.00	\$1313.00
-22	Less fitting	\$ 735.00	\$ 997.00	-0R8	8" rolling thread ABS nipple	No Add	No Add
-25	2" auxiliary inlet, right side	\$ 230.00	\$ 230.00	-0R12*	12" rolling thread ABS nipple*	No Add	No Add
-26	2" auxiliary inlet, left side	\$ 230.00	\$ 230.00	-PFAB	Prefabricated carriers	No Add	No Add

^{*} H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.

MIFAB, Inc. www.mifab.com sales@mifab.com




VERTICAL ADJUSTABLE WATER CLOSET CARRIER WITH ONE OR TWO SIDE INLETS (FOR SIPHON JET AND BLOWOUT TOILETS)


MC-13

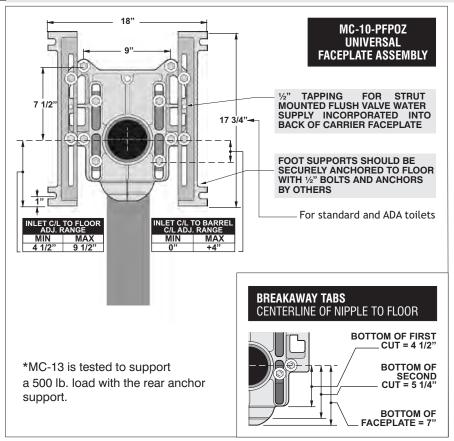

Note: 8" tapered thread ABS nipple shipped standard with MC-13 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).

MC-13						
MODEL No.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE			
MC-13-2 MC-13L MC-13R MC-13D MC-13D-2	Single - two side inlet Single - one left hand side inlet Single - one right hand side inlet Double - back to back one side inlet Double - back to back two side inlet	80.00 80.00 80.00 130.00 130.00	\$ 1210.00 \$ 1112.00 \$ 1112.00 \$ 1729.00 \$ 1827.00			
Add for:	-HS Hub and spigot connection (single) \$ 92.00 (double) \$ 312.00					

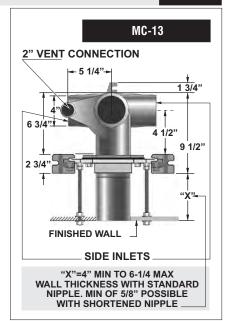

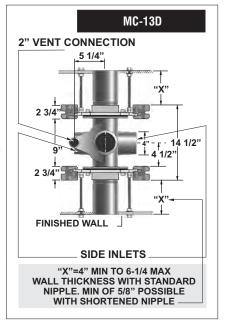


MC-	MC-13 OPTIONAL VARIATIONS:							
		LIST PRICE	LIST PRICE			LIST PRICE	LIST PRICE	
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE	
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-31	Two 2" Auxiliary inlets	\$ 462.00	\$ 489.00	
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add	
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add	
-10	Auxiliary support, recommended	\$468.00	\$ 937.00	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00	
	with nipple lengths over 12" (MC-10-AFS)			-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00	
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add	-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00	
-13	All galvanized	\$522.00	\$1042.00	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00	
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	\$ 235.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00	
-17	Test plug for custom cast iron nipples	\$ 72.00	\$ 145.00	-FM	Floor mount back outlet fixture support	No Add	No Add	
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00	
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-HDX	1,000 Lb. rated extra heavy duty	\$ 688.00	\$1313.00	
-22	Less fitting	\$763.00		-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add	
-25	2" Auxiliary inlet, right side		\$ 230.00		12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	No Add	
-26	2" Auxiliary inlet, left side	\$230.00	\$ 230.00	-PFAB	Prefabricated carriers	No Add	No Add	

* H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00




MC-13-HS VERTICAL ADJUSTABLE HUB AND SPIGOT WATER CLOSET CARRIER WITH ONE OR TWO SIDE INLETS (FOR SIPHON JET AND BLOWOUT TOILETS)


MC-13-HS

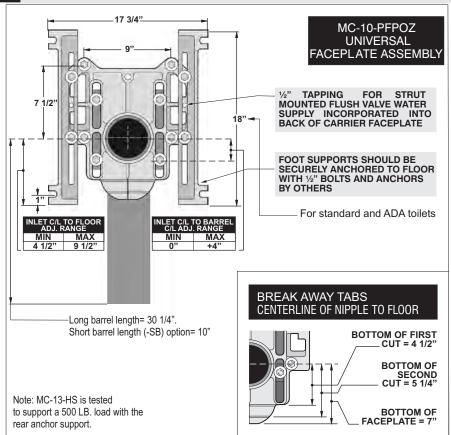

Note: 8" tapered thread ABS nipple shipped standard with MC-13 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).

MC-13-HS			
MODEL No.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-13-2-HS	Single - two side inlets	80.00	\$ 1302.00
MC-13L-HS	Single - one left hand side inlet	80.00	\$ 1205.00
MC-13R-HS	Single - one right hand side inlet	80.00	\$ 1205.00
MC-13D-HS	Double - back to back one side inlet	130.00	\$ 2042.00
MC-13D-2-HS	Double - back to back two side inlets	130.00	\$ 2139.00

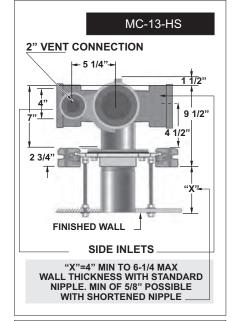

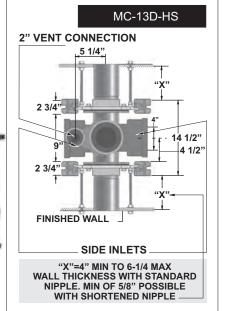

MC-13-	MC-13-HS OPTIONAL VARIATIONS:							
		LIST PRICE	LIST PRICE			LIST PRICE	LIST PRICE	
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE	
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-AH8	8" ABS nipple with adjustable horn	No Add	No Add	
-1	Finishing / Tiling frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH12*	12" ABS nipple with adjustable horn*	No Add	No Add	
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-CI-4	4" rolling thread cast iron nipple	\$ 30.00	\$ 60.00	
-10	Auxiliary support, recommended	\$468.00	\$ 937.00	-CI-6	6" rolling thread cast iron nipple	\$ 30.00	\$ 60.00	
	with nipple lengths over 12" (MC-10-AFS))		-CI-8	8" rolling thread cast iron nipple	\$ 30.00	\$ 60.00	
-12	12" tapered thread ABS nipple*	No Add	No Add	-CI-12*	12" rolling thread cast iron nipple*	\$ 261.00	\$ 523.00	
-13	All galvanized	\$ 522.00	\$1042.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00	
-14	Vandal proof finished trim	\$ 118.00	\$ 235.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00	
-17	Test plug for custom cast iron nipples	\$ 72.00	\$ 145.00	-HDX	1,000 lb. rated extra heavy duty	\$688.00	\$1313.00	
-19	Nipple wrench	\$ 61.00	\$ 61.00	-0R8	8" rolling thread ABS nipple	No Add	No Add	
-20	Flush valve support	\$ 47.00	\$ 95.00	-0R12*	12" rolling thread ABS nipple*	No Add	No Add	
-22	Less fitting	\$ 856.00	\$1344.00	-PFAB	Prefabricated carriers	No Add	No Add	
-25	2" Auxiliary inlet, right side	\$ 230.00	\$ 230.00					
-39	41 1/4" long fitting	\$ 603.00	\$1206.00					


^{*} H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.

MC-14



FIXED VERTICAL ON-STACK WATER CLOSET CARRIER

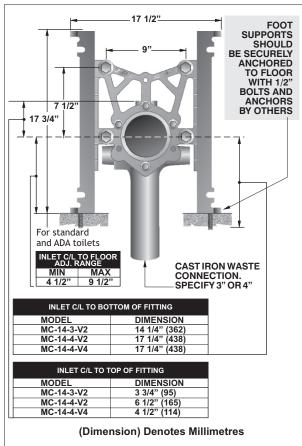

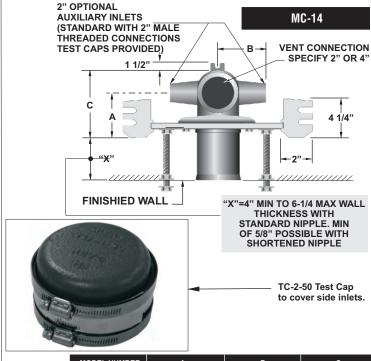

MODEL NUMBER	A	В	С
MC-14-3-V2	4 3/4" (89)	5 1/2" (140)	5 7/8" (125)
MC-14-4-V2	4 7/8" (100)	5 1/2" (140)	7" (156)
MC-14-4-V4	4 7/8" (100)	5 1/2" (140)	7" (156)

waste with 2" vent waste with 2" vent waste with 4" vent

Note: 8" tapered thread ABS nipple shipped standard with MC-14 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).

*MC-14 is tested to support a 500 lb. load with the rear anchor support.

MC-14 SERIES								
MODEL NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE					
MC-14-3-V2	3" No-Hub Single - with 2" vent	62.00	\$ 785.00					
MC-14-4-V2	4" No-Hub Single - with 2" vent	70.00	\$ 785.00					
MC-14-4-V4	4" No-Hub Single - with 4" vent	70.00	\$ 785.00					
Add for:	-HS Hub and spigot connection		\$ 23.00					



MC-	MC-14 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	-31	Two 2" Auxiliary inlets	\$ 460.00		
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add		
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add		
-10	Auxiliary support, recommended	\$468.00	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00		
	with nipple lengths over 12" (MC-10-AFS)		-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00		
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00		
-13	All galvanized	\$522.00	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00		
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00		
-17	Test plug for cast iron nipples	\$ 69.00	-FM	Floor mount back outlet fixture support	No Add		
-19	Nipple wrench (MC-10-PCW)	\$ 58.00	-HD-750	750 lb. rated heavy duty	\$ 572.00		
-20	Flush valve support (MC-10-FVS)	\$ 45.00	-HDX	1,000 lb. rated extra heavy duty	\$ 688.00		
-22	Less Fitting	\$303.00	-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add		
-25	2" Auxiliary inlet, right side	\$230.00	-0R12*	12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add		
-26	2" Auxiliary inlet, left side	\$230.00	-PFAB	Prefabricated carriers	No Add		
* H-1167	7-KA-14 (Threaded rods for 12" nipples 5/8" x 14")	17.00					


^{*} H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14")

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MC-15 FIXED VERTICAL WATER CLOSET CARRIER OFFSET FROM STACK




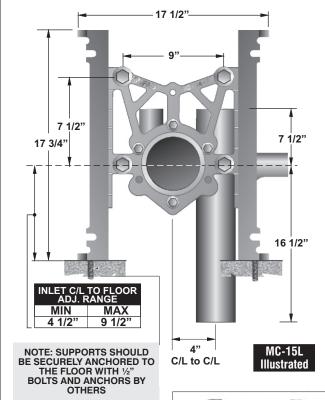


Note: 8" tapered thread ABS nipple shipped standard with MC-15 Series carriers. The universal faceplate assembly accepts all nipple variations, rolling thread (-OR), cast iron (-CI) and tapered thread ABS with adjustable horn (-AH). (See page 206).



MC-15			
MODEL NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
MC-15L	Single left hand offset	77.00	\$ 807.00
MC-15R	Single right hand offset	77.00	\$ 807.00
MC-15D	Double - back to back offset	116.00	\$1440.00
Add for:	-HS Hub and spigot connection (sir	ngle)	\$ 29.00

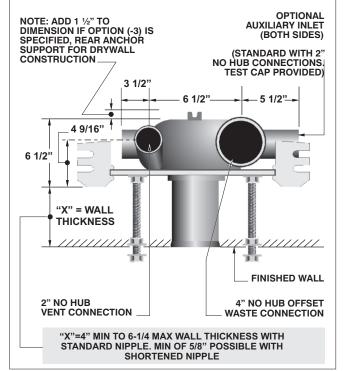

*MC-15 is tested to support a 500 lb. load with the rear anchor support.

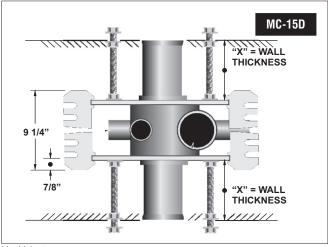

(double) \$ 50.00


MC-1	MC-15 OPTIONAL VARIATIONS:							
		LIST PRICE	LIST PRICE			LIST PRICE	LIST PRICE	
SUFFIX	DESCRIPTION	SINGLE	DOUBLE	SUFFIX	DESCRIPTION	SINGLE	DOUBLE	
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00	-31	Two 2" Auxiliary inlets	\$ 460.00		
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add	
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add	
-10	Auxiliary support, recommended	\$468.00	\$ 937.00	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00	
	with nipple lengths over 12" (MC-10-AFS)			-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00	
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add	-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00	
-13	All galvanized	\$522.00	\$1042.00	-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00	
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	\$ 235.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00	
-17	Test plug for custom cast iron nipples	\$ 72.00	\$ 145.00	-FM	Floor mount back outlet fixture support	No Add	No Add	
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00	-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00	
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00	-HDX	1,000 Lb. rated extra heavy duty	\$ 688.00	\$1313.00	
-22	Less fitting	\$325.00	\$ 476.00	-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add	
-25	2" Auxiliary inlet, right side	\$230.00	\$ 230.00	-0R12*	12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	No Add	
-26	2" Auxiliary inlet, left side	\$230.00	\$ 230.00	-PFAB	Prefabricated carriers	No Add	No Add	

* H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") 17.00 34.00



MC-21 COMPACT REAR OUTLET WATER CLOSET CARRIER

MC-21

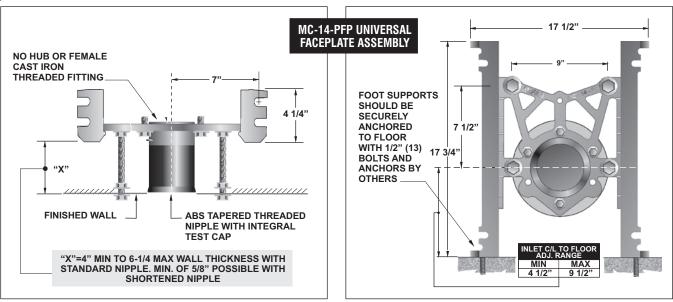


MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-21N	30.00	No hub for siphon jet	\$ 660.00
MC-21T	30.00	Female threaded for siphon jet	\$ 660.00
MC-22N	30.00	No hub for blowout	\$ 660.00
MC-22T	30.00	Female threaded for blowout	\$ 660.00


MC-21 TO MC-22 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	-14	Vandal proof finish trim (MC-10-PFH-14)	\$ 118.00		
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	-17	Test plug for cast iron nipples	\$ 72.00		
-10	Auxiliary foot support, recommended with nipple	\$ 468.00	-19	Nipple wrench (MC-10-PCW)	\$ 61.00		
	Lengths over 12" (MC-10-AFS)		-20	Flush valve support (MC-10-FVS)	\$ 47.00		
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add		
-13	All galvanized	\$ 522.00	-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add		

^{*} H-1167-KA-14 (Threaded rods for 12" nipples 5/8" x 14") \$ 17.00

C-24, MC-25 RESIDENTIAL WATER CLOSET CARRIER

MC-24, MC-25

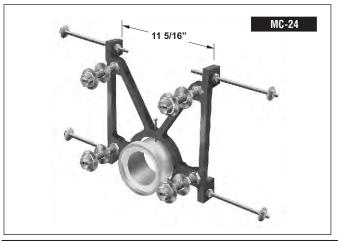

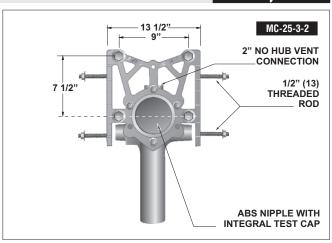


MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-24	25.00	Single carrier with 3" PVC adapter	\$ 369.00
MC-24-DC	25.00	Single carrier with foot supports and opening for 4" PVC adapter fitting	\$ 369.00
MC-25-3-2	30.00	3" No Hub single with 2" vent for connection to No Hub, PVC, ABS, Copper	\$ 432.00
MC-25-4-2	40.00	4" No Hub single with 2" vent for connection to No Hub, PVC, ABS, Copper	\$ 593.00
MC-25-4-4	40.00	4" No Hub single with 4" vent for connection to No Hub, PVC, ABS, Copper	\$ 593.00
MC-25-4D-RV2	50.00	4" No Hub - back to back	\$1014.00
MC-25-RV2	40.00	4" No Hub offset with 2" vent	\$ 779.00
Add for:		-29 Foot support system (MC-25 Series only)	\$ 191.00



MC-26 SINGLE STACK FITTING FOR FLOOR MOUNTED BACK OUTLET WATER CLOSETS



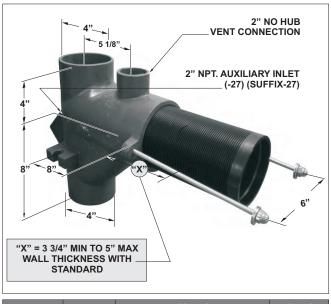


MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-26	28.00	4" Single fitting with 2" vent	\$ 799.00

MC-2	6 and MC-27 OPTIONAL VARIATIONS:		
		LIST PRICE	LIST PRICE
SUFFIX	DESCRIPTION	MC-26	MC-27
-01	Neoprene bowl gasket (MC-10-PBG)	\$ 35.00	\$ 69.00
-1	Finishing / Tiling Frame (MC-10-1-PTFK)	\$ 45.00	\$ 90.00
-3	Rear anchor support (MC-10-3-PRSFK)	Standard	N/A
-10	Auxiliary support, recommended with nipple	\$ 468.00	\$ 937.00
	lengths over 12" (MC-10-AFS)		
-12	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	No Add
-13	All galvanized	\$ 522.00	\$1042.00
-14	Vandal proof finish trim (MC-10-PFH-14)	\$ 118.00	\$ 235.00
-17	Test plug for cast iron nipples	\$ 72.00	\$ 145.00
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	\$ 61.00
-20	Flush valve support (MC-10-FVS)	\$ 47.00	\$ 95.00
-31	Two 2" NH vent connections	N/A	\$ 252.00
-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	No Add
-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add	No Add
-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	\$ 60.00
-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	\$ 60.00
-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	\$ 60.00
-CI-12*	12" rolling thread cast iron nipple* (MC-10-PN12R-50)	\$ 261.00	\$ 523.00
-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$ 697.00	\$1394.00
-HD-750	750 lb. rated heavy duty	\$ 572.00	\$1101.00
-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	No Add
-0R12*		No Add	No Add

MC-27 90° DOUBLE STACK FITTING FOR FLOOR MOUNTED BACK OUTLET WATER CLOSETS


MC-27

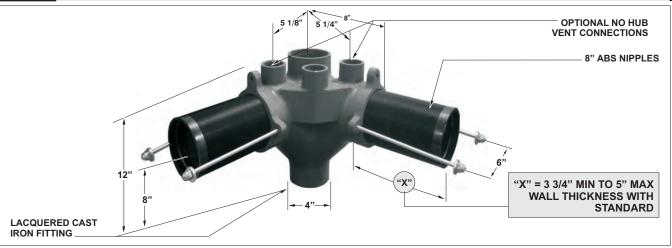

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-27	46.00	Double fitting for back outlet, floor mounted closet	\$ 1425.00

MC-28 90 DOUBLE NO-HUB STACK FITTING FOR FLOOR MOUNTED BACK OUTLET WATER CLOSETS

MC-28

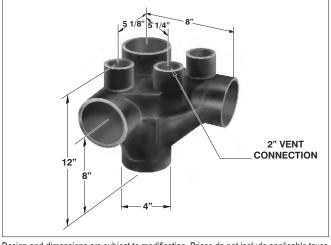


Design and dimensions are sub	ject to modification. Pri-	ces do not include applicable taxes.

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-28	46.00	4" Pipe size 90°Double fitting with 2" center vent	\$ 801.00

MC-28 (MC-28 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-13	All galvanized	\$ 522.00				
-23	45° Auxiliary inlet	\$ 229.00				
-32	No hub nipple w/4" cleanout for penal fixtures	\$ 939.00				



MC-31 SINGLE HANGER PLATE CARRIER WITH TWO UPRIGHTS

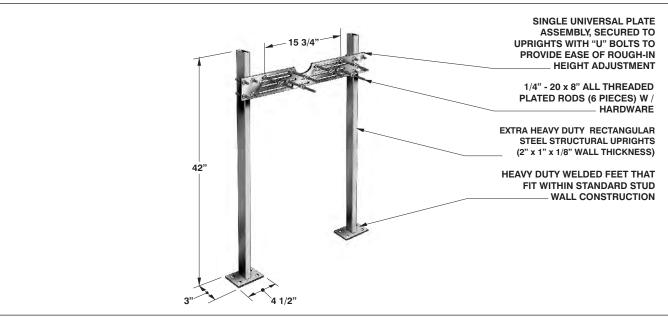


NOTE: Foot supports should be securely anchored to floor with 1/2" bolts and anchors by others

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-31	22.00	Single hanger plate - two uprights	
MC-31-HDH	25.00	00 Single hanger plate with heavy duty hanger	
MC-31D	28.00	Single hanger plate - back to back	
MC-31-C	60.00	Two hanger plates - three uprights for corner mounted lavatory	\$ 841.00

MC-31 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00		
-B	Floor to ceiling upright	\$ 632.00	-20	Flush valve support (MC-10-FVS)	\$ 47.00		

MC-32 DOUBLE PLATE TYPE CARRIER SYSTEM WITH 2 UPRIGHTS

MC-32

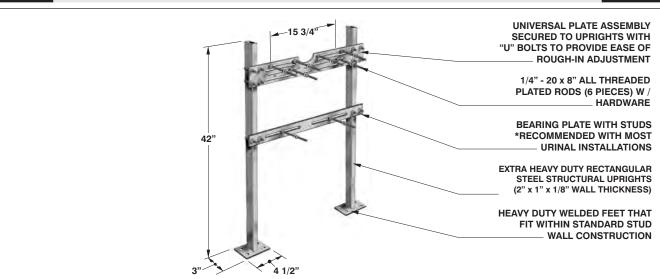

NOTE: Foot supports should be securely anchored to floor with ½" bolts and anchors by others

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-32	27.00	With bearing plate and studs	
MC-32D	29.00	With bearing plate - back to back	

MC-32 01	MC-32 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00		
-B	Floor to ceiling upright	\$ 632.00	-20	Flush valve support (MC-10-FVS)	\$ 47.00		

MC-34



42"

4 1/2"

MC-33 SINGLE HANGER PLATE CARRIER WITH THREE UPRIGHTS

19.62



1/4" - 20 x 8" ALL THREADED PLATED
___ RODS (6 PIECES) W / HARDWARE

EXTRA HEAVY DUTY RECTANGULAR STEEL STRUCTURAL UPRIGHTS (2" x 1" x 1/8" WALL THICKNESS)

HEAVY DUTY WELDED FEET THAT FIT
WITHIN STANDARD STUD WALL
CONSTRUCTION




NOTE: FOOT SUPPORTS SHOULD BE SECURELY ANCHORED TO FLOOR WITH 1/2" BOLTS AND

MC-33 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00	
			-Z	Add per each foot over 42" of upright	\$ 206.00	

MC-34 SINGLE HANGER PLATE CARRIER WITH EXPOSED ARMS

ANCHORS BY OTHERS

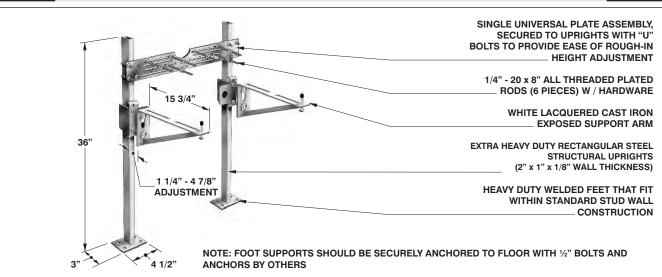


MODEL NO.	WT Lbs.	DESCRIPTION	
MC-34	68.00	Hanger plate with exposed arms	
MC-34D	70.00	Back to back hanger plate with exposed arms (Note: option prices are double for MC-34D)	\$1829.00

MC-34 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00		
-G	Wall support plate (MC-31-PUP)	\$ 296.00	-Z	Add per each foot over 42" of upright	\$ 422.00		
-88	3/8" Threaded eye bolts for cast iron lavs (H-1208)	\$ 145.00	-14	Vandal proof finish trim (MC-10-PFH-14)	\$ 118.00		



HANGER PLATE CARRIER WITH 3 UPRIGHTS AND EXPOSED ARMS

MC-35

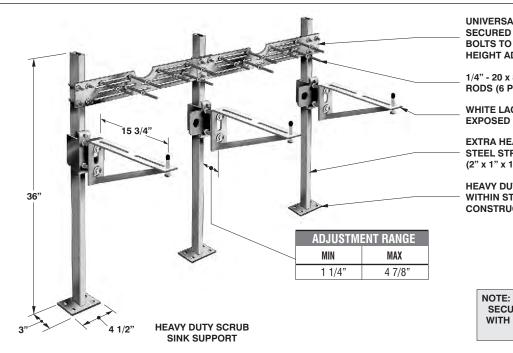

UNIVERSAL PLATE ASSEMBLY, SECURED TO UPRIGHTS WITH "U" BOLTS TO PROVIDE EASE OF ROUGH-IN HEIGHT ADJUSTMENT

1/4" - 20 x 8" ALL THREADED PLATED RODS (6 PIECES) W / HARDWARE

WHITE LACQUERED CAST IRON EXPOSED SUPPORT ARM

EXTRA HEAVY DUTY RECTANGULAR STEEL STRUCTURAL UPRIGHTS (2" x 1" x 1/8" WALL THICKNESS)

HEAVY DUTY WELDED FEET THAT FIT WITHIN STANDARD STUD WALL CONSTRUCTION


NOTE: FOOT SUPPORTS SHOULD BE SECURELY ANCHORED TO FLOOR WITH ½" BOLTS AND ANCHORS BY OTHERS

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-35	102.00	Hanger plates with exposed arms and three uprights	\$2747.00

MC-35 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-A	Stud length over 8" (specify), Add per inch	\$ 50.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00		
-G	Wall support plate (MC-31-PUP)	\$ 593.00	-Z	Add per each foot over 42" of upright	\$ 845.00		
-88	3/8" Threaded eye bolts for cast iron lavs (H-1208)	\$ 290.00	-14	Vandal proof finish trim (MC-10-PFH-14)	\$ 236.00		

MC-36 TO MC-39D WALL SUPPORTED FIXTURE MOUNTING PLATES

MC-36 TO MC-39D

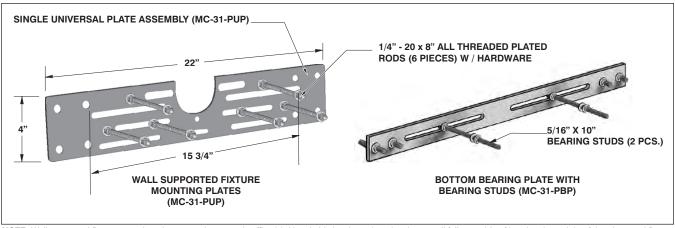

NOTE: Wall supported fixture mounting plates must be securely affixed (with suitable hardware by others) to a wall fully capable of bearing the weight of the plate and fixture.

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-36	6.00	Top universal plate with studs only	\$ 86.00
MC-36-2	MC-36-2 24.00 Top universal plate with studs and bottom bearing plate with bearing studs		\$ 198.00
MC-37	MC-37 12.00 Top front and back plates with studs and bottom front and back plates with bearing studs		\$ 223.00
MC-38D	15.00	Back to back top front plates with studs only	\$ 153.00
MC-39D	24.00	Back to back top front plate with studs and bottom front plate with bearing studs	\$ 258.00


Note: Standard studs are 1/4" - 20 x 8" (6pcs) with hardware. Bearing studs are 5/16" x 10" (2pcs) with hardware.

MC-36 T	MC-36 TO MC-39D OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST	PRICE					
		SINGLE	DOUBLE					
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	\$ 50.00					



MC-41-TR FIXTURE CARRIER WITH CONCEALED ARMS AND MEASURING PLATES

MC-41-TR

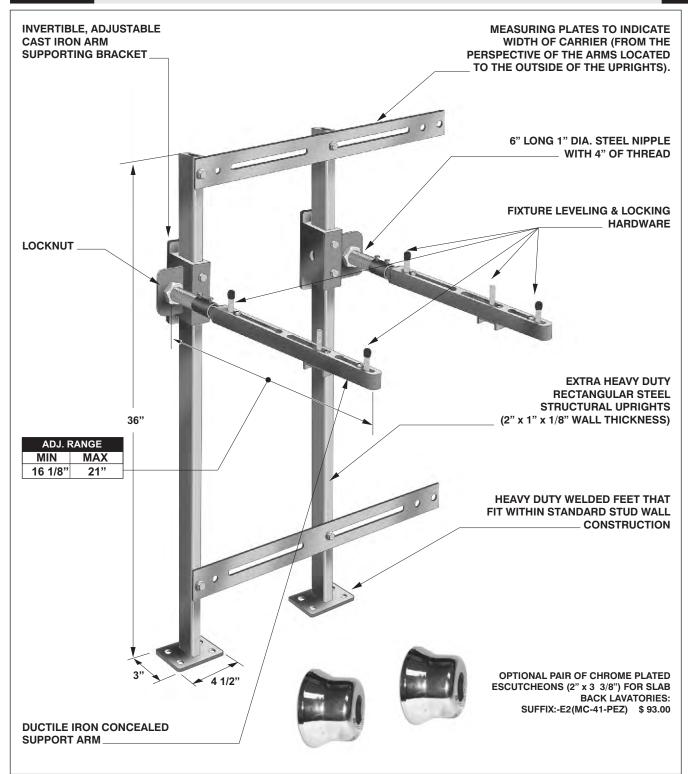

NOTE: Foot supports should be securely anchored to floor with $\frac{1}{2}$ " bolts and anchors by others

	MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
Γ	MC-41-TR	28.00	Concealed arms with two vertical uprights and measuring plates	\$ 422.00
	MC-41D-TR	42.00	Concealed arms, back to back (Note: Option prices are double for MC-41D-TR)	\$ 707.00

MC-41-TR OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-A	Add per inch for nipple length over 6"	\$ 25.00	-G	Wall support plate (MC-31-PUP)	\$148.00			
-B	Floor to ceiling upright	\$ 632.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00			
-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00	-32	Foot pedal mounting plate	\$ 71.00			


Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

The the most recent product information.



FIXTURE CARRIER WITH EXPOSED ARMS

MC-40

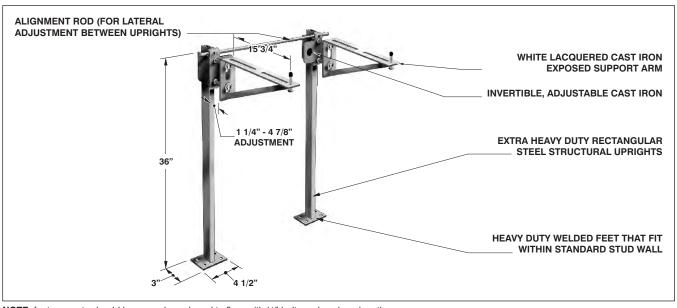


 $\textbf{NOTE:} \ \text{foot supports should be securely anchored to floor with } 1 \!\!\! / 2 \text{" bolts and anchors by others}$

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-40	36.00	Exposed arms with two vertical uprights	
MC-40D			\$ 1156.00

MC-40 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00			
-F	Bar support valve plate	\$ 148.00	-Z	Add per each foot over 42" of upright	\$ 526.00			
-G	Wall support plate (MC-31-PUP)	\$ 148.00	-14	Vandal proof finish trim (MC-10-PFH-14)	\$ 149.00			
-88	3/8" Threaded eye bolts for cast iron lavs (H-1208)	\$ 290.00	-32	Foot pedal mounting plate	\$ 69.00			

MC-41 FIXTURE CARRIER WITH CONCEALED ARMS

MC-41

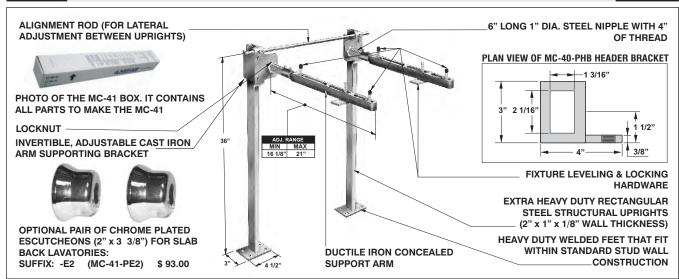

NOTE: Foot supports should be securely anchored to floor with $\frac{1}{2}$ " bolts and anchors by others

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-41	28.00	Concealed arms with two vertical uprights	\$ 353.00


MC-41 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-A	Add per inch for nipple length over 6"	\$ 25.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00			
-B	Floor to ceiling upright	\$ 632.00	-XN8	Extra long 8" nipple	\$ 69.00			
-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00	-32	Foot pedal mounting plate	\$ 69.00			
-G	Wall support plate (MC-31-pup)	\$ 148.00	-88	3/8" threaded eye bolts for cast iron lavs (H-1208)	\$145.00			

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MC-41D BACK TO BACK FIXTURE CARRIER WITH CONCEALED ARMS

MC-41E

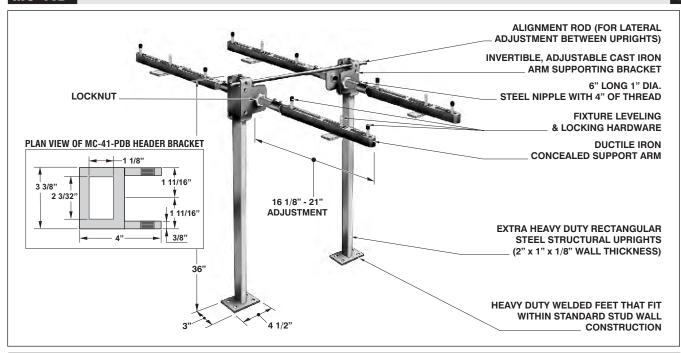


MODEL NO.	WT Lbs.	DESCRIPTION	
MC-41D	42.00	Concealed arms - back to back	\$ 587.00

MC-41D OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-A	Add per inch for nipple length over 6"	\$ 50.00	-G	Wall support plate (MC-31-PUP)	\$ 148.00			
-B	Floor to ceiling upright	\$ 632.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 144.00			
-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 188.00	-32	Foot pedal mounting plate	\$ 69.00			
			-88	3/8" threaded eye bolts for cast iron lavs (H-1208)	\$ 145.00			

MC-41-R FIXTURE CARRIER WITH CONCEALED ARMS AND ROUND UPRIGHTS

MC-41-R

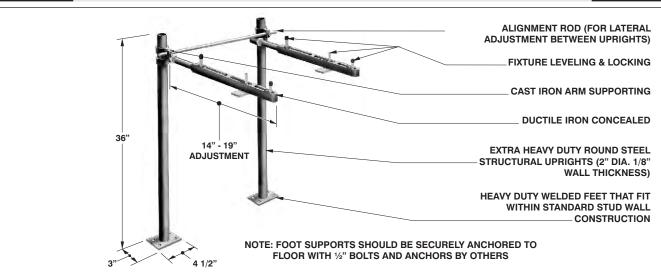

ı	MODEL NO.	WT Lbs.	DESCRIPTION	
N	VIC-41-R	42.00	Concealed arms w/ Round Uprights	\$ 478.00


MC-41-R OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-B	Floor to ceiling upright	\$ 632.00	-G	Wall support plate (MC-31-PUP)	\$ 148.00			
-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00			
			-32	Foot pedal mounting plate	\$ 69.00			
			-88	3/8" threaded eye bolts for cast iron lavs (H-1208)	\$ 145.00			

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit ww



MC-41D-R BACK TO BACK FIXTURE CARRIER WITH CONCEALED ARMS AND ROUND UPRIGHTS

MC-41D-R

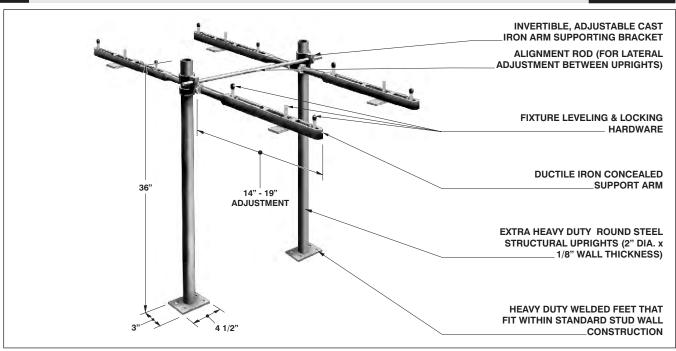


NOTE: Foot supports should be securely anchored to floor with 1/2" bolts and anchors by others

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-41D-R	40.00	Double Concealed arms w/ Round Uprights	\$ 793.00

MC-41D-R OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-B	Floor to ceiling upright	\$ 632.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 144.00				
-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 176.00	-32	Foot pedal mounting plate	\$ 69.00				
-G	Wall support plate, per plate (MC-31-PUP)	\$ 148.00	-88	3/8" threaded eye bolts for cast iron lavs (H-1208)	\$ 148.00				

MC-42 FIXTURE CARRIER WITH CONCEALED ARMS FOR ADA LAVS

MC-42

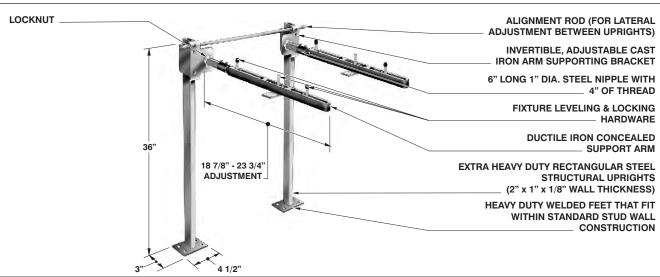

NOTE: Foot supports should be securely anchored to floor with 1/2" bolts and anchors by others

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-42	30.00	ADA Concealed arms with two vertical uprights	\$ 353.00


MC-42 (MC-42 OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE					
-A	Add per inch for nipple length over 6"	\$ 25.00	-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00					
-B	Floor to ceiling upright	\$ 632.00	-G	Wall support plate (MC-31-PUP)	\$ 148.00					
			-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00					

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MC-42D BACK TO BACK FIXTURE CARRIER WITH CONCEALED ARMS FOR ADA LAVS



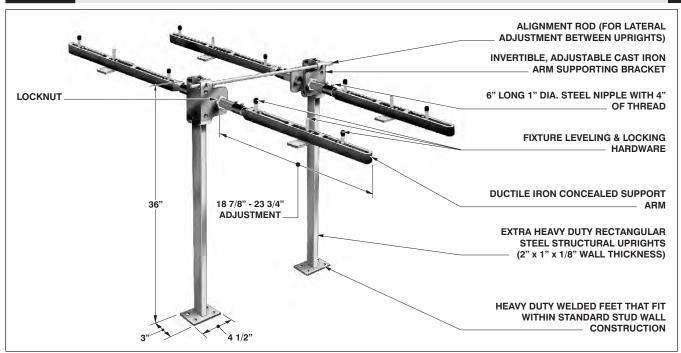


NOTE: Foot supports should be securely anchored to floor with ½" bolts and anchors by others

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-42D 46.00 Back to Back ADA Concealed arms		Back to Back ADA Concealed arms with two vertical uprights	\$ 587.00

MC-42D OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-A	Add per inch for nipple length over 6"	\$ 50.00	-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 188.00				
-B	Floor to ceiling upright	\$ 632.00	-G	Wall support plate (MC-31-PUP)	\$ 148.00				
			-PFAB	Prefabricated carrier bank (per carrier)	\$ 144.00				

MC-42-R ADA LAV CARRIER WITH CONCEALED ARMS AND ROUND UPRIGHTS

MC-42-R

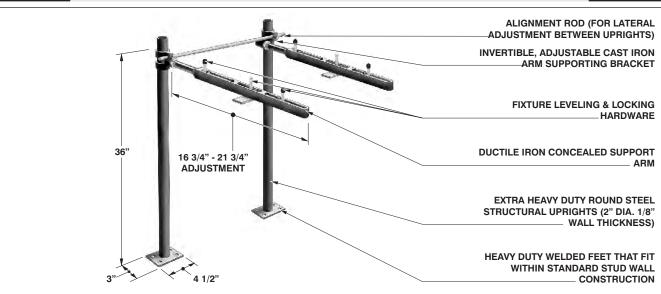

NOTE: Foot supports should be securely anchored to floor with 1/2" bolts and anchors by others


MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-42-R	28.00	ADA Concealed arms with Round Upright	\$ 478.00

MC-42-R OPTIONAL VARIATIONS:								
SUFFIX	SUFFIX DESCRIPTION		SUFFIX	DESCRIPTION	LIST PRICE			
-B	Floor to ceiling upright	\$ 632.00	-G	Wall support plate (MC-31-PUP)	\$ 148.00			
-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00	-PFAB	Prefabricated carrier bank (per carrier)	\$ 71.00			



BACK TO BACK ADA FIXTURE CARRIER WITH CONCEALED ARMS AND ROUND UPRIGHTS

MC-42D-R

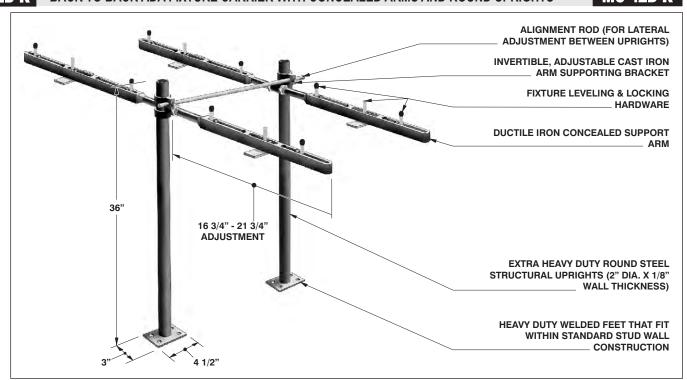


MODEL NO.	WT Lbs.	DESCRIPTION		
MC-42D-R 44.00 Double ADA Concealed a		Double ADA Concealed arms w/ Round Uprights	\$ 734.00	

MC-42D-R OPTIONAL VARIATIONS:									
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE				
-B	Floor to ceiling upright	\$ 632.00	-G	Wall support, plate per plate (MC-31-PUP)	\$148.00				
-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 187.00	-PFAB	Prefabricated carrier bank (per carrier)	\$144.00				

MC-51 CONCEALED ARMS WITH ADJUSTABLE PLATE

MC-51

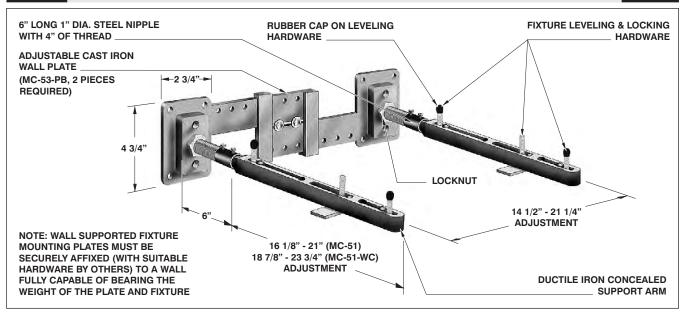

MODEL NO. WT Lbs. DESCRIPTION		LIST PRICE	
MC-51	MC-51 18.00 Concealed arms with adjustable plate		\$ 229.00
MC-51-WC	20.00	ADA concealed arms with adjustable plate	\$ 229.00

MC-51	-51 OPTIONAL VARIATIONS:							
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-A	Add per inch for nipple length over 6"	\$ 25.00	-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00			


Design and dimensions are subject to modification. Prices do not include applicable taxes. Vis


Visit www.mifab.com for the most recent product information.

Toll Free 1-800-387-3880, Fax 773-341-3049








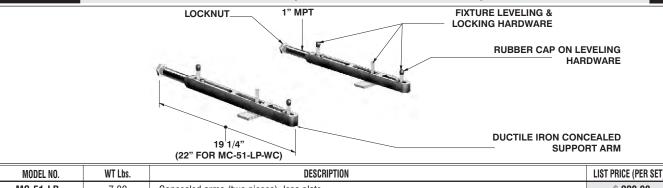

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE (PER SET)
MC-51-LP	7.00	Concealed arms (two pieces), less plate	\$ 229.00
MC-51-LP-WC	8.00	ADA Lav concealed arms, (two pieces), less plate	\$ 229.00

CONCEALED ARMS WITH ADJUSTABLE PLATE AND BACKING PLATES

MC-53

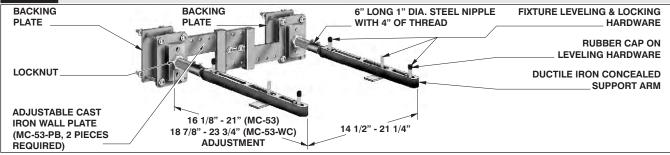

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE		
MC-53	22.00	Concealed arms with surface adjustable plate and back-up plates	\$ 313.00		
MC-53-WC	24.00	ADA concealed arms with surface adjustable plate and back-up plates	\$ 313.00		

MC-53 SERIES OPTIONAL VARIATIONS.


ш	ind do defined of floring Printifford.					
	SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
	-A	Add per inch for nipple length over 6"	\$ 25.00	-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00

MC-54

16" LONG CONCEALED ARMS WITH FIXED STEEL PLATE

MC-5

MC-55

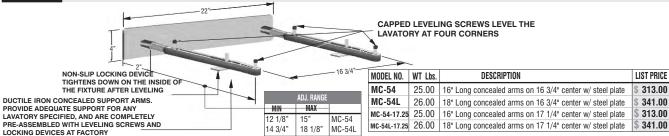

LOCKING DEVI	CLOALTACIONI				
MC-54	OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-A	18" long arms	\$ 56.00	-E2	2" Chrome plated escutcheons (pair) (MC-41-PE2)	\$ 93.00

MC-55 EXPOSED ARMS WITH ADJUSTABLE SURFACE PLATE & BACK MOUNTING PLATES



MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-55	25.00	Exposed arms with adjustable surface plate and back up plates	\$ 710.00

MC-55	MC-55 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE		
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	-14	Vandal proof finish trim (MC-10-PFH-14)	\$ 149.00		
-F	Bar support valve plate	\$ 148.00					


MIFAB, Inc. www.mifab.com sales@mifab.com

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MC-56 EXPOSED ARMS WITH ADJUSTABLE SURFACE PLATE

MC-56

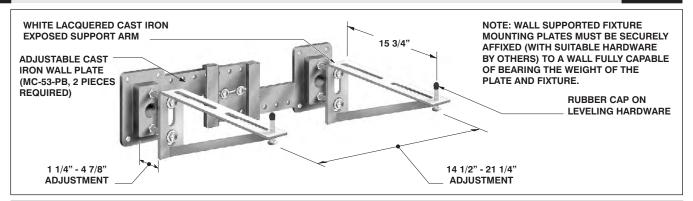


MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE (PER SET)
MC-56	24.00	Exposed arms with adjustable surface plate	\$ 625.00
MC-56-LP	15.00	Exposed arms, less plate	\$ 499.00

MC-56 SERIES OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-A	Stud length over 8" (specify), Add per inch	\$ 25.00	-14	Vandal proof finish trim (MC-10-PFH-14)	\$ 149.00
-F	Bar support valve plate	\$ 148 00		· · · · · · · · · · · · · · · · · · ·	

FLOOR SUPPORTED SYSTEM WITH OUTLET CONNECTIONS FOR WALL URINALS AND SERVICE SINKS

MC-60

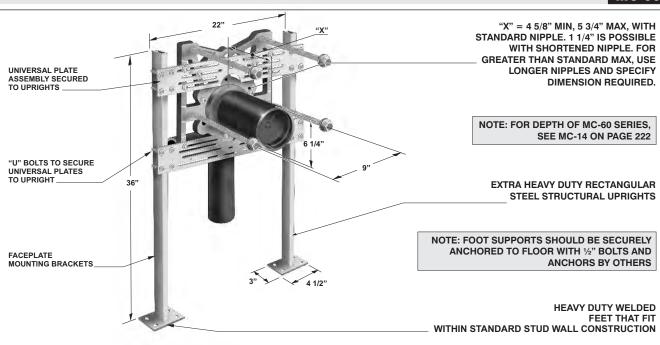


MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MC-61-N	55.00	Two vertical uprights with 4" No Hub waste connection	\$ 916.00
MC-61-T	55.00	Two vertical uprights with 4" female threaded connection	\$ 916.00
MC-62-3-V2	71.00	Two vertical uprights with 3" inline fitting with 2" vent	\$ 630.00
MC-62-4-V2	79.00	Two vertical uprights with 4" inline fitting with 2" vent	\$ 688.00
MC-62-4-V4	79.00	Two vertical uprights with 4" inline fitting with 4" vent	\$ 688.00

MC-61 and MC-62 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-10	Auxiliary support, recommended with nipple	\$468.00	-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	\$ 30.00	
	lengths over 12" (MC-10-AFS)		-CI-6	6" rolling thread cast iron nipple (MC-10-PN6R-50)	\$ 30.00	
-12*	12" tapered thread ABS nipple* (MC-10-PN12-31)	No Add	-CI-8	8" rolling thread cast iron nipple (MC-10-PN8R-50)	\$ 30.00	
-14	Vandal proof finish trim (MC-10-PFH-14)	\$118.00	-CI-12*	12" rolling thread cast iron nipple (MC-10-PN12R-50)	\$261.00	
-19	Nipple wrench (MC-10-PCW)	\$ 61.00	-CI-24	24" rolling thread cast iron nipple (MC-10-PN24R-50)	\$697.00	
-20	Flush valve support (MC-10-FVS)	\$ 47.00	-0R8	8" rolling thread ABS nipple (MC-10-PN8R-31)	No Add	
-32	Foot pedal mounting plate	\$ 69.00	-0R12*	12" rolling thread ABS nipple (MC-10-PN12R-31)	No Add	
-AH8	8" ABS nipple with adjustable horn (MC-10-PN8AH-31)	No Add	* H-11	67-KA-14 (Threaded rods for 12" nipples 5/8" x 14")	\$ 17.00	
-AH12*	12" ABS nipple with adjustable horn* (MC-10-PN12AH-31)	No Add				
Design and	dimensions are subject to modification. Prices do not include appli	cable taxes	Visit w	ww.mifab.com for the most recent product inform	nation	



MC-70 EASTERN STYLE WATER CLOSET



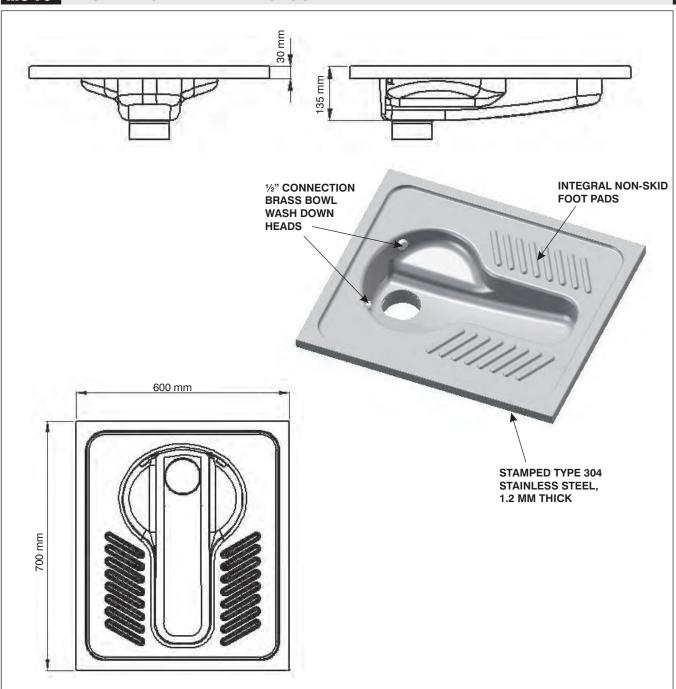

MODEL NO.	LIST PRICE	Type 304 FABRICATED Stainless Steel P-trap (-73)	TWO STAINLESS STEEL Flushing Heads (-71)	TWO CHROME PLATED BRASS Flushing Heads (-72)
MC-70	P.O.A.	P.O.A.	P.O.A.	P.O.A.


The MIFAB MC-70 Eastern Style Water Closet is manufactured from Type 304 stamped stainless steel (1.2mm thick). It is manufactured with integral non-skid foot pads and $\frac{1}{2}$ " bowl wash down connection heads (provides 2 gallons of water flow). The MC-70 is self supporting and does not require external mounting hardware. It should be installed flush with the finished floor providing floor drainage into the bowl. Non potable water (sea water or brackish water) may be used to flush the bowl. Specify -73 for a fabricated Type 304 stainless steel p-trap.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for

Visit $\ensuremath{\textit{www.mifab.com}}$ for the most recent product information.




CUSTOM CARRIERS WITH UPRIGHTS CONTACT MIFAB FOR ADDITIONAL CARRIER LAYOUTS

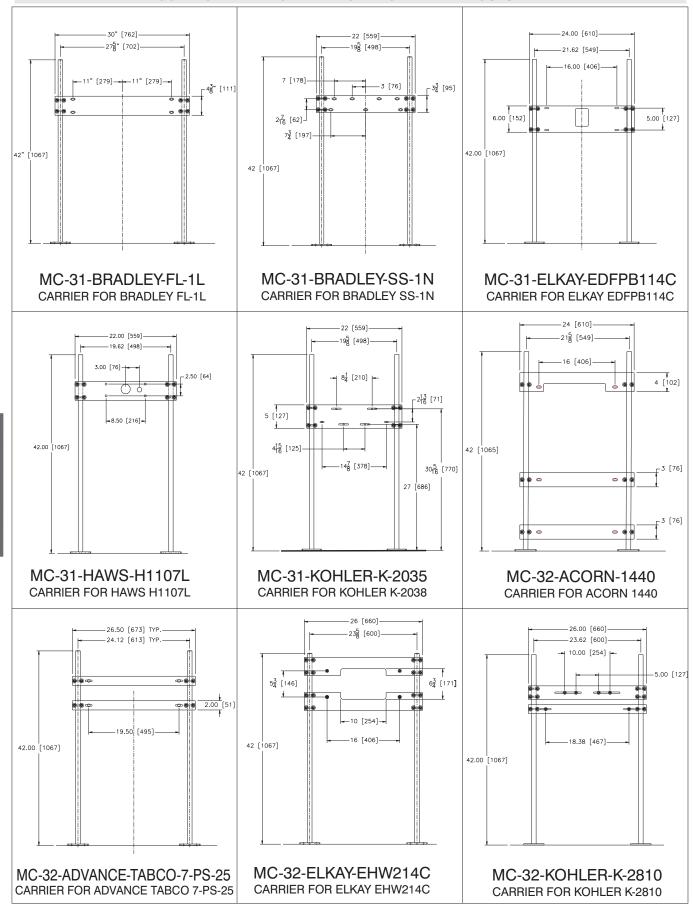

Design and dimensions are subject to modification. Prices do not include applicable taxes.



CUSTOM CARRIERS WITH UPRIGHTS CONTACT MIFAB FOR ADDITIONAL CARRIER LAYOUTS

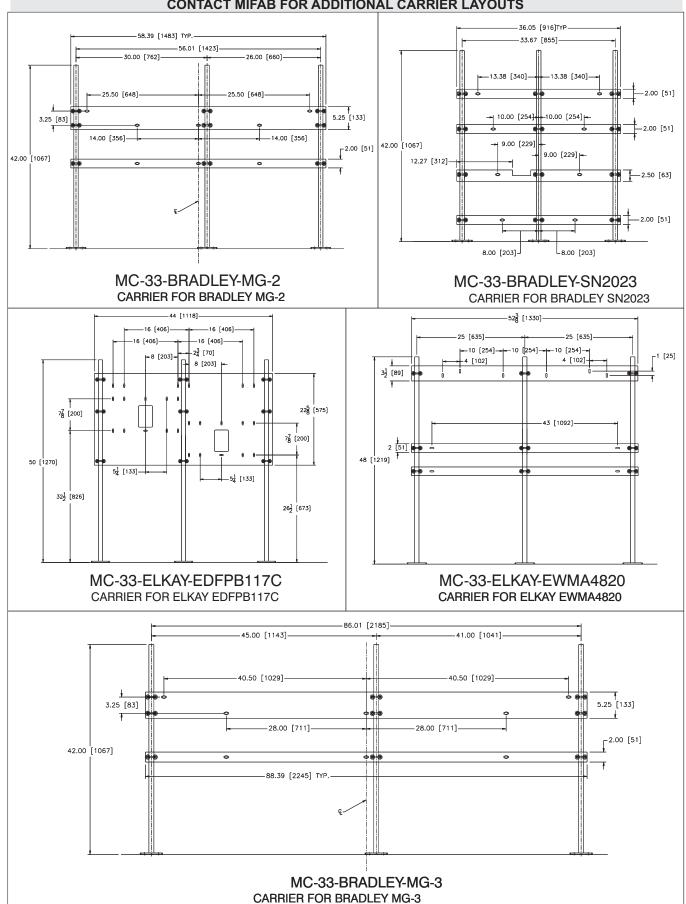

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB®

HYDRANTS

DUAL SIZE INLET CONNECTION

MIFAB's hydrants are manufactured with a combination 3/4" female and 1" male threaded "inlet" connection for maximum installation flexibility.

VACUUM BREAKER


MIFAB's MHY-10, MHY-20 and MHY-60 hydrants are manufactured with a vandal resistant integral vacuum breaker that is tested and certified to the A.S.S.E. 1019-B Standard.

POLISHED CHROME FACE PLATE

MIFAB's wall hydrants are manufactured with a polished chrome plated face plate for a high quality and endearing appearance.

DRIP LIP

MIFAB's hydrant boxes are manufactured with a "drip lip" When the hydrant is turned off, and the hose is removed, the water that is within the hydrant will drain into the box and down the drip lip, away from the wall and onto the ground. This eliminates unsightly stains on the wall below the hydrant box which is typical with others.



(MHY-20 ILLUSTRATED)

CASING

MIFAB's hydrants are manufactured with a heavy duty brass casing. This offers the contractor a solid and consistent shape to attach a wall clamp to.

NICKEL BRONZE BOX

MIFAB's encased wall hydrants are provided with a heavy duty cast nickel bronze box with hinged locking cover for maximum durability. Optional cast Stainless Steel box will not discolor due to oxidation. Specify suffix -3.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB Hydrant Selection Guide

MIFAB HYDRANT SELECTION GUIDE


MIFAB hydrants are engineered to control the supply of water in various types of applications. Due to a wide range of uses, careful consideration should be taken when selecting and specifying the hydrants. The information provided below will aid the specifier in selecting the correct hydrant for the application considering such issues as temperature, recessed boxes, vacuum breaker / backflow preventer and optional variations.

WALL HYDRANTS

The most common installation area for hydrants is in the wall. They may be installed either inside or outside of commercial buildings and serve numerous purposes including watering plants and shrubs and washing floors or parking areas. Non-freeze wall hydrants are available in various lengths to accommodate different wall thick nesses to ensure that the inlet connection is inside the heated building to prevent freezing. Sometimes, non-freeze wall hydrants must be concealed entirely within the wall. In these instances, an overall dimension can be specified. This dimension measures from the back of the face of the hydrant to the end of the inlet connection. Extra precautions must be taken to properly insulate the valve body to protect against freezing. In addition to the standard wall hydrant, MIFAB offers a combination hot and cold water hydrant that allows connection to both hot and cold supplies. It is used to supply tempered water. See MIFAB MHY-45.

NARROW WALL HYDRANTS

Narrow wall hydrants are installed in areas where the entire product must fit within a 4" thick wall. A unique feature on the inlet supply of the MIFAB hydrant permits the installer to rotate the connection to any position to connect to the water supply line. The narrow wall hydrant may also be encased to gain all of the advantages of installing the hydrant in a recessed box. MIFAB's MHY-55 encased narrow wall hydrant has an overall length of 35/8" to ensure that it will still fit within a 4" thick wall.

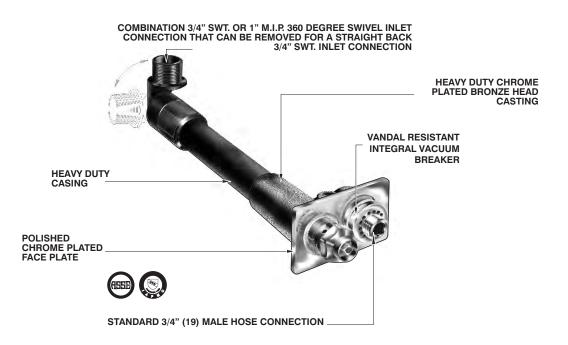



RECESSED BOXES


MIFAB's recessed hydrant boxes are made with a flange that covers the rough opening and is installed flush against the exterior wall surface. The hinged locking cover conceals the hose nozzle and all of the operating parts. The advantages of the flush recessed box:

- Arecessed box provides roughing in the box flush with the exterior wall for a pleasing appearance.
- The hose connection and operating mechanism are concealed within the box instead of protruding from the wall surface.
- The box has a locking hinged cover that will prevent unauthorized access and vandalism of the operating mechanism and hose nozzle. The same key that operates the hydrant also unlocks the box. This key is a special 3-3/4" long to ensure that the operator's fingers are outside of the hydrant box while operating the hydrant. Typically, short keys are provided by others that result in the operator's fingers being scraped or cut by the inside of the hydrant box.

MIFAB hydrant boxes are standard in a satin finished nickel bronze material. Polished chrome plated and cast stainless steel, are also available. The open face hydrant should be specified when the operating mechanism and hose nozzle is preferred to be exposed and may extend beyond the finished wall. This hydrant should be installed in a concealed location or where security is provided. MIFAB's MHY-10 and MHY-30 hydrants can be easily attached to the hydrant box. The hydrant is inserted through the front of the box until the back of the faceplate rests flush against the inside of the box. Two set screws on the top and bottom of the back of the box are used to tighten the hydrant securely into the box.

MIFAB has engineered several unique features into its' wall hydrant boxes.

- A"drip lip" on the exterior of the hydrant box accumulates water that results from the closing of the hydrant. This residual water drips from the lip onto the ground clear of the wall. Standard competitive designs cause unsightly oxide stains on the wall.
- The bottom of MIFAB's hydrant boxes are solid. There are no slots or grooves for water to drain back into the wall and cause damage.
- The boxes are also available with four /" x 1" slots (suffix -S) (one at each side and two on the top of the box) and three mounting brackets (suffix -BR) for easy installation by the contractor into the frame or ladder system. Too often, contractors have difficulty installing hydrant boxes into walls because nothing is provided to secure the box to the wall. Many contractors go to considerable expense to fabricate their own hydrant box mounting devices. MIFAB's hydrant boxes eliminate these extra costs and ensure that the installation and operation of the hydrant box is simple.

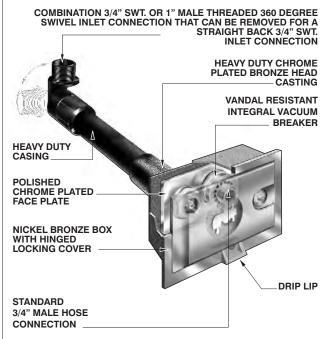


Design and dimensions are subject to modification. Prices do not include applicable taxes.



GROUND, POST and YARD HYDRANTS

Ground hydrants are available for buried applications. The hydrant control and hose connection are housed in a box which is installed flush with the ground or floor. These hydrants are standard with a 1/8" tapped hole in the valve body to drain water from the casing after operation. The valve body should beset in a bed of gravel so that water drained from the casing can leach into the ground. Some locations that require nonfreeze ground hydrants cannot permit water draining from the 1/8" tapped hole. Parking garages, plazas, and roof decks used for recreational purposes are obvious examples. In these types of applications, the valve body will protrude into a finished area that is not subject to freezing. A drain line can be connected to the 1/8" tapped hole to carry away water. The depth of bury should be specified to match the hydrant to the water supply piping which must be below the frost line. Post hydrants are similar in application except that the ground hydrant outlet is recessed below ground and the post hydrant series as an above ground outlet. Yard hydrants are typically used in parks, recreational areas and other places that require both clean, uncontaminated water and the assurance that the water system will not be polluted through the hydrant installation. The yard hydrant drains residual standpipe water while protecting against cross connection with groundwater.

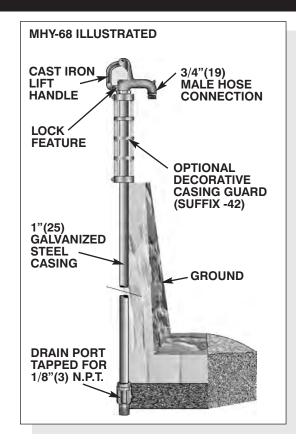

WALL FAUCETS

Wall faucets are required in restrooms, mechanical rooms, and storage areas to prevent the evaporation of water from floor drain traps. Floor drains in these areas often do not receive enough water from the cleaning of the floors to maintain the water seal in their traps. A reliable supply of water is supplied by the MIFAB wall faucet, when operated by maintenance personnel. Typically, they are installed underneath lavatories or counters in restrooms. Wall faucets are also commonly used in moderate climate residential applications and are available with or without an enclosed box. Three different finishes are available: cast brass, rough chrome plated and polished chrome plated. Four different handle options are available: clear plastic wheel handle, brown plastic wheel handle, cast iron wheel handle and loose operating key. Also, 1/2" and 3/4" F.F. inlet supply connections are available.





Design and dimensions are subject to modification. Prices do not include applicable taxes.



TEMPERATURE CONSIDERATIONS

One of the most critical factors in determining the correct hydrant to specify is how ambient temperature will affect its' operation. Moderate climate hydrants are not self draining and should only be specified in heated areas or "mild climates" where freezing temperatures are not a possibility. Non freeze wall hydrants may be installed outside or on outside walls where freezing temperatures may occur. To prevent these hydrants from freezing, the actual valve mechanism susceptible to freezing is positioned away from outside temperatures. Also, standing water is drained from the hydrant after each use via a built-in drainage system. Misapplication of a hydrant regarding surrounding temperature could result in water damage or costly repairs to the hydrant or water piping.


VACUUM BREAKER / BACKFLOW PREVENTER


A vacuum breaker or backflow preventer is an important consideration in preventing fluids from siphoning back from the hose connection into the hydrant or water supply. All MIFAB hydrants are available with vacuum breakers that are A.S.S.E. certified.

When the hydrant valve is open, the supply of water flows through the hydrant and the vacuum breaker automatically opens to allow the water to flow through the hose connection. Water from upstream can siphon back into the hydrant if the hydrant valve is left open and there is no vacuum breaker. A vacuum breaker will automatically close to allow water to drain through it's air vents and not back through the hydrant. When the hydrant valve is closed, the water left in the hydrant is allowed to drain out of the water relief ports surrounding the operating mechanism while the vacuum breaker automatically closes to prevent backflow from the hose.

The preceding paragraph is very important because it describes the draining of the water left in the hydrant body after the hydrant valve is closed. The draining function is critical because water could freeze if it is left inside of the hydrant body. The hydrant must be installed in the correct position to correctly drain and eliminate the possibility of freezing.

All wall hydrants must be installed in a horizontal position. If the hydrant were to be installed with the face plate in the vertical position with the vacuum breaker on the bottom, the vacuum breaker will not permit water to drain from the hydrant and eventually cause the excess water in the hydrant to freeze.

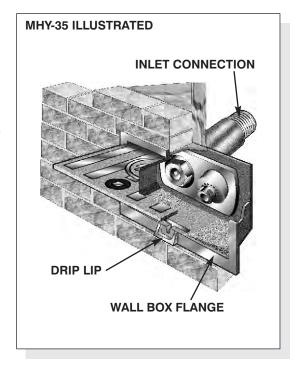

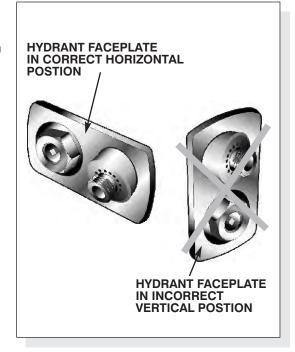



SUGGESTED APPLICATIONS FOR MIFAB HYDRANTS

Wall hydrants	Non-freeze	Moderate climate
Apartments	MHY-10	MHY-30, MHY-35
Cleaning Areas Slop sinks	MHY-10	
Commercial / Multi Family, Narrow wall construction		MHY-30
Hospitals, Institutions, Schools	MHY-20	MHY-35
Office Buildings	MHY-20	MHY-35
Retail Stores	MHY-20 MHY-10	MHY-35

	Ground hydrants	Non-freeze	Moderate climate
--	------------------------	------------	------------------

Agricultural, Farms MHY-65, MHY-68

Gardens MHY-60, MHY-60-HSB, MHY-35

MHY-65, MHY-68

Industrial MHY-60-HSB

Malls, Supermarkets MHY-60 MHY-35

Recreational Areas, Parks MHY-60,

MHY-60-HSB, MHY-68

Stables, Livestock Areas MHY-65, MHY-68

Note: Any of the non-freeze hydrants may be used in moderate climates

FLOW RATES, OPERATING PRESSURES AND TEMPERATURE RANGE

MIFAB's 3/4" hose connection wall and ground hydrants provide a flow of approximately 10 GPM under average water line pressures. The flow rates are in excess of 100 GPM for the 1-1/4", 1-1/2", and 2" hose connection hydrants.

The maximum static operating pressure is 125 psi and the minimum running pressure is 8 psi for MIFAB's wall and ground hydrants.

The maximum temperature range is 130 degrees Fahrenheit and the minimum temperature range is 33 degrees Fahrenheit for MIFAB's wall and ground hydrants.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MHY-CIA-18-A (FOR ALL HY-1000, HY-2000, MHY-10 and MHY-15, MHY-16, MHY-20, MHY-25 AND MHY-26) COMPLETE INTERNAL ASSEMBLY REPLACEMENT INSTRUCTIONS - HYDRANT REPAIR KIT

This kit includes: 2-plunger assemblies; 2-worm stem assemblies; 2-lock nuts; 1-head nut seal; 1-tube thread locker; 1-tube lubricant

REMOVAL

Shut off water supply to hydrant and relieve water pressure. Remove hydrant stem assembly. (Do not disassemble. The old stem must remain assembled for reference dimensions.) Remove the old head nut seal.

Note: The plunger tips provided in this kit will replace all old versions of plunger tips. See inset.




MEASUREMENT

Fully thread the appropriate worm stem assembly on to the 4-1/4" uninterrupted threaded end of the fully threaded rod. Lay the old stem assembly next to the new stem, aligning the o rings on the worm stem assemblies.

Mark the groove in the threaded rod that is closest to the end of the old plunger tip, but not past the plunger end. Using the appropriate holding fixture and a 32TPI hack saw, cut the threaded rod to the appropriate length.


Note: The undercut grooves in the threaded rod will guide the hack saw blade without the need for thread end "clean up" after cutting. See inset.

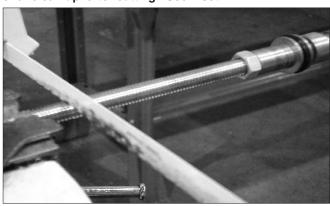

ASSEMBLY AND ADJUSTMENT

Remove the worm stem assembly from the cut rod and thread the two lock nuts onto the rod approximately 1" inward from each end.

Apply thread locker to the two ends of the threaded rod (approx. 3/8" coverage) and a small amount to the internal threads of the plunger and worm assemblies.

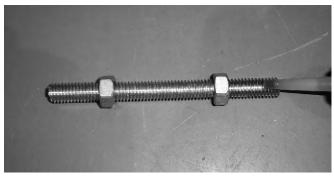

Thread the worm stem assembly until seated fully and then thread the plunger assembly to match the length of the old hydrant stem assembly. (Remove excess thread locker.)

Note: Align the o rings of the two stems side by side and adjust the plunger tips to match.

Once the proper length has been attained, advance the lock nuts toward the two end assemblies and tighten with a 9/16" wrench.

Generously apply lubricant to the plunger tip seals, o ring, and worm stem screw threads.

INSTALLATION

Install the new head nut seal into the body of the hydrant. Thread the worm screw <u>fully</u> into the head nut using a hydrant key.

Thread the head nut and stem assembly into the hydrant body and tighten.

Shut off the hydrant and open the water supply. Test the hydrant for proper function.




Design and dimensions are subject to modification. Prices do not include applicable taxes.




MHY-10 TO MHY-16 NON-FREEZE EXPOSED WALL HYDRANT WITH SELF DRAINING VACUUM BREAKER

MHY-10 TO MHY-16

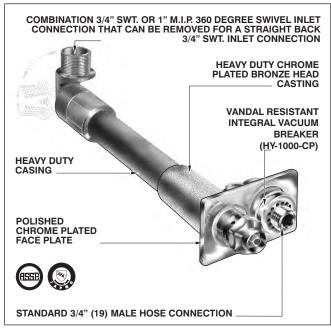

MHY-10			
MODEL Number	WALL. THICKNESS (in)	WEIGHT Lbs.	LIST PRICE
MHY-10-4,6,8	4-6-8	6	\$ 949.00
MHY-10-10,12,14	10-12-14	8	\$ 986.00
MHY-10-16,18	16-18	10	\$1026.00
MHY-10-20,22,24	20-22-24	12	\$1120.00

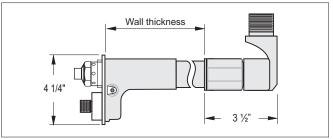

2" x 4" Recommended wall opening


MHY-15 & 16 NON-FREEZE EXPOSED WALL HYDRANT, ANTI SIPHON, AUTOMATIC DRAINING				
MODEL NUMBER	WALL. THICKNESS (in)	WEIGHT Lbs.	LIST PRICE	
MHY-15-4,6,8	4-6-8	5	\$ 864.00	
MHY-15-10,12,14	10-12-14	6	\$ 900.00	
MHY-15-16,18	16-18	7	\$ 941.00	
MHY-15-20, 22, 24	20-22-24	8	\$1034.00	
MHY-15-26, 30	26-30	9	\$1244.00	
MHY-16-4,6,8	4,6,8	5	\$ 668.00	
MHY-16,10,12,14	10-12-14	6	\$ 711.00	
MHY-16-16, 18	16-18	7	\$ 778.00	
MHY-16-20, 22, 24	20-22-24	8	\$ 839.00	
MHY-16-26, 30	26-30	9	\$1137.00	

MHY-10,15,16 OPTIONAL VARIATIONS:				
SUFFIX DESCRIPTION				
-0 1" Hose Connection (HY-HC1)		\$113.00		
MHY-CIA-18-A	Hydrant Repair Kit	\$200.00		
-WC	Wall clamp (HY-H01)	No add		

MHY-20 TO MHY-26

NON-FREEZE ENCASED WALL HYDRANT WITH SELF DRAINING VACUUM BREAKER

MHY-20 TO MHY-26

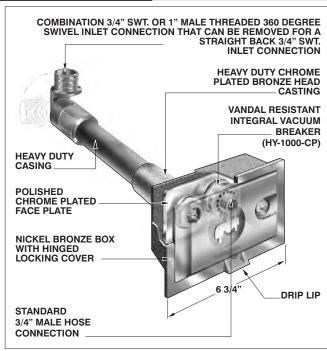

MHY-20			
MODEL Number	WALL. THICKNESS (in)	WEIGHT Lbs.	LIST PRICE
MHY-20-6,8	8-10	8	\$1320.00
MHY-20-10,12,14	12-14-16	9	\$1355.00
MHY-20-16,18	18-20	10	\$1355.00
MHY-20-20,22, 24	22-24-26	12	\$1394.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.


Wall thic 1.5	- 3 1/2" -	
MHY-25 AND 2	P6 NON-FREEZE ENCAS	ED WALL HYDRANT


ANTI SIPHON, AUTOMATIC DRAINING				
MODEL Number	WALL. THICKNESS (in)	WEIGHT Lbs.	LIST PRICE	
MHY-25-6,8	8-10	8	\$1070.00	
MHY-25-10,12,14	12-14-16	9	\$1112.00	
MHY-25-16,18	18-20	10	\$1180.00	
MHY-25-20, 22, 24	22-24-26	11	\$1243.00	
MHY-26-6,8	8-10	8	\$ 899.00	
MHY-26,10,12,14	12-14-16	9	\$ 942.00	
MHY-26-16, 18	18-20	10	\$1009.00	
MHY-26-20, 22, 24	22-24-26	11	\$1072.00	

MHY-20, 2	MHY-20, 25, 26 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE			
-0	1" Hose Connection (HY-HC1)	\$113.00			
-1	Cast Nickel Bronze Box (HY-1500-1)	Standard			
-3	Cast Type 304 Stainless steel box (HY-1500-3)	No add			
-49 Cast Chrome Plated box (HY-1500-49)		\$250.00			
-K Cylinder key lock (RETRO-C)		\$ 97.00			
-S 1" x 1/4" Slots (4 on top & bottom),					
2 on sides) Includes 3 mounting brackets (HY-PC)		\$ 98.00			
MHY-CIA-18-A	Hydrant Repair Kit	\$200.00			
-RB Fabricated stainless steel hydrant box with round back		No Add			
	for tilt up construction (HY-1500-3-RB, 81/4" back opening)				
-WC	Wall clamp (HY-H01)	No Add			



MODERATE CLIMATE EXPOSED WALL HYDRANT

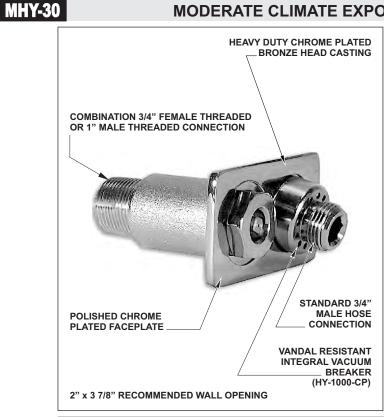

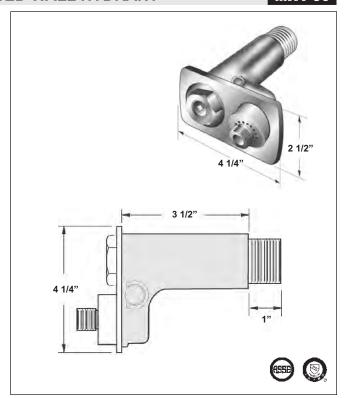


	MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
Г	MHY-30	3.00	4 1/2" Overall Length	\$ 744.00


MHY-30 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION LIST PRICE				
MHY-CIA-30/50	Hydrant Repair Kit		\$ 200.00		
-0	1" Hose Connection (HY-HC1)		\$ 113 00		

MHY-35

MODERATE CLIMATE ENCASED WALL HYDRANT

MHY-35

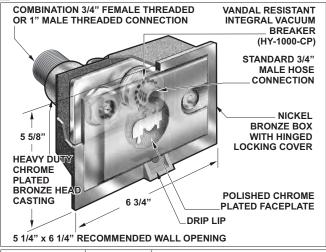

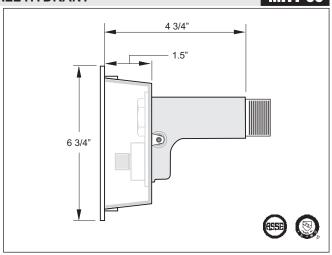


MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE
MHY-35	6.50	4 3/4" Overall Depth	\$ 1141.00

MHY-35 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-0	1" Hose Connection (HY-HC1)	\$ 113.00	-\$	1" x 1/4" Slots (4 on top & bottom),	\$ 98.00	
-1	Cast Nickel Bronze Box (HY-1500-1)	Standard		2 on sides) Includes 3 mounting brackets (HY-PC)		
-3	Cast Type 304 Stainless steel box (HY-1500-3)	No Add	-K	Cylinder key lock (RETRO-C)	\$ 97.00	
-49	Cast Chrome Plated box (HY-1500-49)	\$ 250.00	MHY-CIA-30/50	Hydrant Repair Kit	\$ 200.00	
			-RB	Fabricated stainless steel hydrant box with round back	No Add	
				for tilt up construction (HY-1500-3-RB, 81/4" back opening)		

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MHY-40 NON-FREEZE DUAL TEMPERATURE (HOT & COLD) WALL HYDRANT

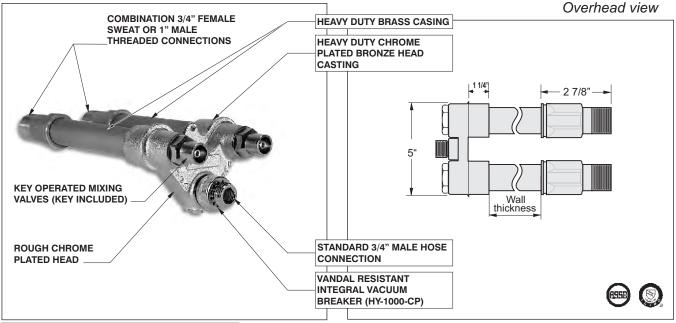




Note: 2 Kits required per hydrant.

MHY-40 SERIES:			
MODEL No.	WALL THICKNESS (IN)	WT Lbs.	LIST PRICE
MHY-40-4,6,8	4-6-8	8.00	\$2287.00
MHY-40-10,12,14	10-12-14	10.00	\$2336.00
MHY-40-16,18	16-18	12.00	\$2371.00
MHY-40-20.24	20-24	16.00	\$2447.00

MHY-40 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-0	1" Hose Connection (HY-HC1)	\$ 113.00	MHY-CIA-4000	Hydrant Repair Kit (2 required)	\$ 200.00
-6	3/4" IPS 90 degree elbow and union nut	\$ 29.00	-WC	Wall clamp (HY-H01)	No Add

NON-FREEZE ENCASED DUAL TEMP WALL HYDRANT

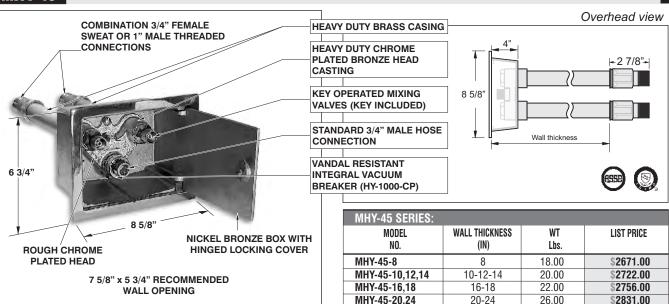

MHY-45 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-0	1" Hose Connection (HY-HC1)	\$ 113.00	-K	Cylinder key lock (RETRO-C)	\$ 97.00	
-5	3/4" Female solder adapter	No Add	MHY-CIA-4000	Hydrant Repair Kit (2 required)	\$ 200.00	
-6	3/4" IPS 90 degree elbow and union nut	\$ 29.00	-WC	Wall clamp (HY-H01)	No Add	
-49	Cast Chrome Plated box (HY-4100-49)	\$ 348.00				

MHY-45-20,24

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit www.mifab.com for the most recent product information.


20-24




MHY-50

MODERATE CLIMATE NARROW WALL HYDRANT

MHY-50

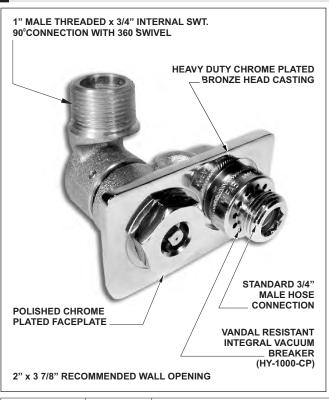

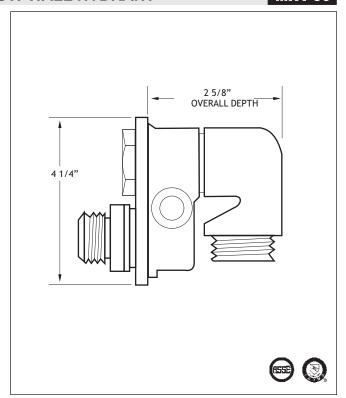



	WT Lbs.	DESCRIPTION	LIST PRICE	
MHY-50	3.25	2 5/8" Overall Depth	\$ 744.00	
MHY-50 OPTIONAL VARIATIONS:				

MHY-50 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE		
MHY-CIA-30/50	Hydrant Repair Kit	\$ 200.00		
-0	1" Hose Connection (HY-HC1)	\$ 113.00		

MHY-55 MODERATE CLIMATE ENCASED NARROW WALL HYDRANT



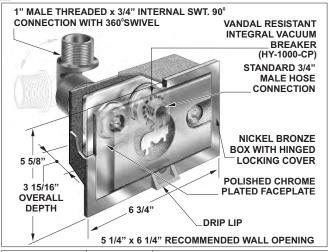

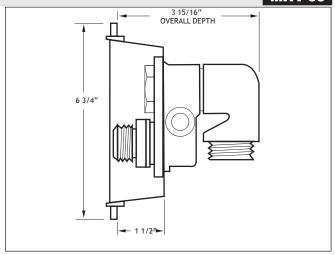

MODEL NO.	WT Lbs.	DESCRIPTION	LIST PRICE	
MHY-55	7.00	3 15/16" Overall Depth	\$ 770.00	


MHY-55 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE	
-0	1" Hose Connection (HY-HC1)	\$ 113.00	-\$	1" x 1/4" Slots (4 on top & bottom),	\$ 98.00	
-3	Cast Type 304 Stainless steel box (HY-1500-3)	No Add		2 on sides) Includes 3 mounting brackets (HY-PC)		
-49	Cast Chrome Plated box (HY-1500-49)	\$ 250.00	-RB	Fabricated stainless steel hydrant box with round back	No Add	
-K	Cylinder key lock (RETRO-C)	\$ 97.00		for tilt up construction (HY-1500-3-RB, 8 1/4" back opening)		
			MHY-CIA-30/50	Hydrant Repair Kit	\$ 200.00	
			-WC	Wall clamp (HY-H01)	No Add	


Design and dimensions are subject to modification. Prices do not include applicable taxes.



MHY-15 CAST BOX FOR MHY-10,30,50 & 60 SERIES HYDRANTS

MHY-15

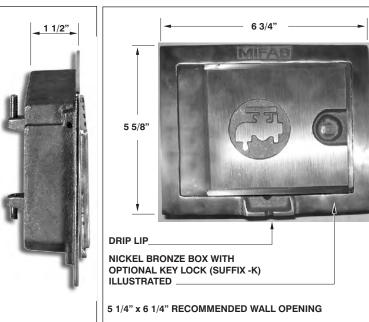

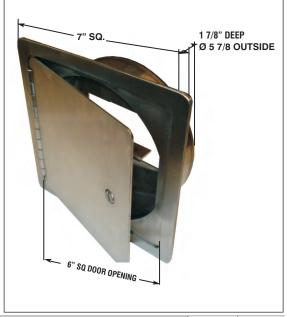

	PRODUCT		LIST	F PRICE	LIS	T PRICE
PART NO.	MATERIAL (CASTING) & FINISH	DESCRIPTION	(-	1,-3)		(49)
MHY-15-(1,3,49)*	NB or SS or Chrome plated	Standard Box for MHY-10 through (MHY-55) Series (except MHY-40,45)	\$:	371.00	\$	621.00
MHY-15-(1,3,49)-S*	NB or SS or Chrome plated	Standard Box for MHY-10 through (MHY-55) Series (except MHY-40,45)	\$ 4	468.00	\$	719.00
		for MHY-10 through MHY-50 Series (suffix -S is for brackets to secure box to studs)				
MHY-15-(1,3,49)-NL*	NB or SS or Chrome plated	No lip box for MHY-60 Series	\$:	371.00	\$	621.00
MHY-3-RB	Fabricated Type 304 Stainless Steel	Fabricated stainless steel Box with 6" round back opening for tilt up construction	\$:	371.00		N/A


* Add a cylinder key lock to any of the above hydrant boxes by specifying **SUFFIX-K** in the part number and adding \$97.00 to the **LIST PRICE**

MHY-CIA-18-A HYDRANT REPAIR KIT FOR MHY-10, 15, 16, 20, 25 and 26 HYDRANTS BRASS THREADED ROD NOTCHED AT 1" INTERVALS FOR EASY CUTTING WORM STEM



PART NO.	DESCRIPTION	LIST PRICE
MHY-CIA-18-A	Hydrant repair kit for MHY-10, 15, 16, 20, 25 and 26 Hydrants (Up to 18" size only)	\$ 200.00



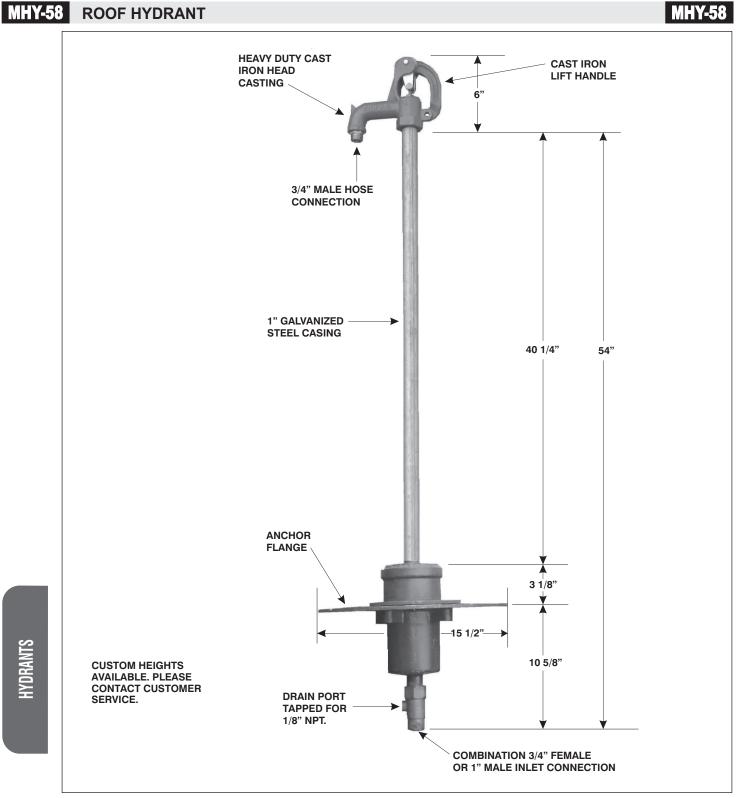


	MODEL NO.	DESCRIPTION	LIST PRICE
Γ	MHY-58	Roof hydrant	\$ 1433.00

MHY-58 OPTIONAL VARIATIONS				
SUFFIX	DESCRIPTION	LIST PRICE		
-0	1" Hose Connection (HY-HC1)	\$ 145.00		
-8	3/4" Adapter Vacuum Breaker (HY-9005-CP)	\$ 95.00		
-42	Decorative Casing Guard (HY-6500-PCG)	\$ 162.00		



MHY-60 NON-FREEZE ENCASED GROUND HYDRANT

MHY-60

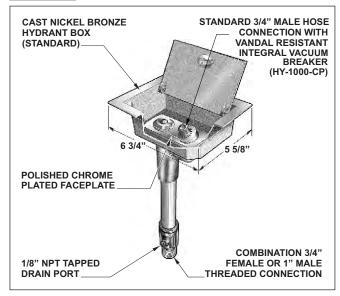


1 1/2" WEEPING AREA
BURY DEPTH

MODEL Number	BURY DEPTH (Ft)	WEIGHT	LIST PRICE 3/4" HOSE CONNECTION
MHY-60-1	1	10	\$ 1386.00
MHY-60-2	2	13	\$ 1386.00
MHY-60-3	3	16	\$ 1423.00
MHY-60-4	4	19	\$ 1460.00
MHY-60-5	5	22	\$ 1496.00
MHY-60-6	6	25	\$ 1534.00
MHY-60-7	7	28	\$ 1624.00
MHY-60-8	8	31	\$ 1721.00
MHY-60-9	9	34	\$ 1826.00
MHY-60-10	10	37	\$ 1936.00

MHY-	MHY-60 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-0	1" Hose Connection (HY-HC1)	\$ 113.00					
-3	Cast Type 304 Stainless steel box (HY-1500-NL-3)	No Add					
-9	1/4" Drain Port in Box	\$ 110.00					
-10	3/8" Drain Port in Box	\$ 110.00					
-11	1/2" Drain Port in Box	\$ 110.00					
-49	Cast Chrome Plated box (HY-1500-NL-49)	\$ 250.00					
-FL	Membrane (Anchor) Flange (HY-PC)	\$ 497.00					
-FLM	Flange with clamp	\$ 539.00					
-HSB	Hose Storage Box (Epoxy coated steel)	\$ 967.00					
-K	Cylinder key lock (RETRO-C)	\$ 97.00					
-RK	Hydrant Repair Kit	\$ 200.00					


MHY-61 NON- FREEZE 1 1/4", 1 1/2" AND 2" ENCASED GROUND HYDRANT

MHY-61

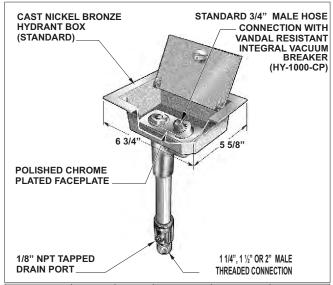

MODEL NUMBER	BURY DEPTH (Ft)	WEIGHT	1 1/4" BOTTOM	LIST PRICE (-1.50) 1 ½" BOTTOM INLET CONNECTION	LIST PRICE (-2.00) 2" BOTTOM INLET CONNECTION
MHY-61-2	2	43	\$ 6630.00	\$ 6862.00	\$ 7616.00
MHY-61-3	3	46	\$ 6700.00	\$ 6932.00	\$ 7840.00
MHY-61-4	4	49	\$ 6769.00	\$ 7002.00	\$ 7916.00
MHY-61-5	5	52	\$ 6839.00	\$ 7071.00	\$ 8129.00
MHY-61-6	6	55	\$ 6907.00	\$ 7144.00	\$ 8358.00
MHY-61-7	7	28	\$ 7256.00	\$ 7501.00	\$ 8514.00
MHY-61-8	8	31	\$ 7448.00	\$ 7672.00	\$ 8729.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.

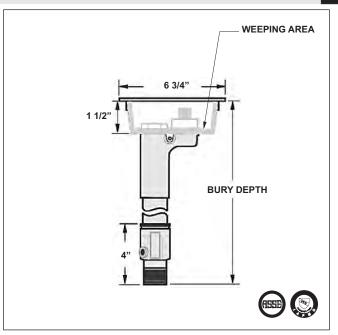


MHY-	MHY-61 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-3	Cast Type 304 Stainless steel box (HY-1500-NL-3)	No Add				
-9	1/4" Drain Port in Box	\$ 110.00				
-10	3/8" Drain Port in Box	\$110.00				
-11	1/2" Drain Port in Box	\$ 110.00				



MHY-65 NON-FREEZE 3/4" AND 1" POST HYDRANT

MHY-65

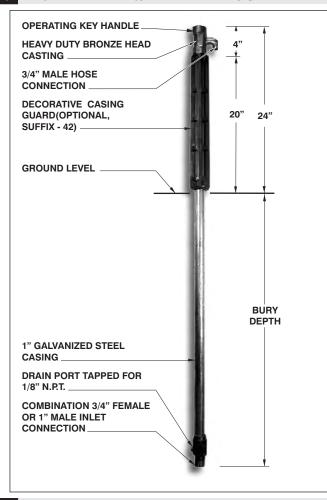


MHY-65 SERIES:						
MODEL No.	BURY DEPTH (Ft)	WT Lbs.	LIST PRICE 3/4" HOSE CONNECTION			
MHY-65-2	2	24.00	\$1268.00			
MHY-65-3	3	28.00	\$1306.00			
MHY-65-4	4	32.00	\$1342.00			
MHY-65-5	5	36.00	\$1381.00			
MHY-65-6	6	40.00	\$1416.00			
MHY-65-7	7	44.00	\$1517.00			
MHY-65-8	8	48.00	\$1610.00			
MHY-65-9	9	52.00	\$1705.00			
MHY-65-10	10	56.00	\$1807.00			

MHY-66 SERIES: NON FREEZE 1 1/4", 1 1/2" AND 2" POST HYDRANT							
MODEL NO.	BURY DEPTH (Ft)	WT Lbs.	1 1/4" BOTTOM INLET CONNECTION (-1.25)	1 1/2" BOTTOM INLET CONNECTION (-1.50)	2" BOTTOM Inlet connection (-2.00)		
MHY-66-2	2	40.00	\$5454.00	\$5685.00	\$6658.00		
MHY-66-3	3	61.00	\$5522.00	\$5751.00	\$6880.00		
MHY-66-4	4	66.00	\$5588.00	\$5820.00	\$6984.00		
MHY-66-5	5	71.00	\$5657.00	\$5889.00	\$7059.00		
MHY-66-6	6	76.00	\$5728.00	\$5935.00	\$7187.00		
MHY-66-7	7	81.00	\$6017.00	\$6258.00	\$7390.00		
MHY-66-8	8	86.00	\$6318.00	\$6573.00	\$7591.00		
MHY-66-9	9	91.00	\$6634.00	\$6903.00	\$8559.00		
MHY-66-10	10	97.00	\$6966.00	\$7248.00	\$8986.00		

MHY-65,66 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE			
-0	1" Hose Connection (HY-HC1)	\$ 113.00			
-8	3/4" Adapter Vacuum Breaker (HY-9005-CP)	\$ 71.00			
-12	Wheel Handle (HY-9003)	\$ 142.00			
-42	Decorative Casing Guard (HY-6500-PCG)	\$ 162.00			

MHY-68 YARD HYDRANT WITH LIFT HANDLE AND GALVANIZED CASING

MHY-68

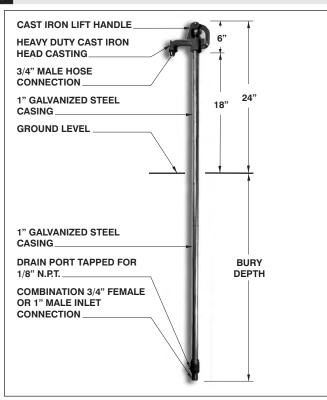

MHY-68 S	MHY-68 SERIES:					
MODEL NO.						
MHY-68-1	1	10.00	36"	\$ 604.00		
MHY-68-2	2	12.00	48"	\$ 604.00		
MHY-68-3	3	17.00	60"	\$ 733.00		
MHY-68-4	4	19.00	72"	\$ 754.00		
MHY-68-5	5	22.00	84"	\$ 818.00		
MHY-68-6	6	24.00	96"	\$ 952.00		
MHY-68-7	7	25.00	108"	\$1019.00		
MHY-68-8	8	26.00	120"	\$1085.00		


MHY-68	MHY-68 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE			
-0	1" Hose Connection (HY-HC1)	\$ 113.00			
-8	3/4" Adapter Vacuum Breaker (HY-9005-CP)	\$ 71.00			
-42	Decorative Casing Guard (HY-6500-PCG)	\$ 162.00			

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MHY-90 **ROUGH BRASS SERIES**



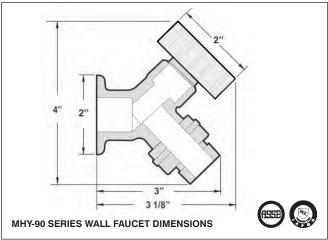

MODEL NO.	PRODUCT FINISH	OPERATING DEVICE	CONNECTION	LIST PRICE
MHY-9040	Rough Brass	Operating loose tee key, cast iron wheel handle, brown plastic and clear plastic wheel handle all included	1/2" F.P.T.	\$ 208.00
MHY-9041	Rough Brass	Operating loose tee key, cast iron wheel handle, brown plastic and clear plastic wheel handle all included	3/4" F.P.T.	\$ 208.00

^{*} Not for use with MHY-95 Series Wall Box

[†] Operating key also included in each box (HY-9004)


MHY-90 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE
-B	Cast brass box	\$ 417.00	-B-49	Chrome plated cast brass box	\$ 695.00
-BK	Cast brass box with cylinder lock	\$ 513.00	-BK-49	Chrome plated cast brass box with cyl. lock	\$ 792.00



POLISHED CHROME PLATED SERIES

MHY-92



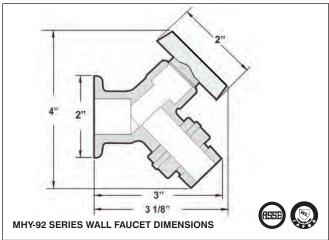

MODEL NO.	PRODUCT FINISH	OPERATING DEVICE	CONNECTION	LIST PRICE
MHY-9240	Polished Chrome Plated	Operating loose tee key, cast iron wheel handle, brown plastic and clear plastic wheel handle all included	1/2" F.P.T.	\$ 264.00
MHY-9241	Polished Chrome Plated	Operating loose tee key, cast iron wheel handle, brown plastic and clear plastic wheel handle all included	3/4" F.P.T.	\$ 264.00


^{*} Not for use with MHY-95 Series Wall Box

[†] Operating key also included in each box (HY-9004)

MHY-92	MHY-92 OPTIONAL VARIATIONS:					
SUFFIX DESCRIPTION LIST PRICE SUFFIX DESCRIPTION					LIST PRICE	
-B	Cast brass box	\$ 417.00	-B-49	Chrome plated cast brass box	\$ 695.00	
-BK	Cast brass box with cylinder lock	\$ 513.00	-BK-49	Chrome plated cast brass box with cyl. lock	\$ 792.00	

MHY-95 FLUSH MOUNTED WALL BOX SERIES

MHY-95

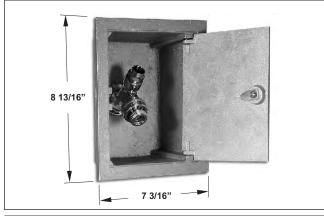

MHY-95 Series is not intended for use with MHY-9(*)30 or 31 Series Cast Iron Wheel Handle Wall Hydrants

(*) 0, 1, or 2

Recommended wall opening: 7 3/4" x 6 1/8" overall depth: 3 3/4"


MODEL NO.	PRODUCT FINISH	DESCRIPTION	ADD TO MHY-90 OR 92 LIST PRICE
MHY-95-B	Cast Brass	Cast Brass Box	\$ 417.00
MHY-95-B-49	Chrome plated Cast Brass	Chrome Plated Box	\$ 695.00
MHY-95-BK	Cast Brass	Cast Brass Box with Cylinder Key Lock	\$ 513.00
MHY-95-BK-49	Chrome plated Cast Brass	Chrome Plated with Cylinder Key Lock	\$ 792.00

^{*} Add to the following list prices: MHY-90 \$208, for MHY-92 \$264.00

MHY-90 SERIES REPLACEMENT PARTS


MODEL NO.	DESCRIPTION	LIST PRICE
MHY-9001	Brown plastic wheel handle	\$ 62.00
MHY-9002	Clear plastic wheel handle	\$ 62.00
MHY-9003	Cast iron wheel handle	\$ 62.00
MHY-9004	Operating key	\$ 48.00
MHY-9005-B	A.S.S.E. 1011 approved vacuum breaker - rough brass	\$ 69.00
MHY-9005-PC	A.S.S.E. 1011 approved vacuum breaker - polished chrome	\$ 84.00

BV1000 CAST IRON HORIZONTAL BACKWATER VALVE WITH BRONZE FLAPPER

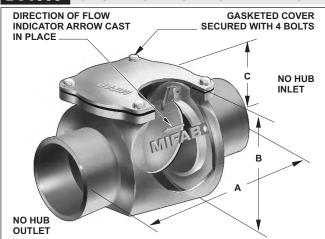

MODEL NUMBER	CONNECTION Size	WEIGHT (Lbs)	LIST PRICE
BV1002	2" No hub	11.50	\$ 492.00
BV1003	3" No hub	18.00	\$ 511.00
BV1004	4" No hub	24.50	\$ 531.00
BV1006	6" No hub	42.00	\$ 2076.00
BV1008	8" No hub	79.00	\$ 2751.00
BV1010	10" No hub	102.00	\$ 3093.00

BV10	BV1000 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE			
-13	All galvanized (2", 3", 4")	\$ 287.00			
-13	All galvanized (6")	\$ 423.00			
-13	All galvanized (8" and 10")	\$ 737.00			
-HS	Hub and spigot connection on inlet only	No Add			

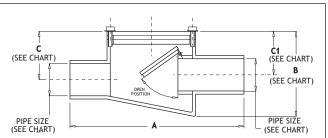

MODEL Number	CONNECTION Size	LENGTH A	HEIGHT B	INVERT (OUTLET) C	INVERT (INLET) C1
BV1002	2" No hub	10 3/4"	5 1/2"	2.40"	2 1/8"
BV1003	3" No hub	11 3/4"	6 3/4"	3.40"	3 1/8"
BV1004	4" No hub	12 3/4"	7 1/2"	3 5/8"	3 1/2"
BV1006	6" No hub	14 3/4"	10"	5"	4 5/8"
BV1008	8" No hub	17"	12 1/4"	7"	6 1/2"
BV1010	10" No hub	23 5/8"	13 1/2"	7"	7 1/2"

BV1000-CS EPOXY COATED HOUSING AND ACCESS COVER FOR BV1000




l	MODEL Number	SIZE	WEIGHT (Lbs)	LIST PRICE
ļ	BV1000-CS	Specify Depth (up to 30")	150.00	\$ 6859.00
		Add per inch over 30"	+22lbs/in	\$ 42.00

REPLACEMENT COVER GASKETS					
MODEL NUMBER	DESCRIPTION	LIST PRICE			
BV1002-GSK	Replacement cover gasket for the BV1002	\$ 90.00			
BV1003-GSK	Replacement cover gasket for the BV1003	\$ 103.00			
BV1004-GSK	Replacement cover gasket for the BV1004	\$ 114.00			
BV1006-GSK	Replacement cover gasket for the BV1006	\$ 126.00			
BV1008-GSK	Replacement cover gasket for the BV1008	\$ 181.00			
BV1010-GSK	Replacement cover gasket for the BV1010	\$ 211.00			

BV1200-R CAST IRON BACKWATER VALVE WITH FLOOR LEVEL NICKEL BRONZE ACCESS COVER

BV1200-R

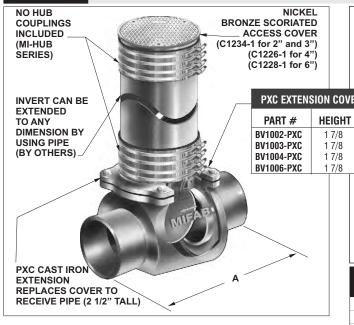

MODEL Number	CONNECTION Size	WEIGHT (Lbs)	LIST PRICE
BV1202-R-1	2" No hub	23.00	\$ 1630.00
BV1203-R-1	3" No hub	30.00	\$ 1630.00
BV1204-R-1	4" No hub	37.00	\$ 1738.00
BV1206-R-1	6" No hub	56.00	\$ 2363.00
Docian and dimensi	one are subject to mad	lification Driege do not	include applicable taxe

Design and dimensions are subject to modification. Prices do not include applicable taxe


		PIPE BY OTHERS	
ov	ERS		
/8 /8 /8 /8	0PENING 4" NO HUB 4" NO HUB 6" NO HUB 8" NO HUB	17/8" PXC CAST IRON EXTENSION PIPE SIZE PIPE SIZE	
	I I		


SIZE	MODEL Number	PIPE Size	LENGTH A
2"	BV1202-R-1	2" No hub	10 3/4"
3"	BV1203-R-1	3" No hub	11 3/4"
4"	BV1204-R-1	4" No hub	12 3/4"
6"	BV1206-R-1	6" No hub	14 3/4"

BV1200-R OPTIONAL VARIATIONS:			
SUFFIX	DESCRIPTION	LIST PRICE	
-13	All galvanized	\$ 488.00	
-HS	Hub and spigot connection on inlet only	No Add	

BV1210 CAST IRON ANGLE PIT DRAIN WITH BACKWATER VALVE

BV1210

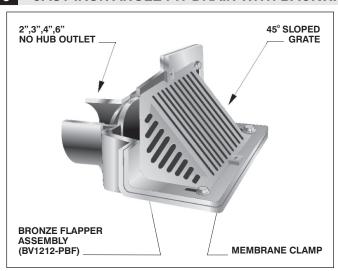

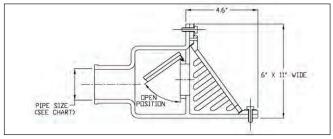

- (*) Denotes outlet size (2, 3, 4 or 6)

 (**) Denotes outlet size and type (2, 3 or 4 No Hub or 2T, 3T or 4T (F.I.P.) 6*
 size only available in no hub with combined body and outlet design.

 (***) Denotes strainer finish (-1or -50)

H-1081 (washers

PARTS R1300-PG(***)









MODEL No.	SIZE	WEIGHT (Lbs.)	C.I. BODY WITH C.I. Grate (-50) List Price	C.I. BODY WITH N.B. Grate (-1) List Price
BV1212,3,4	2", 3", 4" No hub	45.00	\$ 839.00	\$ 1315.00
BV1216	6" No hub	55.00	\$ 1221.00	\$ 1801.00


K1300-P06	
Q	x2




BV1210 SERIES OPTIONAL VARIATIONS:					
SUFFIX	SUFFIX DESCRIPTION LIST PRICE SUFFIX DESCRIPTION I				LIST PRICE
T	Threaded outlet (except 6")	No Add	-13	All galvanized (6")	\$ 230.00
-6	Vandal proof grate (TR25 Torx and Pin)	\$ 76.00	-83	Stainless steel mesh screen	\$ 303.00
-13	All galvanized (2",3",4")	\$144.00			

BV1250 **BRONZE BACKWATER VALVE WITH NEOPRENE SEAT**

BV1250

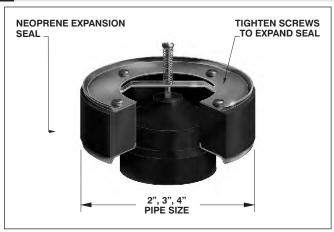

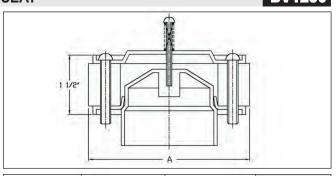


MODEL No.	"A" PIPE SIZE	WEIGHT (Lbs.)	LIST PRICE
BV1252	2" No hub	1.50	\$ 55.00
BV1253	3" No hub	2.00	\$ 55.00
BV1254	4" No hub	2.50	\$ 55.00

BV1260 VERTICAL CAST IRON BACKWATER VALVE WITH NEOPRENE SEAT

BV1260

\$ 97.00

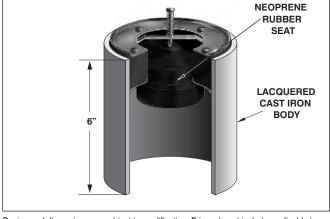

В					
MODEL No.	"A" Pipe Size	WEIGHT (Lbs.)	LIST PRICE		
BV1262	2" No hub	10.00	\$ 366.00		
BV1263	3" No hub	15.00	\$ 366.00		
BV1264	4" No hub	20.00	\$ 366.00		
BV1260 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION		LIST PRICE		

All galvanized (2", 3", 4")


Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit www.mifab.com for the most recent product information.



BV1280 TERMINAL VALVE

BV1280

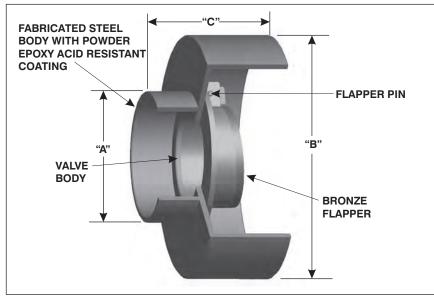


Note: The BV1280 terminal valve is used at the end of sewer lines to prevent backflow into areas that require draining.

MODEL Number	WEIGHT (Lbs.)	"A" Pipe size	"B" Diameter	"C" Length	LIST PRICE	ADD FOR -13 Galvanized Body
BV1282	10	2"	6 1/4"	5 1/4"	\$ 492.00	\$ 155.00
BV1283	12	3"	8"	5 ½"	\$ 492.00	\$ 155.00
BV1284	15	4"	9"	5 3/4"	\$ 511.00	\$ 155.00
BV1285	20	5"	11 ½"	6"	\$ 531.00	\$ 185.00
BV1286	28	6"	11 ½"	6"	\$ 635.00	\$ 185.00
BV1288	42	8"	13 ½"	6 3/4"	\$ 1681.00	\$ 268.00
BV1280-10	58	10"	15 3/4"	7 3/4"	\$ 3434.00	\$ 268.00
BV1280-12	80	12"	17 ½"	8 3/4"	\$ 6249.00	\$ 707.00
BV1280-16	120	16"	26 1/4"	16 ½"	\$11847.00	\$1103.00
BV1280-18	140	18"	26 1/4"	16"	\$15435.00	\$1654.00

BV1290 DRAIN TILE SUMP

BV1290

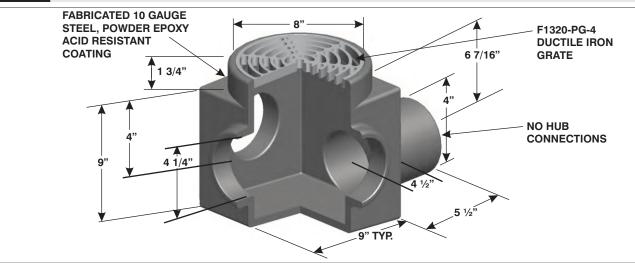

BV1290 OPTIONAL VARIATIONS:					
SUFFIX	SUFFIX DESCRIPTION				
-1	Nickel Bronze grate and frame (veneer)	\$ 639.00			
-3	Stainless Steel grate and frame (veneer)	\$ 639.00			
-13	All Galvanized	\$ 462.00			
-25	Solid cover	\$ 317.00			


Note: The function of the BV1290 is to provide a sump with multiple inlets that the foundation drain lines connect to.

MODEL	WEIGHT	FREE AREA	OUTLET	LIST
Number	(Lbs.)	Square Drain	Size	Price
BV1294	50	14.25"	4"	\$ 644.00


Design and dimensions are subject to modification. Prices do not include applicable taxes.

BV1300 MANUALLY OPERATED GATE TYPE BACKWATER VALVE

BV1300

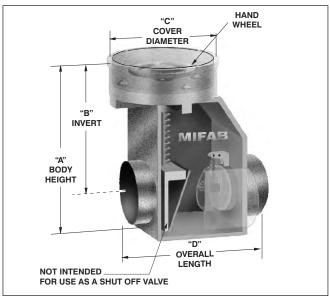

& MIFAB®

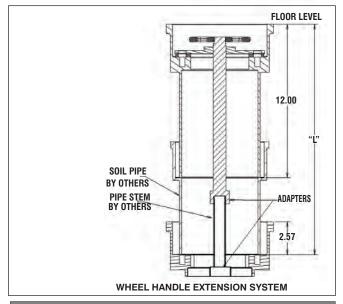

EXISTING COVER PLATE	HANDWHEEL
EXTENSION GASKET	12"
EXTENSION ->	EXTENSION BODY


	BV1300 DIMENSIONS				
	PIPE SIZE	"A" Body Height	"B" Invert	"C" Cover Diameter	"D" Length
Ì	4" (102)	15 3/4" (400)	12" (205)	8" (203)	14" (356)
	6" (152)	19" (483)	14 1/2" (368)	10 1/2" (368)	16" (406)

MODEL Number	"A" Pipe size	WEIGHT (Lbs)	LIST PRICE
BV1304	4" No hub	80.00	\$ 2600.00
BV1306	6" No hub	120.00	\$ 4684.00

BV1300	BV1300 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-13	All galvanized	\$ 753.00				
-EXT4	12" extension (extension only for BV1304)	\$ 796.00				
-EXT6	12" extension (extension only for BV1306)	\$ 916.00				
-34G	Bronze flapper valve	No Add				
-HS	Hub spigot connection on inlet only	No Add				


TS1000 TRAP STANDARD

TS1000

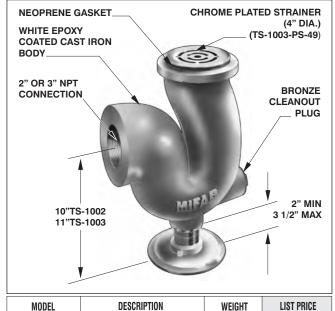

MODEL DESCRIPTION NUMBER		WEIGHT (Lbs)	LIST PRICE
TS1002,3	Trap Standard	22.00	\$ 417.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.

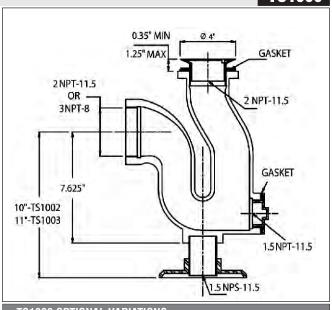


TS1000 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE		
-11	Acid resistant coating Inside & Out	\$ 208.00		



MI-940 COMPACT DEEP SEAL TRAP WITH FUNNEL

MI-940

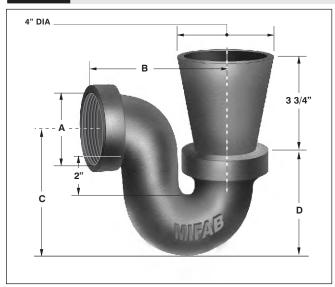


MI-940 DIMENSIONS				
"A" Pipe size	"B" Center to outlet	"C" CENTER OF INLET TO BOTTOM	"D" trap depth	
1 1/2"	5 3/4"	5"	4"	
2"	5 3/4"	5 1/4"	4 1/4"	
3"	7 3/4"	6 3/4"	6 1/4"	

MI-940	MI-940 OPTIONAL VARIATIONS:					
SUFFIX	DESCRIPTION	LIST PRICE				
-13	Galvanized body 1 1/2" (-11 for A.R.E. body, 1 1/2")	\$ 182.00				
-13	Galvanized body 2" (-11 for A.R.E. body, 2")	\$ 182.00				
-13	Galvanized body 3" (-11 for A.R.E. body, 3")	\$ 182.00				
-49	Chrome Plated	\$ 463.00				
-NH	No hub outlet conection (See MI-850)	See MI-850				

MODEL Number	SIZE	WEIGHT (Lbs)	LIST PRICE
MI-941	1 1/2"	4.00	\$ 422.00
MI-942	2"	5.00	\$ 488.00
MI-943	3"	6.00	\$ 695.00

MI-950 DEEP SEAL TRAP

MI-950

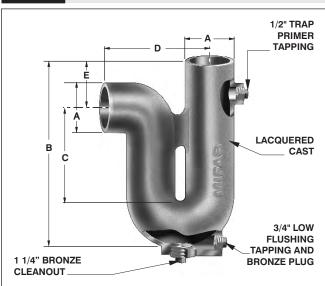


MI-950 DIMI	MI-950 DIMENSIONS					
"A" PIPE SIZE	"B" Body Height	"C" Trap Depth	"D" Center to outlet	"E" Invert		
2"	10 1/2"	4"	6 1/2"	2 3/4"		
3"	13 1/2"	4"	8"	3 1/2"		
4"	15 1/4"	5"	10"	4 1/4"		

MI-950 OPTIONAL VARIATIONS:				
SUFFIX	SUFFIX DESCRIPTION			
-G	Flushing Connection	\$ 32.00		
-7	Trap Primer Connection (½")	\$ 14.00		
-13	Galvanized body 2" (-11 for A.R.E. body, 2")	\$111.00		
-13	Galvanized body 3" (-11 for A.R.E. body, 3")	\$111.00		
-13	Galvanized body 4" (-11 for A.R.E. body, 4")	\$155.00		

MODEL Number	SIZE	WEIGHT (Lbs)	LIST PRICE
MI-952	2" No hub	8.00	\$ 411.00
MI-953	3" No hub	17.00	\$ 594.00
MI-954	4" No hub	25.00	\$ 847.00

MI-950-F DEEP SEAL TRAP WITH FUNNEL

MI-950-F

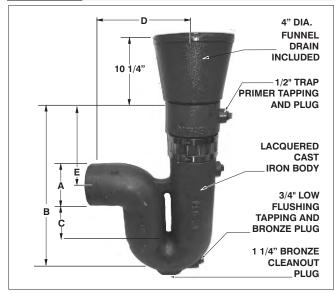

Design and dimensions are subjection	ect to modification. Prices	do not include applicable taxes.

MI-950-F	MI-950-F DIMENSIONS						
"A" Pipe size	"B" Body Height	"C" Trap depth	"D" Center to outlet	"E" Invert			
2"	10 1/2"	4"	6 1/2"	2 3/4"			
3"	13 1/2"	4"	8"	3 1/2"			
4"	15 1/4"	5"	10"	4 1/4"			


MI-950-F OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE		
-G	Flushing Connection	\$ 32.00		
-20	Secondary Flat Strainer (FD-9600 Series)	\$ 38.00		
-6-50	6" Dia. Funnel (-50)	\$ 63.00		
-6-1	6" Dia. Funnel (-1)	\$122.00		
-13	Galvanized body 2" (-11 for A.R.E. body, 2")	\$182.00		
-13	Galvanized body 3" (-11 for A.R.E. body, 3")	\$182.00		
-13	Galvanized body 4" (-11 for A.R.E. body, 4")	\$182.00		

MODEL Number	SIZE	WEIGHT (Lbs)	LIST PRICE (-50) CAST IRON	LIST PRICE (-1) NICKEL BRONZE
MI-952-F	2" No hub	9.00	\$ 422.00	\$ 789.00
MI-953-F	3" No hub	18.00	\$ 488.00	\$1259.00
MI-954-F	4" No hub	26.00	\$ 695.00	\$2107.00



MI-CAG CAST IRON FIXED AIR GAP


MI-CAG

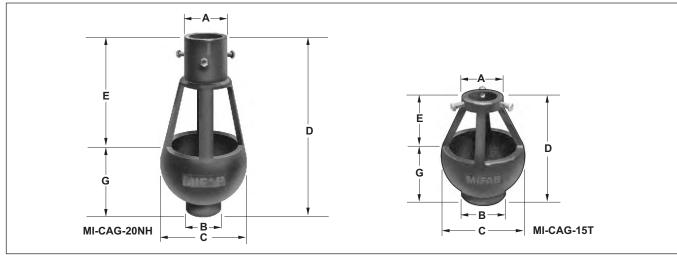

MODEL NUMBER	SIZE (SLIP JOINT x F.I.P.)	SIZE (SLIP JOINT x NO HUB)	"A"	"B"	"C"	"D"	"E"	"G"	WEIGHT (Lbs.)	LIST PRICE
MI-CAG-10T	1/2" x 1"	-	1/2"	1"	3 1/4"	4 3/4"	2"	2 3/4"	3.00	\$ 197.00
MI-CAG-15T	3/4" x 1 1/2"	-	3/4"	1 1/2"	4 1/4"	6 1/3"	2 3/4"	3 1/4"	3.00	\$ 255.00
MI-CAG-20T	1" x 2"	-	1"	2"	4 1/2"	8"	4"	4"	4.00	\$ 278.00
MI-CAG-20NH	-	1 1/2" x 2"	1 1/2"	2"	5 ½"	11 1/2 "	4"	7 1/2"	4.00	\$ 174.00
MI-CAG-30NH	-	2" x 3"	2"	3"	5 1/2"	13"	5 3/4"	7 1/2"	8.00	\$ 208.00
Add for:	All galvanized	(-13) Acid resistant e	poxy coated bo	dy						\$ 57.00

BRASS TRAP SEAL PRIMER AIR GAP FITTING

MI-GAP

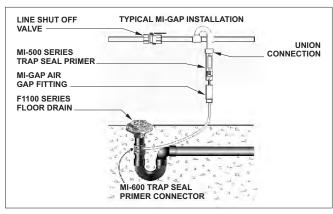



MIFAB's MI-GAP air gap fitting can be used with MIFAB's MR-500, M1-500, M2-500, MI-TSP-1, MI-TSP-2, MI-TSP-3 trap seal primers and MIFAB's MI-DU Series distribution units. The MI-GAP performs the dual functions of backflow preventer and vacuum breaker.


Note: A vertical air gap of twice the connection size is required by code.

MODEL NO.	DESCRIPTION	LIST PRICE	SHIP WEIGHT (Lbs)	CARTON QTY.	CARTON WEIGHT (Lbs)
MI-GAP	Brass Air Gap Fitting for Trap Seal Primer Valves	\$ 125.00	1.5	10	15.0

MI-GRILL FRESH AIR INLET

MI-GRILL



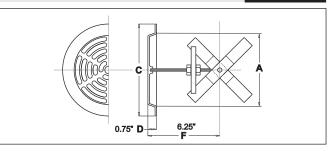

MODEL Number	"A" Pipe Size	"C" Cover Diameter	WEIGHT (lbs)	LIST PRICE NICKEL BRONZE	LIST PRICE Chrome Plated (-49)
MI-GRILL-4	3", 4"	8"	3.00	\$ 399.00	\$ 604.00
MI-GRILL-6	5", 6"	12"	4.00	\$ 676.00	\$ 881.00
MI-GRILL-8	8"	15"	5.00	\$1078.00	\$1282.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.




MI-800 FEMALE THREADED ECCENTRIC REDUCER BUSHING

MI-800



MODEL Number	"A" SIZE "B" (M.P.T. x F.P.T.)	WEIGHT (Lbs)	LIST PRICE
MI-800-2	3" x 2"	1.00	\$ 80.00
MI-800-3	4" x 2"	3.00	\$131.00
MI-800-4	4"x 3"	1.75	\$131.00
MI-800-6	6" x 5"	5.00	\$203.00

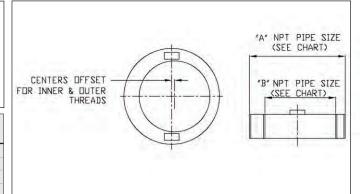

MISCELLANEOUS


MI-830 CAST IRON MALE THREADED TO HUB ADAPTER

MI-830



MODEL Number	SIZE Threaded x hub	WEIGHT (Lbs)	LIST PRICE
MI-830-3	3"	5.00	\$169.00
MI-830-4	4"	6.00	\$230.00
MI-830-5	5"	7.50	\$335.00
MI-830-6	6"	9.00	\$440.00

MI-830 OPTIONAL VARIATIONS:				
SUFFIX	DESCRIPTION	LIST PRICE		
-6	Set of 3 security screws mounted at top.	\$ 110.00		

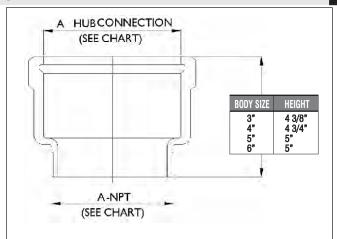


MI-850 CAST IRON NO HUB TO MALE THREADED ADAPTOR

MI-850



MODEL Number	SIZE M.I.P. x NO HUB	WEIGHT (Lbs)	LIST PRICE
MI-850-2	2"	1.00	\$ 68.00
MI-850-3	3"	2.00	\$ 86.00
MI-850-4	4"	3.00	\$118.00
MI-850-6	6"	5.00	\$185.00
MI-850-8	8"	8.00	\$413.00
MI-850-10	10"	11.00	\$510.00
MI-850-12	12"	16.00	\$591.00

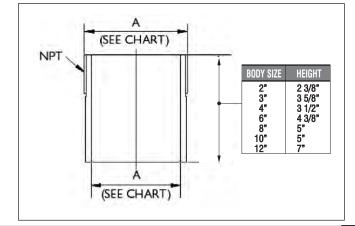


MI-860 CAST IRON ELBOW ADAPTER

MI-860



	MODEL Number	PIPE SIZE (A)	DIMENSIONS (C) (D)		WEIGHT (lbs.)	LIST PRICE
ſ	MI-862	2"	2 3/4"	6"	5	\$129.00
	MI-863	3"	3 3/4"	7"	8	\$205.00
	MI-864	4"	4"	8"	14	\$230.00
	MI-866	6"	5 1/2"	9"	25	\$273.00

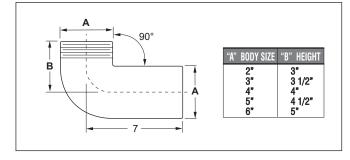

Design and dimensions are subject to modification. Prices do not include applicable taxes.



(R)

TRAP SEAL PRIMERS

3 P.S.I. PRESSURE DROP

Only a three p.s.i. line pressure drop is required to activate the primer compared to five or ten p.s.i. by others. Lower water volume fixtures and faucets has resulted in lower line pressure drops. A three p.s.i. performance point ensures reliable water delivery to maintain the trap seal

SEDIMENT FILTER

A replacement stainless steel sediment filter prevents line debris from entering the primer. This can be replaced after wear and build up of debris to ensure maximum life and performance of the primer.

NO ADJUSTMENTS

The replaceable and repairable cartridge tubes inside of the body are factory engineered to deliver enough water to service three, six or ten floor drain traps without adjustment. This eliminates confusion during field installation.

VIEW HOLES

Four view holes permit easy inspection of water delivery. The holes are across from each other, enabling light at the opposite end to illuminate the performance of the

NO PRECHARGE

MIFAB's trap seal primers can be disassembled in the field for easy cleaning and repair, without risk of losing a precharge.

(MR-500 ILLUSTRATED)

465-2736-USA 387-3880-CAN


NR-500-NPB
Ite drop activated trap
steal prime required.
The supply line.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB TRAP SEAL PRIMER SELECTION GUIDE

Trap seal primers are a necessity where foor drains are infrequently used and in areas such as mechanical and service rooms. In surprisingly little time, evaporation of water in foor drain traps will allow sewer gas to enter the interior of the building. Today's typical method of cleaning foors produces very little water that runs into foor drains. In mechanical rooms, warm dry conditions and air pressure changes caused by HVAC equipment may also serve to compromise the water seal. Trap seal primers provide a supply of water to replenish the deep seal or "P" trap of a drain to prevent sewer or potentially explosive methane gas from entering the area through the foor drains. They are installed on the potable cold water supply line, and react to water fowing in the line to trigger, either by turbulence or pressure drop. Once a triggering event occurs, the primer will release water that is piped to a trap primer connector on or near the "P" trap being maintained. The selection and specifcation of trap seal primers merits careful consideration. Outlined below are some of the factors to be aware of when planning to use trap seal primers effectively. Installation and local code requirements must be taken into account when specifying trap seal primers. The A.S.S.E. (American Society of Sanitary Engineers) trap seal primer standard #1018 is the key standard that relates to trap seal primers. MIFAB's M-500 and MI-TSP trap seal primers are tested and certified to the A.S.S.E. 1018 Standard.

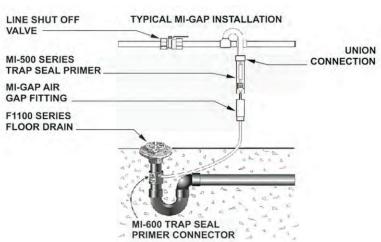

PRIMER CONNECTOR

TYPES OF TRAP SEAL PRIMERS

There are four main types of trap seal primers. They include: continuous fow, pressure drop activated, fush valve operated and electronic.

CONTINUOUS FLOW TRAP SEAL PRIMERS

Continuous fow trap seal primers are the original style of trap seal primers. They are typically constructed of cast brass or bronze with a neoprene rubber poppet foat on the inside that rises upward as water fows through the primer. When the poppet rises off of its seat, water fows from the primer, through the plumbing line connection, and into the foor drain trap. They are manufactured in either sweat, threaded or union connections and should be installed in a vertical position within the horizontal water supply line, at least ten inches above the foor drain trap that it serves. Continuous fow trap seal primers do not have any method of screening out line debris. This often results in their clogging and either fowing water continuously, or not at all. The volume of water that they discharge is directly related to the amount of water that continuously fows through them. For these reasons, pressure drop activated trap seal primers have become the selection of choice for specifers.



ELECTRONIC TRAP SEAL PRIMERS

MIFAB's MI-100 Series of electronic trap seal primers are a pre-assembled electronic trap seal primer system programmed to maintain the water seal of foor drain traps. The device is made with an A.S.S.E. approved vacuum breaker, solenoid valve operated by a timer, shut off valve for maintenance and a manifold system to distribute water evenly to the desired foor drain traps. The design is programmed at MIFAB's factory with standard fush times. These fush times can be adjusted by the operator in order to discharge more or less water to the foor drain traps, depending on the installation and climate conditions. Applications include commercial buildings such as schools, hospitals, manufacturing facilities, and any other buildings that require foor drain trap seal protection. The distribution of water from the MI-100 to the traps avoids possible odors coming from the drains.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MIFAB TRAP SEAL PRIMER SELECTION GUIDE (Cont'd)

PRESSURE DROP ACTIVATED TRAP SEAL PRIMERS

Pressure drop activated trap seal primers are typically manufactured out of brass. They are made with a 1/2" M.I.P. inlet connection and a 1/2" F.I.P. outlet connection. They have an interior cartridge that seals when the line pressure is in a static state. When the line pressure drops as little as three p.s.i. (pounds per square inch) (caused by the fushing of a toilet, opening of a faucet, or any draw of water from the water supply line within a close distance to the primer) the interior cartridge will rise due to the pressure differential within the primer and a metered amount of water is discharged under pressure into the plumbing line connected to the foor drain trap. Pressure drop activated trap seal primers are supplied with a fne mesh stainless steel flter that will screen out debris to ensure that the cartridge is not clogged and that the water deliveries are uniform. The flter is easily accessible for quick cleaning or replacement. Three different cartridges offer three different water deliveries into the foor drain, depending on the number of foor drain traps served and the evaporation rate of the water in the foor drain traps. Assuming line pressure of 60 p.s.i, and a line pressure drop of 3 p.s.i., MIFAB's MR-500 trap seal primer will discharge a one half ounce of water, the M1-500 will discharge a full ounce of water and the M2-500 will discharge a one quarter ounce of water into the foor drain trap every time the line pressure changes by 3 p.s.i.



Flush valve trap seal primers are installed below the fush valve and direct an amount of waste water discharged from the fush valve into a tube that connects to the foor drain trap to maintain the water seal. Their advantages are that the water used is already consumed by the fush valve operation, and this type of primer has no moving parts. Their disadvantage is that their location is determined by the location of the fxtures which may be too far away from the foor drains to be practical; unlike supply line mounted trap seal primers which can be more easily installed close to the foor drain trap to be primed. Many installations cannot use fush valve trap seal primers because the foor drain traps are too far away to be reached by the fush valve trap seal primer.







MIFAB TRAP SEAL PRIMER SELECTION GUIDE (Cont'd)

INSTALLATION CONSIDERATIONS

Continuous fow and pressure drop activated trap seal primers should be installed at least 12" above the foor drain traps for every 20 feet of distance to the drain to ensure that there is enough of a slope for the discharged water to fow to the traps. MIFAB recommends pre-priming the traps, as trap seal primers are meant to replace trap water loss through evaporation, etc. Pressure drop activated primers should be connected to the water supply line with a vertical elbow to limit line debris from entering and contaminating the valve. The primer itself should be installed vertically. Access doors should always be specifed to provide easy access to all trap seal primers. Trap seal primers have moving parts that will eventually wear or be compromised by line debris even in the best of circumstances. The access doors specifed should be large enough to provide "hand access" to the trap seal primer, related accessories and line shut off valve. For quick and easy repair, a line shut off valve and union connections are recommended directly before the trap seal primer on the water supply line. The closing of this valve will facilitate the cleaning and maintenance of the primer without having to separately shut off the building's water supply. Water supply lines should be fushed at least fve times before the trap seal primers are initially installed to ensure that debris will not enter the primers and negatively affect their performance. Pipe dope and paste should never be used when installing trap seal primers in water supply lines because the fne residue from these adhesives will enter the trap seal primers and clog the cartridges. Install the trap seal primer as close to the source of the pressure drop as possible. Fixtures with a water restriction device may not cause a large enough pressure drop to activate the trap seal primer.

AIR GAP FITTING

Many local codes require the use of an air gap fitting underneath the trap seal primer (see MIFAB's MI-GAP product). The purpose of an air gap fitting is to provide a vertical space that is twice the diameter of the water supply connection in order to ensure positive protection against backfow. ANSI / ASME Standard A112.1.2 air gap in plumbing systems is written for the application of air gap fittings. It is recommended that air gaps be specifed for use in areas where splashing water from the air gap will not be objectionable or cause damage.

DISTRIBUTION UNITS

Distribution units can be installed underneath pressure drop activated trap seal primers to distribute water to up to ten foor drain traps that are in close proximity to each other. (See MIFAB's MI-DU product) Typically, distribution units are used when a men and women's restroom are located side by side with a common pipe chase between them. In this instance, one trap seal primer with a distribution unit dialed to the 2 setting can be used to service both foor drain traps. This eliminates a second costly installation procedure, shut off valve, access door and air gap ftting. MIFAB's distribution units are engineered so that they

do not need to be installed level to distribute water evenly and can be adjusted to serve either two, three or four foor drain traps with a single unit. Up to ten foor drain traps can be served by having one main distribution unit feed others below it. Contact MIFAB for layout information on distribution units serving multiple drains.

LINE SHUT OFF VALVE

The closing of this valve will facilitate the cleaning and maintenance of the primer without having to separately shut off the building's water supply. Water supply lines should be fushed several times before the trap seal primers are initially installed to ensure that debris will not enter the primers and negatively affect their performance. Pipe dope and paste should never be used when installing trap seal primers in water supply lines because the fne residue from these adhesives will enter the trap seal primers and clog the cartridges. Once installed, pressure drop activated trap seal primers should be cycled at least fve times to ensure reliable operation. Quickly opening and closing the line shut off valve can accomplish this. Four view holes located directly across from each other at the bottom of the pressure drop activated trap seal primers allow easy observation of water discharging into the make up line that leads to the foor drain trap.



Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-TSP CONTINUOUS FLOW TRAP SEAL PRIMER

MI-TSP





MODEL NO.	DESCRIPTION	LIST PRICE	ADD FOR: Chrome Plated (-CP)	SHIP WEIGHT (Lbs.)	CARTON QTY.	WEIGHT (Lbs.)	REPAIR KIT (-RK)
MI-TSP-1	1/2" Sweat	\$ 130.00	\$ 181.00	1.0	20	20	\$ 23.00
MI-TSP-2	1/2" Threaded	\$ 130.00	\$ 181.00	1.0	20	20	\$ 23.00
MI-TSP-3	1/2" Threaded with union	\$ 375.00	\$ 425.00	1.0	20	20	\$ 23.00
	connections						

Part number for MI-TSP-1,2,3, repair kit is MI-TSP-RK. (SUFFIX-RK)

PRESSURE DROP ACTIVATED TRAP SEAL PRIMERS

MIFAB MR-500, MI-500 & M2-500 SERIES pressure drop activated brass trap seal primer, with inlet opening of 1/2" male N.P.T. and outlet opening of female 1/2" N.P.T. Complete with four view holes and removable filter screen. Requires no adjustments and no air precharge. MIFAB'S Series of pressure activated trap seal primers (MR-500, M1-500 and M2-500) can be connected to any cold water line, and will be automatically activated when a valve or faucet, that is on the line, is opened. A pressure drop of three p.s.i. will activate all of the trap seal primers. MIFAB's Series of trap seal primers can be disassembled in the field. Their unique design permits filter replacement without affecting performance of the primer. The "O" ring seals are tested for reliability at a temperature range of -40 degrees to 450 degrees F. The M-500 Series of trap seal primers do not require adjustment. The operating range for all of MIFAB's Series of trap seal primers is 20 to 125 p.s.i. All three models are listed with I.A.P.M.O. and C.S.A. and are tested and certified to the A.S.S.E. Standard 1018 and are so marked. U.S. Patent # 6,152,164




MODEL NO.	A	В		DRAINS SERVED	REPLACEMENT Filter Screen (-RF)	REPLACEMENT Cartridge (-RC)
MR-500	4 1/8"	1 1/4"	1 1/8"	6	See TSP-2013	See TSP-2013
M1-500	4 1/8"	1 1/4"	1 1/8"	10	See TSP-2013	See TSP-2013
M2-500	4 1/8"	1 1/4"	1 1/8"	3	See TSP-2013	See TSP-2013

MODEL NO.	DESCRIPTION	LIST Price	SHIP WEIGHT (Lbs.)	CARTON QTY.	CARTON WEIGHT (Lbs.)
MR-500	Up to 6 drain	See TSP-2013	.75	25	18.35
M1-500	Up to 10 drains	See TSP-2013	.75	25	18.35
M2-500	Up to 3 drains	See TSP-2013	.75	25	18.35

MI-DU | TRAP SEAL PRIMER DISTRIBUTION UNIT

MIFAB's MI-DU trap seal primer distribution unit is engineered to receive a metered amount of water from a trap seal primer and distribute the water equally to either two, three or four floor drain traps. Choose from either 1/2" or 5/8" compression connections by indicating suffix (-500) for 1/2" or suffix (-625) for 5/8". The lid of the distribution unit has the numbers "2", "3" and "4" marked on it. The body of the distribution unit has a guide marker on the top of the body. The numbers and the guide marker are positioned by removing the three screws in the lid of the unit and rotating the lid to match the appropriate numbers with the guide marker to provide priming for the desired number of drains. Do not over torque the three lid screws when securing the lid back to the body. It is not necessary to install MIFAB's distribution unit perfectly level. The unique design will distribute water uniformly when out of level up to 5 degrees. Model MI-DU is listed with I.A.P.M.O.

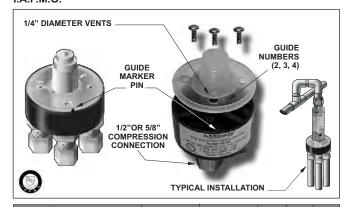

		LIST PRICE	LIST PRICE	SHIP		CARTON
		-500	-625	WEIGHT	CARTON	WEIGHT
MODEL NO.	DESCRIPTION	(-1/2" compression)	(-5/8" compression)	(Lbs.)	QTY.	(Lbs.)
MI-DU-500	Trap Seal Primer Distributio	See TSP-2013	See TSP-2013	.75	6	4.50
0R	unit that serves two, three or					
MI-DU-625	four floor drain traps.					

See Trap Seal Primer Price Book TSP-2013 for List Prices and discount structure of M-500 and MI-DU Series of products.

MI-300



MI-100 ENCLOSED ELECTRONIC TRAP SEAL PRIMER

24 VDC OR 120 VAC CONTROL UNIT WITH 24 HOUR TIMER WITH RELAY. **TEST BUTTON** BEECO VACUUM BREAKER, LEAD FREE ALL ELBOWS AND PIPING ARE PLASTIC **ELECTRONIC** SOLENOID VALVE 16 GAUGE POWDER EPOXY COATED (WHITE) STEEL CABINET. FOR CABINET 12 **COVER THAT BOLTS TO** CABINET FRAME. 1/2" PLASTIC BALL VALVÉ **ADD SUFFIX -AD** 1 1/2" MOUNTED HOLES TO RECEIVE CABINET COVER 3 1/2" DEEP PLASTIC MANIFOLD

MODEL NUMBER	DESCRIPTON	WEIGHT (lbs)	LIST PRICE
MI-100-5	1-5 opening distribution unit w/ flush mounted box 6-10 opening distribution unit w/ flush mounted box	25	See TSP-2013
MI-100-10		26	See TSP-2013

14 1/2"

MI-100 ENGINEERED FOR EQUAL DISTRIBUTION AT ALL PORTS

The perfect solution to keep sewer gas from entering the building from seldom used floor drains. The MI-100 can be located anywhere in the water supply and is engineered to permit the building owner to adjust the frequency and amount of water delivery through a timer and solenoid valve. An engineered distribution manifold ensures that a minimum of 2 ounces of water are delivered equally to every port over a twenty four hour period. The unit must be mounted 12" above the finished floor for every 20' of trap water line. The MI-100 can be installed with a MIFAB MI-100-AD access door. It can be installed up to 5° out of plumb. The system is capable of priming from 1 to 10 floor drain traps. The MI-100 is practical to serve many floor drain traps in infrequently used buildings such as convention centers and sports facilities.

The $\dot{\text{MI-}}$ 100 may be installed flush or surface mounted.

SEE TRAP SEAL PRIMER PRICE BOOK
TSP-2013
FOR LIST PRICES
AND
DISCOUNT STRUCTURE
OF MI-100 SERIES OF ELECTRONIC
TRAP SEAL PRIMERS

MI-100 OPTIONAL VARIATIONS:								
SUFFIX	DESCRIPTION	LIST PRICE	SUFFIX	DESCRIPTION	LIST PRICE			
-AD	Custom access door to fit cabinet	See TSP-2013	- 24	24 VDC	See TSP-2013			
			-120	120 VAC	See TSP-2013			


ELECTRONIC TRAP SEAL PRIMER WITH AIR GAP

TO SERVE UPTO 35 DRAINS

MI-200

COMPRESSION PLASTIC

CONNECTORS TO RECEIVE 1/2"PLASTIC

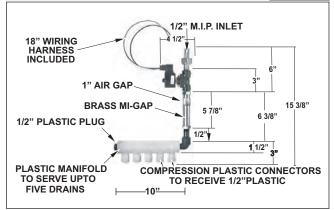

The MI-200 is engineered to connect to the voltage building energy management system used to manage the services in commercial, educational, institutional buildings. It can be located anywhere in the water supply. The MI-200 is practical for infrequently used buildings such as convention centers and sports facilities. The MI-200 is manufactured in accordance with


ANSI/ASME A112.1.2 air gap in plumbing systems Standard. UA 12x12 access door is suggested for access to the MI-200 when installed into the wall

SEE TRAP SEAL PRIMER
PRICE BOOK TSP-2013
FOR LIST PRICES
AND DISCOUNT
STRUCTURE OF
MI-200 and MI-300
ELECTRONIC
TRAP SEAL PRIMERS

MODEL NUMBER	DESCRIPTON	WEIGHT (lbs)	LIST PRICE
MI-200-24 VDC	24 VDC	2	SEE TSP-2013

Design and dimensions are subject to modification. Prices do not include applicable taxes.

ELECTRONIC TRAP SEAL PRIMER WITH AIR GAP, DISTRIBUTION UNIT AND CONTROL PANEL

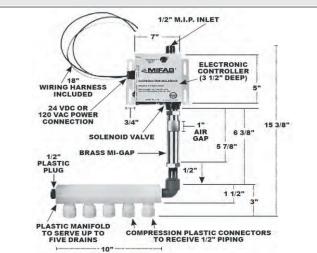

The MI-300 is manufactured with a solenoid valve, air gap, distribution unit and electronic controller. The water discharge frequency can be adjusted to meet the building's needs. The MI-300 can be located anywhere in the water supply. The MI-300 is practical for infrequently used buildings such as convention centers and sports facilities. The MI-300 is manufactured in accordance with ANSI/ASME A112.1.2 air gap in plumbing systems Standard. Specify - ENC option for unit mounted in a 12" x 12" NEMA style enclosure.

MODEL NUMBER	DESCRIPTON	WEIGHT (lbs)	LIST PRICE
MI-300-500-24 VDC	24 VDC	4	See TSP-2013
MI-300-625-24 VDC	24 VDC	4	See TSP-2013
MI-300-500-120 VAC	120 VAC	4	See TSP-2013
MI-300-625-120 VAC	120 VAC	4	See TSP-2013



MI-600 ABS OR PVC "P-TRAP" TRAP SEAL PRIMER CONNECTOR






NOTE: 1/2" connections for 3/8" copper pipe. 5/8" connections for 1/2" copper pipe.

SEE TRAP SEAL PRIMER PRICE BOOK
TSP-2013
FOR LIST PRICES
AND
DISCOUNT STRUCTURE
OF MI-600 SERIES
OF TRAP SEAL PRIMERS


MODEL NO.	CONNECTION SIZE	COMPRESSION Connection Size	MATERIAL	CARTON WEIGHT (Lbs.)	CARTON QTY.	WEIGHT (Lbs.)	LIST PRICE
MI-602	2"	1/2"	ABS	.30	24	7.20	See TSP-2013
MI-603	3"	1/2"	ABS	.50	18	9.00	See TSP-2013
MI-604	4"	1/2"	ABS	.70	12	8.40	See TSP-2013
MI-612	2"	5/8"	ABS	.30	24	7.2	See TSP-2013
MI-613	3"	5/8"	ABS	.50	18	9.00	See TSP-2013
MI-614	4"	5/8"	ABS	.70	12	8.40	See TSP-2013
MI-622	2"	1/2"	PVC	.30	24	7.20	See TSP-2013
MI-623	3"	1/2"	PVC	.50	18	9.00	See TSP-2013
MI-624	4"	1/2"	PVC	.70	12	8.40	See TSP-2013
MI-632	2"	5/8"	PVC	.30	24	7.20	See TSP-2013
MI-633	3"	5/8"	PVC	.50	18	9.00	See TSP-2013
MI-634	4"	5/8"	PVC	.70	12	8.40	See TSP-2013

MI-600-50 CAST IRON P-TRAP SEAL PRIMER CONNECTOR

MI-730

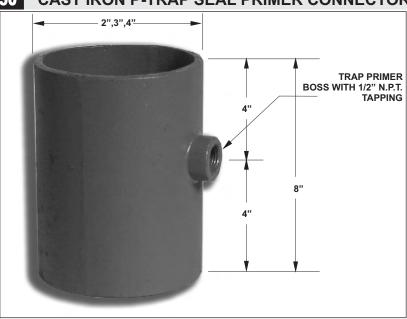


POLISHED CHROME PLATED BRASS P-TRAP

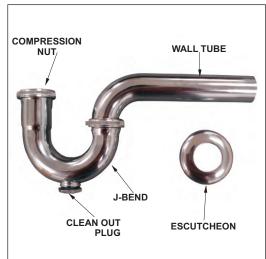

MODEL Number	PIPE SIZE	DESCRIPTION	LIST PRICE
MI-602,3,4-50	2", 3", 4"	Cast iron Trap Primer Adapter	\$ 73.00

MI-600	MI-600-50 OPTIONAL VARIATIONS:						
SUFFIX	DESCRIPTION	LIST PRICE					
-13	All galvanized	\$ 57.00					

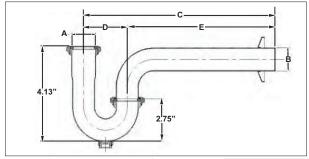

MI-730

0	MODEL NUMBER	A SLIP NUT INLET	A Outlet	GAUGE	C	DIMENSIONS D	E	LIST PRICE
	MI-730-125	1 1/4"	1 1/4"	17	11 1/4"	3 1/4"	8"	\$ 240.00
	MI-730-150	1 1/2"	1 1/2"	17	12 1/2"	3 1/2"	9"	\$ 270.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



MI-700 GRAVITY FED TRAP SEAL PRIMERS

MIFAB's MI-700 Series trap seal primers are engineered to prime one floor drain trap that is no further than twenty feet from the fixture supplying the prime. A 1/2" (13) O.D. copper make-up water line connecting the trap seal primer to the floor drain trap is recommended for the M-700 & MI-701

Note: S.S. braided supply pipe w/escutcheon is available for the MI-702 (option -BH)


1 1/4" M.I.P. THREAD 1 1/2" F.I.P. THREAD 1 1/2" F.I.P. THREAD 2 3/16 VACUUM BREAKER 6" 5 1/2" 8 1/2" 11 1/2" MI-700 MI-701 MI-702 17 GAUGE CHROME PLATED CAST BRASS BODY

SEE TRAP SEAL PRIMER PRICE BOOK TSP-2013 **FOR LIST PRICES** AND **DISCOUNT STRUCTURE** OF MI-700 SERIES OF GRAVITY FED TRAP SEAL PRIMERS

			SHIP WEIGHT		CARTON WEIGHT
MODEL NO.	DESCRIPTION	LIST PRICE	(Lbs.)	CARTON QTY.	(Lbs.)
MI-700	1 1/4" Lavatory Trap seal Primer	See TSP-2013	0.75	20	15.00
MI-701	1 1/2" Valve Trap seal Primer	See TSP-2013	1.25	20	25.00
MI-702-9.5	1 1/2" Valve Trap seal Primer w/ VB, 9 1/2"long	See TSP-2013	1.25	20	25.00
MI-702-12.5	1 1/2" Valve Trap seal Primer w/ VB, 12 1/2" long	See TSP-2013	1.50	20	30.00
MI-702-15.5	1 1/2" Valve Trap seal Primer w/ VB, 15 1/2" long	See TSP-2013	1.75	20	35.00
MI-702-23	1 1/2" Valve Trap seal Primer w/ VB, 23" long	See TSP-2013	2.25	20	45.00

MI-750 TAILPIECE TRAP SEAL PRIMER WITH BRAIDED CONNECTING HOSE

MI-750

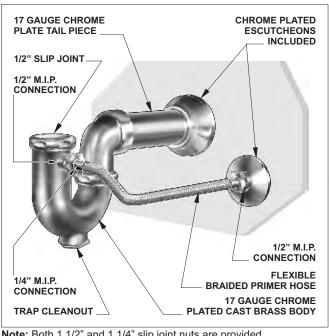

4.938

Note: Both 1 1/2" and 1 1/4" slip joint nuts are provided.


MODEL Number	DESCRIPTION	LIST PRICE
MI-750	Tailpiece Trap Seal Primer	\$ 250.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



LMIFAE R

WATER HAMMER ARRESTORS

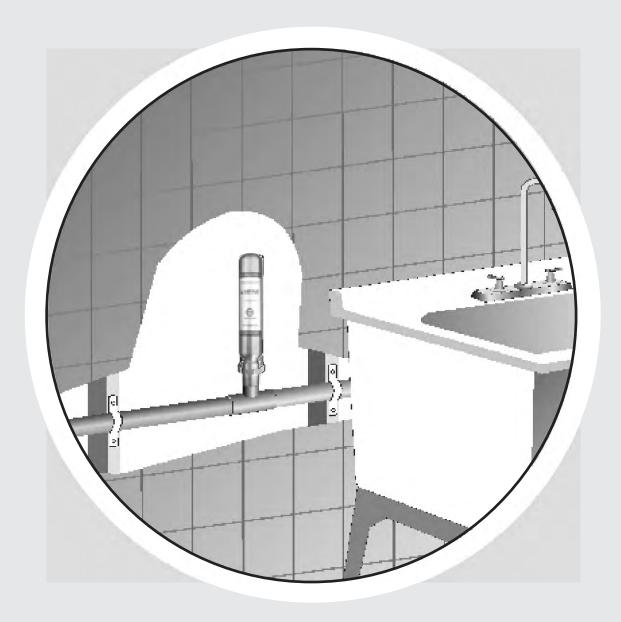



WATER HAMMER ARRESTOR SIZING

Single and Multiple Fixture Branch Lines

The water hammer arrestor sizing procedure for single and multiple fixtures described below conforms to that established by the American Society of Sanitary Engineers in their Standard ASSE-1010. Selection of the water hammer arrestor is based upon the total quantity of Fixture-Units on each cold and hot water branch line.

Fixture-Unit Listing

Determine the total number of Fixture-Units on each branch line by referring to the list of fixtures in Table One.

Water Hammer Arrestor Selection

Refer to Table Two and select the water hammer arrestor model with proper Fixture-Unit capacity. In long batteries of fixtures over 20 feet in length, more than one water hammer arrestor will be required. (See placement data shown below.)

WATER HAMMER ARRESTOR PLACEMENT DATA

On multiple fixture branch lines up to 20 feet in length, the water hammer arrestor should be installed on the branch line between the last two fixtures being served. The water hammer arrestor should have a Fixture-Unit rating equal to or greater than the total Fixture-Units connected to the branch line.

On multiple fixture branch lines over 20 feet in length, two water hammer arrestors should be used on each line with the second unit placed at the approximate midpoint of the line. The sum of the Fixture-Unit ratings of the water hammer arrestors on each branch should be equal to or greater than the total Fixture-Units connected to the branch line.

Table One


	Weight in Fixture Units Public Private				
Fixture	Type of Supply Control	C.W.	H.W.	C.W.	H.W.
Water Closet	Flush Valve	10	_	6	-
Water Closet	Flush Tank	5	-	3	-
Pedestal Urinal	Flush Valve	10	-	-	-
Stall or Wall Urinal	Flush Valve	5	-	-	-
Stall or Wall Urinal	Flush Tank	3	-	-	-
Lavatory	Faucet	1-1/2	1-1/2	1	1
Bathtub	Faucet	2	3	1-1/2	1-1/2
Shower Head	Mixing Valve	2	3	1	2
Bathroom Group	Flush Valve Closet	-	-	8	3
Bathroom Group	Flush Tank Closet	-	-	6	3
Separate Shower	Mixing Valve	-	-	1	2
Service Sink	Faucet	3	3	-	-
Laundry Tubs (1-3)	Faucet	-	-	3	3
Combination Fixture	Faucet	-	-	3	3

Table Two

Water Hammer Arrestor Model No.	Α	В	С	D	E	F
Fixture Unit Capacity	1-11	12-32	33-60	61-113	114-154	155-330

NOTES:

- (1) All sizing data in this book are based on flow velocities of 10 feet per second or less.
- (2) When the static water pressure in the line exceeds 65 psig, contact the MIFABEngr. Dept.
- (3) If the fixture-unit total has 1/2" fraction, it is to be "rounded-up" to the next larger whole number. If the total is 11-1/2 fixture units, use 12 fixture units.

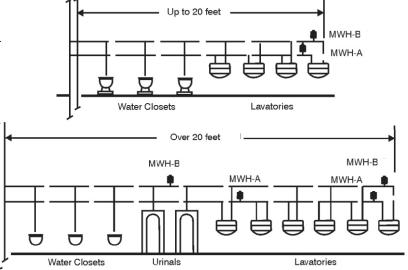

(Dimension Denotes Millimeters)



PISTON TYPE WATER HAMMER ARRESTORS



- Thick walled one piece, seamless "K" copper body. Unique design eliminates separate end cap connection to ensure maximum integrity of the body and guarantees free movement of the piston for maximum performance.
- RYTONTM PPS piston with two EPDM o-rings (Parco#5778-80) with FDA(Dow CorningTM#111) approved silicone lubricant. Ribbed piston design reduces secondary shock and flared piston skirt prevents hard particles suspended in the water supply from contacting the o-rings to provide increased product life.
- · Large volume air chamber provides better dampening for superior water hammer arrestor performance.



NOT RECOMMENDED FOR INSTALLATION IN HORIZONTAL OR INVERTED POSITION

- Temperature range: maximum working temperature is 250 °F
- . Operating pressure: Water hammer arrestors are engineered for a flowing pressure of up to 60 p.s.i. If the

system pressure exceeds 85 p.s.i., a pressure reducing valve should be installed upstream of the arrestor to lower the line pressure.

. Engineered to limit the system surge pressure of 1,500 p.s.i. Tested and certified to the A.S.S.E. 1010 and ANSI A112.26.1M Standards and listed with I.A.P.M.O.

Patent # 6,539,976

MODEL NUMBER	ASSE Rating	FIXTURE UNITS	(A) Height	(B) PIPE SIZE	(C) Wrench flats	LIST PRICE
MWH-A	A	1-11	4 1/2"	1/2"	1 1/8"	\$ 95.00
MWH-B	В	12-30	6 3/4"	3/4"	1 1/8"	\$ 111.00
MWH-C	С	31-60	6 3/4"	1"	1 1/8"	\$ 270.00
MWH-D	D	61-113	10 1/2"	1 1/4"	1 3/4"	\$ 320.00
MWH-E	E	114-154	11 1/4"	1 1/2"	2"	\$ 428.00
MWH-F	F	155-330	13"	2"	2 1/2"	\$ 689.00

WHB STAINLESS STEEL BELLOWS

WHB

TYPE WATER HAMMER ARRESTORS



MODEL NUMBER	PDI Rating	FIXTURE Units	PIPE SIZE	"A" Height	"B" Conn. Size	"C" Diameter	LIST PRICE
WHB-A	Α	1-11	3/4"	3 3/8"	3/4"	3 3/8"	\$ 260.00
WHB-B	В	12-30	1"	4"	1"	3 3/8"	\$ 371.00
WHB-C	С	31-60	1"	4 3/8"	1"	3 3/8"	\$ 635.00
WHB-D	D	61-113	1"	5 3/8"	1"	3 3/8"	\$1180.00
WHB-E	E	114-154	1"	7 1/4"	1"	3 3/8"	\$1514.00
WHB-F	F	155-330	1"	7 1/4"	1"	3 3/8"	\$1928.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.



WHS WATER HAMMER ARRESTORS FOR HEAVY EQUIPMENT





MODEL Number	NOMINAL GAS CAPACITY (Cubic Inches)	FLUID DISPLACEMENT (Cubic Inches)	HOUSING SIZE DIA. (Inches)	HOUSING SIZE HEIGHT (Inches)	CONNECTION Size	APPROXIMATE Weight (LBS.)	LIST PRICE
WHS-11	100	60	10 1/2"	8"	2" Nipple	70	P.O.A.
WHS-12	200	120	10 1/2"	10"	2" Nipple	80	P.O.A.
WHS-13	500	300	16"	10 3/4"	2" Nipple	140	P.O.A.
WHS-14	1,000	600	16"	14"	2" Nipple	150	P.O.A.
WHS-15	2,000	1,200	24"	18"	3" Flange	300	P.O.A.
WHS-16	5,000	3,000	24"	22 3/4"	3" Flange	350	P.O.A.
WHS-17	10,000	6,000	36"	25"	4" Flange	570	P.O.A.
WHS-17S	25,000	15,000	42"	40"	6" Flange	2200	P.O.A.
WHS-18	50,000	30,000	48"	47"	6" Flange	3000	P.O.A.



A1 BODY

FOR: F1000, F1300, F1320 and F1420 Series floor drains, R1100 Series roof drains, C1000 and C1100 Series cleanouts

PART NO.	DESCRIPTION	PIPE SIZE	CARTON QTY.	CARTON WT. (LBS.)	LIST PRICE	Find this part in A1 BODY
A1-2,3,4NH-7		2", 3", 4"	8/8/8	39/39/39	\$ 45.00	MIFAB literature
A1-5,6NH-7	trap seal primer tapping Cast Iron, no hub with ½" NPT trap seal primer tapping	5", 6"	8/8	37/87	\$ 230.00	by this component icon:
A1-2,3,4-30-7		2", 3", 4"	12/10/8	8/7.5/6.5	\$ 73.00	8"
A1-2,3,4-31-7	ABS, Socket Weld with 1/2" NPT	2", 3", 4"	12/10/8	8/7.5/6.5	\$ 73.00	
A1-2,3,4P-7		2", 3", 4"	8/8/8	45/45/56	\$ 70.00	
A1-6P-7	trap seal primer tapping Cast Iron, push-on with ½" NPT	6"	4	50	\$ 255.00	A1-2, 3, 4-90-NH
A1-2,3,4T-7		2", 3", 4"	8/8/8	40/40/40	\$ 106.00	
A1-5T-7	trap seal primer tapping Cast Iron, threaded with ½" NPT trap seal primer tapping	5"	4	40	\$ 291.00	8"
A1-2,3,4X-7	Cast Iron, inside caulk with 1/2" NPT	2", 3", 4"	4/4/4	45/45/35	\$ 45.00	
A1-5X-7	trap seal primer tapping Cast Iron, inside caulk with ½" NPT	5"	4	50	\$ 230.00	A1 No Hub side outlet body
A1-2,3,4-28-7	trap seal primer tapping Cast 304 SS, no hub with ½" NPT trap seal primer tapping	2", 3", 4"	NA	NA	\$1473.00	
A1-2,3T-90-7	Cast Iron, threaded side outlet	2", 3"	NA	NA	\$ 213.00	
	Cast Iron, no hub side outlet	2", 3"	NA	NA	\$ 213.00	A1-2, 3, 4T-90
A1-4T-90-7	Cast Iron, threaded side outlet	4" 4"	NA NA	NA NA	\$ 213.00	A1 Threaded Side Outlet body
A1-4-9U-NH-7	Cast Iron, no hub side outlet	4"	NA	INA	\$ 213.00	,

PART No.	DESCRIPTION	WEIGHT (LBS.)	LIST Price				
C1442	"T-cone" style plastic closure plug		\$ 65.00				
	w/ neoprene compression gasket, 2"	.50					
C1443	"T-cone" style plastic closure plug		\$ 65.00				
	w/ neoprene compression gasket, 3"	.75					
C1444	"T-cone" style plastic closure plug		\$ 65.00				
	w/ neoprene compression gasket, 4"	1.00					
Note: fo	Note: for use in No Hub and Plastic Socket outlet bodies only.						



A5 BODY

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST Price
A5-2,3,4,6-NH	Cast iron, no hub connection body	.10	\$ 69.00
A5-2,3,4,6X	Cast iron, inside caulk connection body	.10	\$ 69.00



A2 BODY

FOR: F1330C, F1340, F1360, F1430C, F1440, Series Floor Drains, R1200 Series Roof Drains

		111 - 01	WEIGHT (LBS.)	LIST PRICE
A2-2,3,4NH-7 C	Cast Iron, no hub w/ ½ NPT trap primer tapping	2", 3", 4"	15.00	\$ 116.00
A2-5,6NH-7 C	Cast Iron, no hub w/ ½ NPT trap primer tapping	5",6"	15.00	\$ 235.00
A2-8NH-7 C	Cast Iron, no hub w/ ½ NPT trap primer tapping	8"	18.00	\$235.00
A2-2,3,4-30-7 P	PVC, Socket Weld w/ 1/2 NPT trap primer tapping	2", 3", 4"	14.00	\$ 143.00
A2-2,3,4-31-7 A	ABS, Socket Weld w/ 1/2 NPT trap primer tapping	2", 3", 4"	14.00	\$ 143.00
A2-2,3,4P-7 C	Cast Iron, push-on w/ ½ NPT trap primer tapping	2", 3", 4"	15.00	\$ 143.00
A2-6P-7 C	Cast Iron, push-on w/ ½ NPT trap primer tapping	6"	15.00	\$ 256.00
A2-2,3,4T-7 C	Cast Iron, threaded w/ 1/2 NPT trap primer tapping	2", 3", 4"	15.00	\$ 176.00
A2-5,6T-7 C	Cast Iron, threaded w/ ½ NPT trap primer tapping	5",6"	15.00	\$ 296.00
A2-2,3,4X-7 C	Cast Iron, inside caulk w/ ½ NPT trap primer tapping	2", 3", 4"	15.00	\$ 176.00
A2-5,6X-7 C	Cast Iron, inside caulk w/ ½ NPT trap primer tapping	5",6"	15.00	\$ 296.00
A2-2,3,4T-90-7 C	Cast Iron, with threaded side outlet	2", 3", 4"	20.00	\$ 256.00
A2-2,3,4-90-NH-7 Ca	ast Iron, with no hub side outlet	2", 3", 4"	22.00	\$ 256.00



A3 BODY

List price of A3 body is \$ 314.00



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
POG-2	2" Push-on neoprene gasket for all MIFAB A1, A2, A3, A4 bodies (PVC + CI. pipe)	.75	\$ 18.00
POG-3	3" Push-on neoprene gasket for all MIFAB A1, A2, A3, A4 bodies (PVC + CI. pipe)	1.00	\$ 18.00
POG-4	4" Push-on neoprene gasket for all MIFAB A1, A2, A3, A4 bodies (PVC + Cl. pipe)	1.25	\$ 18.00
POG-6	6" Push-on neoprene gasket for all MIFAB A1, A2, A3, A4 bodies (Cl. pipe) (Black color)	1.75	\$ 59.00
POG-6-PVC	6" Push-on neoprene gasket for all MIFAB A1, A2, A3, A4 bodies (PVC pipe only) (White color)	1.75	\$ 59.00

POG "PUSH ON GASKET"

Note: Push on gasket fits all plastic schedule 40 & service weight cast iron pipe. For 6" push on gasket, specify POG-6 or POG-6-PVC for either C.I. or PVC pipe. Add Suffix - PVC to model number when PVC gasket is required.



Design and dimensions are subject to modification. Prices do not include applicable taxes.

 $\label{thm:com} \mbox{Visit ${\bf www.mifab.com}$ for the most recent product information.}$



PARTS PARTS

A4 BODY Part No.	DESCRIPTION	PIPE SIZE	CARTON QTY.	CARTON WT. LBS.	LIST PRICE
A4-2,3,4NH-7	Cast Iron, no hub with trap seal primer tapping	2", 3", 4"	9	20.00	\$ 45.00
A4-2,3,4-30-7	PVC Socket Weld with trap seal primer tapping	2", 3", 4"	27(2")/18(3",4")	22/16/17	\$ 73.00
A4-2,3,4-31-7	ABS Socket Weld with trap seal primer tapping	2", 3", 4"	27(2")/18(3",4")	22/16/17	\$ 73.00
A4-2,3,4P-7	Cast Iron, push-on with trap seal primer tapping	2", 3", 4"	9	43.00	\$ 70.00
A4-34B	Threaded bronze tapered closure plug			N/A	\$103.00
	fits all A4 bodies				
A4-34P	Threaded plastic tapered closure plug			N/A	\$ 84.00
	fits all A4 bodies				



A7 BODY for R1260 SERIES ROOF DRAINS				
PART NO.	DESCRIPTION	PIPE SIZE	WEIGHT (Lbs.)	LIST PRICE
A7-8X A7-10NH A7-12NH	Cast iron, inside caulk with Cast iron, no hub with Cast iron, no hub with	8" 10" 12"	25.00 24.00 21.00	\$1513.00 \$1513.00 \$1638.00



Find this part in MIFAB literature by this component icon:



CLA	M	PS
-----	---	----

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A1-C1	Low rough-in membrane clamp used where	1.50	\$ 54.00
A1-C1-3	top assembly threads into body Low rough-in 304-SS membrane clamp	1.50	\$405.00



Find this part in MIFAB literature by this component icon:



INCLUDES HS-1 HARDWARE PACK AT NO CHARGE

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A1-C2	High rough-in membrane clamp for all 8" diameter A1 bodies to receive threaded top assemblies	2.50	\$54.00



Find this part in MIFAB literature by this component icon:



INCLUDES HS-1 HARDWARE PACK AT NO CHARGE

INCLUDES HS-2 HARDWARE PACK AT NO CHARGE

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A1-C3	Membrane clamp and dome receiver w/ integral gravel stop adjustable extension ring and/or	2.00	\$108.00
A1-C3-C0	underdeck clamp for all drains using A1 bodies. A1-C3 with cutaway side	1.75	\$108.00



Find this part in MIFAB literature by this component icon:



Contact MIFAB for correct underdeck clamp to work with A1-4X and a all 5" and 6" outlet A1 bodies. Part number A1-C3-4PU

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A1-WD	Membrane Clamp and dome receiver with integral 2" water dam for all 8" diameter A1 bodies	3.75	\$181.00



Find this part in MIFAB literature by this component icon:



INCLUDES HS-2 HARDWA	RE PACK AT NO	CHARGE

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A2-C3	Membrane clamp and dome receiver w/ integral gravel stop. Adjustable extension ring and or	6.75	\$108.00
	underdeck clamp for all drains using A2 bodies		



Find this part in MIFAB literature by this component icon:



INCLUDES HS-2 HARDWARE PACK AT NO CHARGE

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A2-C3-C0	Underdeck Clamp with cut-out to install around existing roof drain piping and A2-90 side outlet bodies	5.75	\$108.00



Find this part in MIFAB literature by this component icon:



PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A2-C3-W	Membrane clamp and dome receiver threaded		
A2-C3-W6	for 4" standpipe w/integral gravel stop As above, threaded for 6" standpipe	9.50 8.00	\$189.00 \$270.00



Find this part in MIFAB literature by this component icon:



G

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A2-WD	Membrane clamp and dome receiver w/integral	10.00	\$240.00
	2" water dam for all drains using A2 bodies		



Find this part in MIFAB literature by this component icon:



INCLUDES HS-2 HARDWARE PACK AT NO CHARGE

Design and dimensions are subject to modification. Prices do not include applicable taxes.

 $\label{thm:com} \mbox{ Visit ${\bf www.mifab.com}$ for the most recent product information.}$



CLAMPS HARDWARE PARTS

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A368-DC	Deck Clamp and extension ring for all drains using A2-8NH bodies	6.25	\$108.00



Find this part in MIFAB literature by this component icon



INCLUDES HS-3 HARDWARE PACK AT N	O CHARGE!
----------------------------------	-----------

INCLUDES HS-7 HARDWARE PACK AT NO CHARGE!

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A7-C3	Membrane Clamp and dome receiver w/ integral gravel stop for all drains using A7 bodies	7.50	\$108.00



Find this part in MIFAB literature by this component icon:



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A7-UDC-10	Underdeck Clamp and/or adjustable extension ring for R1261 10" no hub outlet large capacity roof drain	8.50	\$108.00



Find this part in MIFAB literature by this component icon



INCLUDES	HS_8	HARDW	ARE D	VCK VI	NO.	CHARGI
INCLUDES	п э -о	DARDW	ARE PA	ACK AI	NU	CHARGI





Find this part in MIFAB literature by this component icor



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
R1810	Universal Membrane Clamp Bolts directly onto all MIFAB A2 bodies and roof drains from the following manufacturers: Josam, J. R. Smith, Wade, Watts & Zurn	8.75	\$111.00



	J. R. Smith, Wade, Watts & Zurn								
				INCLUDES HS-9 HARDWARE PACK AT NO CHARGE!					
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	Find this part in HS-1					
HS-1	3 hex head cap screws for assembling membrane clamps to floor and roof drains (5/16" x 7/8")	.20	\$5.50	Find this part in MIFAB literature by this component icon:					
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	Find this part in HS-2					
HS-2	Set of 3 studs, washers and nuts for use with A2-SR siphonic roof drains (5/16" x 2-3/4")	.75	\$11.00	MIFAB literature by this component icon:					
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	Find this part in HS-3					
HS-3	Set of 3 studs, 9 washers and nuts for assembling deck clamps (-U) and/or extensions (-E)(5/16" x 10")	1.50	\$9.00	Find this part in MIFAB literature by this component icon:					
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE						
HS-4 HS-5	Set of 3 hex head bolts for assembling (A2-V2) fixed extension to A2 body (5/16" x 2") Set of 3 hex head bolts for assembling (A2-V3)	.50	\$11.00						
по-о	fixed extension to A2 body (5/16" x 3")	.75	\$14.00	HS-4 HS-5					
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE						
HS-6	Set of 3 hex head bolts for assembling A2-V4 fixed extension to A2 body (5/16" x 4")	1.25	\$15.00						
HS-10	Set of 3 hex head bolts for assembling A7-V2 fixed extension to A7 body.	.50	\$11.00						
HS-11	Set of 3 hex head bolts for assembling A7-V3 fixed extension to A7 body.	.75	\$15.00	111					
HS-12	Set of 3 hex head bolts for assembling A7-V4 fixed extension to A7 body.	1.25	\$15.00	HS-6					
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE						

5.00

7.50

\$108.00

\$189.00

2" water dam for all drains using A5 bodies. Design and dimensions are subject to modification. Prices do not include applicable taxes.

Membrane clamp and dome receiver w/ integral gravel stop. Adjustable extension ring and/or underdeck clamp for all drains using A5 bodies.

Membrane clamp and dome receiver w/ integral

Visit www.mifab.com for the most recent product information.

A5-C3

A5-WD



PARTS

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE		6	8 8	1007		5555
HS-7 HS-8	Set of 4 studs, washers and nuts for assembling A7-C3 membrane clamp to top of A7 body (5/16" x 2-3/4") Set of 4 studs, 12 washers and nuts for assembling deck clamps (-U)	.50	\$11.00	Sames and	Ollessin	THE SHAPE			
110-0	and/or extensions (-E) to the underside of the A7 body (5/16" x 10")	1.00	\$14.00		HS	-7			HS-8
PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE		(2)	(2)		9	
HS-9	Set of 4 studs, nuts & washers for the R1810 universal membrane clamp when retrofitting to Zurn, Smith, Wade, Josam roof drains* (3/8" x 2-3/4") * Use HS-2 for Watts or when installing on MIFAB R1200 Series Roof Drains (5/16" x 2-3/4")	.50	\$ 9.00			Commence and Commence of the C		A A A A A A A A A A A A A A A A A A A	HS-9
PART NO.	DESCRIPTION						WEIGHT	(Lbs.)	LIST PRICE

Set of 3 brackets and hardware for assembling the A2-BP bearing pan to the underside of the A2 body (5/16" x 3/4")

EXTENSIONS

(Shipped Standard with all A2-BP)

HS-20

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
DD-50	Cast iron extension for all floor drains with adjustable top assemblies which thread	2.25	\$62.00
	into A1 bodies		





\$8.00


PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A2-V2 A2-V3 A2-V4	2" Cast iron fixed extension for A2 body with gasket and hardware 3" Cast iron fixed extension for A2 body with gasket and hardware 4" Cast iron fixed extension for A2 body with gasket and hardware	10.00	\$185.00 \$185.00 \$185.00



Find this part in MIFAB literature by this component icon



PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE	G II
A2-XY	Cast iron adjustable extension for all drains	15.00	\$181.00	







Find this part in MIFAB literature by this component icon

(*) DENOTES EXTENSION HEIGHT (IN)



SPACERS

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
SPR-5-1	5" Dia. x 3/8" Nickel Bronze	.75	\$179.00
SPR-5-3	5" Dia. x 3/8" Stainless Steel	.75	\$179.00
SPR-6-1	6" Dia. x 3/8" Nickel Bronze	1.00	\$179.00
SPR-6-3	6" Dia. x 3/8" Stainless Steel	1.00	\$179.00
	Note: See name 47 for hardware required		



The SPR spacer ring can be used to adjust the height of the strainer to match any discrepancies floor grade. Any number of rings can be aded together. Each ring adds 3/8" of height



STANDARD REINFORCED ROUND STRAINER (NICKEL BRONZE OR STAINLESS STEEL)

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
4-1	4" Dia. NB	1.00	\$117.00
5-(1,3)	5" Dia. NB or SS*	1.25	\$117.00
6-(1,3)	6" Dia. NB or SS*	1.75	\$207.00
7-(1,3)	7" Dia. NB or SS*	2.50	\$266.00
8-(1,3)	8" Dia. NB or SS*	4.00	\$396.00
10-(1,3)	10" Dia. NB or SS*	8.50	\$510.00

Find this part in MIFAB literature by this component icon:



(*) DENOTES STRAINER DIAMETER

STANDARD REINFORCED SQUARE STRAINER (NICKEL BRONZE OR STAINLESS STEEL)

				See page 46 & 47 for
PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE	The second
S5-(1,3)	5" x 5" NB or SS*	2.00	\$200.00	
S6-(1,3)	6" x 6" NB or SS*	3.00	\$345.00	l'e
S8-(1,3)	8" x 8" NB or SS*	7.00	\$456.00	
\$10-(1,3)	10" x 10" NB or SS*	12.00	\$743.00	



Find this part in MIFAB literature by this component icon:



* Heavy Duty Load Rated Stainless Steel at the same price as light duty nickel bronze!

(*) DENOTES STRAINER SIZE

DUCTILE IRON, ROUND, HEAVY DUTY STRAINER

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE	Γ
X5-4	5" Dia. Ductile Iron	2.00	\$ 83.00	



Find this part in MIFAB literature by this component icon:



Design and dimensions are subject to modification. Prices do not include applicable taxes.

^{*} Heavy Duty Load Rated Stainless Steel at the same price as light duty nickel bronze!



EF 4" ROUND FUNNEL STRAINER

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
EF-(1,3)	4" Round funnel strainer in NB or SS	3.25	\$269.00
EF-50	4" Round funnel strainer in Cast Iron	3.50	\$210.00



Find this part in MIFAB literature by this component icon:



F FUNNELS ONLY

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
F4-(1,3)	4" Round NB or SS funnel only	1.50	\$152.00
F4-50	4" Round cast iron funnel only	1.75	\$ 72.00

NOTE: Includes 1 of H-1083 1/4-20 x 3/4 Hex head cap screw to assemble funnel to strainer and H-1081 Washer



Find this part in MIFAB literature by this component icon:



EG 4" x 9" ELONGATED FUNNEL STRAINER

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE		
EG-(1,3) EG-50	9" Oval funnel strainer in NB or SS 9" Oval funnel strainer in Cast Iron	4.25 5.25	\$336.00 \$170.00		



Find this part in MIFAB literature by this component icon



G FUNNELS ONLY

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
G-(1,3)	9" NB or SS oval funnel only	2.50	\$207.00
G-50	9" Cast Iron oval funnel only	3.50	\$100.00

NOTE: Includes 1 of H-1083 1/4-20 x 3/4 Hex head cap screw to assemble funnel to strainer and H-1081 Washer



Find this part in MIFAB literature by this component icon:



STAINLESS STEEL DOME FOR OVERFLOW AND PLANTING AREA DRAINS

DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
Cast Type 304 Stainless steel dome	2.50	\$ 180.00
С		



(F1830-PD-3)

REPLACEMENT STRAINER GRATES, SECURING HARDWARE & SPECIAL TOOLS

PART NO.	DESCRIPTION	GRATE DIMENSION	WEIGHT (Lbs.)	LIST PRICE
4PG-1	4" Dia. NB Grate with securing screws	3.86" DIA	.35	\$ 80.00
5PG-(1,3)	5" Dia. NB or SS Grate with securing screws	4.86" DIA	.50	\$ 80.00
5PG-4	5" Dia. Ductile Iron Grate with securing screws	4.86" DIA	.75	\$ 59.00
6PG-(1,3)	6" Dia. NB or SS Grate with securing screws	5.42" DIA	.75	\$128.00
7PG-(1,3)	7" Dia. NB or SS Grate with securing screws	6.61" DIA	1.00	\$185.00
8PG-(1,3)	8" Dia. NB or SS Grate with securing screws	7.13" DIA	1.50	\$226.00
10PG-(1,3)	10" Dia. NB or SS Grate with securing screws	9.72" DIA	1.90	\$379.00
S5PG-(1,3)	5" Sq. NB or SS Grate with securing screws	4.50" SQ	.75	\$151.00
S6PG-(1,3)	6" Sq. NB or SS Grate with securing screws	5.47" SQ	1.00	\$174.00
S8PG-(1,3)	8" Sq. NB or SS Grate with securing screws	7.44" SQ	1.75	\$295.00
S10PG-(1,3)	10" Sq. NB or SS Grate with securing screws	9.15" SQ	2.25	\$453.00
PART NO.	DESCRIPTION	GRATE DIMENSION	WEIGHT (Lbs.)	LIST PRICE
X5PG-1	5" Dia. 1/2" thick NB Grate with securing screws	4.86" DIA	.75	\$139.00
X6PG-1	6" Dia. 1/2" thick NB Grate with securing screws	5.42" DIA	1.00	\$185.00
X8PG-1	8" Dia. 1/2" thick NB Grate with securing screws	7.13" DIA	2.00	\$278.00
XS5PG-1	5" Sq. 1/2" thick NB Grate with securing screws	4.50" SQ	1.00	\$185.00
XS6PG-1	6" Sq. 1/2" thick NB Grate with securing screws	5.47" SQ	1.50	\$208.00
XS8PG-1	8" Sq. 1/2" thick NB Grate with securing screws	7.44" SQ	2.50	\$365.00

7901 G-1	0 3q. 1/2 tillck ND drate with securing screws				
STRAINER HARDWARE					
PART NO.		DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE	
H-1010		dard SS Allen Head screws (3)	.10	\$ 12.00	
H-1039A	ŠS Va	24 x 3/8" SS flat allen key) andal Proof screws (3) 5 Torx and Pin, 10-24 x 3/8")	.10	\$ 28.00	
H-1032A	ŠS V	eneer securing screws (4) lke eyes", 10-24 x 3/8")	.10	\$ 28.00	
H-1083	Àdj. t	op assembly & extension set screws (3) 2 body (1/4-20 x 3/4" Hex head cap screw)	.10	\$ 12.00	
H-1033		e eye screw tool	1.00	\$50.00	
H-1032	,	Torx and Pin) Tamper proof Torx Screw drivers		\$50.00 \$87.00	
H-1042 "T" Strainer cover removal tool 1.00				1	
NOTE ON REPLACEMENT GRATE FINISHES: add to the LIS					
SUFFIX		DESCRIPTION	of replace	ment grate	
-2 -49		hed Brass hed Chrome Plated NB		\$41.00 \$41.00	



PARTS PARTS

DESCRIPTION WEIGHT (Lbs.) LIST PRICE

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
F1300-TA-(1,3)	7" round ductile iron top assembly	8.50	\$362.00
F1300-TA-4		7.00	\$112.00
F1300-PG-(1,3)		4.50	\$272.00
F1300-PG-4		3.00	\$ 85.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES TOP ASSEMBLY FINISH

I AIII NO.		WEIGITT (EDS.)	EIGITIUGE
F1320-TA-(1,3)	9" round DI top assembly w/NB or SS Veneer	12.00	\$464.00
F1320-TA-4	9" round ductile iron top assembly	10.50	\$210.00
F1320-PG-(1,3)	9" round DI Grate Only w/NB or SS Veneer	6.50	\$349.00
F1320-PG-4	9" round ductile iron Grate Only (8.07" DIA)	5.00	\$158.00
F1320-TA-4-Z	9" round ductile iron top assembly with Z flange	15.00	\$435.00
PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
F1340-TA-(1,3)	12" round DI top assembly w/NB or SS Veneer	28.00	\$1005.00
F1340-TA-4	12" round ductile iron top assembly	26.00	\$ 553.00
F1340-PG-(1,3)	12" round DI Grate Only w/NB or SS Veneer	16.00	\$ 754.00
F1340-PG-4	12" round ductile iron Grate Only (11.94" DIA)	14.00	\$ 417.00



Find this part in MIFAB literature by this component icon:



F1340-TA-(*)

by this	
component icon:	-

(*) DENOTES TOP ASSEMBLY FINISH

Find this part in MIFAB literature

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
F1360-TA-(1,3)	15" round DI top assembly w/NB or SS Veneer	41.00	\$3574.00
F1360-TA-4		38.00	\$1612.00
F1360-PG-(1,3)	15" round DI Grate Only w/NB or SS Veneer	23.00	\$2682.00
F1360-PG-4	15" round ductile iron Grate Only (14.96" DIA)	20.00	\$1209.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES TOP ASSEMBLY FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
F1420-TA-(1,3)	8" Sq. DI top assembly w/NB or SS Veneer	10.00	\$1006.00
F1420-TA-4	8" Sq. ductile iron top assembly	8.50	\$ 432.00
F1420-PG-(1,3)	8" Sq. DI Grate Only w/NB or SS Veneer	5.00	\$ 755.00
F1420-PG-4	8" Sq. ductile iron Grate Only (7.09" SQ)	3.50	\$ 323.00



Find this part in MIFAB literature by this component icon:



(*)	DENOTES	TOP	ASSEMBLY	FINISH
-----	---------	-----	-----------------	--------

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
F1440-TA-(1,3)	12" Sq. DI top assembly w/NB or SS Veneer	37.50	\$1505.00
F1440-TA-4	12" Sq. ductile iron top assembly	35.50	\$ 830.00
F1440-PG-(1,3)	12" Sq. DI Grate Only w/NB or SS Veneer	21.00	\$1129.00
F1440-PG-4	12" Sq. ductile iron Grate Only (12.00" SQ)	19.00	\$ 622.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES TOP ASSEMBLY FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
F1460-TA-(1,3)	15" Sq. DI top assembly w/NB or SS Veneer	54.00	\$ 2145.00
F1460-TA-4	15" Sq. ductile iron top assembly	51.00	\$ 1115.00
F1460-PG-(1,3)	15" Sq. DI Grate Only w/NB or SS Veneer	30.50	\$ 1610.00
F1460-PG-4	15" Sq. ductile iron Grate Only (15.00" SQ)	27.50	\$ 839.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES TOP ASSEMBLY FINISH

SEDIMENT BUCKETS

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A1-PB	Plastic Sediment Bucket for all F1100 Series Floor Drains	.10	\$ 32.00
A1-MB	Cast iron Sediment Bucket for F1300, F1320, F1330C, F1420 and F1430C top assemblies	1.50	\$ 32.00
A1-MB-83	Cast iron Sediment Bucket for F1300, F1320, F1330C, F1420 and F1430C top assemblies with	1.75	\$311.00
A1-SSB	stainless steel mesh screen Stainless Steel Sediment Bucket for all F1100 Series Floor Drains	.75	\$226.00



by this A1-MB







(*) DENOTES BUCKET MATERIAL

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
A2-MB	Cast Iron Sediment Bucket for all area drain top assemblies that fit the A2 Body*	4.00	\$135.00
A2-MB-83	*Except "TFB" area drains, see below Cast Iron Sediment Bucket w/SS mesh screen	4.50	\$415.00



Find this part in MIFAB literature by this component icon:



PART NO.	DESCRIPTION	LIST PRICE
F1320-TA-4-TFB	Top assembly for F1320-TFB	\$ 281.00
	9" Dia. true fit area drain. (-1, -3) (8.07" DIA)	\$ 603.00
F1340-TA-4-TFB		\$ 687.00
	12" Dia. true fit area drain. (-1, -3) (11.94" DIA)	
F1360-TA-4-TFB		\$1852.00
	16" Dia. true fit area drain. (-3 only) (14.96" DIA)	\$4167.00

Design and dimensions are subject to modification. Prices do not include applicable taxes.

PART NO.	DESCRIPTION	LIST PRICE
F1320-TFB-MB	Cast Iron Sediment Bucket for F1320-TFB	\$156.00
F1340-TFB-MB	Cast Iron Sediment Bucket for F1340-TFB	\$208.00
F1360-TFB-MB	Cast Iron Sediment Bucket for F1360-TFB	\$417.00





FLOOR SINK GRATES

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	
FS1500-PG FS1500-PG-150 FS1500-PG-175	8" x 8" A.R.E. coated cast iron floor sink full grate (7.68" SQ) 8" x 8" A.R.E. coated cast iron floor sink half grate (7.68" SQ) 8" x 8" A.R.E. coated cast iron floor sink three quarter grate *Grate size is nominal to fit body (7.68" SQ)	3.75 2.75 3.50	\$ 80.00 \$ 80.00 \$ 80.00	

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	(-PG) grate only	(-PF) frame only	
FS1500-TA-150-(1,3) 8	8" x 8" NB or SS floor sink full frame & grate* (8.09" SQ) " x 8" NB or SS floor sink full frame & half grate* (8.09" SQ)	4.75 4.00	\$477.00	\$155.00	\$321.00 \$321.00	4
	" x 8" NB or SS full frame & three quarter grate* (8.09" SQ) *Add \$223.00 for -9 Hinged grate to above prices in SS *Grate size is nominal to fit body	3.75	\$477.00	\$155.00	\$321.00	
	Grate Size is norminal to hit body					



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
FS1530-PG FS1530-PG-150 FS1530-PG-175	4" x 8" A.R.E. coated cast iron floor sink full grate (6.9" x 2.86") 4" x 8" A.R.E. coated cast iron floor sink half grate (6.9" x 2.86") 4" x 8" A.R.E. coated cast iron floor sink three quarter grate *Grate size is nominal to fit body (6.9" x 2.86")		\$100.00 \$100.00 \$100.00



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	(-PG) grate only	(-PF) frame only	
FS1530-TA-150-(1,3) 4 FS1530-TA-175-(1,3)	4" x 8" NB or SS floor sink full frame & grate* (3.56" x 7.44") " x 8" NB or SS floor sink full frame & half grate* (3.56" x 7.44") 4" x 8" NB or SS full frame & three quarter grate* (3.56" x 7.44") *Grate size is nominal to fit body	3.50 3.00 2.75	\$180.00 \$180.00 \$180.00	\$90.00 \$90.00 \$90.00	\$90.00 \$90.00 \$90.00	



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
FS1700-PG	12" x 12" A.R.E. coated cast iron floor sink full grate (9.31" SQ)	6.75	\$ 80.00
FS1700-PG-150	12" x 12" A.R.E. coated cast iron floor sink half grate (9.31" SQ)	5.50	\$ 80.00
FS1700-PG-175	12" x 12" A.R.E. coated cast iron floor sink	6.25	\$ 80.00
	three quarter grate (9.31" SQ)		
	*Grate size is nominal to fit body		



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	(-PG) grate only	(-PF) frame only
FS1700-TA-(1,3)	12" x 12" NB or SS floor sink full frame & grate* (11.86" SQ)	8.50	\$256.00	\$128.00	\$128.00
FS1700-TA-150-(1,3)	12" x 12" NB or SS floor sink full frame & half grate* (11.86" SQ)	6.75	\$256.00	\$128.00	\$128.00
FS1700-TA-175-(1,3)	12" x 12" NB or SS full frame & three quarter grate* (11.86" SQ)	7.50	\$256.00	\$128.00	\$128.00
	*Add \$ 212.00 for -9 Hinged grate to above prices in SS				
	*Grate size is nominal to fit body				



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
FS1750-PG FS1750-PG-150	8" Round A.R.E. coated cast iron floor sink full grate (6.98" DIA) 8" Round A.R.E. coated cast iron floor sink half grate (6.98" DIA)	2.75 2.25	\$ 100.00 \$ 100.00
FS1750-PG-175	8" Round A.R.E. coated cast iron floor sink three quarter grate (6.98" DIA) *Grate size is nominal to fit body	2.50	\$ 100.00



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	(-PG) grate only	(-PF) frame only
FS1750-TA-150-(1,3)	8" Round NB or SS floor sink full frame & grate* (7.70" DIA) 8" Round NB or SS floor sink full frame & half grate* (7.70" DIA) 8" Round NB or SS full frame & three quarter grate* (7.70" DIA)			\$180.00 \$180.00 \$180.00	\$173.00
	*Grate size is nominal to fit body				



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
FS1760-PG FS1760-PG-150 FS1760-PG-175	12" Round A.R.E. coated cast iron floor sink full grate (10.37" DIA) 12" Round A.R.E. coated cast iron floor sink half grate (10.37" DIA) 12" Round A.R.E. coated cast iron floor sink three quarter grate (10.37" DIA) *Grate size is nominal to fit body		\$ 100.00 \$ 100.00 \$ 100.00



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	(-PG) grate only	(-PF) frame only
	12" Round NB or SS floor sink full frame & grate* (12.10" DIA)	8.00	\$593.00		
	12" Round NB or SS floor sink full frame & half grate* (12.10" DIA)	6.50	\$593.00		
FS1760-TA-175-(1,3)	12" Round NB or SS full frame & three quarter grate*(12.10" DIA)	7.75	\$593.00	\$110.00	\$483.00
	*Grate size is nominal to fit body				



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
FS1500-PD	Aluminum Dome Strainer (for all cast iron floor sinks)	.50	\$ 30.00
FS1500-PD-3	Stainless Steel Dome Strainer (for all SS floor sinks)	1.25	\$366.00
FD-9602	2" Stainless Steel Snap in Secondary Strainer	.10	\$ 62.00
FD-9603	3" Stainless Steel Snap in Secondary Strainer	.15	\$ 62.00
FD-9604	4" Stainless Steel Snap in Secondary Strainer	.25	\$ 62.00





Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit $\ensuremath{\textbf{www.mifab.com}}$ for the most recent product information.



FLOOR SINK PARTS

A.R.E. COATED CAST IRON FLOOR SINK BODIES

Floor sink body list prices are with the standard No Hub outlet connection. See outlet optional variations below floor sink body listing for prices and suffixes.

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	
FS1522,3,4-PB-7	8" x 8" x 6" deep floor sink body, 2", 3", 4" no hub connection	12.50	\$ 918.00	of server
FS1522,3,4-FL-PB-7	8" x 8" x 6" deep floor sink body, w/anchor flange, 2", 3", 4" no hub conn.	21.00	\$1035.00	
FS1532,3,4-PB-7	8" x 4" x 4" deep floor sink body, 2", 3", 4" no hub connection	11.00	\$ 984.00	
FS1532,3,4-FL-PB-7	8" x 4" x 4" deep floor sink body, w/anchor flange, 2", 3", 4" no hub conn.	21.00	\$1156.00	
FS1722,3,4-PB-7	12" x 12" x 6" deep floor sink body, 2", 3", 4" no hub connection	21.00	\$1369.00	8 8
FS1722,3,4-FL-PB-7	12" x 12" x 6" deep floor sink body, w/anchor flange, 2", 3",4" no hub conn.	35.00	\$1592.00	
FS1732,3,4-PB-7	12" x 12" x 8" deep floor sink body, 2", 3", 4" no hub connection	24.00	\$1329.00	
FS1732,3,4-FL-PB-7	12" x 12" x 8" deep floor sink body, w/anchor flange, 2", 3",4" no hub conn.	36.00	\$1552.00	
FS1742,3,4-PB-7	12" x 12" x 10" deep floor sink body, 2", 3", 4" no hub connection	26.00	\$1411.00	
FS1742,3,4-FL-PB-7	12" x 12" x 10" deep floor sink body, w/anchor flange,2",3",4" no hub conn.	38.00	\$1634.00	
FS1752,3,4-PB-7	8" round x 6" deep floor sink body, 2", 3", 4" no hub connection	13.00	\$ 739.00	
FS1752,3,4-FL-PB-7	8" round x 6" deep floor sink body, w/anchor flange, 2", 3",4" no hub conn.	23.00	\$ 911.00	
FS1762,3,4-PB-7	12" round x 8" deep floor sink body, 2", 3", 4" no hub connection	22.00	\$1112.00	
FS1762,3,4-FL-PB-7	12" round x 8" deep floor sink body, w/anchor flange, 2",3",4" no hub conn.	31.00	\$1358.00	
F\$1772,3,4-PB-7	16" x 16" x 11" deep floor sink body, 2", 3", 4" no hub connection	55.00	\$2544.00	
FS1772,3,4-FL-PB-7	16" x 16" x 11" deep floor sink body, w/anchor flange,2",3",4" no hub conn.	60.00	\$3382.00	
FS1792,3,4-PB-7	24" x 16" x 17" deep floor sink body, 2", 3", 4" no hub connection	200.00	\$5225.00	

NOTE: Transition floor sink bodies are available at the same price as the standard floor sink body pricing above. Transition floor sink bodies use the A3-PG gasket and the appropriate A1 body to attain the outlet connection size and type required. See the floor sink section of the www.mifab.com website for specification sheets on MIFAB's transition floor sink bodies. See page 96 for transition floor sink body heights.

STAINLESS STEEL (TYPE 304) FLOOR SINK BODIES

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
FS1922,3,4-FL-PB	12" x 12" x 6" deep floor sink body, w/anchor flange, 2", 3",4" no hub conn.	17.00	\$2522.00
FS1932,3,4-FL-PB	12" x 12" x 8" deep floor sink body, w/anchor flange, 2", 3",4" no hub conn.	19.00	\$2936.00
FS1942,3,4-FL-PB	12" x 12" x 10" deep floor sink body, w/anchor flange,2",3",4" no hub conn.	21.00	\$3217.00

OUTLET OPTIONAL VARIATIONS (for cast iron and stainless steel bodies)

OUTLET CONNECTION	(SUFFIX) add after outlet size	WEIGHT (LBS.)	add to No Hu	b LIST PRICE
Push on outlet (2", 3", 4")	P	1.00	\$25.00	
Threaded outlet (2", 3", 4")	T	1.00	\$61.00	
Inside caulk outlet (2", 3", 4")	X	1.50	No Add	
PVC socket outlet w/A.R.E. body	-30	-	\$28.00	
ARS socket outlet w/A R F hody	-31	_	\$28.00	

PANTINU.	DESCRIPTION	WEIGHT (LDS.)	LIGI PRICE	
FS1500-PB-3	S.S Sediment Bucket for 8" x 8" floor sinks	2.00	\$272.00	
FS1700-PB-3	S.S Sediment Bucket for 12" x 12" floor sinks	4.00	\$378.00	
FS1750-PB-3	S.S Sediment Bucket for 8" round floor sinks	2.00	\$299.00	
FS1760-PB-3	S.S Sediment Bucket for 12" round floor sinks	4.00	\$347.00	
* Add for S.S. mesh screen over bucket (Suffix -83) and \$299.00 to all the above S.S. sediment buckets. Combined suffix is -69-83.				



To specify a stainless steel sediment bucket, add **suffix-69** to the floor sink model number.


PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
FS1500-PB	Plastic Sediment Bucket for 8" x 8" floor sinks Plastic Sediment Bucket for 12" x 12" floor sinks Plastic Sediment Bucket for 8" round floor sinks Plastic Sediment Bucket for 12" round floor sinks The -5 suffix is for the standard plastic sediment bucket.	1.00	\$ 126.00
FS1700-PB		1.50	\$ 186.00
FS1750-PB		1.00	\$ 122.00
FS1760-PB		1.50	\$ 144.00



FS1750-PB



PART NO. **DESCRIPTION** WEIGHT (LBS.) **LIST PRICE** FS1500-PC Membrane clamps (2) for 8" x 8" floor sinks w/ 6 H-1083 screws 4.00 \$ 92.00 FS1530-PC Membrane Clamps (2) for 8" x 4" floor sinks w / 4 H-1083 screws 3.00 \$110.00 FS1700-PCS & Short and long membrane clamps (2 each) FS1700-PCL for 12" x 12" floor sinks w 8 H-1083 screws 6.00 \$ 110.00 FS1750-PC Membrane clamps (2) for 8" round floor sinks w/ 4 H-1083 screws 5.00 \$122.00 FS1760-PC Membrane clamps (2) for 12" round floor sinks w/ 4 H-1083 screws 8.00 \$120.00 FS1900-PCS Short and long membrane clamps (2 each) for 12" x 12" 6.00 \$110.00 & FS1900-PCL stainless steel floor sinks w 8 H-1083 screws $H-1083 = 1/4-20 \times 3/4$ " hex head plated cap screws



Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com

Visit $\ensuremath{\textbf{www.mifab.com}}$ for the most recent product information.



ROOF DRAIN PARTS

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
W-31 W-31-PERF W6-31	4" Dia. x 5" high ABS solid standpipe for R1200-W 4" Dia. x 5" perforated standpipe for F1830-P, PL 6" Dia. x 5" high ABS solid standpipe for R1200-W6	1.00 .80 1.50	\$ 337.00 \$ 382.00 \$ 382.00
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A2-BG	R1200-G, 6" high S.S. ballast gaurd	3.00	\$ 307.00



Find this part in MIFAB literature by this component icon:



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A2-BG	R1200-G, 6" high S.S. ballast gaurd	3.00	\$ 307.00
A2-BG8	R1200-G, 8" high S.S. ballast gaurd	4.00	\$ 376.00
A5-BG	R1220-G, 5" high S.S. ballast guard	3.50	\$ 287.00



Find this part in MIFAB literature by this component icon:



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A1-PD	Poly dome (R1100 Series)	.75	\$ 41.00
A1-MD	Metal dome (R1100 Series)	1.00	\$ 97.00
A1-MD-81	Bronze dome (R1100 Series)	1.50	\$ 282.00
A1-SSD	SS Mesh over metal dome (R1100 Series)	1.25	\$ 439.00



Find this part in MIFAB literature by this component





PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A1-BP R1150-BP	Sump Receiver (12" x 12") Loose Set Sump Receiver for R1150 (12" x 24") combination Roof Drain.	2.25 5.20	\$ 108.00 \$ 139.00
A1-BP-90	Sump receiver for R1100 Series side outlet roof drains		\$ 108.00



Find this part in MIFAB literature by this component icon:



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A1-BG	6" high SS ballast guard	2.00	\$268.00




Find this part in MIFAB literature by this component icon:




PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A1-F1	One slot weir for R1100 Series (5 GPM Max)	3.25	\$ 79.00
A1-F2	Two slot weir for R1100 Series (10 GPM Max)	3.15	\$ 79.00
A1-F3	Three slot weir for R1100 Series (15 GPM Max)	3.00	\$ 79.00



Find this part in MIFAB literature by this component icon:



INCLUDES HS-1 HARDWARE PACK AT NO CHARGE!	
5-50-5-15-10-1	





Find this part in MIFAB literature by this component icon



Use HS-20 hardware pack for A1-4T-90 side outlet bodies for underdeck clamp.

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	
A1-WD	Membrane Clamp and and dome receiver w/ integral water dam for all 8" diameter A1 bodies INCLUDES HS-1 HARDWARE PACK AT NO CHARGE!	3.50	\$ 181 .00	
				=
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	
10.00	D (D1000 0 :)	4 ==	÷ 04.00	1



Find this part in MIFAB literature by this component icon



PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A2-PD	Poly dome (R1200 Series) Cast Iron Dome (R1200 Series) Low Profile Aluminum dome (R1200 Series) Low Profile Bronze dome (R1200 Series) SS Mesh over A2-MDL-80 (R1200 Series) Cast Iron Dome (R1220 Series)	1.75	\$ 61.00
A2-MD		9.00	\$ 120.00
A2-MDL-80		5.75	\$ 122.00
A2-MDL-81		8.00	\$ 649.00
A2-SSD		6.50	\$ 480.00
A5-MD		7.00	\$ 61.00



Find this part in MIFAB literature by this component icon







PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
A2-BP A2-BP-90 A7-BP R1270-BP	Sump receiver (R1200 Series) (24" x 24") Bearing pan for R1200-90 series (24" x 24") Bearing pan for R1260 series Roof Drains Bearing pan for large combination Roof Drain	6.50 6.00 7.00 14.00	\$ 108.00 \$ 223.00 \$ 108.00 \$ 141.00
A5-BP	Bearing pan for R1220 series (24" x 24")	5.00	\$ 108.00
ΔΙΙΕ	REARING PANS MADE FROM GALVANIZED 18 GALIGE S	STEEL (I	NCLUDES HS-20





PART NO. **DESCRIPTION** WEIGHT (LBS.) LIST PRICE

A2-F1 One slot weir for R1200 Series (5 GPM Max.) 7.25 \$ 139.00 Two slot weir for R1200 Series (10 GPM Max.) 7.35 \$ 139.00 A2-F2 7.00 \$ 139.00 A2-F3 Three slot weir for R1200 Series (15 GPM Max.)



Find this part in MIFAB literature by this component icon:



(*) DENOTES NUMBER OF WEIR SLOTS

Design and dimensions are subject to modification. Prices do not include applicable taxes.

MIFAB, Inc. www.mifab.com sales@mifab.com



CLEANOUT PARTS

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
R-1	5" Round N.B. combined cover/plug	3.50	\$191.00
R-3	5" Round heavy duty S.S. combined cover/plug	3.50	\$191.00



Find this part in MIFAB literature by this component icon:



			(*) DENOTES COVER FINISH
DADT NO	DECODIDATION	WEIGHT (LL.) LICT DDICE	

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
RC-1	5" Round N.B. combined cover/plug with carpet marker	3.60	\$201.00
H-1019	Stainless Steel marker disc with screw (2" Dia.)	.10	\$ 82.00



Find this part in MIFAB literature by this component icon:



PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE	
RFC7-1,3 RFC9-3	7" Round N.B. or S.S. combined cover/plug with finished floor level clamping flange (for Pirelli® type floor coverings) 9" Round S.S. combined cover/plug with finished floor level clamping flange (for Pirelli® type floor coverings)	6.00 8.00	\$399.00 \$520.00	



Find this part in MIFAB literature by this component icon:



		(")	DENOTES SIZE & FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
S-1	5" Square N.B. combined cover/plug	5.50	\$231.00
S-3	5" Square S.S. combined cover/plug	5.50	\$231.00
6S-1	6" Square N.B. combined cover/plug	7.50	\$354.00
6S-3	6" Square S.S. combined cover/plug	7.50	\$354.00



Find this part in MIFAB literature by this component icon:



	(*) DENOTES COVER FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
T-1	5" Round nickel bronze combined cover/plug with tile recess 5" Round stainless steel combined cover/plug with tile recess	3.75	\$191.00
T-3		3.75	\$191.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES COVER FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
TS-1	5" Square nickel bronze combined cover/plug with tile recess 5" Square stainless steel combined cover/plug with tile recess	5.00	\$231.00
TS-3		5.00	\$231.00



Find this part in MIFAB literature by this component icon:



(*) DENOTI	ES COVER FINISH
------------	-----------------

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
UR-1 UR-3	5" Round nickel bronze combined cover/plug with terrazzo recess 5" Round stainless steel combined cover/plug with terrazzo recess		\$293.00 \$293.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES COVER FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
	5" Square nickel bronze combined cover/plug with terrazzo reces 5" Square stainless steel combined cover/plug with terrazzo rece		\$351.00 \$351.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES COVER FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
XR-1	5" Round heavy duty nickel bronze combined cover/plug	4.00	\$249.00
XR-4	5" Round heavy duty ductile iron combined cover/plug	5.00	\$153.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES COVER FINISH

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
XS-1	5" Square heavy duty N.B. combined cover/plug	6.00	\$351.00
XS-3	5" Square heavy duty S.S. combined cover/plug	6.00	\$351.00



Find this part in MIFAB literature by this component icon:



(*) DENOTES COVER FINISH

REPLACE	MENT CLEANOUT COVERS ONLY
PART NO.	DESCRIPTION

PART NO.	DESCRIPTION	WEIGHT (Lbs.)	LIST PRICE
5CO-(1,3)	5" Replacement NB or SS cover only for R-1,3 w/ 3 securing screws (4.86" DIA)	1.50	\$139.00
5CO-4	5" Replacement ductile iron cover for XR-4 w/ 3 securing screws (4.86" DIA)	2.50	\$128.00
X5CO-1	5" Replacement 1/2" thick heavy duty NB cover only for XR-1 w/ 3 securing screws (4.86" DIA)	2.00	\$185.00
H-1019	Replacement 2" Dia. SS carpet marker plate and screw (H-1019) for RC-(1,3)	.10	\$ 82.00



CLEANOUT PARTS

CLEANOUT PARTS					
PART NO. C1226-TA-(1,3)	DESCRIPTION Heavy duty round SS or NB veneer cleanout top assembly for	WEIGHT (LBS.) 8.00	LIST PRICE \$ 463.00	← 8 1/4"→	
C1226-TA-4	C1226 (cover and shank) (C1226-PS-50 = shank only), 8 1/4" Dia. Heavy duty round ductile iron cleanout top assembly for C1226 (cover and shank) (C1226-PS-50 = shank only), 8 1/4" Dia.	9.00	\$ 336.00		
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	9 1/4" ▶	
C1228-TA-(1,3)	Heavy duty round SS or NB veneer cleanout top	11.00	\$ 579.00		
C1228-TA-4	assembly for C1228 (cover and shank) (C1228-PS-50 = shank only), 9 1/4" Dia. Heavy duty round ductile iron cleanout top assembly for C1228 (cover and shank) (C1228-PS-50 = shank only), 9 1/4" Dia.	12.00	\$ 445.00		
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE		
C1226-PB-50* C1226X-PB-50* C1228-PB-50* C1226P-PB-50*	8" no hub cast iron cleanout body w/ABS closure plug for C1228 * For brass plug, add suffix "-34B" and add \$328.00	12.00 13.00 14.00	\$ 139.00 \$ 139.00 \$ 174.00 \$ 139.00		
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE		
C1226-PP-31 C1226-PP-81 C1228-PP-31 C1228-PP-81	ABS closure plug for C1226 Brass closure plug for C1226 ABS closure plug for C1228 Brass closure plug for C1228	1.00 3.00 1.00 4.00	\$ 84.00 \$ 324.00 \$ 84.00 \$ 324.00	C1226-PP-31	
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE		
CO-1 CO-2	Cover Gasket for C1000, C1100, C1230 Series Test Seal "0" ring Gasket for C1000 & C1100 Series	.10 .15	\$ 23.00 \$ 23.00	CO-1 CO-2	
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE		
C1442 C1443 C1444	"T-cone" style plastic closure plug w/ neoprene compression gasket "T-cone" style plastic closure plug w/ neoprene compression gasket "T-cone" style plastic closure plug w/ neoprene compression gasket	.50 .75 1.00	\$ 65.00 \$ 65.00 \$ 65.00		
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE		
A4-34B A4-34P	Threaded bronze tapered closure plug that fits 2", 3", 4" A4 bodies Threaded plastic tapered closure plug that fits 2", 3", 4" A4 bodies	2.00 .50	\$103.00 \$ 79.00	A4-34B	

INTERCEPTOR PARTS

PART NO.	DESCRIPTION	NUMBER OF BOLTS REQU.	WEIGHT (LBS.)	LIST PRICE	
MI-G-0-LID	Epoxy Lid for MI-G-O	1	20.00	\$ 481.00	A STATE OF THE STA
MI-G-1-LID	Epoxy Lid for MI-G-1	1	22.00	\$ 481.00	A STATE OF THE STA
MI-G-2-LID	Epoxy Lid for MI-G-2	1	25.00	\$ 532.00	
MI-G-3-LID	Epoxy Lid for MI-G-3	1	27.00	\$ 625.00	
MI-G-4-LID	Epoxy Lid for MI-G-4	1	29.00	\$ 625.00	The state of the s
MI-G-5-LID	Epoxy Lid for MI-G-5	1	33.00	\$ 625.00	
MI-G-6-LID	Epoxy Lid for MI-G-6	4	36.00	\$ 967.00	
MI-G-7-LID	Epoxy Lid for MI-G-7	4	36.00	\$ 967.00	
MI-G-L-20-LID	Epoxy Lid for MI-G-L-20	4	45.00	\$ 625.00	
MI-G-L-35-LID(2)	Epoxy Lid for MI-G-L-35	8	55.00	\$ 967.00	MI-BOLT MI-CAP
MI-G-L-50-LID(2)	Epoxy Lid for MI-G-L-50	8	70.00	\$ 967.00	- IIII 3711
	. ,				/ \
XL-MI-G-0-LID(2)	Epoxy Lid for XL-MI-G-0	8 8	125.00	\$1448.00	/ 1
XL-MI-G-1-LID(2)	Epoxy Lid for XL-MI-G-1	8	150.00	\$1644.00	
MI-CAP	Plastic Bolt Cap for MI-G Series, each		.50	\$ 49.00	
	•				三
MI-BOLT	5/8"-11, 2" bolt, washer & neoprene gasket,		1.00		
	(more than one bolt maybe required per lid)			\$ 49.00	
	(HS-11)				
MI-G GASKET	50' Roll interceptor gasket		1.00	\$ 197.00	
MI-G-SGS	Sewer gas stopper, each		.10	\$ 41.00	
IIII-u-ouo	ocwer gas stopper, each		.10	Ψ 41.00	
MI-HAIR-O-RING	O ring gookst for MLHAID lid		10	\$ 28.00	
WII-HAIM-U-KING	O-ring gasket for MI-HAIR lid		.10	\$ 28.00	7
					☐ IVII-G GASKET



INTERCEPTOR PARTS

PART NO.	DESCRIPTION	LIST PRICE	
MI-G-0-XBAR	Cross Bar & Cotter pins for MI-G-0	\$ 145.00	
MI-G-1-XBAR	Cross Bar & Cotter pins for MI-G-1	\$ 145.00	(COTTER PINS)
MI-G-2-XBAR	Cross Bar & Cotter pins for MI-G-2	\$ 164.00	
MI-G-3-XBAR	Cross Bar & Cotter pins for MI-G-3	\$ 164.00	13
MI-G-4-XBAR	Cross Bar & Cotter pins for MI-G-4	\$ 194.00	11
MI-G-5-XBAR	Cross Bar & Cotter pins for MI-G-5	\$ 194.00	11 3
MI-G-6-XBAR	Cross Bar & Cotter pins for MI-G-6 (1 set of 2 cross bars)	\$ 290.00	(set of 2)
MI-G-7-XBAR	Cross Bar & Cotter pins for MI-G-7 (1 set of 2 cross bars)	\$ 290.00	(set of 2)
MI-G-L-20-XBAR	Cross Bar & Cotter pins for MI-G-L-20 (1 set of 2 cross bars)	\$ 197.00	(set of 2) (CROSS BAR)
MI-G-L-35-XBAR	Cross Bar & Cotter pins for MI-G-L-35 (1 set of 2 cross bars)	\$ 290.00	(set of 2)
MI-G-L-50-XBAR	Cross Bar & Cotter pins for MI-G-L-50 (1 set of 2 cross bars)	\$ 290.00	(set of 2)
XL-MI-G-0-XBAR	Cross Bar & Cotter pins for XL-MI-G-0 (1 set of 2 cross bars)	\$ 481.00	(set of 2)
XL-MI-G-1-XBAR	Cross Bar & Cotter pins for XL-MI-G-1 (1 set of 2 cross bars)	\$ 674.00	(set of 2)

PART NO.		DESCRIPT	ION		LIST PRICE
MI-G-L-50-OP	Orfice Plate for MI-G-L-50				\$ 290.00
XL-MI-G-0-0P	Orfice Plate for XL-MI-G-0				\$ 386.00
XL-MI-G-1-0P	Orfice Plate for XL-MI-G-1				\$ 435.00
PART NO.	SAMPLE BOXES	LIST PRICE	PART NO.	SAMPLE BOXES	LIST PRICE
G-XL-0-SMPB	Sample box - for XL-MI-G-0	\$ 2205.00	G-0-SMPB	Sample box - for MI-	G-0 \$ 2095.00
G-XL-1-SMPB	Sample box - for XL-MI-G-1	\$ 2315.00	G-1-SMPB	Sample box - for MI-	G-1 \$ 2095.00
G-XL-2-SMPB	Sample box - for XL-MI-G-2	\$ 2315.00	G-2-SMPB	Sample box - for MI-	G-2 \$ 2095.00
G-XL-3-SMPB	Sample box - for XL-MI-G-3	\$ 2315.00	G-3-SMPB	Sample box - for MI-	G-3 \$ 2095.00
G-XL-4-SMPB	Sample box - for XL-MI-G-4	\$ 2426.00	G-4-SMPB	Sample box - for MI-	G-4 \$ 2095.00
G-XL-5-SMPB	Sample box - for XL-MI-G-5	\$ 2426.00	G-5-SMPB	Sample box - for MI-	G-5 \$ 2095.00
G-XL-6-SMPB	Sample box - for XL-MI-G-6	\$ 2536.00	G-6-SMPB	Sample box - for MI-	G-6 \$ 2095.00
G-XL-7-SMPB	Sample box - for XL-MI-G-7	\$ 2536.00	G-7-SMPB	Sample box - for MI-	G-7 \$ 2095.00
G-XL-8-SMPB	Sample box - XL-MI-G-8	\$ 2756.00	G-L-20-SMPB	Sample box - MI-G-L	-20 \$ 2095.00
G-XL-9-SMPB	Sample box - XL-MI-G-9	\$ 2756.00	G-L-35-SMPB	Sample box - MI-G-L	-35 \$ 2095.00
G-XL-10-SMPB	Sample box - XL-MI-G-10	\$ 2756.00	G-L-50-SMPB	Sample box - MI-G-L	-50 \$ 2095.00
G-XL-11-SMPB	Sample box - XL-MI-G-11	\$ 2756.00			



	7 22222	
PART NO.	DESCRIPTION	LIST PRICE
FLCT-0	2" F.I.P. 4 G.P.M. Flow Control Fitting (.250" orifice size)	\$ 193.00
FLCT-1	2" F.I.P. 7 G.P.M. Flow Control Fitting (.375" orifice size)	\$ 193.00
FLCT-2	2" F.I.P. 10 G.P.M. Flow Control Fitting (.500" orifice size)	\$ 193.00
FLCT-3	2" F.I.P. 15 G.P.M. Flow Control Fitting (.750" orifice size)	\$ 193.00
FLCT-4	3" F.I.P. 20 G.P.M. Flow Control Fitting (1.000" orifice size)	\$ 290.00
FLCT-5	3" F.I.P. 25 G.P.M. Flow Control Fitting (1.250" orifice size)	\$ 290.00
FLCT-6	3" F.I.P. 35 G.P.M. Flow Control Fitting (1.500" orifice size)	\$ 290.00
FLCT-7	3" F.I.P. 50 G.P.M. Flow Control Fitting (2.000" orifice size)	\$ 290.00
FLCT-XL-0	4" F.I.P. 75 G.P.M. Flow Control Fitting (2.000" orifice size)	\$ 441.00
FLCT-XL-1	4" F.I.P. 100 G.P.M. Flow Control Fitting (2.25" orifice size)	\$ 441.00
FLC-0	2" No Hub 4 G.P.M. Flow Control Fitting (.250" orifice size)	\$ 193.00
FLC-1	2" No Hub 7 G.P.M. Flow Control Fitting (.375" orifice size)	\$ 193.00
FLC-2	2" No Hub 10 G.P.M. Flow Control Fitting (.500" orifice size)	\$ 193.00
FLC-3	2" No Hub 15 G.P.M. Flow Control Fitting (.750" orifice size)	\$ 193.00
FLC-4	3" No Hub 20 G.P.M. Flow Control Fitting (1.000" orifice size)	\$ 290.00
FLC-5	3" No Hub 25 G.P.M. Flow Control Fitting (1.250" orifice size)	\$ 290.00
FLC-6	3" No Hub 35 G.P.M. Flow Control Fitting (1.500" orifice size)	\$ 290.00
FLC-7	3" No Hub 50 G.P.M. Flow Control Fitting (2.000" orifice size)	\$ 290.00
FLC-XL-0	4" No Hub 75 G.P.M. Flow Control Fitting (2.000" orifice size)	\$ 441.00
FLC-XL-1	4" No Hub 100 G.P.M. Flow Control Fitting (2.25" orifice size)	\$ 441.00



Note: F.I.P. - Female iron pipe (threaded connection)

ITOTO: I.I.I. TOTTIA	io non pipo (unoddod connocuon)	
PART NO.	DESCRIPTION	LIST PRICE
MI-G-0-BAF	Baffle for MI-G-0 - 7" High x 8.80" Wide	\$ 193.00
MI-G-1-BAF	Baffle for MI-G-1 - 7" High x 11.30" Wide	\$ 193.00
MI-G-2-BAF	Baffle for MI-G-2 - 7" High x 13.30" Wide	\$ 240.00
MI-G-3-BAF	Baffle for MI-G-3 - 10" High x 13.30" Wide	\$ 290.00
MI-G-4-BAF	Baffle for MI-G-4 - 12.30" High x 13.30" Wide	\$ 290.00
MI-G-5-BAF	Baffle for MI-G-5 - 12.60" High x 16.40" Wide	\$ 290.00
MI-G-6-BAF	Baffle for MI-G-6 - 17.20" High x 21.30" Wide	\$ 386.00
MI-G-7-BAF	Baffle for MI-G-7 - 19" High x 21.30" Wide	\$ 386.00
MI-G-L-20-BAF	Baffle MI-G-L-20 - 6.70" High x 21.80" Wide	\$ 290.00
MI-G-L-35-BAF	Baffle MI-G-L-35 - 6.70" High x 25.80" Wide	\$ 382.00
MI-G-L-50-BAF	Baffle MI-G-L-50 - 6.70" High x 27.80" Wide	\$ 382.00

HEIGHT WIDTH

Note: Only one baffle required per interceptor.



CARRIER PARTS

CLOSET CARRIER TRIM KITS

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE	
MC-100	Standard nipple trim kit only for adjustable chair carriers: MC-10, MC-12, MC-13*	40.00	\$ 349.00	FITTING +
MC-100-8	Adjustable horn nipple trim kit only for adjustable chair carriers: MC-10, MC-12, MC-13		\$ 349.00	TRIM KIT
MC-100-OR	Rolling thread nipple trim kit only for adjustable chair carriers: MC-10, MC-12, MC-13*		\$ 349.00	
MC-200	Trim Kit only for fixed vertical carriers: MC-14, MC-15*	33.00	\$ 482.00	=COMPLETE CARRI
	*Note: 2 required for double (back to back) carrier installations			- OOMII EETE OATIIII

RIM KITS ARE N	OT COMPLETE CARRIERS! ADD APPROPRIATE CARRIER FITTING FROM BELOW!		
NO HUB C	ARRIER FITTINGS		
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRI
MC-10L-PF	Left Hand carrier fitting only for MC-10L horizontal adj. chair carrier	29.00	\$ 351.00
MC-10R-PF	Right Hand carrier fitting only for MC-10R horizontal adj. chair carrier	29.00	\$ 351.00
MC-10D-PF	Double carrier fitting only for MC-10D horizontal adj. chair carrier	43.00	\$ 514.00
WC-10L-27-PF	Left Hand carrier fitting only for MC-10L-27 horizontal adj. chair carrier w/ aux. 2" inlet	31.00	\$ 580.0
MC-10R-27-PF	Right Hand carrier fitting only for MC-10R-27 horizontal adj. chair carrier w/ aux. 2" inlet	31.00	\$ 580.0
MC-10D-27-PF	Double carrier fitting only for MC-10D-27 horizontal adj. chair carrier w/ aux. 2" inlet	45.00	\$ 743.0
/IC-10L-27-37-PF	Left Hand carrier fitting only for MC-10D-27-36 horizontal adj. chair carrier w/ aux. 2" inlet and 37" barrel	55.00	\$ 664.0
/IC-10R-27-37-PF	Right Hand fitting only for MC-10D-27-36 horizontal adj. chair carrier w/ aux. 2" inlet and 37" barrel	55.00	\$ 664.0
/IC-10D-27-37-PF	Double carrier fitting only for MC-10D-27-36 horizontal adj. chair carrier w/ aux. 2" inlet and 37" barrel	71.00	\$1060.0
IC-10L-EXT-PF	High Rough in (ADA) Left Hand carrier fitting only for MC-10L-EXT horizontal adj. chair carrier	32.00	\$ 605.0
IC-10R-EXT-PF	High Rough in (ADA) Right Hand carrier fitting only for MC-10R-EXT horizontal adj. chair carrier	32.00	\$ 605.0
IC-10D-EXT-PF	High Rough in (ADA) Double carrier fitting only for MC-10D-EXT horizontal adj. chair carrier	46.00	\$1087.0
PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PR
IC-12-PF	Carrier fitting only for MC-12 vertical adjustable chair carrier	39.00	\$ 649.0
IC-12D-PF	Carrier fitting only for MC-12D vertical adjustable chair carrier		
	Curron maing only for two 125 vortion adjustable on all our for	50.00	\$ 893.0
	DESCRIPTION	50.00 WEIGHT (LBS.)	
PART NO.			LIST PR
PART NO. IC-13-2-PF	DESCRIPTION	WEIGHT (LBS.)	LIST PR \$ 861.0
PART NO. IC-13-2-PF IC-13L-PF	DESCRIPTION Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap	WEIGHT (LBS.) 45.00	LIST PR \$ 861.0 \$ 763.0
PART NO. IC-13-2-PF IC-13L-PF IC-13R-PF	DESCRIPTION Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap Carrier fitting only for MC-13L vertical adjustable chair carrier w/ left hand side inlet and one TC-4 test cap	WEIGHT (LBS.) 45.00 45.00	\$ 861.0 \$ 763.0 \$ 763.0 \$ 1031.0
PART NO. IC-13-2-PF IC-13L-PF IC-13R-PF IC-13D-PF	DESCRIPTION Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap Carrier fitting only for MC-13L vertical adjustable chair carrier w/ left hand side inlet and one TC-4 test cap Carrier fitting only for MC-13R vertical adjustable chair carrier w/ right hand side inlet and one TC-4 test cap	WEIGHT (LBS.) 45.00 45.00 45.00	\$ 861.0 \$ 763.0 \$ 763.0 \$ 1031.0
PART NO. 1C-13-2-PF 1C-13L-PF 1C-13R-PF 1C-13D-PF 1C-13D-2-PF	DESCRIPTION Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap Carrier fitting only for MC-13L vertical adjustable chair carrier w/ left hand side inlet and one TC-4 test cap Carrier fitting only for MC-13R vertical adjustable chair carrier w/ right hand side inlet and one TC-4 test cap Carrier fitting only for MC-13D vertical adjustable back to back chair carrier w/ one side inlet and one TC-4 test cap	WEIGHT (LBS.) 45.00 45.00 45.00 56.00	\$ 861.0 \$ 763.0 \$ 763.0 \$ 1031.0 \$1129.0
PART NO. IC-13-2-PF IC-13L-PF IC-13R-PF IC-13D-PF IC-13D-2-PF	DESCRIPTION Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap Carrier fitting only for MC-13L vertical adjustable chair carrier w/ left hand side inlet and one TC-4 test cap Carrier fitting only for MC-13R vertical adjustable chair carrier w/ right hand side inlet and one TC-4 test cap Carrier fitting only for MC-13D vertical adjustable back to back chair carrier w/ one side inlet and one TC-4 test cap Carrier fitting only for MC-13D-2 vertical adjustable back to back chair carrier w/ two side inlets and one TC-4 test cap	WEIGHT (LBS.) 45.00 45.00 45.00 56.00	LIST PR \$ 861.0 \$ 763.0 \$ 763.0 \$1031.0 \$1129.0
PART NO. IC-13-2-PF IC-13L-PF IC-13R-PF IC-13D-PF IC-13D-2-PF PART NO. IC-14-3-V2-PF	DESCRIPTION Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap Carrier fitting only for MC-13L vertical adjustable chair carrier w/ left hand side inlet and one TC-4 test cap Carrier fitting only for MC-13R vertical adjustable chair carrier w/ right hand side inlet and one TC-4 test cap Carrier fitting only for MC-13D vertical adjustable back to back chair carrier w/ one side inlet and one TC-4 test cap Carrier fitting only for MC-13D-2 vertical adjustable back to back chair carrier w/ two side inlets and one TC-4 test cap DESCRIPTION	WEIGHT (LBS.) 45.00 45.00 45.00 56.00 56.00 WEIGHT (LBS.)	LIST PR \$ 861.0 \$ 763.0 \$ 763.0 \$1031.0 \$1129.0 LIST PR \$ 303.0
PART NO. IC-13-2-PF IC-13L-PF IC-13R-PF IC-13D-PF IC-13D-2-PF PART NO. IC-14-3-V2-PF	Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap Carrier fitting only for MC-13L vertical adjustable chair carrier w/ left hand side inlet and one TC-4 test cap Carrier fitting only for MC-13R vertical adjustable chair carrier w/ right hand side inlet and one TC-4 test cap Carrier fitting only for MC-13D vertical adjustable back to back chair carrier w/ one side inlet and one TC-4 test cap Carrier fitting only for MC-13D-2 vertical adjustable back to back chair carrier w/ two side inlets and one TC-4 test cap Carrier fitting only for MC-13D-2 vertical adjustable back to back chair carrier w/ two side inlets and one TC-4 test cap DESCRIPTION Carrier fitting only for MC-14-3-V2 fixed vertical chair carrier w/ 3" barrel and 2" vent	WEIGHT (LBS.) 45.00 45.00 45.00 56.00 56.00 WEIGHT (LBS.) 26.00	\$ 861.0 \$ 763.0 \$ 763.0 \$1031.0 \$1129.0
PART NO. MC-13-2-PF MC-13L-PF MC-13D-PF MC-13D-2-PF PART NO. MC-14-3-V2-PF MC-14-4-V2-PF MC-14-4-V4-PF MC-15L-PF	Carrier fitting only for MC-13-2 vertical adjustable chair carrier w/ 2 side inlets and one TC-4 test cap Carrier fitting only for MC-13L vertical adjustable chair carrier w/ left hand side inlet and one TC-4 test cap Carrier fitting only for MC-13R vertical adjustable chair carrier w/ right hand side inlet and one TC-4 test cap Carrier fitting only for MC-13D vertical adjustable back to back chair carrier w/ one side inlet and one TC-4 test cap Carrier fitting only for MC-13D-2 vertical adjustable back to back chair carrier w/ two side inlets and one TC-4 test cap Carrier fitting only for MC-14-3-V2 fixed vertical chair carrier w/ 3" barrel and 2" vent Carrier fitting only for MC-14-4-V2 fixed vertical chair carrier w/ 4" barrel and 2" vent	WEIGHT (LBS.) 45.00 45.00 45.00 56.00 56.00 WEIGHT (LBS.) 26.00 31.00	LIST PR \$ 861.0 \$ 763.0 \$ 763.0 \$1031.0 \$1129.0 LIST PR \$ 303.0 \$ 303.0

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
MC-14-3-V2-PF	Carrier fitting only for MC-14-3-V2 fixed vertical chair carrier w/ 3" barrel and 2" vent	26.00	\$ 303.00
MC-14-4-V2-PF	Carrier fitting only for MC-14-4-V2 fixed vertical chair carrier w/ 4" barrel and 2" vent	31.00	\$ 303.00
MC-14-4-V4-PF	Carrier fitting only for MC-14-4-V4 fixed vertical chair carrier w/ 4" barrel and 4" vent	31.00	\$ 303.00
MC-15L-PF	Carrier fitting only for MC-15L fixed vertical chair carrier offset to left of stack	36.00	\$ 325.00
MC-15R-PF	Carrier fitting only for MC-15R fixed vertical chair carrier offset to right of stack	36.00	\$ 325.00
MC-15D-PF	Carrier fitting only for MC-15D fixed vertical back to back offset chair carrier	46.00	\$ 476.00

HUB AND SPIGOT CARRIER FITTINGS

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
MC-10L-HS-PF	Left Hand carrier fitting only for MC-10L-HS hub & spigot horizontal adj. chair carrier	35.00	\$ 377.00
MC-10R-HS-PF	Right Hand carrier fitting only for MC-10R-HS hub & spigot horizontal adj. chair carrier	35.00	\$ 377.00
MC-10D-HS-PF	Double carrier fitting only for MC-10D-HS hub & spigot horizontal adj. chair carrier	45.00	\$ 564.00
MC-10L-HS-27-PF	Left Hand carrier fitting only for MC-10L-HS-27 hub & spigot horizontal adj. chair carrier w/ aux. 2" inlet	37.00	\$ 608.00
MC-10R-HS-27-PF	Right Hand carrier fitting only for MC-10R-HS-27 hub & spigot horizontal adj. chair carrier w/ aux. 2" inlet	37.00	\$ 608.00
MC-10D-HS-27-PF	Double carrier fitting only for MC-10D-HS-27 hub & spigot horizontal adj. chair carrier w/ aux. 2" inlet	47.00	\$ 793.00
MC-10L-HS-27-37-PF	Left Hand carrier fitting only for MC-10L-HS-27-37 hub & spigot horizontal adj. chair carrier w/ aux. 2" inlet and 37" barrel	66.00	\$ 811.00
MC-10R-HS-27-37-PF	Right Hand carrier fitting only for MC-10R-HS-27-37 hub & spigot horizontal adj. chair carrier w/ aux. 2" inlet and 37" barrel	66.00	\$ 811.00
MC-10D-HS-27-37-PF	Double carrier fitting only for MC-10D-HS-27-37 hub & spigot horizontal adj. chair carrier w/ aux. 2" inlet and 37" barrel	90.00	\$1426.00

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
MC-12-HS-PF	Carrier fitting only for MC-12-HS hub & spigot vertical adjustable chair carrier	45.00	\$ 735.00
MC-12D-HS-PF	Carrier fitting only for MC-12D-HS hub & spigot vertical adjustable chair carrier	57.00	\$ 997.00
MC-13-2-HS-PF	Carrier fitting only for MC-13-2-HS hub & spigot vertical adjustable chair carrier w/ 2 side inlets	58.00	\$ 953.00
MC-13L-HS-PF	Carrier fitting only for MC-13L-HS hub & spigot vertical adjustable chair carrier w/ left hand side inlet	58.00	\$ 856.00
MC-13R-HS-PF	Carrier fitting only for MC-13R-HS hub & spigot vertical adjustable chair carrier w/ right hand side inlet	58.00	\$ 856.00
MC-13D-HS-PF	Carrier fitting only for MC-13D-HS hub & spigot vertical adjustable back to back chair carrier w/ one side inlet	69.00	\$1344.00
MC-13D-2-HS-PF	Carrier fitting only for MC-13D-2-HS hub & spigot vertical adjustable back to back chair carrier w/ two side inlets	69.00	\$1441.00

PART NO.	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
MC-14-4-V2-HS-PF	Carrier fitting only for MC-14-4-V2-HS hub & spigot fixed vertical chair carrier w/ 4" barrel and 2" vent	36.00	\$ 326.00
MC-15L-HS-PF	Carrier fitting only for MC-15L-HS hub & spigot fixed vertical chair carrier offset to left of stack	41.00	\$ 354.00
MC-15R-HS-PF	Carrier fitting only for MC-15R-HS hub & spigot fixed vertical chair carrier offset to right of stack	41.00	\$ 354.00
MC-15D-HS-PF	Carrier fitting only for MC-15D-HS hub & spigot fixed vertical back to back offset chair carrier	50.00	\$ 526.00

REAR ANCHOR FOOT SUPPORT SHIPPED AT NO CHARGE WITH CARRIER FITTING



MC-12-HS (HUB AND SPIGOT, VERTICAL ADJUSTABLE CARRIER FITTINGS)

MC-12-03 (00E	AND SPIGOT, VERTICAL ADJUSTABLE CARRIE	K FII HING	၁)
PART NO.	DESCRIPTION	LIST PRICE	
MC-12-HS-PF MC-12-HS-25-PF	Vertical, adjustable water closet carrier fitting, regular length Vertical, adjustable water closet carrier fitting, one 2" aux. inlet tapping, right side, regular length	\$735.00 \$979.00	
MC-12-HS-26-PF	Vertical, adjustable water closet carrier fitting, one 2" aux. inlet tapping, left side, requiar length	\$979.00	
MC-12-HS-31-PF	Vertical, adjustable water closet carrier fitting, two 2" aux. inlet tappings, regular length	\$1,211.00	
MC-12-HS-39-PF MC-12-HS-25-39-PF	Vertical, adjustable water closet carrier fitting, 41 1/4" long Vertical, adjustable water closet carrier fitting, one 2" aux. inlet tapping, right side, 41 1/4" long	\$1,284.00 \$1,580.00	
MC-12-HS-26-39-PF	Vertical, adjustable water closet carrier fitting, one 2" aux. inlet tapping, left side, 41 1/4" long	\$1,580.00	munisms -
MC-12-HS-31-39-PF	Vertical, adjustable water closet carrier fitting, two 2" aux. inlet tappings, 41 1/4" long	\$1,811.00	MC-12-HS
MC-12D-HS-PF MC-12D-HS-25-PF	Vertical, adjustable water closet carrier back to back fitting, regular length Vertical, adjustable water closet carrier back to back fitting, one 2" aux. inlet tapping, right side, regular length	\$ 997.00 \$1,453.00	
MC-12D-HS-26-PF	Vertical, adjustable water closet carrier back to back fitting, one 2" aux. inlet tapping, left side, regular length	\$1,453.00	
MC-12D-HS-31-PF	Vertical, adjustable water closet carrier back to back fitting, two 2" aux. inlet tappings, regular length	\$1,916.00	
MC-12D-HS-39-PF MC-12D-HS-25-39-PF	Vertical, adjustable water closet carrier back to back fitting, 41 1/4" long Vertical adjustable water closet carrier back to back fitting, one 2" aux. inlet tapping, right side, 41 1/4" long	\$2,195.00 \$2,654.00	
MC-12D-HS-26-39-PF	Vertical, adjustable water closet carrier back to back fitting, one 2" aux. inlet tapping, left side, 41 1/4" long	\$2,654.00	numa Sum
MC-12D-HS-31-39-PF	Vertical, adjustable water closet carrier back to back fitting, two 2" aux. inlet tappings, 41 1/4" long	\$3,117.00	MC-12D-HS

MC-13-HS (HUB AND SPIGOT, VERTICAL ADJUSTABLE CARRIER FITTINGS WITH ONE OR TWO SIDE INI ETS)

	,	1100000000	
PART NO.	DESCRIPTION	LIST PRICE	
MC-13R-HS-PF	Vertical, adjustable water closet carrier fitting, one right hand side inlet,	\$ 856.00	200
MC-13R-HS-25-PF	regular length Vertical, adjustable water closet carrier fitting, one right hand side inlet and one 2" aux. inlet, left side, regular length	\$1,094.00	\circ
MC-13R-HS-39-PF	Vertical, adjustable water closet carrier fitting, one right hand side inlet, $41.1/4$ " long	\$1,467.00	
MC-13R-HS-25-39-PF	Vertical, adjustable water closet carrier fitting, one right hand side inlet and one 2" aux. inlet, left side, 41 1/4" long	\$1,697.00	
MC-13L-HS-PF	Vertical, adjustable water closet carrier fitting, one left hand side inlet, regular length	\$ 856.00	
MC-13L-HS-25-PF	Vertical, adjustable water closet carrier fitting, one left hand side inlet and one 2" aux. inlet, right side, regular length	\$1,094.00	MC-13-HS
MC-13L-HS-39-PF	Vertical, adjustable water closet carrier fitting, one left hand side inlet, $41.1/4$ " long	\$1,467.00	MC-13-H2
MC-13L-HS-25-39-PF	Vertical, adjustable water closet carrier fitting, one left hand side inlet and one 2" aux. inlet, right side, 41 1/4" long	\$1,697.00	med
MC-13-2-HS-PF	Vertical, adjustable water closet carrier fitting, two side inlets, regular length	\$ 953.00	
MC-13-2-HS-39-PF	Vertical, adjustable water closet carrier fitting, two side inlets, 41 $1/4$ long	\$1,565.00	
MC-13D-HS-PF	Vertical, adjustable water closet carrier back to back fitting, one side inlet, regular length	\$1,344.00	\circ
MC-13D-HS-25-PF	Vertical, adjustable water closet carrier back to back fitting, one side inlet and one 2" aux. inlet, 41 1/4" long	\$1,592.00	
MC-13D-HS-39-PF	Vertical, adjustable water closet carrier back to back fitting, one side inlet, $41.1/4$ " long	\$2,337.00	
MC-13D-HS-25-39-PF	Vertical, adjustable water closet carrier back to back fitting, one side inlet and one 2" aux. inlet, 41 1/4" long	\$2,798.00	ununt sun
MC-13D-2-HS-PF	Vertical, adjustable water closet back to back carrier fitting, two side inlets, regular length	\$1,441.00	MC-13D-H
MC-13D-2-HS-39-PF	Vertical, adjustable water closet back to back carrier fitting, two side inlets, 41 1/4" long	\$2,337.00	



MC-100 TRIM KIT CONTENTS*

CARRIER PARTS

PART NO.	DESCRIPTION	REQU'D QUANTITY	LIST PRICE	KNO
MC-10-PFPOZ MC-FP O-ring MC-10-PFTZ H-1167-KA-10 MC-10-PRP	Faceplate w/ "0" ring Faceplate "0" ring gasket (included inside faceplate groove) Foot (two assembled to MC-10-PFPOZ face plate) 5/8" X 10" Threaded rods with 5/8" hex nuts (to support toilet) 8" plastic rod protector (assembled onto H-1167-KA-10 studs)		\$145.00 \$ 11.00 \$41.00 (for 2 pcs.) \$17.00 (for 4 pcs.) \$ 3.75 (for 4 pcs.)	FITT FACE
MC-10-PHP1 PARTS	"FINISH" HARDWARE PACK	REQU'D QUANTITY	EACH	
H-1194 MC-10-PBG H-1176 H-1166A	Chrome plated finishing cap nuts Neoprene Bowl gasket Bowl saver washer 8 high density polyethylene washers (use with H-1176)	4 1 4 8	\$82.00 (for 4 pcs.) \$ 36.00 \$4.75 each (\$19.00 for 4 pcs.) \$1.60 each (\$12.80 for 8 pcs.)	NIPF TO FIX
MC-10-PHP2 PARTS	"ROUGH-IN" HARDWARE PACK	REQU'D QUANTITY	EACH	MC-10
MC-10-PFPG H-1209 MC-10-PNS MC-10-LUB H-1164	Faceplate gasket (install between faceplate and fitting) 1/2" x 1-3/4" flanged bolts (to secure faceplate to fitting) Silicone Sealant for tapered thread & adj. Horn nipple Lubricant for faceplate "0" ring nipple 5/8" Hex nuts (for use as "back-up" nuts on H-1167 studs	1 4 1 1 4	\$ 20.00 \$1.60 each (\$6.40 for 4 pcs.) \$ 15.00 \$ 5.75 \$1.60 each (\$6.40 for 4 pcs.)	
NIPPLE PART NO.	behind faceplate) DESCRIPTION	REQU'D QUANTITY	LIST PRICE	(i)
MC-10-PN8-31	8" Standard tapered thread ABS nipple	1	\$ 40.00	H-117

KNOW YOUR GASKETS!		
\Box 0	-0	
	FITTING TO	
FACE PLATE MC-10-PFPG	FACE PLATE MC-FP 0-ring	
MC-10-FFFG	WC-FF 0-Hilly	











H-1209

MC-200 TRIM KIT CONTENTS*

PART NO.	DESCRIPTION	REQU'D QUANTITY	LIST PRICE
MC-14-PFP	Faceplate	1	\$185.00
MC-FP O-ring	Fitting "0" ring	1	\$ 11.00
MC-10-PNS	Silicone Sealant for tapered thread & adj. horn nipple	1	\$ 15.00
MC-10-LUB	Lubricant for faceplate "O" ring nipple	1	\$ 5.75
MC-10-PFT	Foot	2	\$40.00 (for 2 pcs.)
MC-10-PHP1	Hardware pack (contents listed above in MC-100 parts)	1	\$105.00
H-1146	1/2" Flat washers	4	\$1.60 each (\$6.40 for 4 pcs.)
H-1141	1/2" X 1" Hex head machine screws	4	\$5.75 each (\$23.00 for 4 pcs.)
H-1167-KA-10	5/8" X 10" Threaded rods, (for rod protectors see MC-100 parts)	4	\$17.00 (for 4 pcs.)
MC-14-PHP1 PARTS	DESCRIPTION	REQU'D QUANTITY	LIST PRICE
H-1164	5/8" Hex nuts	8	\$1.60 each (\$6.40 for 4 pcs.)
H-1209	1/2" x 1-3/4" flanged bolts	4	\$1.60 each (\$6.40 for 4 pcs.)
H-1146	1/2" Flat washers	4	\$1.60 each (\$6.40 for 4 pcs.)
NIPPLE PART NO.	DESCRIPTION	REQU'D QUANTITY	LIST PRICE
MC-10-PN8-31	8" Standard tapered thread ABS nipple	1	\$40.00




CLOSET CARRIER NIPPLE VARIATIONS





PART NO.	DESCRIPTION	CARRIER MODEL NUMBER SUFFIX	LIST PRICE
MC-10-PN8-31	8" Standard tapered thread ABS nipple	Standard	\$ 40.00
MC-10-PN12-31*	12" tapered thread ABS nipple	-12	\$ 93.00
MC-10-PN8R-31	8" rolling thread ABS nipple	-OR	\$ 40.00
MC-10-PN12R-31*	12" rolling thread ABS nipple	-0R12	\$ 93.00
MC-10-PN8AH-31	8" tapered thread ABS nipple with adjustable horn	-AH	\$ 40.00
MC-10-PN12AH-31*	12" tapered thread ABS nipple with adjustable horn	-A12	\$ 93.00
MC-10-PN4R-50	4" rolling thread cast iron nipple	-CI-4	\$ 54.00
MC-10-PN6R-50	6" rolling thread cast iron nipple	-CI-6	\$ 56.00
MC-10-PN8R-50	8" rolling thread cast iron nipple	-CI-8	\$ 69.00
MC-10-PN12R-50*	12" rolling thread cast iron nipple	-CI-12	\$ 105.00
MC-10-PN24R-50	24" rolling thread cast iron nipple	-CI-24	\$ 203.00



TC-4-50

PARTS FOR CLOSET CARRIER NIPPLE VARIATIONS

IAILIOIO	IN OLOOLI OMINICINIII I LL V	AINAIIONO		
PART NO.	DESCRIPTION	CARRIER MODEL NUMBER SUFFIX	LIST PRICE	
MC-10-1-PTFK	Finishing tiling Frame w/ hardware kit	-1	\$ 44.00	1
MC-10-3-PRSFK	Rear anchor support kit	-3 (normally furnished at no charge)	\$ 40.00	ı
MC-10-AFS	Auxillary fixture support for wide pipe chase	-10	\$468.00	ı
H-1194-14	Set of 4 vandal proof fixture securing cap nuts	-14	\$118.00	1
H-1194	Set of 4 fixture securing shoulder cap nuts	-S	\$ 82.00	1
MC-10-PCW	Nipple wrench	-19	\$ 61.00	
MC-10-FVS	Flush Valve support	-20	\$ 47.00	ı
MC-10-PBG-FELT	Felt bowl gaskets for use with toilets		\$ 41.00	ı
MC-31-PBG-FELT	Felt gaskets for use with lavatories		\$ 39.00	ı
H-1167-KA-14	5/8" X 14"Threaded rod (4 required) (studs are 12" long)	(varies by longer nipple suffix)	\$ 17.00	IV
TC-2-50, TC-4-50	2" or 4" Caps for aux. /side inlets	(varies by closet carrier model)	\$ 40.00	

MC-10-3-PRSFK Visit www.mifab.com for the most recent product information.

Design and dimensions are subject to modification. Prices do not include applicable taxes.



URINAL AND LAVATORY CARRIER PARTS **PARTS** MC-31 PARTS DESCRIPTION **REQU'D QUANTITY LIST PRICE** PART NO. \$82.00 (for 2 pcs.) MC-31-PLA Upright, 42 2 MC-31-PUP Universal plate 1 \$122.00 MC-31-PHP Hardware pack (contents listed below) \$ 60.00 MC-31-PHP PARTS DESCRIPTION REQU'D QUANTITY PART NO. **LIST PRICE** MC-40-50-PLN H-1104 5/16" U-Bolts \$3.75 each (\$15.00 for 4 pcs.) \$1.60 each (\$13.00 for 8 pcs.) \$2.75 each (\$16.50 for 6 pcs.) 5/16" Hex nuts 8 H-1102 H-1087 1/4-20 x 8" Threaded rods 6 H-1080 1/4-20 Hex nuts 24 \$1.60 each (\$38.50 for 24 pcs.) H-1081 1/4 Flat washers 32 \$1.60 each (\$51.00 for 32 pcs.) REQU'D QUANTITY MC-41 PARTS DESCRIPTION PART NO. **LIST PRICE** H-1208 MC-40-PHB Header bracket 2 \$37.00 each (\$74.00 for 2 pcs.) MC-40-PLA Upright, 36" 2 2 2 2 \$75.00 each (\$150.00 for 2 pcs.) \$116.00 each (\$232.00 for 2 pcs.) \$37.00 each (\$74.00 for 2 pcs.) \$7.50 each (\$15.00 for 2 pcs.) MC-41-PA Concealed arm with locking & leveling hardware MC-40/50-PN6 6" Nipple & lock nut w/ screws for concealed arm MC-40/50-PLN Locknut for nipple \$24.00 H-1137 Tie rod 1 H-1208 Eye bolt hardware kit for cast iron lavatories 1 \$116.00 H-1104 (Suffix - I for MC-40, MC-41, lavatory carriers) 2 H-1083 1/4"-20 x1" Cup point set hex head screw \$2.75 each (\$5.50 for 2 pcs.) \$2.75 each (\$11.00 for 4 pcs.) \$1.60 each (\$6.40 for 4 pcs.) \$1.60 each (\$3.20 for 2 pcs.) H-1132 3/8" x ½" Cup point hex head screws 4 H-1084 1/4" Rubber bumpers 4 2 H-1126 3/8" Hex nuts REQU'D QUANTITY PART NO. MC-30/40/50 SERIES PARTS VARIATIONS LIST PRICE MC-40-50-PN6 MC-31-PBP Lower bearing plate for MC-32 \$46.00 H-1101 5/16" X 10" Threaded rods for MC-32 lower bearing plate 2 \$11.00 each (\$22.00 for 2 pcs.) \$1.60 each (\$6.40 for 4 pcs.) \$1.60 each (\$6.40 for 4 pcs.) \$244.00 each (\$488.00 for 2 pcs.) H-1102 5/16" Nuts MC-32 bearing plate studs 4 H-1103 5/16" Washers MC-32 bearing plate studs 4 2 2 2 2 2 MC-40-PUA Left or right exposed arm for MC-40 Installation kit for MC-40-PUA exposed arm Round upright, 36", for **MC-41-R** Series Double header bracket for **MC-41-D** MC-40-PUA-IK \$55.00 each (\$110.00 for 2 pcs.) \$83.00 each (\$166.00 for 2 pcs.) \$87.00 each (\$174.00 for 2 pcs.) \$43.00 each (\$86.00 for 2 pcs.) MC-40-R-PLA MC-41-PDB MC-40-R-PHB Header bracket for round uprights MC-41-AHK Set of replacement leveling & locking hardware for concealed arms 1 \$41.00 \$47.00 each (\$94.00 for 2 pcs.) \$139.00 each (\$278.00 for 2 pcs.) 2 MC-41-PE2 2" deep by 3-3/8" Dia. chrome plated escutcheon MC-41-PE2 MC-41-R-PA Concealed threaded arm with locking & leveling hardware for round header bracket 2 ADA Lav. concealed arm with locking & leveling hardware \$139.00 each (\$278.00 for 2 pcs.) MC-42-PA MC-42-R-PA ADA Lav. concealed threaded arm with locking & leveling hardware \$156.00 each (\$312.00 for 2 pcs.) for round header bracket 2 MC-53-PB Adjustable wall bracket for MC-50 Series \$133.00 each (\$266.00 for 2 pcs.) \$1.60 each (\$3.20 for 2 pcs.) \$1.60 each (\$3.20 for 2 pcs.) 3/8" x 1/2" Flat phillips head machine screw for MC-53-PB H-1138 2 2 2 H-1126 3/8" Hex nuts Back plate for MC-53 Series MC-40-PHB MC-51-PBP \$83.00 each (\$166.00 for 2 pcs.) H-1101 5/16" x 10" Threaded rod 8 \$11.00 each (\$22.00 for 2 pcs.)

HYDRANI	PARIS		
PART NO.	MHY INTERNAL PARTS DESCRIPTION	REQU'D QUANTITY	LIST PRICE
MHY-CIA-18-A MHY-CIA-30/50 MHY-1 MHY-2 MHY-CIA-4000 PART NO.	Universal hydrant repair kit for MHY-10 /20 (up to 18" wall thickness) Universal hydrant repair kit for MHY-30 /50 Hydrant operating key Chrome plated head nut Hydrant repair kit for MHY-40 Series up to MHY-40-14 only PARTS FOR HYDRANT VARIATIONS MHY-CIA-18-A	1 1 1 1 1 Hydrant Suffix	\$ 200.00 \$ 200.00 \$ 14.00 \$ 31.50 \$ 200.00 LIST PRICE
HY-HC1 HY-H01	1" hose connection WHY-9004 Wall clamp	-0 -WC	\$113.00 \$ 41.00
HY-PC PART NO.	3 Mounting brackets with hardware MHY-1 HY-HC-1 MHY-90 SERIES REPLACEMENTS PARTS	-S Requ'd quantity	\$ 99.00 LIST PRICE
MHY-9001 MHY-9002 MHY-9003 MHY-9005-B MHY-9005-PC HY-1000-CP	Brown plastic wheel handle Clear plastic wheel handle Cast iron wheel handle Operating key A.S.S.E. 1011 approved vacuum breaker - rough brass A.S.S.E. 1011 approved vacuum breaker - polished chrome A.S.S.E. 1019 approved vacuum breaker for MHY-10 Series HY-1000-CP	1 1 1 1 1 1	\$ 63.00 \$ 63.00 \$ 63.00 \$ 50.00 \$ 69.50 \$ 85.00 \$105.00
H1-1000-CP	A.S.S.E. 1019 approved vacuum breaker for MHY-10 Series HY-1000-CP	ļ ļ	φ100.00

CAST HYDRANT BOXES

PART NO.	PRODUCT FINISH	DESCRIPTION	LIST PRICE (-1,-3)	LIST PRICE (-49)
MHY-15-(1,3,49)*	Cast NB or SS or Ch. Plated	Standard Box for MHY-10 through MHY-55 Series (except MHY-40,45) Slotted Box with installation brackets and hardware	\$ 371.00	\$ 621.00
MHY-15-(1,3,49)-S*	Cast NB or SS or Ch. Plated		\$ 468.00	\$ 719.00
MHY-15-(1,3,49)-NL*	Cast NB or SS or Ch. Plated	for MHY-10 through MHY-55 Series (except MHY-40, 45) No lip box for MHY-60 Series Cast Brass Box for MHY-90 Series Fabricated stainless steel Box with 6" round back opening for tilt up construction	\$ 371.00	\$ 621.00
MHY-95(1,3,49)*	Cast NB or SS or Ch. Plated		\$ 417.00	\$ 695.00
MHY-3-RB	Fabricated Type 304 Stainless Steel		\$ 371.00	\$ 621.00

*ADD A KEY LOCK TO ANY OF THE ABOVE HYDRANT BOXES BY SPECIFYING SUFFIX "-K" IN THE PART NUMBER ADDING \$97.00 TO LIST PRICE Visit www.mifab.com for the most recent product information Design and dimensions are subject to modification. Prices do not include applicable taxes.



WATER CLOSET CARRIERS

J R Smith		MIFAB
0115	(pg. 214)	MC-10-EXT
0115D	(pg. 214)	MC-10D-EXT-HS
01151	(ng 214)	MC-10L-EXT-HS
0116E	(ng 21/1)	MC-10R-EXT-HS
0115IT	(pg. 214)	MC 10D EVT
011301	(py. 214)	MC-10D-EXT
0115LY	(pg. 214)	MC-10L-EXT
		MC-10R-EXT
0175	(pg. 220)	MC-13
		MC-13D-HS
		MC-13L-HS
0176E	(pg. 221).	MC-13R-HS
		MC-13D
		MC-13L
0175RY	(pg. 220)	MC-13R
0185	(pg. 221)	MC-13-2-HS
		MC-13D-2-HS
		MC-13-2
		MC-13D-2
		MC-10
		MC-10D
0208LY	(pg. 212)	MC-10L
		MC-10R
		MC-10-27
0209DY	(pg. 215)	MC-10D-27
		MC-10L-27
		MC-10R-27
0210	(pg. 212)	MC-10
		MC-10D-HS
		MC-10L-HS
0210E	(ng 212)	MC-10R-HS
		MC-10D
		MC-10L
0210RY	(pg. 212)	MC-10R
0210LY-M54-XK	(pg. 213).	MC-10L-HDX
0210LY-M54-XX	(ng 212)	MC-10L-HD-750
0210LY-M58/54-XK	(ng 213)	MC-10L-HDX
0210L1 W00/04 XX	(pg. 210).	MC-10L-HD-750
0210L1-W00/04-AA	(py. 212).	IVIG-TUL-FID-730
		MC-10R-HDX
		MC-10R-HD-750
0210RY-M58/54-XK	(pg. 213).	MC-10R-HDX
0210RY-M58/54-XX	(pg. 212)	MC-10R-HD-750
0210DY-M54-XK	(ng. 213)	MC-10D-HDX
0210D1 M617K	(ng 212)	MC-10D-HD-750
021001-1004-777	(pg. 212)	MO 10D 11DV
0210DY-W38/34-XN	(pg. 213).	MC-10D-HDX
0210DY-M58/54-XX	(pg. 212)	MC-10D-HD-750
0219	(pg. 216)	MC-10-27-37
0219DY	.(pg. 216)	MC-10D-27-37
0219LY	.(pg. 216)	MC-10L-27-37
		MC-10R-27-37
0210111	(pg. 216)	MC-10-27-37
		MC-10D-27-37-HS
0220L	(pg. 216)	MC-10L-27-37-HS
0220R	.(pg. 216)	MC-10R-27-37-HS
		MC-10D-27-37
		MC-10L-27-37
		MC-10R-27-37
000011/ ME 4 1/1/	(pg. 210)	
		MC-10L-27-37-HDX
0220LY-M54-XX	(pg. 216) N	ИС-10L-27-37-HD-750
0220LY-M58/54-XK	(pg. 216)	MC-10L-27-37-HDX
0220LY-M58/54-XX	(pg. 216) N	MC-10L-27-37-HD-750
		MC-10R-27-37-HDX
0220BY_ME4 YY	(ng 216) N	/IC-10R-27-37-HD-750
0220111-14104-VV	(pg. 210) I	עמון לה לה ממן און
		MC-10R-27-37-HDX
		MC-10R-27-37-HD-750
0220DY-M54-XK	(pg. 216)	MC-10D-27-37-HDX
0220DY-M54-XX	(pg. 216) N	/IC-10D-27-37-HD-750
		MC-10D-27-37-HDX
	(1-3: -:-)	2. 0

ERENCE		
0220DV-M58/54-XX	(ng 216) M(C-10D-27-37-HD-750
		MC-12-HS*
0230D	(ng 219)	MC-12D-HS*
		MC-12*
0230DV	(ng 218)	MC-12D*
0230V-M54-XK	(pg. 210) (ng. 218)	MC-12-HDX
		MC-12-HD-750
		MC-12-HDX
0230Y-M58/5/LYY	(pg. 210) (ng. 218)	MC-12-HD-750
02301-W30/34-777	(pg. 210) (pg. 218)	
0230D1-W54-XX	(pg. 210) (pg. 218)	MC-12D-HD-750
0230D1-W54-XX	(pg. 210) (ng. 218)	MC-12D-HDX
		MC-12D-HD-750
023001-1030/34-700	(pg. 210) (ng. 220)	MC-12D-11D-730
0240 0240D	(pg. 220) (ng. 221)	MC-13D-HS
		MC-13L-HS
		MC-13E-113
		MC-13D
		MC-13L
		MC-13R
		MC-13L-HDX
0240LI-W54-XK	(pg. 220)	MC-13L-HD-750
0240LI-W34-77	(pg. 220) (pg. 220)	MC-13L-HDX
0240LT-W30/34-AN .	(pg. 220)	MC-13L-HD-750
		MC-13L-11D-730
0240D1-W54-XX	(pg. 220)	MC-13R-HD-750
		MC-13R-HDX
0240N1-W30/34-AN	(pg. 220)	MO 10D UD 750
0240DV ME 4 VV	(pg. 220)	MC-13R-HD-750 MC-13D-HDX
0240DY-W50/54 VV	(pg. 220)	MC-13D-HD-750
0240DY-W50/54-XK	(pg. 220)	MC-13D-HDX
		MC-13D-HD-750
0230	(pg. 221)	MC-13-2-HS
0230D	(pg. 221)	MC-13D-2-HS
		MC-13-2
		MC-13D-2 MC-13-2-HDX
02501-W54-XN	(pg. 220)	MC-13-2-HD-750
02301-W34-AA	(pg. 220)	MC-13-2-HDX
02301-W30/34-AN	(pg. 220)	MC-13-2-HD-750
02301-W30/34-7/X	(pg. 220) (pg. 220)	MC-13D-2-HDX
0230D1-W34-AN	(pg. 220)	MC-13D-2-HD-750
0230D1-W54-XX	(pg. 220)	MC-13D-2-HDX
0230D1-W30/34-AR	(pg. 220) (pg. 220)	MC-13D-2-HD-750
0230D1-W30/34-AA	(pg. 220) (pg. 210)	MC-13D-2-11D-730
0200	(pg. 219)	MC-12D-HS*
0200D	(pg. 219)	
		MC-13-HS
02700	(pg. 221)	MC-13D-HS
0270L	(pg. 221)	MC-13L-HS
0270h	(py. 221)	MC-13R-HS
		MC-13-HS
		MC-13D-HS
0200D	(pg. 221)	MC-13L-HS
		MC-13R-HS
		MC-10
0310D	(pg. 212)	MC-10D-HS
0310L	(pg. 212)	MC-10L-HS
		MC-10R-HS
		MC-10D
		MC-10L
0310RY	(pg. 212)	MC-10R
		MC-10-EXT
0315D	(pg. 214)	MC-10D-EXT-HS
0315L	(pg. 214)	MC-10L-EXT-HS
0315R	(pg. 214)	MC-10R-EXT-HS
		MC-10D-EXT
0315LY	(pg. 214)	MC-10L-EXT
0315RY	(pg. 214)	MC-10R-EXT
		MC-10-27-37
JOEO	(۲9 10)	10 10 21 01

-HS
-HS
-по
-HS
-37
7-37
-37
אטנ ≀ט
IS*
HS'
12*
2D ³
-13
-HS
-па
-HS
-HS
13E
13L
I3R
חטו
-HS
-HS
3-2
D-2
10*
IS*
HS [*]
-HS
-HS
-HS
шс
-HS
-13
-HS
-HS
-HS
130
IOL
13L
I3R
-HS
-HS
-HS
-HS -HS
-HS -HS -HS
-HS -HS -HS
-HS -HS -HS
-HS -HS -HS -HS
-HS -HS -HS -HS -HS
-HS -HS -HS -HS 3-2 D-2
-HS -HS -HS -HS 3-2 D-2
-HS -HS -HS -HS 3-2 D-2 -15
-HS -HS -HS -HS 3-2 D-2 -15
-HS -HS -HS -HS 3-2 D-2 -15 -HS
-HS -HS -HS -HS 3-2 D-2 -15 -HS -HS
-HS -HS -HS -HS 3-2 D-2 -HS -HS -HS
-HS -HS -HS -HS 3-2 D-2 -HS -HS -HS 15L
-HS -HS -HS -HS 3-2 D-2 -HS -HS -HS 15L
-HS -HS -HS 3-2 D-2 -HS -HS 15E 15E
-HS -HS -HS 3-2 D-2 -HS -HS 15E 15E
-HS -HS -HS 3-2 D-2 -HS -HS -HS 15L 15L -HS
-HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS 3-2 -HS -HS -HS -HS -HS
-HS -HS -HS -HS 3-2 -15 -HS -HS -HS HS -HS
-HS -HS -HS -HS 3-2 -15 -HS -HS -HS HS -26
-HS -HS -HS -HS 3-2 -15 -HS -HS -HS HS -26
-HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS 3-2 -15 -HS -HS HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS 3-2 -HS -HS -HS -HS -HS 5D -25 -5D
-HS -HS -HS -HS 3-2 -HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS 3-2 -HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS 3-2 -HS -HS -HS -HS -HS -15 -HS -15 -15 -15 -15 -15 -15 -15 -15 -15 -15
-HS -HS -HS 3-2 -HS -HS 15L 15R -HS 5D -25 -15 15L 15L 5D
-HS -HS -HS 3-2 -HS -HS -HS -HS -HS -HS -15 -HS -15 -HS -15 -15 -HS -15 -HS -15 -15 -HS -15 -15 -15 -15 -15 -15 -15 -15 -15 -15
-HS -HS -HS 3-2 -15 -HS -HS -HS 5D-2 -15 -HS -HS -15 -15 -15 -15 -15 -15 -15 -15 -15 -15
-HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS -HS -HS -HS -HS -HS -HS
-HS -HS -HS -HS -HS -HS -HS -HS -HS -HS

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc. www.mifab.com sales@mifab.com



WATER CLOSET CARRIERS CONTINUED

CONTINUED			
J R Smith	MIFAB		
0415DY(pg. 223)	MC-15D		
0415LY(pg. 223)	MC-15L		
0415RY(pg. 223)	MC-15R		
0416(pg. 223)	MC-15-HS		
0416D(pg. 223) N	ЛС-15D-HS		
0416L(pg. 223). MC-	-15L-26-HS		
0416R(pg. 223) MC-	15R-25-HS		
0416DY(pg. 223)			
0416LY(pg. 223)			
0416RY(pg. 223)			
0417(pg. 223)	MC-15		
0417D(pg. 223) l	MC-15D-HS		
0417L(pg. 223)			
0417R(pg. 223)			
0417DY(pg. 223)	IVIC-13D		
0417DYS(pg. 223)	IVIC-13D		
0417DYT(pg. 223)	IVIC-13D		
0417LY(pg. 223) 0417LYS(pg. 223)	IVIG-13L		
0417LYT(pg. 223)	MC-13L		
0417RY(pg. 223)	MC-15E		
0417RYS(pg. 223)			
0417RYT(pg. 223)	MC-15R		
0419(pg. 223)	. MC-15-HS		
0419D(pg. 223) I	MC-15D-HS		
0419L(pg. 223) MC			
0419R(pg. 223) MC-	-15R-25-HS		
0419DY (ng 223)	MC-15D		
0419DYS(pg. 223)	MC-15D		
0419DYT(pg. 223)	MC-15D		
0419LY(pg. 223)	MC-15L-26		
0419LYS(pg. 223)	MC-15L-26		
0419LYT(pg. 223)			
0419RY(pg. 223)			
0419RYS(pg. 223)			
0419RYT(pg. 223)	MC 15 21		
0429(pg. 223) 0430(pg. 223)	IVIU-13-31 MC 15		
0430D(pg. 223)			
0430L(pg. 223)	MC-15I-HS		
0430R(pg. 223)			
0430DY(pg. 223)			
0430LY(pg. 223)	MC-15L		
0430RY(pg. 223)			
0431(pg. 223)	. MC-15-HS		
0431D(pg. 223) I	MC-15D-HS		
0431L(pg. 223) MC	-15L-26-HS		
0431R(pg. 223) MC-	-15R-25-HS		
0431DY(pg. 223)			
0431LY(pg. 223)	MC-15L-26		
0431RY(pg. 223)	MC-15R-25		
0437(pg. 223)			
0437L(pg. 223) 0437R(pg. 223)	MC-15L-113 MC-15R-H9		
0437DY(pg. 223)			
0437LY(pg. 223)	MC-15I		
0437RY(pg. 223)			
0440(pg. 222) MC	-14-4-V2-HS		
0440Y(pg. 222)	MC-14-4-V2		
0444(pg. 225)	MC-27-HS		
0444Y(pg. 225)	MC-27		
0447 (pg. 222) MC	-14-4-V2-HS		
0447Y(pg. 222)	IVIU-14-4-V2		
0450(pg. 222) MC 0450Y(pg. 222)	- 14-4-V4-HS MC-1/1-///		
04501(μy. 222)			
Design and disconsists are	uhiaat ta maali		

0457	(pa.	222).	MC-	14-4-V4	-HS
0457Y	(na :	2221	M	C-14-4-	.V4
0480	(na	2221	MC-	14-4-V2	-HS
0480Y .	(pg.	222)	١٧١٠	MC-1/1-/	1_\/2
0484	(pg.	225).	1	MC 27	ᅜ
0404	(py.	220).		MC-27	-NO
0484Y.	(pg.	225).		IVIU	-27
0487	(pg.	222).	MC-	14-4-V2	-HS
0487Y.	(pg.	222).	N	VIC-14-4	1-V2
0490	(pg.	222).	MC-	14-4-V4	-HS
0490Y.	(pg.	222).	N	VIC-14-4	1-V4
0497	(pg.	222).	MC-	14-4-V4	-HS
0497Y.	(pg.	222).	N	VIC-14-4	1-V4
0532	(na	224).	MC	-25-3-2	-HS
0532F	nn)	224)	MC.	-25-3-2	-HS
0532FY	(pg.	22/1)	1410	MC-25	3_2
0532Y.	(pg.	224)		MC 25	2 0
05321.	(py.	224).		1010-20	-0-2
0533	(pg.	224).	IVIU	-23-3-4	-по
0533F	(pg.	224)	IVIC	-25-3-4	-H5
0533FY	(pg.	224).		MC-25-	-3-4
0533Y.	(pg.	. 224).		MC-25	-3-4
0542	(pg.	224).	MC	-25-4-2	-HS
0542F	(pg	224).	MC	-25-4-2	?-HS
0542FY	(pq.	224).		MC-25-	-4-2
0542Y.	(pa.	224).		MC-25	-4-2
0544	(na	224).	MC	-25-4-4	-HS
0544D	nn)	224)	MC-	-25-4-4	-HS
0544DY	(na '	224)	MC-	25-4D-F	?V2
0544F('na 2	24) N	₩.0 10-25-/	1D_R\/2_	.HS
0544FD	py. Zi	27) Ⅳ 224\ N	//C 25	4D DV/0	ПC
0544FD	Y(þ	J. ZZ4,) IVIU-	-20-4D-I	ΚV2
0544FY.	(pg	1. 224)		IVIU-25-	4-4
0544Y.	(p	g. 224)	MC-25	-4-4
0548D .	(pg. 2	224) I	VIC-25-	4D-RV2	!-HS
0548D3	(pg.	224)[MC-25-	4D-RV2	!-HS
0548DP	(pg.	224)I	MC-25-	-4D-RV2	?-HS
0548F-3	}	(pg.	. 224)	MC	-24
0548F-4	ļ	(pg	. 224)	MC	-24
0548FD		(pa	. 224)	MC	-24
0548FD	3	(ng	224)	MC	-24
0548FD 0548FD	P (na	224)	ис-25-	4D-RV2	-HS
0548FP	(na	22/1)	VIO 20	MC	-24
0548P	(pg	224)	MC	25 2 2	ЦC
0540F	(µy	. 444). 224)	IVIO:	25 2 2	-110 DD
0548-3.	(pg	. 224).	IVIU	-20-3-2	по СП-
0548-4.	(pg	. 224).	IVIU:	-25-4-2	-H2
0550	(pg. 22	4)	IVIU-15	-HS
0600					
0620	(pg. 22	4)	MC-2	22-T

* MC-14 or MC-15 are recommended alternatives. Less pipe space, lower cost and fewer parts

"X" Contact MIFAB

WATER CLOSET **OPTIONAL VARIATIONS**

J R SMITH	MIFAB
-G(pg. 319, 320)	17
-M12(pg. 319, 320)	20
-M13(pg. 319, 320)	1
-M17(pg. 319, 320)	
-M40(pg. 319, 320)	
-M50(pg. 319, 320)	Standard
-M51(pg. 319, 320)	Standard
-M54(pg. 319, 320)	Standard
-M73	"X"
-M74	"X"
-N1	"X"
-N2(pg. 319, 320)	27
-N15(pg. 319, 320)	27
-U(pg. 319, 320)	14
-2	
-95(pg. 319, 320)	
-99(pg. 319, 320)	

LAVATORY, URINAL **AND SINK CARRIERS**

I D CMITH

J R SMI	TH	MIFAB
	(pg. 236)	
0610	(pg. 236)	MC-62
0614	(pg. 226)	MC-31
0615		MC-32
0616	(pg. 226)	MC-31
	(pg. 226)	MC-32
	(pg. 226)	MC-32
0623	(pg. 226)	MC-31
0624	(pg. 226)	MC-32
0628	(pg. 226)	MC-32
0629	(pg. 236)	MC-61-T
0630	(pg. 236)	MC-61-T
0632	.(pg. 224)	MC-25-2-0
0633	.(pg. 224)	MC-24
0634	.(pg. 226)	MC-31
0635	.(pg. 226)	MC-32
0636	.(pg. 226)	MC-31
0637	.(pg. 226)	MC-32
0642	.(pg. 226)	MC-32
0643	.(pg. 226)	MC-31
0644	.(pg. 226)	MC-32
0648	(pg. 220) (pg. 226)	MC 32
0650	.(pg. 226) .(pg. 225)	MC 28 HS
0030	.(pg. 225)	MC-28
0651	.(pg. 225) M	C 20 27 LC
0651Y	(pg. 225) IVI (pg. 225)	MC 20 27
0660	(pg. 225) (pg. 225)	MC-27
0661	(pg. 225) (pg. 225)	M/C 20 27
0672	(pg. 225) (pg. 225)	IVIU-20-21
0672	(pg. 225)	. IVIU-20-ПЗ
0672	(pg. 225)	IVIU-20
0673	(pg. 223)	IVIU-13
0674	(pg. 225)	. IVIU-20-ПЗ
00741	(pg. 225)) MC-26
0675 to 06	09(pg. 223)) IVIU-13
07000	(pg. 231)	IVIU-41-N
07000	(pg. 232) (pg. 232)	MC 41D-N
070000	(py. 232)	IVIU-4 IU-N
0700E	(pg. 231)	IVIU-41-K
0700-27	(pg. 233) 131(pg. 230	IVIU-42-N
07000-27-10	131(pg. 230) IVIU-41
0700D-27-	M31.(pg. 231))IVIU-4 IU
0700-10131	(pg. 230) MC-41
0710	(pg. 229)	IVIU-41-IK
07100	(pg. 231)	MO 40 TD
0710-27	(pg. 232)	IVIU-42-1K
07100-27	(pg. 233)	MO 44D TD
0/ 10DE	(pg. 229)	IVIU-41D-1K
0710E	(pg. 229)	IVIU-41-IK
0720E	.(pg. 235)	IVIU-33
0720E	.(pg. 235)	IVIU-33-E
0722	.(pg. 234) .(pg. 234)	IVIU-51
U/ ZZE	.(µy. ∠34)	IVIU-51-E2
\ C = !4		

0700	(OOF)	MO E4 LD
0723	(pg. 235)	MC-51-LP
0723E	(pg. 235)	MC-51-LP-E2
0727	(pg. 234)	MC-51
0727	(pg. 204)	1010-31
0/2/E	(pg. 234)	MC-51-E2
0728	(pg. 234)	MC-51
0720	(pg. 204)	IVIO 01
0/28E	(pg. 234)	MG-51-E2
0750	(pg. 230)	MC-40
07500	(pg. 230)	MC 40D
U/3UD .	(µy. ∠აບ)	IVIU-4UD
0752	(pg. 230)	MC-40
0752D	(pg. 230)	MC-40D
07020.	(pg. 200)	1010-400
0/60	(pg. 230)	MC-40
0760D	(pg. 230)	MC-40D
07000	(na 000)	MO 40
0/62	(pg. 230)	1010-40
0762D .	(pg. 230) (pg. 235)	MC-40D
0770	(ng 235)	MC 55
0770	(pg. 200)	1010-55
0772	(pg. 235)	MC-55
0780	(pg. 235)	MC-55
0700	(pg. 200)	MAC EE
0782	(pg. 235)	
0790	(pg. 236)	MC-56-LP
0792	(pg. 236)	MC 56 LD
0732	(pg. 200)	IVIO-30-LF
0793	(pg. 234)	MC-51
0800	(pg. 226)	MC-31
0000	(pg. 220)	IVIO 01
	(pg. 226)	
0801D .	(pg. 226)	MC-31D
0805	(pg. 226)	MC 22
0823	(pg. 226)	MC-31-SP
0824	(pg. 226)	MC-31-SP
0021	(pg. 220)	1410 01 01
0825	(pg. 228)	IVIU-38D
0826	(pg. 228)	MC-36
0827	(pg. 228)	MC 38D
0027	(µy. 220)	IVIU-30D
0828	(pg. 228)	MC-36
0830	(pg. 226)	MC-32
0000	(pg. 220)	MAC 22
0831	(pg. 226)	MC-32
0844	(pg. 226)	MC-31
0870	(pg. 230)	MC 40
0070	(pg. 230)	1010-40
0870D .	(pg. 230)	MC-40D
0871	(pg. 230)	MC-40
00710	(pg. 200)	MO 40D
U8/ID.	(pg. 230)	IVIU-4UD
0876	(pg. 230)	MC-40
0913	(pg. 236)	MC-61-T
0010	(pg. 200)	IVIO O1 T
0914	(pg. 236)	IVIG-61-I
0915	(pg. 236) MC	:-62-4-V4-HS
0015 1	.(pg. 236) MC	62 4 1/2 116
0915-1	.(pg. 236) IVIU	-02-4-VZ-HS
0915Y	(pg. 236)	MC-62-4-V2
0015V2	(pg. 236)	MC-62-4-V2
031312	(pg. 200)	1010-02-4-02
0915Y3	(pg. 236)	MC-62-4-V3
0915Y4	(pg. 236)	MC-62-4-V2
001575	(pg. 236)	MC GO 4 V/4
091515	(µy. 230)	1010-02-4-04
0923	(pg. 236)	MC-61-T
N924	(ng 236)	MC-61-T
0027	(pg. 236) (pg. 236) MC	1410 01-1
0925	(py. 236) IVIC	,-0∠-4-V4-HS
0925-1	(pg. 236) MC	-62-4-V2-HS
0925Y	(pg. 236)	MC-62 4 1/2
000510	(pg. 200)	MO 00 4 1/2
U925Y2	(pg. 236)	MC-62-4-V2
0925Y3	(pg. 236)	MC-62-4-V3
0005//4	(pg. 200)	MC 60 4 VO
092314	(pg. 236)	IVIU-02-4-V2
0925Y5	(pg. 236)	MC-62-4-V4
	(10)	

LAVATORY, URINAL AND SINK CARRIEROPTIONAL VARIATIONS

J R SMI	TH	MIFAB
	.(pg. 319, 320	
E	(pg. 319, 320)E2
	(pg. 319, 320	
	(pg. 319, 320	
	(pg. 319, 320	
KW	.(pg. 319, 320	ýG
M11	(pg. 319, 320)B
M30		"X"
M31	(pg. 319, 320) Std.
M40		"X"
M51		"X"
N		"X"
U	(pg. 319, 320))14
	(pg. 319, 320	



ROOF DRAINS

ROOF DRAINS	
J R SMITH MIFAL	
1001(pg. 148)R1810w/A2-P	D
1002(pg. 148)	j
1010-C(pg. 125) R1200-U	J
1010-C-CID (pg. 125) R1200-W-(/
1010-CID(pg. 125) R1200-N 1010-R-C(pg. 125) R1200-B-I	J
1010-R-C-CID(pg. 125).R1200-M-B-1010-10"(pg. 136)	0
DX1010(pg. 132) R1200- 1011(pg. 127) R1200- 1015(pg. 125) R1200-	Z
1011(pg. 127) R1200- 1015(pg. 125) R1200-	G E
1015-C(pg. 126) R1200-EL 1015-C-CID.(pg. 126) R1200-M-EL 1015-R-C(pg. 126) R1200-EL	J
1015-6-61D.(pg. 126) R1200-M-Et 1015-R-C(pg. 126) R1200-Et	J
1013-K-6-610 (00. 120).K1200-191-E	U
1016(pg. 127) R1200-G-U	С
1018(pg. 128) R1200-JC-	Z
1019(pg. 127) R1200-G- 1020(pg. 133) R1200-9 1070(pg. 132) R1200-V	0
1070(pg. 132) R1200-V	V
1080(pg. 130) R1200-	R
1083 (pg. 127) K1200-	r
1084(pg. 127) R1200- 1085(pg. 127) R1200-	F
1088(pg. 127) R1200-F-9	0
1089(pg. 127) R1200-F-9 DX1240(pg. 53) F1320-Y-14-7	7
DX1250(pg. 52) F1300-Y-14-2	Z
1310(pg. 134)	
1330(pg. 120) R1100	0
1340(pg. 124) R1100-9 1409(pg. 129) R1200-PR15-	U J
1410(pg. 129)R1200-P 1415(pg. 129) R1200-PR15-E-	ĸ
1416(pg. 59) F1360-C-Y-14	*
1419(pg. 129) R1200-PR15-J-7 1420(pg. 128) R1200-PR-9	<u>7</u>
1422(pg. 128) R1200-P	R
1425(pg. 129) R1200-PR15-90 1440(pg. 129) R1200-P	R
1450(pg. 135) R1220-P	R
1470(pg. 122) R1100-P	R
1472(pg. 122)′ R1100-PR-4 1480(pg. 122) R1100-PR-9	4
1482 (ng 122) R1100-PR-4-9	N
1510(pg. 142))
1530(pg. 142) R1310	U
1540(pg. 143) R1330 1550)
1560(pg. 142) R1300	T
1570(pg. 142) R1310 ⁻¹ 1580(pg. 142) R1300 ⁻¹	
1610(pg. 144) R1400-1	4
1620(pg. 144)	
1640 (pg. 145) R1410-1	4
1650(pg. 145) R1410 1660(pg. 145) R1410-HN	
1670(pg. 145) R1420-1	4
1690(pg. 145) R1420-HM	VI
1710(pg. 149)	
1730 (pa. 147) R1640	0
1740"X 1748(pg. 149)R1930	."
1750 "X	,,,
1760	n
1785 (pg. 146) R1510	0
1786(pg. 146) R1520 1787(pg. 147) R1530)

ROOF DRAINS OPTIONAL VARIATIONS

	VARIATIONS
J R SN	/ITH MIFAB
	Aluminum body80
-AD	Aluminum domeM-80
	Sediment bucket5
-BB	Bronze body28
-BS	Bird screen83
-BZS	.Bronze standpipe "X"
C	.Inside caulk outlet X
	Underdeck clampU
	Metal domeM
	8" high metal domeM
-CIDG	.Galvanized domeM-12
-CIDSSN	Metal dome withA2-SSD
010	SS mesh screen
	Cast iron standpipe "X"
-UL	.Underdeck clampU
-67	CP dome/grate49 Secondary clamp
	Dome grate20
-D	.NB dome grate20-1
	.PB dome grate20-1
	Ext. wide flange2
	.Fixed extensionV
	All galvanized13
-GG	.SS ballast guard
-HP	Heel proof grateStandard
	Push on outletP
-LD	Less domeLess dome
-M	.Ductile iron grate4
-N	NB grate1
	NB grate1
-NBM	NB veneer over1
	DI grate
	PB grate1
	PB grate1
-PRIVI	PB veneer over1
D	DI grate Sump receiverB
	Rough bronze2RB
	.Rough br. dome81
-NUU	Square top16
	Secured grate
-SH	Securing holes" "X"
-SNB	.NB square top16-1
-SPB	PB square top16-1
-SSM	SS mesh over83
	dome
T	.Threaded outlet T
-U	Vandal proof6
-W	.3/8" weep holes in "X"
	collar
	.Water damW2, -W3, -W4
	2" water damR
	Multiple weir openF
	1 weir openingF1
	. 2 weir openings
-WK3	3 weir openings

YStandard "X".....Contact MIFAB

FLOOR AND AREA DRAINS

FLOOK AND AKEA DRAINS
J R Smith MIFAB
2005(pg. 276) A1-C body* 2005-A(pg. 33) F1100-C*
DX2005-A .(pg. 43). F1100-C-Z*
DX2005-A .(pg. 43). F1100-C-Z* DX2005-B.(pg. 44) F1100-C-ZS*
2005-AV(pg. 33) F1100-C-8*
2005_R (na 30) F1100_C_S*
2005-BS (pg. 40) F1100-C-SD6*
2005-0(pg. 42) F1100-0-X** 2005-D (ng. 38) F1100-C-N7*
2005-B. (pg. 40) F1100-C-SD6* 2005-C(pg. 42) F1100-C-X* 2005-D(pg. 38)F1100-C-N7* 2005-E(pg. 38)F1100-C-N7*
2005-F(pg. 37) F1100-C-FT6*
2005-F37 . (pg. 36) F1100-C-ER7*
2005-F38 .(pg. 36) F1100-C-ER9^
2005-E(pg. 36). F1100-C-R9* 2005-F.37. (pg. 36). F1100-C-ER7* 2005-F38. (pg. 36) F1100-C-ER9* 2005-G(pg. 38) F1100-C-K* 2005-H(pg. 41) F1100-C-VD* 2005-J(pg. 41) F1100-C-X* 2005-K(pg. 43) F1100-C-X\$*
2005-J(pg. 41) F1100-C-T*
2005-K(pg. 43) F1100-C-XS*
2005-N. (pg. 45) F1100-C-RS48* 2005-M. (pg. 39) F1100-C-RS412* 2005-N. (pg. 39) F1100-C-RS412* 2005-P. (pg. 39) F1100-C-RS517* 2005-R. (pg. 39) F1100-C-RS517*
2005-M.(pg. 39) F1100-C-RS412*
2005-N .(pg. 39) F1100-C-RS517*
2005-R .(pg. 39) F1100-C-RS517*
2005-T .(pg. 39) F1100-C-RS517* 2005-V(pg. 34) F1100-C-AS*
2005-V(pg. 34) F1100-C-AS*
2005-W(pg. 34) F1100-C-AS* 2005-Y(pg. 42). F1100-C-WD*
2005-Z(pg. 42). F1100-C-WD* 2005-69 (pg. 42) F1100-C-X* 2010 (pg. 276) A1-X-C body*
2005-69 (pg. 42) F1100-C-X*
2010 (pg. 276) A1-X-C body*
2010-A`(pg. 33) F1100X-C*
DX2010-B(pg. 44).F1100X-C-ZS*
2010-AV .(pg. 33). F1100X-C-8*
DX2010-A(pg. 43) F1100X-C-Z* DX2010-A .(pg. 43) F1100X-C-Z* 2010-AV .(pg. 33). F1100X-C-S* 2010-B(pg. 39) F1100X-C-S* 2010-B .(pg. 40). F1100X-C-SD6*
2010-D .(pg. 38). F1100X-C-N7*
2010-D .(pg. 38). F1100X-C-N7* 2010-E .(pg. 38). F1100X-C-N9* 2010-F .(pg. 37) F1100X-C-F6*
2010-F37 (pg. 37) F1100X-C-FR7*
2010-F37 (pg. 36). F1100X-C-ER7* 2010-F38 (pg. 36). F1100X-C-ER9* 2010-G (pg. 38) F1100X-C-C-K*
2010-G(pg. 36) F1100X-G-N" 2010-H (ng. 41) F1100X-C-VD*
2010-H(pg. 41) F1100X-C-VD* 2010-J(pg. 41) F1100X-C-T*
2010-K.(pg. 43) F1100X-C-XS* 2010-L(pg. 39) F1100X-C-RS-48*
2010-L(pg. 39) F1100X-C-RS-48*
2010-N. (pg. 39) F1100X-C-RS-412*
2010-L(pg. 39). F1100X-C-RS-412* 2010-M.(pg. 39) F1100X-C-RS-412* 2010-P. (pg. 39) F1100X-C-RS-412* 2010-P. (pg. 39) F1100X-C-RS-517*
2010-R. (pg. 39) F1100X-C-RS-517*
2010-V(pg. 34). F1100X-C-AS*
2010-F. (pg. 39) F1100A-C-RS-517* 2010-R. (pg. 39) F1100X-C-RS-517* 2010-T. (pg. 39) F1100X-C-RS-517* 2010-V. (pg. 34). F1100X-C-AS* 2010-W. (pg. 34). F1100X-C-AS*
2010-WF-1A(pg. 51).F1230-WF 2010-Y.(pg. 42). F1100X-C-WD*
2010-Z.(pg. 42). F1100X-C-WD*
DX2010-B.(pg. 44). F1100X-C-ZS*
2015 (pg. 276) A1-2,3,4T-90-C*
2016(pg. 49) F1160 2017(pg. 50) F1170
2020(pg. 48) F1120-C*
2021(pg. 48) F1120-C*
2030(pg. 48)F1120-C* 2031(pg. 48)F1120-C*
2040 (ng 48) F1130C
2041(pg. 48)F1130C
2110(pg. 53) F1320-C-Y-14* 2115(pg. 53) F1320-C-90-Y-14*
2120(pg. 53) F1320-C-Y*
2125 (pg. 53) F1320-C-90-Y*

2130(pg. 56) F1340-Y-Q-14
2131(pg. 54) F1340-Y-14
2135 .(pg. 56). F1340-Y-Q-14-90
2140 (pg. 50). 11540-1-Q-14-50
2140(pg. 56) F1340-Y-Q
2141(pg. 54) F1340-Y
2142(pg. 54) F1340-Y-5
2143(pg. 59) F1360-C-Y*
2145(pg. 54) F1340-Y-90
2147(pg. 54). F1340-Y-14-5-90
2210(pa. 53) F1320-1FB-4
2215(pg. 53) F1320-TFB-90-4
2220(pg. 53) F1320-C-TFB-4*
2225 . (pg. 53) F1320-C-TFB-90-4*
2220 . (pg. 33) 1 1320-0-11 D-30-4
2230(pg. 55) F1340-TFB-4
2231(pg. 55) F1340-TFB-4
2233(pg. 54) F1340-Y-14-5
2235(pg. 54) F1340-Y-5-90
2238(pg. 54) F1340-Y-5-90
2240(pg. 58) F1350-TFB-4
2241(pg. 58) F1350-TFB-4
2242(pg. 58) F1350-5
2243(pg. 58) F1350-5
2245(pg. 58) F1350-5-90
2247(pg. 58) F1350-5-90
2248(pg. 58) F1350-5-90
2250(pg. 59) F1360-C-5*
2253(pg. 60) F1370-C-5*
2255(pg. 00) F1570-0-5
2255(pg. 59) F1360-C-Y-5-90*
22/0(pg. 53) F1320-Y-14
2270(pg. 53) F1320-Y-14 2275(pg. 53) F1320-Y-14-90
2280(pg. 37) F1100-HG8-3 2285(pg. 37) F1100-HG8-90-3
2285(pg. 37) F1100-HG8-90-3
2310(pg. 53) F1320-C-14*
Dx2312 (pg. 53) .F1320-C-14-Z*
DX2312B (pg. 53) F1320-C-14-5-Z*
DAZSIZD (pg. 33) F1320-0-14-3-2
2315(pg. 53). F1320-C-14-90*
2320(pg. 53) F1320-C*
2325 .(pg. 53) F1320-C-90*
2330 .(pg. 54) F1340-C-14*
2331(pg. 54) F1340-C-Q-14*
2335(pg. 54) F1340-14-90
2340(pg. 54) F1340
2040(py. 54) F1040
2341(pg. 54) F1340-Q
2345(pg. 54) F1340-90
2350(pg. 53). F1320-C-TFB-14*
2355 (pg. 53) F1320-C-TFB-14-90*
2360 .(pg. 55). F1340-C-TFB-14*
2365 (pg. 55) F1340-C-TFB-14-90*
2370(pg. 61) F1420-Y-5
2377(pg. 62) F1440
2077(pg. 02) 1 1440
2385(pg. 61) F1420-Y-6
2095(pg. 50)F1170-C
2402(pg. 61) F1420-Y
2410 .(pg. 64) F1450-Y-5-14-26-33
2412(pg. 61) F1420-Y-5-14
2414(pg. 62) F1440-5-14-6
2414(bu, 021 1440-0-14-0
2415(pg. 64) F1450-Y-5-14-6
2415(pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90
2415(pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90 2425(pg. 64) F1450-5-26-90
2415(pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90 2425(pg. 64) F1450-5-26-90 2450(pg. 65) F1460-5
2415(pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90 2425(pg. 64) F1450-5-26-90 2450(pg. 65) F1460-5 2452(pg. 65)
2415(pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90 2425(pg. 64) F1450-5-26-90 2450(pg. 65) F1460-5 2452(pg. 65) F1460-5 2455(pg. 70) F1560
2415(pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90 2425(pg. 64) F1450-5-26-90 2450(pg. 65) F1460-5 2452(pg. 65) F1460-5 2455(pg. 70) F1560 2470(pg. 66) F1480-4
2415 (pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90 2425 (pg. 64) F1450-5-26-90 2450 (pg. 65) F1460-5 2452 (pg. 65) F1460-5 2455 (pg. 70) F1560 2470 (pg. 66) F1480-4 2473 (pg. 66) F1480-FL-4
2415(pg. 64) F1450-Y-5-14-6 2420 (pg. 64) F1450-5-26-33-90 2425(pg. 64) F1450-5-26-90 2450(pg. 65) F1460-5 2452(pg. 65) F1460-5 2455(pg. 70) F1560 2470(pg. 66) F1480-4

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit $\ensuremath{\textit{www.mifab.com}}$ for the most recent product information.



2479 (22 62) 51440 / 5 14 00
2478 . (pg. 62). F1440-Y-5-14-90 2484 (pg. 194) MI-0S
2484(pg. 194) MI-OS 2488(pg. 65) F1460-4-5
2490(pg. 54) F1330C-33
2495(pg. 54) F1330C
2500(pg. 74) F1650
2501(pg. 74) F1650-A
2502(pg. 74) F1650 2505(pg. 74) F1650-G
2505(pg. 74) F1650-G 2506(pg. 74) F1650-G-A
2507(pg. 74) F1650-G
2508 (pg. 74) F1660
2510(pg. 49) F1140C
2515(pg. 49) F1140C
2530(pg. 49) F1140C DX2565 (pg. 53) F1320-Y-Z-5-14
DX2566 (pg. 53) F1320-1-2-5-14
DX2566 (pg. 54) F1340-Y-Z-5-14 DX2568 (pg. 43) F1100-ZX6-1
2570 "X"
2585(pg. 75) F1760-FL
2586(pg. 75) F1760-FL
2586(pg. 75) F1760-FL 2589(pg. 63). F1440-C-Y-5-Q* 2614(pg. 68) F1530
2624 (pg. 69) F1550
2624(pg. 69) F1550 2630(pg. 78) F1860-16-4-5
2631(pg. 78) F1860-5 2632(pg. 78) F1860-16-4
2632(pg. 78) F1860-16-4
2633(pg. 78)
2641 (ng 263) MI-860
2641(pg. 263)MI-860 2643
2645(pg. 263) MI-830
2646(pg. 263) MI-850
2648(pg. 263) MI-860
2645(pg. 263)
2652(pg. 263) MI-800 2670(pg. 144) R1400-HM-83 2671(pg. 144) R1400-HM-83 2673(pg. 145) R1410-HM-83
2670(pg. 144) [°] R1400-HM-83
2671(pg. 144) R1400-HM-83
2673(pg. 145) R1410-HM-83
2674(pg. 145) R1420-HM-83 2675(pg. 76) F1820
2680(pg.77) F1830-P
2680(pg. 77)
2690(pg. 58) F1350-Y-36

FLOOR AND AREA DRAIN OPTIONAL VARIATIONS

11000 1	7 LI		NOL	
-DNB .Dom -DNP .Dom -EExten -F4" ro FBSFlat I -FBSSeco	e gratision	e, NB e, PB n straine n stra	20-120-11574 r21 r21 r21 r13	
-HC4 .4" Hi	gh co	llar	"X"	
-HPHeel	proof	grate	Standard	
I Push	ຸດກຸດເ	ıtlet	P	
-IWH Less	weer	holes	"X"	
-M Duct	ile iro	n arate	-4	
-MGB Duct	ile iror	n bucket	/grate X"	
-NHigh	auxili	arv inlet	-44	
-NHLow	auxilia	arv inlet	44	
-NLAuxil	iarv in	let	44	
-N15 .1 1/2	e aux.	Inlet	44T	
-N22" au	x. Inle	t	44	
D Tron	ماممم	rimar ta	n 7	
-P0501/2"	trap s	eal prim.	. Tap7	
-P0753/4"	trap s	eal prim.	. Tap . "X"	
-RMem	brane	clamp	C	
-SSqua	re top		16	
-SEC .Secu	red gr	ate	6	
-SCSecu	rea co	over	b "V"	
-5051110	OUII CU	otod oov	A	
-303011u	110JG nar ar	albu buv ata	′ει ∧ "Y"	
-SGSeco	ndarv	strainer	········ ^ · -21	
-SHSecu	rina h	oles in f	lan "X"	
-SNB .Squa	re tor	. NB	16-1	
-SPB .Squa	re ton	PB	16-1	
-SSB .SS s	edime	nt bucke	et5-3	
-SWSpan	ner w	rench	H-1042	
TThre	aded o	outlet	T	
-UVano	dal pro	of	-6	
-VBack	water	valve	8	
-XExter	nsion		15	
-XPClosu	ire plu	ıg	34	
-XPClosu Y No h	ub ou	tĪet	Standard	
-XPClosu	ire plu	g	34	
-94Push	on ot	ītlet	P	
	auida		rad ta	

Note: This guide is prepared to assist in determining the MIFAB Catalog number which is similar to the J R Smith number referred to. Due to the simplified modular design of MIFAB products, this index indicates the product which is closest in design, based on function: eg. Free Area, Loading Rating, Depth, Material etc.

* Includes "-C"membrane clamp in areas with waterproof Membrane. As a recommended alternate,

use F1100 in non membrane

"X".....Contact MIFAB

2000 SERIES FLOOR DRAIN ADJUSTABLE STRAINER VARIATIONS

-A-05(pg. 46).....-5-1

MIFAB

J R SMITH

/ CO	(µy. 40)	5-1
-A-06	(pg. 46)	6-1
-A-07		
-A-08	(ng 46)	_8_1
Λ-00	(pg. 40)	-0-1
-A-09	(pg. 46)	10-1
-A-10	(pg. 46)	10-1
-AV-05	(pg. 46)	5-1-8
-AV-06	(ng. 46)	-6-1-8
AV 00	(pg. 40)	710
-AV-07	(pg. 40)	/-1-8
-AV-08	(pg. 46)	8-1-8
-B-05	(pa. 47)	S5-1
-B-06	(ng 47)	-\$6-1
D 00	(pg. +1)	00 1
-B-07	(pg. 47)	58-1
-B-08	(pg. 47)	S8-1
-B-09	(pa. 47)	S10-1
-B-10	(ng 47)	-S10-1
D.C.	(pg. 17)	CD6 2
-BS	(pg. 47)	500-3
-C-05		
-C-06	(pg. 47)	X6-1
-C-08	(ng 47)	_X8_1
0 10	(pg. 17)	V10 0
-C-10	(µg. 47)	۸ IU-3
-D	(pg. 46)	N7
-DXA	(pa. 47)	Z5-1
-DXB	(ng 47)	-75-1
D/D	(pg. +1)	20 I
- <u>E</u>	(pg. 46)	IN9
-F	(pg. 46)	FT6-1
-F10	(pg. 46)	EF
-F11	(ng. 46)	_FF
F10	(pg. +0)	LI
-F12	(pg. 47)	5-F4
-F13	(pg. 46)	RS48-F4
-F14	(pa. 46)	RS412-F4
-F15	(ng 46)	RS412-F4
E16	(pg. 40)	DCE17 E4
-F16	(pg. 46)	40017-64
	(10)	5051551
-F17	(pg. 46)	RS517-F4
-F17	(pg. 46)	RS517-F4
-F17	(pg. 46) (pg. 46)	RS517-F4 RS517-F4
-F17 -F18 -F19	(pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8
-F17 -F18 -F19 -F20	(pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6
-F17 -F18 -F19 -F20	(pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7
-F17 -F18 -F19 -F20	(pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7
-F17 -F18 -F19 -F20 -F21	(pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8
-F17 -F18 -F19 -F20 -F21 -F22	(pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8
-F17 -F18 -F19 -F20 -F21 -F22 -F23 -F24	(pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10
-F17 -F18 -F19 -F20 -F21 -F22 -F23 -F24 -F25	(pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-10
-F17 -F18 -F19 -F20 -F21 -F22 -F23 -F24 -F25	(pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-86
-F17 -F18 -F19 -F20 -F21 -F22 -F23 -F24 -F25	(pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-86
-F17F18F19F20F21F22F23F24F25F26F27	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-10 EG-86 EG-88 EG-88
-F17F18F19F20F21F22F23F24F25F26F27F28	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-S6 EG-S8 EG-S8
-F17F18F19F20F21F22F23F24F25F26F26F27F28	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-S6 EG-S8 EG-S8 EG-S8 EG-S10 EG-S10
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-10 EG-S6 EG-S8 EG-S8 EG-S10 EG-S10 EG-S10
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-10 EG-S6 EG-S8 EG-S8 EG-S10 EG-S10 EG-S10
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-S6 EG-S8 EG-S8 EG-S10 EG-RS48 EG-RS48 EG-RS48
-F17F18F19F20F21F22F23F24F25F26F26F27F28F29F30F31F32	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-10 EG-S6 EG-S8 EG-S8 EG-S10 EG-S10 EG-RS48 EG-RS412 EG-RS412
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-10 EG-S10 EG-S10 EG-S10 EG-S10 EG-S10 EG-RS48 EG-RS412 EG-RS412 EG-RS412
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-80 EG-S10 EG-S10 EG-S10 EG-S10 EG-RS48 EG-RS412 EG-RS412 EG-RS412 EG-RS412 EG-RS417 EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-80 EG-S10 EG-S10 EG-S10 EG-S10 EG-RS48 EG-RS412 EG-RS412 EG-RS412 EG-RS412 EG-RS417 EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34F35	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-8 EG-10 EG-88 EG-810 EG-810 EG-RS412 EG-RS412 EG-RS517 EG-RS517 EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F33F34F35F37	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-10 EG-S8 EG-S8 EG-S10 EG-RS412 EG-RS412 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34F34F34F34F34	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-S6 EG-S8 EG-S10 EG-RS412 EG-RS412 EG-RS412 EG-RS517 EG-RS517 EG-RS517 EG-RS517 EG-RS517 EG-RS517 EG-RS517 EG-RS517 EG-RS517 EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34F35F37F37F38F37	(pg. 46) (pg. 46)	RS517-F4 RS517-F4 EG-8 EG-6 EG-7 EG-10 EG-S6 EG-S8 EG-S10 EG-S10 EG-RS412 EG-RS412 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F30F31F32F33F34F35F37F38F37F38F38F38F39F31	(pg. 46)(pg. 47)(pg. 47)(p	RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-S8EG-S8EG-S10EG-RS412EG-RS412EG-RS412EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F30F31F32F33F34F35F37F38F37F38F38F38F39F31	(pg. 46)(pg. 47)(pg. 47)(p	RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-S8EG-S8EG-S10EG-RS412EG-RS412EG-RS412EG-RS517
-F17F18F19F20F21F22F23F24F25F26F27F28F30F31F32F33F34F35F37F38F37F38F38F38F40	(pg. 46)(pg. 47)(pg. 47)(pg. 47)(pg. 47)(pg. 46)(pg. 47)(pg. 47)(pg. 46)(pg. 46)(pg. 47)(pg. 46)(pg. 46)(pg. 46)(pg. 47)(pg. 47)(pg. 46)(pg. 47)(pg. 47)(pg. 47)(pg. 47)(pg. 46)(pg. 46)	RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-S6EG-S8EG-S10EG-S10EG-RS412EG-RS412EG-RS412 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -EG-RS517 -ER9 -W -W -W
-F17F18F19F20F21F22F23F24F25F26F27F28F30F31F32F33F34F35F37F38F38F38F38F40F41GH	(pg. 46)(pg. 47)(pg. 47)(pg. 47)(pg. 47)(pg. 47)(pg. 46)(pg. 47)(pg. 46)(pg. 47)(pg. 46)(pg. 47)(pg. 47)(pg. 46)(pg. 47)(pg. 46)(pg. 47)(pg. 46)(pg. 47)(pg. 46)(pg. 47)(pg. 46)(pg. 47)(pg. 46)(pg. 47)(pg. 47)(pg. 46)(pg. 47)(pg. 47)(pg. 46)(pg. 46)(pg. 46)	RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-S6EG-S8EG-S10EG-S10EG-RS412EG-RS412EG-RS412EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517EG-RS517ER9W
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34F35F37F38F37F38F40F41GHJ	(pg. 46)(pg. 47)(pg. 47)	RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-S6EG-S8EG-S10EG-S10EG-S44EG-RS412EG-RS412EG-RS412EG-RS517EG-RS
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34F35F37F38F37F38F40F41GHJ	(pg. 46)(pg. 47)(pg. 47)	RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-S6EG-S8EG-S10EG-S10EG-S44EG-RS412EG-RS412EG-RS412EG-RS517EG-RS
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34F35F37F38F41GHJK-05	(pg. 46)(pg. 47)(pg. 47)(pg	RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-S6EG-S8EG-S8EG-S10EG-S10EG-S442EG-RS412EG-RS412 -EG-RS517 -EG-RS51
-F17F18F19F20F21F22F23F24F25F26F27F28F30F31F31F31F32F33F34F35F37F38F40F41GHJK-05K-06	(pg. 46)(pg. 47)(pg. 47)	RS517-F4RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-10EG-88EG-S8EG-S10EG-S10EG-S10EG-S10EG-S412EG-RS412EG-RS412 -EG-RS517 -EG-RS517 -ER7ER7ER9WVD5-3K5-1XS6-1
-F17F18F19F20F21F22F23F24F25F26F27F28F30F31F31F31F32F33F34F35F37F38F40F41GHJK-05K-06K-07	(pg. 46)(pg. 47)(pg. 47)(pg	RS517-F4RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-10EG-88EG-S8EG-S10EG-S10EG-S10EG-S10EG-S17EG-RS412 -EG-RS412 -EG-RS517 -EG-RS517 -ER7ER7ER9WVD5-3K5-1VD5-3XS6-1XS8-1
-F17F18F19F20F21F22F23F24F25F26F27F28F29F30F31F32F33F34F35F37F38F40F41GHJK-05K-06K-07K-08	(pg. 46)(pg. 47)(pg. 47)(pg	RS517-F4RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-8EG-88EG-88EG-810EG-8412EG-RS412 -EG-RS417 -EG-RS517 -EG-RS51
-F17F18F19F20F21F22F23F24F25F26F27F28F30F31F31F31F32F33F34F35F37F38F40F41GHJK-05K-06K-07	(pg. 46)(pg. 47)(pg. 47)(pg	RS517-F4RS517-F4RS517-F4EG-8EG-6EG-7EG-8EG-10EG-8EG-88EG-88EG-810EG-8412EG-RS412 -EG-RS417 -EG-RS517 -EG-RS51

-M......pg. 46)..... -RS412-1

-N(pg. 46)..... -RS412-1

-P	(pg. 46)	RS517-3
-R	(pg. 46)	RS517-3
-T	(pg. 46)	RS517-3
-V	.(pg. 46)	AS-1
	(pg. 46)	
-X	(pg. 46)	DD-50
-Y	.(pg. 47)	WD-3
	.(pg. 47)	
-69	(pg. 47)	X6-1
3580	(pg. 46)	F4
	(pg. 46)	
	(pg. 46)	
3591	(pg. 46)	G-1

TRAP SEAL PRIMERS AND SPECIALTIES

		MIFAB
		MI-600-50
		"X"
		"X"
		MI-750
		MI-TSP-2
		MI-TSP-1
		MI-CAG-T
		MI-CAG-T
3955	.(pg. 262)	MI-CAG-NH

TRENCH DRAINS

TRENCH D	RAINS
J R SMITH	MIFAB
2710(pg. 82).	T1350-FL-4
2710-DH(pg. 82).	T1350-FL-4
2710-DH(pg. 82). 2711(pg. 82).	T1350-FI -4
2712 (ng 82)	T1350-FI 2-4
2712(pg. 82) 2713(pg. 82) 2714(pg. 82)	T1350-FI 3-4
271/ (pg. 02)	T1350-FL0-4
2715(pg. 82).	T1250-124-4
2716(pg. 82).	T1350-FL6-4
2717(pg. 82).	T1050-FL0-4
2717(pg. 82).	T1250-FL7-4
2/18(pg. 82).	T1350-FL7-4 T1350-FL8-4
Z/ 19(DQ, 8Z).	I I 33U-FL9-4
2720(pg. 82).	T1350-FL10-4
2810(pg. 82).	T1320-FL-4
2811(pg. 82).	T1320-FL-4
2812(pg. 82).	T1320-FL2-4 T1320-FL3-4
2813 (pg. 82).	T1320-FL3-4
2014(pq. 02).	1132U-FL4-4
2816(pg. 82).	T1320-FL6-4 T1320-FL6-4 T1320-FL7-4 T1320-FL8-4 T1320-FL9-4 T1320-FL10-4
2817(pg. 82).	T1320-FL7-4
2818(pg. 82).	T1320-FI 8-4
2819(pg. 82).	T1320-FI 9-4
2820(pg. 82).	T1320-FI 10-4
2900(pg. 81).	11020 1210 4 T1000-3
2901(pg. 81).	T1000-3
2901	T1000-1-3
2002 (pg. 01)	T1000-12-3
2000(pg. 01)	T1000-13-3
2904(pg. 01)	T1000-F4-3
2900(pg. 01)	11000-F3-3
2910(pg. 81)	T1150-4
2911(pg. 81)	11150-F-4
2912(pg. 81).	T1150-F2-4
2920(pg. 81)	T1200-F-4
2922(pg. 81).	T1200-F2-4
2923(bg. 81).	11200-F3-4
2924(pg. 81).	T1200-F4-4
2924(pg. 81) 2940(pg. 81)	T1200-4
2941(pg. 81)	11200-F-4
2942(pg. 81). 2950(pg. 81).	T1200-F2-4
2950(pg. 81).	T1200-F2-4
2952 (pg. 81)	T1200-F2-4
2953 (pg. 81)	T1200-F3-4
2954 (ng 81)	T1200-F4-4
2970 (ng 81)	T1200-4
2950	T1200-4
2072 (ng Q1)	T1200-1-4
2972(pg. 81) 2980(pg. 81)	T1200-1-4-0
2000(pg. 01)	1200-F-4
2982(pg. 81). 2983(pg. 81). 2984(pg. 81).	T1200-12-4
2003(pg. 81).	1120U-F3-4
∠9ŏ4(pg. 81).	11200-r4-4

Design and dimensions are subject to modification. Prices do not include applicable taxes.



TRENCH DRAIN OPTIONAL **VARIATIONS**

J R SMITH MIFAB
-ARIO ARC inside and out11
CInside caulk outlet X
-CFlashing clampC
-DBSCICI dome bottom strainer20
-DHDeep no hub outlet "X"
-FAnchor flange
-F-CAnchor flange withFLC
membrane clamp
-GAll galvanized13
-HPHeel proofStandard
-MStandard
-NBStainless steel veneer3
-PBStainless steel veneer3
-SGSlotted cast iron grateStandard
-TThreaded outlet T
-UVandal proof6
-VBackwater valve8
-VCIBackwater valve8
-VGBackwater valve8
YStandard

INDIRECT WASTE DRAINS

INDIRECT WASTE DRAINS
J R SMITH MIFAB
3000(pg. 106) FS1920-FL
to 3004(pg. 106) FS1920-FL
to 3004(pg. 106) FS1920-FL 3005(pg. 106) FS1920-5 to
to 3009(pg. 106) FS1920-FL-5
DX3001
to DX3004 (pg. 106) FS1920-FL
DX3005
to DX3009 (pg. 106) FS1920-FL
3001NB(pg. 106) FS1920-FL-5-Z
to 3004NB (pg. 106) FS1920-FL-1
3005NB(pg. 106) FS1920-FL-5-1 to 3009NB (pg. 106) FS1920-FL-5-1
3020(pg. 38) F1100-C-N9-1-11*
3020-F.(pg. 38) F1100-C-N9-1-11*
3021 .(pg. 38). F1100-C-N9-1-5-11*
3021-F (pg. 38). F1100-C-N9-1-5-11*
DX3027 (pg. 102) FS1750-5-1-Z
3030(pg. 103) FS1760-1
3030-F(pg. 103) FS1760-FL-1
3031(pg. 103) FS1760-5-1
3031-F(pg. 103) FS1760-FL-5-1
3040(pg. 102) FS1750-1
3040-F(pg. 102) FS1750-FL-1
3041(pg. 102) FS1750-5-1
3041-F(pg. 102) FS1750-FL-5-1
3060(pg. 103) FS1760-1
3060-F(pg. 103) FS1760-FL-1 3061(pg. 103) FS1760-5-1
3001(pg. 103) F31/00-3-1
3061-F(pg. 103)FS1760-FL-5-1 Dx3068(pg. 103) FS1760-5-1-Z
3100(pg. 97) FS1520-FL-1
3101(pg. 97) FS1520-FL-5-1
3110(pg. 99) FS1720-FL-1
3111(pg. 99) FS1720-FL-5-1
3120(pg. 100) FS1730-FL-1
3121(pg. 100) FS1730-FL-5-1
3130(pg. 101) FS1740-FL-1
3131(pg. 102) FS1750-FL-5-1
3140(pg. 99) FS1720-FL-1
3141(pg. 99) FS1720-FL-5-1
3150(pg. 100) FS1730-FL-1
3151(pg. 100) FS1730-FL-5-1
3160(pg. 101) FS1740-FL-1 3200(pg. 105) FS1790-FL-1
3200(pg. 105) F31790-FL-1

3250(pg. 105)	FS1790-FL-1
3251(pg. 105)	FS1790-FL-1-5
3300(pg. 98)	FS1530-FL-1
3301(pg. 98)	FS1530-FI-5-1
3320 (pg. 102) FS	31750-FL-11-21-1
3321 (pg. 102) FS1	750-FL-5-11-21-1
3365(pg. 36)	F1100-C-ER9*
3370(pg. 58)	F1350-Y-36
3371(pg. 58)	F1350-Y-36
3380(pg. 74)	F1670-5
3380(pg. 74) 3385(pg. 74)	F1670-5
3400(pg. 103)	FS1760-F
3401(pg. 103)	FS1760-FL-5
3402	"X"
3402(pg. 97)	FS1520-FL
3411(pg. 97)	FS1520-FL-5
3412	"X"
3420(pg. 99)	FS1720-FL
3421(pg. 99)	FS1720-FL-5
3430(pg. 100)	FS1730-FL
3431(pg. 100)	FS1730-FL-5
3440(pg. 101)	FS1740-FL
3441(pg. 101)	FS1740-FL-5
3450(pg. 105)	FS1790-FL-1
3451(pg. 105)	FS1790-FL-5-1
3460(pg. 98)	FS1530-FL
3461(pg. 98)	FS1530-FL-5
3470(pg. 102)	FS1750-FL-11-21
3471(pg. 102) FS	S1750-FL-5-11-21
3482(pg. 105) 3483(pg. 105)	FS1790-FL
3483(pg. 105)	FS1790-FL-5
3510(pg. 35)	F1100-C-EF*
3510(pg. 35) 3510-A(pg. 35)	F1100-C-EF-1 [*]
3510-S(pg. 35)	. F1100-C-S-EF-1 [*]
3510-F11(pg. 35)	F1100-C-EF*
3515(pg. 35)	. F1100-C-EF-90*
3515-F11(pg. 35)	. F1100-C-EF-90*
3520(pg. 48)	F1120-C-EF*
3520-F11(pg. 48) 3521(pg. 48)	F1120-C-EF*
3521(pg. 48) F1120-C-EF-NH ²
3521-F11(pg. 48) F1120-C-EF-NH ³
3530(pg. 48)	F1120-C-EF*
3530-F11(pg. 48)	F1120-C-EF*
3531(pg. 48)	. F1120-C-EF-NH ²
3531-F11(pg. 48)	. F1120-C-EF-NH
3540(pg. 48)	
3540-F11(pg. 48)	F1130C-EF
3541(pg. 48)	F1130C-EI
3541-F11(pg. 48)	F1130C-EF
3580(pg. 46)	F4
3581(pg. 46)	Ft
3590(pg. 46)	
3591(pg. 46)	U
3610(pg. 53)	F132U-U-F4^
3615(pg. 54)	+ 134U-U-+4*
3620(pg. 53)	. r1320-U-90-F4*
3625(pg. 54)	. r1340-G-90-F4*
3650(pg. 53)	F1320-U-G*
3655(pg. 54)	F134U-U-G*
3660(pg. 53)	r1320-U-90-G'
3665(pg. 54)	r134U-U-9U-G²
3710(pg. 53) I	-13∠U-U-Y-14-F4*

* If no membrane clamp is required, delete suffix "-C" for cost savings

"X".....Contact MIFAB Design and dimensions are subject to modification. Prices do not include applicable taxes.

INDIRECT WASTE DRAINS CON'T

	MIFAB
3715(pg. 56). F1340-C	-Y-Q-14-F4*
3720 .(pg. 53) F1320-C-Y	/-14-90-F4*
3725 .(pg. 54) F1340-C-\	/-14-90-F4*
3750 .(pg. 53) F1320-C	C-Y-Q-14-G*
3755 .(pg. 56) F1340-C	C-Y-Q-14-G*
3760 .(pg. 53). F1320-C-	
3765 .(pg. 54). F1340-C-	
3811(pg. 75)	
3812(pg. 75)	
3813(pg. 75)	F1790-1
3814(pg. 75)	F1790-49
3821(pg. 261)	
3822(pg. 261)	MI-940
3823(pg. 261)	
3824(pg. 261)	
3950(pg. 262)	
3951(pg. 262)	
3955(pg. 262)	
3960(pg. 123)	
3970(pg. 135)	
3980(pg. 130)	R1200-RS
SQ-2-1717(pg. 62).	
SQ-4-1753-D(pg. 33).	
oa : ::00 b(pg. 00).	

INDIRECT WASTE DRAIN OPTIONAL VARIATIONS

J R SMITH	MIFAB
-B/MSS mesh lined bucket	"X"
CInside caulk outlet	Х
-CMembrane clamp	C
-CILacquered cast iron	
-DBS.SS dome bottom strain	ner"X"
-FBS .Secondary strainer	21
-GAll galvanized	13
-LPush on outlet	Р
-LGLess grate	21
-LSH.Less seepage holes	
-PTSP connection	7
TThreaded outlet	Т
-UVandal proof	6
YNo hub outlet	Standard
-10Less NB rim and grate	e"X"
-11Less grate with NB/SS	3 rim22
-12Half grate	150
-13Three quarter grate	175
-14Grate w/2-1/2" center	hole"X"
-21Grate w/4" funnel	F4
-22Grate w/6" funnel	F6
-25Grate w/4" x 9" funnel	G
-26Grate w/6" x 3" x 1" fu	innelJ
-316 .316 Stainless Steel	29

CLEANOUTS

J R SMITH	MIFAB
4000(pg. 156)	C1100-R
4020(pg. 156)	C1100-R
4020-F(pg. 156)	
4020-FC(pg. 156)	C1100-C-R*
4020S(pg. 156)	C1100-R
4021S(pg. 156)	C1100-F
4022(pg. 156)	C1100-R
4023S(pg. 156)	C1100-F
4024S(pg. 156)	C1100-F
4025(pg. 156)	
4025C(pg. 156)	C1100X-F
4026C(pg. 156)	C1100X-R
4028C(pg. 156)	C1100X-F

4031 4031-F 4031-FC. 4031L 4032L 4033 4034L	(pg	156)	C1100X-R C1100P-R C1100P-R C1100P-R C1100P-R C1100P-R C1100P-R C1100P-R C1100-T C1100-T C1100-T C1100-T C1100-TS C1100-UR C1100-UR C1100-UR C1100-UR
4236 to 4 4250 to 4 4280 to 4 4313 4318 4338 DX4343 4401 4420 4421 4422 4433 4435 4436 4437 4441 4450 4471 4471	1248L 1294L 1294L (pg. 15. (pg. 16. (pg. 16. (pg. 17.	(pg. 160) (pg. 166) (pg. 166) (pg. 166) (pg. 166) (pg. 166) (pg. 166) (pg. 167) (pg. 168) (pg. 168) (pg. 169) (pg. 1	. C1100-XR) C1300-MF w/ C1230
4511 4512 4530 4531 4532 4550 4551 4553	(pg. 1 (pg. 1 (pg. 1 (pg. 1 (pg. 1 (pg. 1 (pg. 1 (pg. 1	72) 73) 72) 73) 66) 73)	
4558 4710 4715	(pg. 1 (pg. 1 (pg. 1 (pg. 1	73) 167)	C1460-S C1460-RD C1400-RD C1400-RD

MITH	MIFAB
(pg. 156)	C1100-R
(pg. 156)	C1100-R
(pg. 156)	C1100-R
C(pg. 156) C11	00-C-R*
(pg. 156)	C1100-R
(pg. 156)	
(pg. 156)	C1100-R
(pg. 156) C	1100X-R
(pg. 156) C	1100X-R
(pg. 156) C	

4910(pg. 176)..... FHA 4915(pg. 176)......FHA 4930(pg. 165)......C1300-S 4940(pg. 176)..... FHA

4725(pg. 166).......... C1400-R 4730(pg. 166)......C1400-S 4735(pg. 166)......C1400-S

4740 (pg. 176) MI-VB 4745 (pg. 176) MI-VB-SM 4760 to 4762 (pg. 176) UA 4765 to 4767 (pg. 176) MDW 4810 (pg. 165) C1300-R

4890(pg. 164)...... C1230 DX4890(pg. 164)..... C1230-WF

Visit www.mifab.com for the most recent product information.

3201(pg. 105)...... FS1790-FL-1-5



CLEANOUT OPTIONAL VARIATIONS

LD CMITH	MILAD
J R SMITH	MIFAB
CInside caulk outlet	
-DXExtend. wide flange	Z
-FAnchor flange	Standard
-F-C .Anchor flange	
w/membrane clamp .	C
-GAll galvanized	
-IPIron plug	
LPush on outlet	
-LSS6" long center screw .	
-MDuctile iron	
-RTRecessed for tile	
-SECSecured cover	6
-SNBSq.top, Nickel bronze	1
-SPBSqu.op, Polished bror	nze1
-SWSpanner wrench	H-1042
TThreaded outlet	
-UVandal proof	
•	
-XCarpet clamping type.	
-YCarpet marker	
YNo hub outlet	.Standard

WATER HAMMER **ARRESTORS**

J R SMITH	MIFAE
5000(pg. 274)	WHB
5005(pg. 274)	WHB- <i>A</i>
5010(pg. 274)	WHB-E
5020(pg. 274)	WHB-C
5030(pg. 274)	WHB-D
5040(pg. 274)	WHB-E
5050(pg. 274)	WHB-F
5200(pg. 274)	MWH
5205(pg. 274)	MWH-A
5210(pg. 274)	MWH-B
5220(pg. 274)	MWH-C
5230(pg. 274)	MWH-D
5240(pg. 274)	MWH-E
5250(pg. 274)	MWH-F

HYDRANTS

J R SMITH MIFAE
5509-QT(pg. 247) MHY-26
5509-QT-SAP(pg. 250)MHY-55
5519(pg. 247) MHY-26-52
5560-QT(pg. 249) MHY-45
5609-QT(pg. 247) MHY-16
5609-QT-SAP(pg. 250)MHY-50
5619(pg. 247) MHY-16-52
5810(pg. 253) MHY-60-3/4
5810-F .(pg. 253).MHY-60-FLM-3/4"
5812(pg. 253) MHY-61- 1-1/4"
5813(pg. 253) MHY-61-1-1/2"
5814(pg. 253) MHY-61-2
5909(pg. 254) MHY-68
5910(pg. 254) MHY-65-3/4
5911(pg. 254) MHY-65-1
5912(pg. 254) MHY-66-1-1/4"
5913(pg. 254) MHY-66-1-1/2"
5914(pg. 254) MHY-66-2
5950 (pg. 253)MHY-60-HSB-3/4
5951(pg. 253) MHY-60-HSB-1
"X"Contact MIFAB

HYDRANT OPTIONAL VARIATIONS

J R SMITH	MIFAB
-1" Hose conn(pg. 319, 3	20)0
-CI(pg. 319, 320)	50
-CL(pg. 319, 320)	
-CP(pg. 319, 320)	
-E(pg. 319, 320)	
-E1(pg. 319, 320)	
-HC1(pg. 319, 320)	
-IC1(pg. 319, 320)	
-MF1	
-NB(pg. 319, 320)	
-PB(pg. 319, 320)	
-RB(pg. 319, 320)	
-SE(pg. 319, 320)	
-SE1(pg. 319, 320)	
-SS(pg. 319, 320)	
-SS1	
-W(pg. 319, 320)	
-WC(pg. 319, 320)	
-WH(pg. 319, 320)	
-vvii(pg. 319, 320)	12

BACKWATER VALVES AND TRAPS

J R SMITH	MIFAB
7000(pg. 258)	BV1210
7012(pg. 257)	BV1000
7022(pg. 257)	BV1000
7070(pg. 259)	BV1280
7080(pg. 258)	BV1260
7097(pg. 259)	
7140	
7150(pg. 260)	
7220(pg. 261)	MI-950
7221(pg. 261)	
7222(pg. 261)	MI-950
7230(pg. 175)	
7231(pg. 175)	
7232(pg. 175)	

INTERCEPTORS

J R SMITH	MIFAB
8000(pg. 187)	MI-G
8004(pg. 187)	
8007(pg. 187)	MI-G-1
8010(pg. 187)	
8015(pg. 187)	
8020(pg. 187)	
8025(pg. 187)	
8035(pg. 187)	
8050(pg. 187)	
8000GT(pg. 190)	
8000GTX(pg. 190)	
8100(pg. 187)	
8100GT(pg. 187) M	
8100GTX(pg. 187) N 8120(pg. 187)	
8135(pg. 187)	
8150(pg. 187)	
8200(pg. 187)	
8300(pg. 187)MI-	
8300GT(pg. 190)	
(Pg: 100)	w/MI-CS
8400(pg. 188)	,

INTERCEPTORS CON'T

J R SMITH	MIFAB
8400E(pg. 188)	XL-MI-G-C
8510(pg. 192)	MI-0
8510E(pg. 192)	
8560(pg. 192)	
8560E(pg. 192)	
0500L(pg. 192)	IVII -00
8599(pg. 193)	IVII-U-ПU
8710(pg. 194)	MI-SOLID-S
8714(pg. 194)	MI-SOLID-M
8715(pg. 194)	
8730(pg. 194) I	
8750(pg. 194)	
8760(pg. 194)	
8790	
8795	
8811(pg. 196)	MI-SD
8817(pg. 196)	MI-SAND
8905(pg. 199)	
8910(pg. 198)	
8925(pg. 194)	
8930(pg. 70)	
8970	

INTERCEPTOR OPTIONAL VARIATIONS

J R SMITH	MIFAB
-AC(pg. 319, 320)	
-ACC(pg. 319, 320)	AL
-ARC(pg. 319, 320)	. Standard
-ARI(pg. 319, 320)	Standard
-ARIO(pg. 319, 320)	. Standard
-ARO(pg. 319, 320)	Standard
-B(pg. 319, 320)	SB
-E(pg. 319, 320)	
-F(pg. 319, 320)	
-F-C(pg. 319, 320)	
-HC(pg. 319, 320)	HD
-QC(pg. 319, 320)	
-SS(pg. 319, 320)	
-TC(pg. 319, 320)	
-U(pg. 319, 320)	
-Y(pg. 319, 320)	
DI grate(pg. 319, 320)	
No Hub(pg. 319, 320)	

SPECIALTIES

JRS	SMITH		MIFAB
9005.	(pg. 2	62) I	VII-GRILL
9010.	(pg. 2	62) [VII-GRILL
9020.	(pg. 2	62) ľ	VII-GRILL
	(pg. 2		
	(pg. 2		
9134.			"X"
9200.	(pg. 2	71)	. MI-750
	(pg. 7		
9690.	(pg. 10)6) FS	1920-FL
9692.	(pg. 10)6) FS	1920-FL
9693	(pg. 10)6) FS	1930-FL
9694.	(pg. 10)6) FS	1940-FL
9696.	(pg. 10)6) FS19	920-FL-5
9698 .	(pg. 10	06) FS19	930-FL-5
9699.	(pg. 10)6) FS19	940-FL-5
9700.	(pg. 33)	F1000-C	-6-3-28*
9703.	(pg.	46)	F-3
9704	(pg.	46)	G-3
9705 .	(pg. 32)	F1000-	8-3-28-7
9710 .	(pg. 32)	F1000)-8-3-28

9713(pg. 33)	F1000-8-3-28
9715(pg. 33)	
9718(pg. 33)	
9720(pg. 158)	
9725(pg. 33)	
9730(pg. 103)	FS1760-3-28
9733(pg. 59)	
9734(pg. 103)	FS1760-3-28
9735(pg. 158)	C1100-T7-3-28
9740(pg. 78)	F1880
9745(pg. 46)	RS48-3-28-NH
9750(pg. 48)	F1130C-28-3
9755(pg. 257).	
9759(pg. 263)	
9760(pg. 158)	C1100-T6-3-28
	C1100-T6-3-28
9775(pg. 167)	C1430-28
9776(pg. 167).	C1430-RD-28
	R1200-M-28
9785(pg. 142)	
	BV1210-28
9795(pg. 257)	BV1000-28

Note: This guide is prepared to assist in determining the MIFAB Catalog number which is similar to the J R Smith number referred to. Due to the simplified modular design of MIFAB products, this index indicates the product which is closest in design, based on function: eg. Free Area, Loading Rating, Depth, Material etc.

* Includes "-C" membrane clamp in areas with waterproof membrane. As a recommended alternate, use F1100 in non membrane areas, delete "-C" membrane clamp. * MC-14 or MC-15 are recommended alternatives. Less pipe space, lower cost and fewer parts

WADE - MIFAB CROSS REFERENCE

WATER HAMMER ARRESTORS

WADE		MIFAB
5	(pg. 274)	WHB-A
10	(pg. 274)	WHB-B
20	(pg. 274)	WHB-C
		WHB-D
		WHB-E
100	 (pg. 274)	WHB-F
		MWH-A
		MWH-B
20P	(pg. 274)	MWH-C
		MWH-D
		MWH-E
		MWH-F



WATER CLOSET CARRIERS

WAIER CLUSE!	CARRIERS
WADE	MIFAB
310 (pg. 212)	MU 10
310CD(pg. 212)	ייייייייייייייייייייייייייייייייייייי
210CD(pg. 212)	MC 101-110
310CL(pg. 212)	IVIU-10L-113
310CR(pg. 212)	MC-10K-HS
310CD-36 (pg. 216) M	C-10D-27-37-HS
310CL-36. (pg. 216) M	C-10L-27-37-HS
310CR-36 (pg. 216) M	U-10K-2/-3/-HS
310ND(pg. 212)	MC-10D
310NL(pg. 212)	MC-10L
310NR(pg. 212)	MC-10R
310-36(pg. 216).	MC-10-27-37
310ND-36.(pg. 216).	MC-10D-27-37
310NL-36 .(pg. 216)	MC-10L-27-37
310NR-36 (pg. 216).	MC-10R-27-37
310-H(pg. 214).	MC-10-EXT
310ND-H(pg. 214).	MC-10D-EXT
310NL-H(pg. 214).	MC-10L-EXT
310NR-H(pg. 214).	MC-10R-EXT
310-UA(pg. 215) MC-10-27
310ND-UA(pg. 215)	MC-10D-27
310NL-UA(pg. 215)	MC-10I-27
310NR-UA(pg. 215)	MC-10R-27
330(pg. 218)	MC-12*
330CD(pg. 219)	MC-12D-HS*
330CL(pg. 219)	MC_12_26_HS*
330CR(pg. 219)	MC 12 25 HC*
2200n(py. 219)	MC 10D*
330ND(pg. 218)	IVIU-12D"
330NL(pg. 218)	IVIU-12-26^
330NR(pg. 218)	IVIU-12-25^
340(pg. 220)	MC-13
340CD(pg. 221)	MC-13D-HS
340CL(pg. 221)	MC-13L-HS
340CR(pg. 221)	MC-13R-HS
340ND(pg. 220)	MC-13D
340NL(pg. 220)	MC-13L
340NR(pg. 220)	MC-13R
340A(pg. 220)	MC-13-2
340ACD(pg. 221)	. MC-13D-2-HS
340ACD5(pg. 221)	. MC-13D-2-HS
340ACD6 .(pg. 221)	. MC-13D-2-HS
340ACL(pg. 221).	MC-13-2-HS
340ACL5(pg. 221).	MC-13-2-HS
340ACL6(pg. 221).	MC-13-2-HS
340ACR(pg. 221)	MC-13-2-HS
340AND(pg. 220). 340AND5(pg. 220).	
340AND6(pg. 220).	MC 12D 2
340ANL(pg. 220)	NC 12 0
340ANL5(pg. 220)	
340ANL6(pg. 220)	IVIU-13-2
340ANR(pg. 220).	MC-13-2
350(pg. 222)	MC-14
350C4(pg. 222) l	MC-14-4-V4-HS
350C4,AB(pg. 222). N	ЛС-14-4-V4-HS
350N2(pg. 222)	
350N2,AB(pg. 222)	MC-14-4-V2
350N4(pg. 222)	MC-14-4-V4
350N4,AB(pg. 222)	MC-14-4-V4
360(pg. 223)	MC-15-HS
360CD(pg. 223)	MC-15D-HS
360CD,AB(pg. 223) MC-15D-HS
360CL(pg. 223)	MC-15I -HS
360CL,AB(pg. 223)	
360CR(pg. 223)	MC_15E_HS
360CR,AB(pg. 223	
371(pg. 223	
υι ι(μy. 223	, IVIO-13

371D(pg.	223)	. MC-15D
371D,X8.5(pg.	223) MO	C-15D-23
371D,X8.5,Z45 (pg	j. 223) M(C-15D-31
371D,Z45(pg	. 223). MO	C-15D-25
371L(pg.	223)	. MC-15L
371L,X8.5(pg.	223) M	C-15L-23
371L,X8.5,Z45 (pg	. 223) N	1C-15L-26
380P3(pg	. 224)	MC-24
380P4(pg	. 224)	MC-24
410(pg.	224)	. MC-21T

WATER CLOSET CARRIER OPTIONAL VARIATIONS

WADE	MIFAE
Am1(pg. 319, 320))20
Am21(pg. 319, 320))01
B(pg. 319, 320)	Standard
C(pg. 319, 320)) HS
D(pg. 319, 320))L
M3(pg. 319, 320)	14
M4(pg. 319, 320)	10
M14(pg. 319, 320)	11
M26 (pg. 319, 320)	CI
N(pg. 319, 320)) Standard
P(pg. 319, 320))0
R(pg. 319, 320)) R
V4(pg. 319, 320)	V4

LAVATORY, URINAL, SINK CARRIERS

MADE	BAILE
WADE	MIFAB
400(pg. 226)	IVIU-31
400-AM11(pg. 226)	MC-32
400D(pg. 226)	MC-31D
400D-AM11(pg. 226)	MC-32D
420(pg. 226)	MC-31
420-AM11(pg. 226)	MC-32
420D(pg. 226)	MC-31D
420D-AM11(pg. 226)	MC-32D
430(pg. 226)	. MC-31-C
440(pg. 227)	MC-33
440-AM11(pg. 227)	
461(pg. 228)	
462(pg. 228)	
471(pg. 228)	
472(pg. 228)	MC-38D
510(pg. 230)	MC-40
510D(pg. 230)	MC-40D
520(pg. 230)	MC-41
520D(pg. 231)	MC-41D
571 Concealed(pg. 235)	
571 Exposed(pg. 235)	
572 Concealed(pg. 234)	
572 Exposed(pg. 236)	
573(pg. 234)	
610(pg. 230)	
610D(pg. 230)	MC-40D
620(pg. 227)	MC-34
623(pg. 228)	MC-35
640(pg. 236)	
640-NV2(pg. 236) M	
640-NV4(pg. 236) M	
640-NL(pg. 236)	MC-63-1
640-NR(pg. 236)	MC-63 D
"Χ"Contac	. 1410-03-N 4 N/IEAD
AContac	LIVIIFAD

LAVATORY, URINAL, SINK CARRIER OPTIONAL VARAIATIONS

WADE	MIFAB
AM11 (pg. 319, 320)	Standard
AM27(pg. 319, 320)	F
AM28(pg. 319, 320)	G
M3(pg. 319, 320)	14
M19(pg. 319, 320)	l
M23(pg. 319, 320)	E2
M24(pg. 319, 320)	Standard
M25(pg. 319, 320)	Specify
M36(pg. 319, 320)	Standard

FLOOR AND AREA DRAINS

WADE	MIFAB
900-C(pg. 33)	F1100
900-C(pg. 33) 1000STD, SS(pg. 32)	. F1000-C*
1070STD (ng 32) F1	UUU-C-0U*
1100CTD (pg. 32)11	000-0-30
1070STD(pg. 32) F1 1100STD, (pg. 32)F1 1100STD(pg. 33)	000-3-20
110051D(pg. 33)	. F1100-G^
1100AX(pg. 42) F	1100-C-X*
1100D(pg. 37) F1 1100-DT(pg. 43)F	100-C-HG*
1100-DT(pg. 43)F	1100-C-Z*
1100-DTS (ng 44) F1	100-C-7S*
1100ER (pg. 11)1	100 C EB*
1100E11(pg. 30)11	00 C ETC*
1100-DTS(pg. 44) F1 1100ER(pg. 36) F1 1100F(pg. 37) F11 1100FC(pg. 36) F1	100-0-610
1100FC(pg. 36)F1	100-6-66
1100G(pg. 39) F	1100-C-S*
1100G(pg. 39) F1	100-C-RS*
1100K(pg. 38) F 1100N(pg. 40) F110 1100P(pg. 41) F	1100-C-K*
1100N(pg. 40) F110	00-C-SHG*
1100P (ng. 41) F	1100-C-T*
1100TG(pg. 42) F	1100 C X*
1100TS(pg. 38) F	1100 C X
110013(pg. 30) F	100-0-11
1100VD(pg. 41) F1 1100-WD(pg. 42) F11	100-C-AD
1100-WD(pg. 42) F11	00-C-WD*
1100 body (pg. 2/6) A	11-C* body
1100 body (pg. 276) A 1120NH(pg. 48)	. F1120-C*
1120CUNH(bg. 48)	F1130C
1160(pg. 44) £1	100-C-90*
1160(pg. 44) F1 1200(pg. 56) F1340	-C-Y-14-Q*
1200E(pg. 56) F 1200PG(pg. 69)	1340-Y-Q-Z
1200PG (ng. 69)	F1540
1200FG(pg. 59)	40-C-TFR*
1210 (ng 54)	1340-V-14
1210(pg. 54) E1	240 V 14 7
1210E(pg. 54) F1	540-1-14-2
1210PG(pg. 69)	F154U
12101D(pg. 55) F13	40-C-IFB^
1220(pg. 58)	. F1350-C*
1230 .(pg. 56). F1340-C-Y	′-14-Q-90*
1220(pg. 58)(pg. 58)(pg. 58)	340-C-14*
1300(pg. 53) F132	20-C-Y-14*
1300(pg. 53) F132 1300-BG(pg. 78)	F1840
1300TD(pg. 53) F13	20-C-TFR*
1300SS(pg. 32) F10	70 0 11 0
1310(pg. 52) F132	00-0-3-20
1310E(pg. 53) F1320	0.744.7*
1310E(pg. 53) F1320	-U-Y-14-Z"
1310-PG(pg. 68) 1310TD(pg. 53) F13	F1530
13101D(pg. 53) F13	20-C-IFB*
1320 (ng 54)	F1330C
1320-MC(pg. 53) F132	:0-C-8-44*
1330-SS(pg. 53) F132 1340(pg. 53) F1	20-C-3-28*
1340(pg. 53) F1	320-C-14*
1340TD (ng 53) F1320-	.C.TFR-14*
1350(pg. 53) F1320)-C-14-90*
1000(pg. 00) 1 1020	, 5 1 1 50

* Includes "-C" membrane clamp in areas with waterproof membrane. As a recommended alternate, use F1100 in non membrane areas, delete "-C" membrane clamp.

"X".....Contact MIFAB

Visit www.mifab.com for the most recent product information.

FLOOR AND AREA DRAINS

FLOOR DRAIN 1100 SERIES ADJUSTABLE STRAINER VARIATIONS

WADE		MIFAB
STD5	(pg. 46)	5-1
STD6	(pg. 46)	6-1
STD7		
STD8		
STD10		
AX	(pg. 47)	X
AX6	(pg. 47)	X6-1
D		
D6		
DT		
DTS	(pg. 47)	ZS-1
ER		
ER5	(pg. 46)	ER5-1
ER7		
ER9	(pg. 46)	ER9-1
F	(pg. 46)	FT6-1
FC	(pg. 46)	FC
FF4		
G	(pg. 47)	S
G5	(pg. 47)	S5-1
G6		
G8	(pg. 47)	S8-1
H		
H8	(pg. 46)	RS48-1
H12	(pg. 46)	RS412-1
H17	(pg. 46)	RS517-3
K	(pg. 46)	K
N	(pg. 47)	SHG
N6	(pg. 47)	SHG6-3
P	(pg. 47)	T
P6		
TG	(pg. 47)	S8-3
TS		
TS7		
TS7-1		
TS7-39		
VD		
VD6		
WD		
WD2		
WW2X7	(pg. 46)	EF4-1

Design and dimensions are subject to modification. Prices do not include applicable taxes.



FLOOR AND AREA DRAIN **OPTIONAL VARIATIONS**

WADE	MIFAB
-1Nickel bronze	
-2Polished bronze	(pg. 319. 320) -2
-4Square top(p	g. 319, 320)16
-5Vandal proof(og. 319, 320)6
-6Trp. Seal pri. Tpg	(pg. 319, 320) -7
-7Dome grate(p	a. 319. 320)20
-8Secondary strainer	(pg. 319, 320) -21
-9Sec. dome straine	r (pg. 319, 320) -20
-11Heel proof grate (pg. 319, 320) 510
-12Ductile iron(p -13Tractor grate .(p	y. 319, 320)4 a 310 320) Std
-14Hinged top(p	g. 319, 320). 310 in 310 320) -0
-18Solid cover .(pg	319 320) -25-1
-19Chained grate (p	ng 319 320) -23
-23(p	a. 319. 320)15
-25Solid cover .(pg	. 319, 320) -25-1
-26Membrane clamp	pg. 319, 320)-(
-27Sediment bucket	(pg. 319, 320) -5
-30Backwater valve	(pg. 319, 320) -8
-31Backwater valve	(pg. 319, 320) -8
-33Closure plug .(p	
-37Aux. tapping .(p	g. 319, 320)44
-39All galvanized (p -40Galv. Top only (p	ig. 319, 320) -13
-41All galvanized (p	19. 319, 320) - 12 na 310 320) - 13
-52Sump receiver (
-53Underdeck clamp	(pg. 319, 320) -40
-61Acid rnt epy stng	(pg. 319, 320) -11
-94(pc	ı. 319, 320) <i>-</i> 15
-106SS. Mesh bucket	(pg. 319, 320) -35
-179Vandal proof(p	og. 319, 320)6
-DIDuctile iron(p	g. 319, 320)4
-EExt. wide flange	(pg. 319, 320) -2
-EF4 4"round funnel(p	y. 319, 320)F4 a 210 220) E6
-EF6 6"round funnel(p -EG6 6" x 3"funnel(p	g. 313, 320)10 n 310 320) _ l_1
-EG8 4" x 9"funnel(pg	y. 319, 320)3-1 i 319, 320) -G
-ICInside caulk outle	t (pg. 319. 320) X
-IPSThreaded outlet	.(pg. 319, 320) T
MC2" Aux. Inlet(p	
-NHNo hub outlet (p	g. 319, 320). Std
-TYPush on outlet	

TRAP SEAL PRIMERS AND **SPECIALTIES**

WADE	MIFAE
2400(pg. 268)	MI-TSF
2400-S(pg. 268)	MI-TSP-1
2400-T(pg. 268)	MI-TSP-2
2400-MF(pg. 268)	MI-DU
2400-M(pg. 268).	
2400-P(pg. 268)	

TRENCH DRAINS

WADE	MIFAI
2902(pg.	81) T1200-F-4
2002	71000
2902A(pa.	81) 11200-
3003D \ba	81) T1200 81) T1200-F-
۲۶۵۲۲(py.	01) 11200-F-

2902A	(pg. 81) T1200-4
2902D	pg. 81) T1200-F-4
2908	(pg. 81)) T1100-F2-4
2908A	pg. 81)T1100-4
) T1100-F2-4
2920	(pa. 82	ĺ) T1350-FL-4
		າ T1320-FL-4

TRENCH DRAIN OPTIONAL **VARIATIONS**

WADE	MIFAE
-1Nickel b	oronze (pg. 319, 320) -1
-2Polished	bronze (pg. 319, 320) -2
-5Vandal	proof .(pg. 319, 320)6
-12Ductile	iron(pg. 319, 320)4
-26Memb.	Clamp (pg. 319, 320) -
-27Sedimen	nt bucket (pg. 319, 320) -5
-31Backwat	ter valve (pg. 319, 320) -8
-39All galva	anized (pg. 319, 320) -13
-40Galv. Top	only (pg. 319, 320) -12
-179Vandal	proof .(pg. 319, 320)6

ROOF DRAINS

WADE	MIFAB
3000 (pg. 125)	R1200
3009(pg. 136)	R1261
3000AE(pg. 126)	
3009AE(pg. 136)	R1261-EU
3000DF(pg. 125)	R1200-V
3000DP(pg. 127)	R1200-G
3000FCS(pg. 127)	R1200-F
3000PA(pg. 129)	R1200-PR
3000SD(pg. 132)	R1200-W
3009SD(pg. 136)	
3012(pg. 136)	R1262
3030(pg. 133)	
3100(pg. 129)	. R1200-PR
3130SO .(pg. 129) R1	200-PR-90
3200(pg. 120)	
3200-P(pg. 122)	
3210(pg. 124)	
3220(pg. 134)	
3220A(pg. 134)	
3220PA(pg. 76)	
3220RS(pg. 135)	
3230(pg. 145)	
3240(pg. 144)	
3240B(pg. 144)	K1400
3240BD(pg. 144)	K1400
3270(pg. 142)	K1300
3270A(pg. 142)	K1310
3290(pg. 143)	K1320
3290A(pg. 143)	K I 330
3880P(pg. 262) 3900(pg. 149)	IVII-GKILL
3900(pg. 149)	K 1900
3940(pg. 149)	K1900
3210-P(pg. 122)R	N 1940 1100 DD 00
3220-0P(pg. 122)R	D100-FD-90
3220-Ur(py. 129)	. n 1200-PK

ROOF DRAIN OPTIONAL VARIATIONS

WADE -AEAdjustable ExtensionEU -BGBallast guardG -D2" high water damR -DFExtension flangeV -DFS .Ballast guardG
-DPBallast guardG -FCSFlow control weirF ICInside caulk outlet X
IPSThreaded outlet T NHNo hub outlet Standard -SDStandpipe assemblyWD TYPush on outlet P
-3Rough bronze dome81 -5Vandal proof6
-39All galvanized13 -42Cast iron domeM -46Aluminum domeM-80
-47High domeHM -49SS mesh screen over83 dome
-50SS Msh scrn ov.dome83 -52Sump receiverB -53Underdeck clampU -54Membrane clampC

-55Flashing collar adap....."X"

BACKWATER VALVES

WADE		MIFAB
4200(pg.	257)	BV1000

INTERCEPTORS

WADE	MIFAB
5100(pg. 187)	MI-G
5100XT(pg. 187)	MI-G-C
5100JCX(pg. 190)	MI-G-SDH
5100FH(pg. 191)	MI-CS
5100FHT(pg. 191)	MI-CS-EN
5100LR(pg. 187)	
5200(pg. 188)	
5400(pg. 192)	MI-0
5500(pg. 193)	MI-0-HU
5600(pg. 198)	MI-LINT
5730(pg. 194)	
5740(pg. 194)	MI-SOLID-M
5740L(pg. 194)	MI-SOLID-L
5750(pg. 194)	MI-HAIR
5800(pg. 196)	
5900(pg. 196)	MI-SAND

CLEANOUTS

MIFAB

WADE

***		14111 / 12
6000	(pg. 156)	C1100-R
6000CF	(pg. 157)	. C1100-RFC
6000CM	(pg. 157)	C1100-RC
6000D	(pg. 156)	. C1100-R-Z
6000S	(na 158)	C1100-S
6000T	(na 1E0)	C1100 T
6000TS	(pg. 159)	C1100-TS C1100-UR
6000U	(pg. 159)	C1100-UR
6000US.	(pq. 100)	61100-03
6000X	(pg. 160)	C1100-XR
6000XS	(pg. 161)	C1100-XS
6000Z	(pg. 160)	C1100-XR
7000	(pg. 156)	C1100-R
7000Z	(pg. 156)	C1100-R
8000	(pg. 156)	C1100-R
8100	(pg. 156)	C1100-R
8130AF	(pg. 163)	C1220
8190	(pg. 156)	C1100-C-R*
8240	(pg. 160) C11	100-C-XR-4*
83000	(ng. 165)	C1300-R
8300S	(pg. 165) (pg. 165) (pg. 165)	C1300-S
8300SH	(pg. 165)	C1300-S
8300SS	(pg. 165)	C1300-S
8300MF	(pg. 166) (pg. 171)	C1300-MF
8450R	(pg. 171)	C1450-RD
8460R	(pg. 173)	C1460-RD
8470R	(pg. 167)	C1430-RD
8480C	(pg. 166)	C1400-R
8480R	(pg. 167)	C1400-RD
8480S	(pg. 166)	C1400-S
8480X		"X"
8550	(pg. 170)	C1/150
8550-R.		61430
	(pg. 170)	C1450
8560	(pg. 170) (pg. 172)	C1450 C1460
8560 8590	(pg. 170) (pg. 172)	C1450 C1460
8560 8590	(pg. 170)	C1450 C1460

Note: This guide is prepared to assist in determining the MIFAB Catalog number which is similar to the Wade catalog number referred to. Due to the simplified modular design of MIFAB products, this index indicates the product which is closest in design, based on function: eg. Free Area, Load Rating, Depth, Material etc.

CLEANOUT OPTIONAL VARIATIONS

WADE MIFAB
BRaised Br. Plug (pg. 167) C1430
ECountersunk br. plug (pg. 167) C1430
-CFCarpet flange (pg. 319, 320) -RFC
-CMCarpet marker (pg. 319, 320) -RC
-DExtended wide flange . (pg. 319, 320) -Z
ICInside caulk outlet . (pg. 319, 320). X
NHNo hub outlet (pg. 319, 320) Std
SSquare top(pg. 319, 320)S
-TRound tile top (pg. 319, 320) -T
-TSSquare tile top .(pg. 319, 320) -TS
TYPush on outlet (pg. 319, 320) P
-URound terrazzo top .(pg. 319, 320) -UR
-USSquare terrazo top (pg. 319, 320) -US
-XHeavy duty round top (pg. 319, 320) -XR
-XSHeavy duty sq. top (pg. 319, 320) -XS
-39 All galvanized . (pg. 319, 320) -13
-72Carpet marker cover (pg. 319, 320) -RC
-75Bronze tapered plug .(pg. 319, 320) -34B
-118Bronze gasket plug (pg. 319, 320) -34
-179.Vandal proof .(pg. 319, 320)6

HYDRANTS		
WADE		MIFAB
8600	(pg. 247)	MHY-10
8600,175	(pg. 247)	MHY-20
8600MT	(pg. 248)	MHY-35
8600HC	(pg. 249)	MHY-45
		MHY-60
		MHY-65/66

FLOOR SINKS

WADE	MIFAB
9010(pg. 38)	F1100-C-N9-1-11*
9010-24 .(pg. 38)	.F1100-C-N9-1-11*
9040(pg. 10	3) FS1760-FL-1
9040-24(pg. 10	3) FS1760-FL-1
9100(pg. 106) FS1920-FL
9110(pg. 97) FS1520-FL-1
9140(pg. 100	0) FS1730-FL-1-9
9160(pg. 75) F1760-FL
9170(pg. 75) F1780-FL-1
9210(pg. 98) FS1530-1
9210-24(pg. 98	3) FS1530-FL-1
9300(pg. 74	4) F1650
9300-B(pg. 74	l) F1650-6

FLOOR SINK OPTIONAL **VARIATIONS**

VANIALIUNS	
WADE	MIFAB
1Nickel bronze	1
5Vandal proof	6
6 Trap seal primer tap	Std
9Sec. Dome strainer	20
15Half grate	
163/4 grate	
18SS solid cover	
26Anchor flange and	
membrane clamp	
27Sediment bucket	-5
64Acid rstant epxy ctng	
155.Extra heavy grate	
179. Vandal proof	
:F44" Dia. NB funnel	
:F66" Dia. NB funnel	
G6 .6"x3"x1" NB funnel	
G8 .4" x 9" NB funnel	
IHNo hub outlet	
YPush on outlet	P

Design and dimensions are subject to modification. Prices do not include applicable taxes.

WATTS - MIFAB CROSS REFERENCE

BACKWATER VALVES

WATTS	MIFAB
BV-200 (pg. 257)	BV1000
BV-230-R-1(pg. 257) B	
BV-230-R-50.(pg. 257)BV	1200-R-4
BV-240(pg. 259)	BV1280
BV-600(pg. 258)	BV1210
BV-600-1(pg. 258)	BV1210-1
BV-800(pg. 260)	BV1300
BV-1000(pg. 258)	BV1250

BACKWATER VALVES OPTIONAL VARIATIONS

WATTS		MIFAB
-FG(pg.	319, 320).	FG
-1(pg.	319, 320).	1
-6(pg.	319, 320).	6

WATER CLOSET CARRIERS

WATTS		MIFAB
CA-100	(ng 212)	MC-10
CA-101	(pg. 212)	MC-10
CA 101	(pg. 212)	01-01VI
CA-101-D	(pg. 212)	MIC-10D
CA-101-DL (p	g. 216) MC-	-10D-27-37
CA-101-L	(pg. 212)	MC-10L
CA-101-I -AUX	(.(ng. 215).	MC-10I-27
CA-101-LL .(p	a `216) MC	-101-27-37
CΔ-101-R	(ng. 212)	MC-10R
CA-101-R CA-101-R-AUX	X(ng 215) N	MC-10R-27
CA 101-11-A02	~ (pg. 210).i	-10R-27-37
CA-101-RL.(p	y. 210) Mo.	MC 101
CA-120(pg. 218)	MC-12*
CA-121(pg. 218)	IVIU-12^
CA-121-D	(pg. 218)	. MC-12D*
CA-130	(pg. 220)	MC-13
CA-131	(pg. 220)	MC-13
CΔ_131_D	(ng 220)	MC_13D
CA-131-D-2	(ng 220)	MC-13D-2
CΔ-131-D2	(ng 220)	MC-13D-2
CA-131-D-2 CA-131-D2 CA-131-L	(pg. 220) (pg. 220)	MC 131
CA-131-R	(pg. 220)	MC 13D
OA-131-N	(pg. 220)	NO 10 O
CA-131-2	(pg. 220)	1/10-13-2
CA-140	(pg. 222)	IVIC-14
CA-141	(pg. 222)	MC-14
CA-141-DL	(pg. 220)	MC-13D
CA-141-3 (na 222) N	IC-14-3-V2
CA-141-3-V2-	L(pg. 222) N	ИС-14-3-V2
CA-141-4-D	(pg. 22Ó).	MC-13D
CA-141-4-DL.	(pg. 220).	MC-13D
CA-141-4-V2	(ng 222) N	1C-14-4-V2
CA-141-4-V2-I CA-141-4-V4	(ng 222) I	MC-14-4-V2
CA-141-4-V4	(ng 222) M	1C-14-4-V4
CA-141-4-V4-	l (ng 222)N	1C-14-4-V4
CA-150	(pg. 222)N	MC 15
CA-151	.(pg. 223)	MC 15
CA 151 D	(pg. 220)	MC-15D
CA-151-D CA-151-DL	.(pg. 223)	MC 15D
CA-131-DL	(pg. 223)	NIC-13D
CA-151-L	.(pg. 223)	IVIU-13L
CA-151-LL	(py. 223)	MC-15L
CA-151-R CA-151-RL	(pg. 223)	MC-12K
CA-151-KL	(pg. 223).	MC-15R
CA-200	(pg. 224)	IVIU-21
CA-201	(pg. 224)	
CA-201-T	(pg. 224)	
CA-201T	(pg. 224)	
CA-202	(pg. 224)	
CA-202-T	(pg. 224)	MC-22T
CA-202T	(pa. 224)	MC-22T
CA-5213	(pg. 224)	MC-25-3-2
CA-5213-V2-L	(pa. 224)	MC-25-3-2
CA-5214	(ng. 224)	MC-25-4-2
CA-5214-V2-L	(ng 224)	MC-25-4-2
CA-5214-V4-L	ng 224)	
5/1 0Z 11 VT L	···(Pg· ᠘᠘커)	5 20 1 1

WATTS	MIFA	E
ISCA-101	(pg. 212)MC-1	C
ISCA-101-D	.(pg. 212)MC-10	C
ISCA-101-L	(pg. 212)MC-10	L
ISCA-101-R	.(pg. 212)MC-10	R
ISCA-101-AUX	.(pg. 215)MC-10-2	7

ISCA-101-L-AUX (pg. 215)MC-10L-27
ISCA-101-R-AUX (pg. 215)MC-10R-27
ISCA-121(pg. 218)MC-12*
ISCA-121-D(pg. 218)MC-12D*
ISCA-131-L(pg. 220)MC-13L
ISCA-131-R(pg. 220)MC-13R
ISCA-131-2(pg. 220)MC-13-2
ISCA-131-D(pg. 220)MC-13D
ISCA-141(pg. 222)MC-14
ISCA-151(pg. 223)MC-15
ISCA-550(pg. 236)MC-60
ISCA-560(pg. 236)MC-60

CLEANOUTS

WATTS	MIFAB
CO-200-SX-4(pg.	158)C1100-S-4
CO-270(pg.	164)C1238

WATER CLOSET CARRIERS **OPTIONAL VARIATIONS**

WATTS						MIF	ΔΡ
VA.1	(na	η.	10 '	รวก	14111	-01
CA-1 CA-100-EXT CA-FACEPLAT	(py. Ina	٦	10,	320	ر ا	01 10
CA-FACEPLAT	F (nc	(P9	. c	320) M(7-10-F	PFP07
CAP-NUTS	(na.	31	9	320)) (C	AP-N	IUTS
-M1(na.	319	9.	320)	Stan	dard
-M2(pa.	319	9.	320)		-12
-M2W(pa.	319	9.	320)		-19
-M3	(pa.	31	ġ.	320))		-CI-8
-M4	(pa.	31	9.	320))	()I-12
-M5	(pg.	31	9,	320	າ)່	()I-12
-M10	(pa.	31	9.	320))		13
-M11	(pg.	31	9,	320))		1
-M12	(pg.	31	9,	320))		Std
-M14	(pa.	31	9.	320))		16
-M15	(pg.	31	9,	320))		15
-M16	(pg.	31	9,	320))		14
-M17	(pg.	31	9,	320))		11
-M18	(pg.	31	9,	320))		-12
-M19	(pg.	31	9,	320))		-21
-M20	(pg.	31	9,	320))		20
-M21	(pg.	31	9,	320))		23
-M22	(pg.	31	9,	320))		24
-M23	(pg.	31	9,	320	J)		-25
-M24	(pg.	31	9,	320	J)		-26
-M30	(pg.	31	9,	320	J)		-30
-MA	(pg.	31	9,	320	J)		28
-WC	(pg.	31	19,	320	J)		. Std

LAVATORY, URINAL, SINK **CARRIERS**

WATTS	MIFAB
CA-300(pg. 226)	MC-31
CA-311(pg. 226)	MC-31
CA-321(pg. 226)	MC-32
CA-321-1(pg. 226)	
CA-321-3(pg. 227)	
CA-323-N(pg. 236)	
CA-323-T(pg. 236).	
CA-323-2N(pg. 236)	
CA-323-2T(pg. 236).	
CA-361(pg. 228).	
CA-362(pg. 228).	MC-38D
CA-400(pg. 230).	
CA-401(pg. 230).	
(1.3)	

* MC-14 or MC-15 are recommended alternatives. Less pipe space, lower cost and fewer parts "X" Contact MIFAB

LAVATORY, URINAL, SINK AND **CARRIERS CON'T**

WATT	S			М	FAB
CA-401	-M-60) (n	1 230) MC	-40-G
CA-401 CA-401	-ווו-טנ)(þí	j. 200) IVIO	חחו <i>ו</i> י
CV 400	-ט	(þí	J. 200) IVIC	ν" "V"
CA-402 CA-402					^ "V"
CA-4UZ	ע-				A
CA-411		. (pg	. 230).	IV	10-41
CA-411	-D	(pg	. 231)	IVIC	;-41U
CA-411	-D-W(p) ز	g. 233	3) IVI	U-42D
CA-411	-M-54	l(bí	j. 230). MC-4	41-E2
CA-411	-M-60)(p	g. 230)) MC	-41-G
CA-411	-WC .	(р	g. 232	2) N	ЛС-42
CA-420		(pg. :	226)	N	1C-31
CA-421		(pg. :	226)	N	1C-31
CA-421	-D	(pg. 2	226)	MC	C-31D
CA-421	-2	.(pq.	226)	N	/IC-32
CA-421 CA-421	-2D	(pg. 2	226)	MC	C-32D
CA-421	-5	(pa. 2	226)	MC	-31-C
CA-421	-6	(pa. 2	226)	MC	-32-C
CA-421	-HFH.	(pa. :	226)	MC-31	-HDH
CA-431	-1	(ng.	227)		/IC-33
CA-451		na 2	35)	Λ	1C-55
CA-452		na 2	36)		10-56
CA-460		na 2	.00)	۱۷۱۷	10 50 10_51
CA-461		ng 2	.04)	N	10-51
CA-462		pg. 2	.00)	N	10-33
		pg. 2	.04)	IV	10-01
CA-465		pg. 2	.00)	IVIC-	01-LP
CA-466	(μy. 2	(ເວລ	IVIU-	01-LP
CA-480		(pg	. 220).	IV	10-30
CA-481		(pg	. 220).	IV	10-30
CA-481	-2	(pg	. 228)	IVIC	,-3b-2
CA-482		(pg	228).	IVI	J-38D
CA-482	-2	(pg	. 228)	<u>N</u>	/IC-3/
CA-501		(pg	. 230).	N	1C-40
CA-501	-M60	(pg	. 230)	MC	-40-G
CA-501	-M61	(pg	j. 230)) MC	;-40-F
CA-501 CA-501	-D	(pg	. 230)	MC	C-40D
CA-501	-1	(pg	j. 227) N	/IC-34
CA-501	-2	(pç	j. 226)) №	/IC-32
CA-501	-3	(pg	j. 227) MC	-33-2
CA-531		(pc	ı. 228)	N	1C-35
CA-531	-1	(pg	j. 228) N	/IC-35
CA-550		(pg. :	236)	MC	-61-T
CA-550	-N	.(pg.	236)	MC	-61-N
CA-550	-3	. (pa.	236).	MC-62	2-3-V2
CA-550-	-3-V2-	L (no	. 236)	MC-62	2-3-V2
CA-550	-4-V2.	.(pg.	236)	MC-62	2-4-V2
CA-550- CA-550-	4-V2-	·F(bu	236)	MC-62	2-4-V2
CA-550	-4-V4.	.(pa.	236)	MC-62	2-4-V4
CA-550	4-V4	·L.(nr	. 236)	MC-6	2-4-V4
TCA-41	1 (na. 2	29).	MC-	41-TR
TCA-41 TCA-41	1-D-V	VC (r	na. 23	2). MC	-42-TF
WCA-41	 11	nر)را	, 23N	_, 	ис. <u>4</u> 1
		(h	,. <u>~</u> 00)	,	71

CA-300 TO CA-700 OPTIONAL **VARIATIONS**

WATT	S	MIFAE
-M51	(pg. 319, 320)	A
-M52	(pg. 319, 320)	A
-M53	(pg. 319, 320).	14
-M54	(pg. 319, 320)	E2
-M55	(pg. 319, 320)	E4
-M56	(pg. 319, 320)	E6
-M57	(pg. 319, 320)	"X"
	(pg. 319, 320)	
	(pg. 319, 320).	
-M60	(pg. 319, 320).	G
-M61	(pg. 319, 320).	G
-M62	(pg. 319, 320).	20
-WC	(pg. 319, 320).	Standard

CLEANOUTS		
WATTS MIFAB		
CO-100-C-R(pg. 156). C1100-C-R*		
CO-100-C-R-1 (pg. 156) C1100-C-R-1*		
CO-100-C-R-3 (pg. 156) C1100-C-R-3*		
CO-100-C-RC (pg. 157) C1100-C-RC*		
CO-100-C-RC-1(pg. 157) C1100-C-RC-1*		
CO-100-C-RX (pg. 160) C1100-C-XR* CO-100-C-RX-1(pg. 160) C1100-C-XR-1*		
CO-100-C-RX-4(pg. 160) C1100-C-XR-4*		
CO-100-C-S(pg. 158). C1100-C-S*		
CO-100-C-S-1 (pg. 158) C1100-C-S-1*		
CO-100-C-S-3 .(pg. 158) C1100-C-S-3*		
CO-100-C-T(pg. 158) C1100-C-T* CO-100-C-T-1 (pg. 158) C1100-C-T-1*		
CO-100-C-TS (pg. 159) C1100-C-TS*		
CO-100-C-TS-1(pg. 159) C1100-C-TS-1*		
CO-100-C-U .(pg. 159) C1100-C-UR*		
CO-100-C-U-1(pg. 159) C1100-C-UR-1*		
CO-100-C-US(pg. 160) C1100-C-US*		
CO-100-C-US-1(pg. 160) C1100-C-US-1*		
CO-200(pg. 164)C1230 CO-200-1(pg. 164) C1230-1		
CO-200-4(pg. 164) C1230-4		
CO-200-50(pg. 164) C1230-4		
CO-200-60(pg. 164) C1230-30		
CO-200-61(pg. 164) C1230-31		
CO-200-63(pg. 164) C1230-WF		
CO-200-63-1 .(pg. 164). C1230-WF-1		
CO-200-R(pg. 156) C1100-R		
CO-200-R-1(pg. 156) C1100-R-1 CO-200-R-3(pg. 156) C1100-R-3		
CO-200-RC(pg. 157) C1100-RC		
CO-200-RC-1 .(pg. 157) C1100-RC-1		
CO-200-RFC7(pg. 157).C1100-RFC7-3		
CO-200-RX(pg. 160) C1100-XR		
CO-200-RX-1 .(pg. 160). C1100-XR-1		
CO-200-RX-3 .(pg. 160). C1100-XR-3		
CO-200-RX-4 .(pg. 160). C1100-XR-4 CO-200-S(pg. 158) C1100-S		
CO-200-S-1(pg. 158) C1100-S-1		
CO-200-SX(pg. 158) C1100-S-3		
CO-200-T(pg. 158) C1100-T		
CO-200-T-1(pg. 158) C1100-T-1		
CO-200-TS(pg. 159) C1100-TS		
CO-200-TS-1 .(pg. 159) C1100-TS-1		
CO-200-U(pg. 159) C1100-UR		
CO-200-U-1 .(pg. 159) C1100-UR-1 CO-200-US(pg. 160) C1100-US		
CO-200-US-1 (pg. 160). C1100-US-1		
CO-260(pg. 163)C1228		
CO-260-1(pg. 163) C1228-1		
CO-270(pg. 164) C1238		
CO-300-MF(pg. 166) C1300-MF		
CO-300-MF-1 .(pg. 166) C1300-MF-3		
CO-300-MF-4 .(pg. 166) C1300-MF-4		
CO-300-R(pg. 165) C1300-R		
CO-300-R6(pg. 165)C1300-R6-1 CO-300-R6-1 .(pg. 165)C1300-R6-1		
CO-300-R8(pg. 165) C1300-R9		
CO-300-R8-1 .(pg. 165)C1300-R9-1		
CO-300-R9(pg. 165) C1300-R9		
CO-300-R9-1 .(pg. 165)C1300-R9-1		
CO-300-S(pg. 165) C1300-S		
CO-300-S6(pg. 165) C1300-S7		
CO-300-S6-1 .(pg. 165). C1300-S7-1		

Design and dimensions are subject to modification. Prices do not include applicable taxes.



CO-300-S7-1 (pg. 165). C1300-S7-1 CO-300-S8 ...(pg. 165).... C1300-S9 CO-300-S8-1 .(pg. 165) C1300-S9-1 CO-300-S9-1 .(pg. 165) C1300-S9-1 CO-300-S9-50(pg. 165) C1300-S9-4 CO-300-S12 ..(pg. 165). C1300-S12 CO-300-S12-1 (pg. 165) C1300-S12-1 CO-300-S12-50 (pg. 165) C1300-S12-4 CO-300-U(pg. 165).... C1300-UR CO-300-U-1 .(pg. 165). C1300-UR-1 CO-300-US ...(pg. 165).... C1300-US CO-300-US-1 (pg. 165) C1300-US-1 CO-380(pg. 170)...... C1450 CO-380-RD....(pg. 171)....C1450-RD CO-390-E(pg. 164)...... C1230 CO-390-E-1 ...(pg. 164)..... C1230-1 CO-410(see CLPB).. C234-TS-1 CO-440(pg. 168)...... C1440 CO-440-A(pg. 168)....... C1440 CO-440-RD...(pg. 169).... C1440-RD CO-450(pg. 170)...... C1450 CO-450-RD ...(pg. 171)... C1450-RD CO-450-RD-60 (pg. 171) C1450-RD-30 CO-450-RD-61 (pg. 171) C1450-RD-31 CO-450-S(pg. 171)..... C1450-S CO-450-S-1 ..(pg. 171)... C1450-S-1 CO-450-S-3 ..(pg. 171)... C1450-S-1 CO-450-S-60-1 (pg. 171) C1450-S-30-1 CO-450-S-60-3 (pg. 171) C1450-S-30-1 CO-450-S-61-1 (pg. 171) C1450-S-31-1 CO-450-S-61-3 (pg. 171) C1450-S-31-1 CO-450-60(pg. 170).... C1450-30 CO-450-61(pg. 170).... C1450-31 CO-460(pg. 172)...... C1460 CO-460-RD ...(pg. 173)... C1460-RD CO-460-S(pg. 173).... C1460-S CO-460-S-1 ... (pg. 173).. C1460-S-1 CO-460-S7-1 .(pg. 173) C1460-S7-1 CO-480(pg. 166)...... C1400 CO-480-R(pg. 166).... C1400-R CO-480-RD ...(pg. 167)... C1400-RD CO-480-RD4.5 (pg. 167) C1400-RD4 CO-480-RD6 .(pg. 167). C1400-RD6 CO-480-RD6.5 (pg. 167) C1400-RD6 CO-480-RD8 .(pg. 167). C1400-RD8 CO-480-RD9 (pg. 167) C1400-RD10 CO-480-RD11 (pg. 167) C1400-RD10 CO-480-R6-1 .(pg. 166) C1400-R6-1 CO-480-R8-1 (pg. 166) C1400-R9-1 CO-480-R9-1 (pg. 166) C1400-R9-1 CO-480-S(pg. 166)..... C1400-S CO-480-S7-1 .(pg. 166).C1400-S7-1 CO-480-S9-1 .(pg. 166) C1400-S9-1 CO-480-S12-1 (pg. 166) C1400-S12-1 CO-590(pg. 167)...... C1430 CO-590-R(pg. 167)... C1430-RD CO-590-RD ...(pg. 167)... C1430-RD CO-1100-C-R .(pg. 156).C1000-C-R-3* CO-1100-C-R-3 (pg. 156) C1000-C-R-3* CO-1100-C-S(pg. 158) C1000-C-S-3* CO-1100-C-S-3 (pg. 158) C1000-C-S-3* CO-1200-C-R ..(pg. 156). C1000-R-3 CO-1200-C-R-3 (pg. 156) C1000-R-3 CO-1200-S ...(pg. 158).... C1000-S-3 CO-1200-SX .(pg. 158).... C1000-S-3 CO-1200-R .. (pg. 156).... C1000-R-3 CO-1200-RX (pg. 156).... C1000-R-3

CLEANOUT OPTIONAL VARIATIONS FLOOR AND AREA DRAINS CON'T

WATTS MIFAB -1.....Nickel Bronze (pg. 319, 320) -1 -2......Polished Bronze (pg. 319, 320) -2 -3......Stainless Steel (pg. 319, 320) -3 -4......Ductile Iron . (pg. 319, 320). -4 -6......Vandal proof (pg. 319, 320) -6 -9......Hinged cover (pg. 319, 320) -9 -13.....All galvanized (pg. 319, 320) -13 .304 Stainless Steel (pg. 319, 320) -28 ..316 Stainless Steel (pg. 319, 320) -29 Secondary closure Plug (pg. 319, 320) -34 ..Brass threaded plug (pg. 319, 320) -34B -34G... ..ABS expansion plug (pg. 319, 320) -34 -60.....PVC body .(pg. 319, 320). -30 -61.....ABS body .(pg. 319, 320). -31 -85.....Special word on top (pg. 319, 320) -95 -87.....Longer screw (pg. 319, 320). -87 -100...Client logo (pg. 319, 320). -95 -113M3M epoxy .(pg. 319, 320). -11 Push on connection . (pg. 319, 320) P .Female threaded conn (pg. 319, 320) T Inside caulk connection (pg. 319, 320) X .Elastomeric flange ..(pg. 319, 320) -Z

FLOOR And area drains

```
WATTS
FD-100-C-RS-48-1..(pg. 39). F1100-C-RS48-1*
FD-100-C-RS-412-1(pg. 39) F1100-C-RS412-1*
FD-100-C-RS-517-1 (pg. 39) F1100-C-RS517-3*
FD-100-C-VD. (pg. 41). F1100-C-VD*
FD-100-C-VS . (pg. 40).F1100-C-SD6*
FD-100-C-W .. (pg. 42).. F1100-C-W*
FD-100-C-WD (pg. 42) F1100-C-WD*
FD-100-C-WD-1 .(pg. 42) F1100-C-WD-3*
FD-100-C-5-1 . (pg. 42) F1100-C-X5-1*
FD-100-C-5-3 .(pg. 42) F1100-C-X5-1*
FD-100-C-5-4 (pg. 33) F1100-C-5-4*
FD-100-C-6-1 (pg. 42) F1100-C-X6-1*
FD-100-C-6-3 (pg. 42) F1100-C-X6-1*
FD-100-C-8-1 (pg. 42) F1100-C-X8-1*
FD-100-DD ..(pg. 34).. F1100-C-DD*
FD-100-DD-1 .(pg. 34) F1100-C-DD-1*
FD-100-DD-50 (pg. 34) F1100-C-DD-50*
FD-100-EF ... (pg. 35)... F1100-C-EF*
FD-100-EF-1 (pg. 35) F1100-C-EF-1*
FD-100-EF-50 (pg. 35) F1100-C-EF-50*
FD-100-EG .. (pg. 35)... F1100-C-EG*
FD-100-EG-1 .(pg. 35). F1100-C-EG-1*
FD-100-EG-50 (pg. 35) F1100-C-EG-50*
FD-100-ER...(pg. 36)... F1100-C-ER*
FD-100-ER5 (pg. 36). F1100-C-ER7*
FD-100-ER7 .(pg. 36) F1100-C-ER7*
FD-100-FC....(pg. 36)... F1100-C-FC*
FD-100-FT6 .(pg. 37). F1100-C-FT6*
FD-100-K ....(pg. 38)..... F1100-C-K*
FD-100-L .. (pg. 43).. F1100-C-XS-1*
FD-100-L5 .(pg. 43) F1100-C-XS5-1*
FD-100-L6 (pg. 43) F1100-C-XS6-1*
FD-100-L8 (pg. 43) F1100-C-XS8-1*
FD-100-M ....(pg. 39).... F1100-C-S*
FD-100-M5 .(pg. 39) F1100-C-S5-1*
FD-100-M6 .(pg. 39) F1100-C-S6-1*
FD-100-M8 .(pg. 39) F1100-C-S8-1*
FD-100-RS ...(pg. 39)...F1100-C-RS*
FD-100-RS48(pg. 39) F1100-C-RS48-1*
FD-100-RS412 (pg. 39) F1100-C-RS412-1*
FD-100-RS517(pg. 39) F1100-C-RS517-3*
FD-100-VS ..(pg. 40)... F1100-C-SD6
FD-100-VD ..(pg. 41)... F1100-C-VD*
FD-100-WD (pg. 42) F1100-C-WD-3*
FD-160-C ...(pg. 44).... F1100-C-90*
FD-160-C-A5-1.(pg. 44). F1100-C-5-1-90*
FD-160-C-A6-1 .(pg. 44). F1100-C-6-1-90*
FD-160-C-A7-1 .(pg. 44). F1100-C-7-1-90*
FD-160-C-A8-1 .(pg. 44). F1100-C-8-1-90*
FD-174.......(pg. 50)...... F1170
FD-200 ......(pg. 42)...... F1100-X-1
FD-200-A .....(pg. 33)..... F1100-1
FD-200-AS ...(pg. 34).... F1100-AS-1
FD-200-A5 ....(pg. 33)..... F1100-5-1
FD-200-A6 ....(pg. 33)..... F1100-6-1
FD-200-A7 ....(pg. 33)..... F1100-7-1
FD-200-A8 .....(pg. 33)..... F1100-8-1
FD-200-A10 ...(pg. 33)... F1100-10-1
FD-200-A5-1..(pg. 33)..... F1100-5-1
FD-200-A6-1..(pg. 33)..... F1100-6-1
FD-200-A7-1..(pg. 33)..... F1100-7-1
FD-200-A8-1..(pg. 33)..... F1100-8-1
FD-200-B ......(pg. 42).....F1100-X-1
FD-200-B5 .....(pg. 42)....F1100-X5-1
FD-200-B5-4 ..(pg. 33).... F1100-5-4
FD-200-B5-50 (pg. 33).... F1100-5-4
FD-200-B6 .....(pg. 42)....F1100-X6-1
FD-200-B8 .....(pg. 42)... F1100-X8-1
```

```
FD-200-DD .....(pg. 34)...... F1100-DD
FD-200-DD-1 ..(pg. 34).. F1100-DD-1
FD-200-DD-50 (pg. 34) F1100-DD-50
FD-200-EF .....(pg. 35)......F1100-EF
FD-200-EF-1 ..(pg. 35).... F1100-EF-1
FD-200-EF-50 .(pg. 35). F1100-EF-50
FD-200-EG .....(pg. 35).... F1100-EG
FD-200-EG-1 ...(pg. 35).. F1100-EG-1
FD-200-EG-50 (pg. 35) F1100-EG-50
FD-200-ER .....(pg. 36)..... F1100-ER
FD-200-ER5 ...(pg. 36). F1100-ER7-1
FD-200-ER5-1 (pg. 36). F1100-ER7-1
FD-200-ER7 ... (pg. 36). F1100-ER7-1
FD-200-ER7-1 (pg. 36). F1100-ER7-1
FD-200-ER9-1 (pg. 36). F1100-ER9-1
FD-200-FC .....(pg. 36)..... F1100-FC
FD-200-FC7-1.(pg. 36). F1100-FC7-1
FD-200-FC9-1.(pg. 36). F1100-FC9-1
FD-200-FT6 ....(pg. 37).... F1100-FT6
FD-200-FT6-1 .(pg. 37). F1100-FT6-1
FD-200-K ......(pg. 38)...... F1100-K
FD-200-K-1.....(pg. 38)..... F1100-K-1
FD-200-L .....(pg. 43)..... F1100-XS-1
FD-200-L5 ...(pg. 43).... F1100-XS5-1
FD-200-L6 ...(pg. 43).... F1100-XS6-1
FD-200-L8 ...(pg. 43).... F1100-XS8-1
FD-200-L5-1 .(pg. 43).. F1100-XS5-1
FD-200-L6-1 .(pg. 43).. F1100-XS6-1
FD-200-L8-1 .(pg. 43).. F1100-XS8-1
FD-200-M......(pg. 39)...... F1100-S
FD-200-M5 ...(pg. 39).... F1100-S5-1
FD-200-M6 ...(pg. 39).... F1100-S6-1
FD-200-M8 ...(pg. 39).... F1100-S8-1
FD-200-M5-1 (pg. 39).... F1100-S5-1
FD-200-M6-1 (pg. 39).... F1100-S6-1
FD-200-M8-1 (pg. 39).... F1100-S8-1
FD-200-RS ....(pg. 39)...... F1100-RS
FD-200-RS48 (pg. 39) F1100-RS48-1
FD-200-RS-48-1 (pg. 39) F1100-RS48-1
FD-200-RS412.(pg. 39) F1100-RS412-1
FD-200-RS-412-1. (pg. 39). F1100-RS412-1
FD-200-RS517 .(pg. 39). F1100-RS517-3
FD-200-RS-517-1 (pg. 39).F1100-RS517-3
FD-200-VD .....(pg. 41)..... F1100-VD
FD-200-VS .....(pg. 40).... F1100-SD6
FD-200-W .....(pg. 42).... F1100-W-3
FD-200-W-1 ...(pg. 42).... F1100-W-3
FD-200-WD ....(pg. 42).. F1100-WD-3
FD-200-WD-1..(pg. 42). F1100-WD-3
FD-200-5-1 ....(pg. 42)... F1100-X5-1
FD-200-5-3 ....(pg. 33)..... F1100-5-3
FD-200-5-4 ....(pg. 33)..... F1100-5-4
FD-200-6-1 ....(pg. 42)... F1100-X6-1
FD-200-6-3 ....(pg. 33)..... F1100-6-3
FD-200-8-1 ....(pg. 42)... F1100-X8-1
FD-220-C ......(pg. 48)..... F1120-C*
FD-220-C-A5-1 (pg. 48) F1120-C-5-1*
FD-220-C-A6-1(pg. 48) F1120-C-6-1*
FD-220-C-A7-1(pg. 48) F1120-C-7-1*
FD-220-C-A8-1(pg. 48) F1120-C-8-1*
FD-230-A ......(pg. 48)..... F1130C
FD-230-A5 .....(pg. 48)... F1130C-5-1
FD-230-A6 .....(pg. 48)... F1130C-6-1
FD-230-C-A5 ..(pg. 48)... F1130C-5-1
FD-230-C-A6 ..(pg. 48).. F1130C-6-1
FD-230-C-A .....(pg. 48)...... F1130C
FD-230-C-A5-1 (pg. 48). F1130C-5-1
FD-230-C-A6-1 (pg. 48). F1130C-6-1
FD-230-C-A7-1 .(pg. 48) F1130C-7-1
FD-240.....(pg. 49)..... F1160
"X".....Contact MIFAB
```

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit www.mifab.com for the most recent product information.

"X".....Contact MIFAB



FLOOR DRAIN ADJUSTABLE STRAINERS

WATTS		MIFAE
STANDARD 5-	1(pg. 4	46) X5-1
STANDARD 5-4	4(pg. 4	16) 5-4
STANDARD 6-		
STANDARD 8-		
A5-1		
A6-1	(pg. 46)	6-1
A7-1	(pg. 46)	7-1
A8-1	(pg. 46)	8-1
AS 4X5X4-1	(pg. 46)	AS-1
DD-1	(pg. 46)	DD-1
DD-50	(pg. 46)	DD-50
EF4-1	(pg. 46)	EF4-1
EF4-50	(pg. 46)	EF4-50
EF6-1	(pg. 46)	EF6-1
EF6-50	(pg. 46)	EF6-50
EG-1	(pg. 46)	EG-1
EG-50	(pg. 46)	EG-50
ER5-1	(pg. 46)	ER5-1
ER7-1	(pg. 46)	ER7-1
ER9-1	(pg. 46)	ER9-1
FC7-1	(pg. 46)	FC7-1
FC9-1	(pg. 46)	FC9-1
FT6-1		
K5-1	(pg. 46)	K5-1
L5-1	(pg. 46)	XS5-1
L6-1	(pg. 46)	XS6-1
L8-1	(pg. 46)	XS8-1
M5-1	(pg. 46)	S5-1
M6-1	(pg. 46)	S6-1
M8-1	(pg. 46)	S8-1
RS48-1	(pg. 46)	RS48-1
RS412-1	(pg. 46)	RS412-1
RS517-1	(pg. 46)	RS517-3
W-1	(pg. 47)	W-3
WD-1	(pg. 47)	WD-3

HEAVY DUTY FLOOR AND AREA DRAINS

WATTS MIFAB
FD-300(pg. 52) F1300-C*
FD-300-1(pg. 52) F1300-C-1*
FD-300-4(pg. 52) F1300-C-4*
FD-310(pg. 52) F1300-C*
FD-310-1(pg. 52) F1300-C-1*
FD-310-4(pg. 52) F1300-C-4*
FD-320(pg. 53) F1320-C*
FD-320-1(pg. 53) F1320-C-1*
FD-320-4(pg. 53) F1320-C-4*
FD-320-25(pg. 53) F1320-C-25*
FD-320-25-1(pg. 53) F1320-C-25-1*
FD-320-Y(pg. 53). F1320-C-Y-14*
FD-320-Y-1 (pg. 53) F1320-C-Y-14-1*
FD-320-Y-4 (pg. 53) F1320-C-Y-14-4*
FD-320-SET(pg. 53) F1320-TFB
FD-320-Y-SET(pg. 53) F1320-TFB
FD-330(pg. 61) F1420-C*
FD-330-Y(pg. 61) F1420-C-Y*
FD-330-Y-1(pg. 61) F1420-C-Y-1*
FD-330-1(pg. 61) F1420-C-1*
FD-330-4(pg. 61) F1420-C-4*
FD-340(pg. 54) F1340
FD-340-Y(pg. 54) F1340-Y
FD-340-Y-1(pg. 54) F1340-Y-1
FD-340-Y-4(pg. 54) F1340-Y-4
FD-340-1(pg. 54) F1340-1
FD-340-4(pg. 54) F1340-4

00 1121		_
ED 040 C7	(n = CO)	E4 E 4 O
гD-940-01	(þg. 69)	F1340
FD-340-67 FD-340-SET	(pa. 55)	F1340-TFB
FD-340-Y-SET	(ng 55)	F13/10_TFR
ED 050	(pg. 00)	1 10 TO 11 D
FD-350 FD-350-Y-36 FD-350-1	.(pg. 58)	F1350
FD-350-Y-36	(ng 58) F1	1350-Y-36-4
TD 000 1 00	(pg. 00)i	T10E0 1
FD-350-1	(pg. 58)	11350-1
FD-350-4 FD-360	(ng. 58)	F1350-4
ED 000 1	(pg. 00)	E1000
FD-300	(pg. ɔ9)	1300
FD-360-1 FD-360-4	(pg. 59)	F1360-1
ED 360 4	(pg. 50)	E1060 /
ru-300-4	(pg. ၁ ୭)	F130U-4
FD-360-Y	(pa. 59)	F1360
FD-370	(na 6Ó)	F1370
TD-070	(pg. 00)	1 10/0
FD-370-1	(pg. 60)	F13/0-1
FD-370-4	(na 60)	F1370-4
FD 000	(pg. 00)	
FD-380	(pg. 51)	. F123U-WF
FD-390	(ng. 52)	F1300-14
ED 300 E	(pg. 51)	E1000
FD-390-E	(pg. ɔ ɪ)	F1230
FD-390-E-1	(pg. 51)	F1230-1
ED 200 E 4	(ng 51)	E1000 /
FD-390-E-4	(þg. <u>5 i)</u>	
FD-390-E-1 FD-390-E-4 FD-390-E-63 FD-390-E-63-	(pg. 51)	F1230-WF
FD_390_F_63_	1 (na 51) F	1230_WF_1
TD 000 L 00	/ FO	T4000 44 4
FD-390-1	.(pg. 52)	F1300-14-1
FD-390-4	.(pg. 52)	F1300-14-4
ED 410	(pg. 70)	[1E70
FD-410 FD-410-A	(pg. 70)	F15/U
FD-410-A	(pg. 70)	F1570-A-4
FD 410 D	(pg. 70)	C1E70 D 4
FD-410-B	.(pg. 70)	. F13/U-B-4
FD-410-C	.(pa. 70)	. F1570-C-4
FD-410-D	(pg. 70)	E1570 D /
гр-410-р	.(pg. / u)	F1370-D-4
FD-410-E	(pg. 70)	F1570-E-4
FD-430	(ng 70)	F1560
FD 400 d	(pg. 70)	1 1000
FD-430-1	(pg. /U)	F156U-1
FD-430-4	(ng 70)	F1560-4
FD 440	(pg. 10)	MI OC
FD-440	(pg. 194)	1711-05
FD-440-12	(ng. 194)	MI-0S-1
ED 110 ED	(pg. 101)	MI OC 2
FD-440-60 FD-440-100 .	(pg. 194)	1711-03-2
FD-440-100 .	(pa. 194)	MI-0S-3
FD_440_200	(ng 10/)	MI_OS_4
TD-440-200.	(pg. 134)	1411-00-4
FD-440-200 . FD-450	(pg. 65)	F1460
FD-450-AF FD-450-AF-1	(na 65)	F1460
FD 450 AF 4	(pg. 00)	F4 400 4
FD-45U-AF-1	(pg. b5)	11460-1
FD-450-AF-4	(pa. 65)	F1460-4
FD-450-F	(pg. 65)	E1/160
гр-430-г	(pg. 65)	F1400
FD-450-F-1	(pg. 65)	F1460-Y-1
FD-450-F-4	(ng 65)	F1/160_V_/
TD-430-1-4	(pg. 05)	
FD-450-1	(pg. 65)	F1460-1
FD-460	(na 62)	F1440
FD 400 AF	(pg. 02)	
FD-460-AF	(pg. 62)	F1440
FD-460-AF-1.	(ng. 62)	F1440-1
FD-460-AF-4.	(pg. 62)	E1 / / O /
FD-400-AF-4.	(pg. 62)	Г1440-4
FD-460-F	(pg. 62)	F1440-Y-14
FD-460-F-1	(ng 62) E	1//N V 1// 1
TD-400-1-1	(pg. 02) I	1440-1-14-1
FD-460-F-4	(pg. 62) F	144U-Y-14-4
FD-460-F-9-4	6 (ng. 70) F1560
ED 460 1	(ng 62)	E1///0 1
FD-460-1	(pg. 02)	1 1440-1
FD-470-F-1	(pg. 65)	F1460-Q
FD-480-AF-1	(ng 64)	F1450-1
FD 400 AF 4	(pg. 01).	[] 100 [
FD-480-AF-4	(pg. 64)	F145U-4
FD-490	(na 60)	F1510
ED 400 ATE	(pg. 00)	1510 00 TE
FD-490-ATE	.(pg. 68) F	1510-80-TE
FD-490-ATE FD-490-F-4	.(pg. 68) F	1510-80-TE
FD-490-F-4	.(pg. 68) F (pg. 68)	1510-80-TE F1510-4
FD-490-F-4 FD-490-F-4-A	.(pg. 68) F (pg. 68) TE.(pg. 68)	1510-80-TE F1510-4 .F1510-4-TE
FD-490-F-4 FD-490-F-4-A FD-490-F-80.	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68)	1510-80-TE F1510-4 .F1510-4-TE F1510-80
FD-490-F-4 FD-490-F-4-A FD-490-F-80.	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68)	1510-80-TE F1510-4 .F1510-4-TE F1510-80
FD-490-F-4 FD-490-F-4-A FD-490-F-80. FD-470-AF-1	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65)	1510-80-TE F1510-4 .F1510-4-TE F1510-80 F1470-3
FD-490-F-4 FD-490-F-4-A FD-490-F-80. FD-470-AF-1 FD-470-AF-4	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65)(pg. 65)	1510-80-TE F1510-4 .F1510-4-TE F1510-80 F1470-3 F1470-4
FD-490-F-4 FD-490-F-4-A FD-490-F-80. FD-470-AF-1 FD-470-AF-4	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65)(pg. 65)	1510-80-TE F1510-4 .F1510-4-TE F1510-80 F1470-3 F1470-4
FD-490-F-4 FD-490-F-4-A FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65)	1510-80-TE F1510-4 F1510-4-TE F1510-80 F1470-3 F1470-4 F1460-Q
FD-490-F-4 FD-490-F-4-A FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 64)	1510-80-TE F1510-4 .F1510-4-TE F1510-80 F1470-3 F1470-4 F1460-Q F1450
FD-490-F-4 FD-490-F-4-A FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 64)	1510-80-TE F1510-4 .F1510-4-TE F1510-80 F1470-3 F1470-4 F1460-Q F1450
FD-490-F-4 FD-490-F-4-A FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF FD-490-F-4-T	.(pg. 68) F (pg. 68) TE.(pg. 68)(pg. 68)(pg. 65)(pg. 65)(pg. 65)(pg. 64)	1510-80-TE F1510-4 .F1510-4-TE F1510-80 F1470-3 F1470-4 F1460-Q F1450 F1510-4-TE
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-1 FD-470-F-1 FD-480-AF FD-490-F-4-T FD-490-F-4-1	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 64) (pg. 68) 0.(pg. 68)	1510-80-TE F1510-4 .F1510-4-TE F1510-80 F1470-3 F1470-4 F1460-Q F1450 F1510-4-TE . F1510-4-6
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF FD-490-F-4-1 FD-490-F-80-F	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 65) (pg. 64) E.(pg. 68) 0(pg. 68) TE.(pg. 68).	1510-80-TE F1510-4 F1510-4-TE F1510-80 I F1470-3 I F1460-Q I F1450 F1510-4-F F1510-4-6 F1510-80-TE
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF FD-490-F-4-1 FD-490-F-80-F	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 65) (pg. 64) E.(pg. 68) 0(pg. 68) TE.(pg. 68).	1510-80-TE F1510-4 F1510-4-TE F1510-80 I F1470-3 I F1460-Q I F1450 F1510-4-F F1510-4-6 F1510-80-TE
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF FD-490-F-4-1 FD-490-F-80-F FD-490-F-80-F	.(pg. 68) F (pg. 68) TE.(pg. 68)(pg. 68) (pg. 68)(pg. 65)(pg. 65) (pg. 65) (pg. 64) E.(pg. 68) 0.(pg. 68) TE.(pg. 68) TE.(pg. 68)	1510-80-TE F1510-4 F1510-4-TE F1510-80 F1470-3 F1460-Q F1450 F1510-4-TE .F1510-80-TE F1510-80-TE F1510-80-TE
FD-490-F-4 FD-490-F-4A- FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-F-4-T FD-490-F-4-T FD-490-F-80-F FD-490-F-80-F FD-490-TE	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 64) E(pg. 68) 0(pg. 68) (pg. 68) (pg. 68) (pg. 68)	1510-80-TE F1510-4 F1510-4-TE F1510-80 F1470-3 F1470-4 F1450 F1510-4-TE .F1510-80-TE F1510-80-TE F1510-80-TE
FD-490-F-4 FD-490-F-4A- FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-F-4-T FD-490-F-4-T FD-490-F-80-F FD-490-F-80-F FD-490-TE	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 64) E(pg. 68) 0(pg. 68) (pg. 68) (pg. 68) (pg. 68)	1510-80-TE F1510-4 F1510-4-TE F1510-80 F1470-3 F1470-4 F1450 F1510-4-TE .F1510-80-TE F1510-80-TE F1510-80-TE
FD-490-F-4 FD-490-F-4-A FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF FD-490-F-4-T FD-490-F-80-F FD-490-F-80-F FD-490-F-80-F FD-500	.(pg. 68) F (pg. 68) TE.(pg. 68) (pg. 68) (pg. 65) (pg. 65) (pg. 64) (pg. 68) 0(pg. 68) TE(pg. 68) (pg. 69) F (pg. 69) F	1510-80-TE F1510-4 F1510-4-TE F1510-80 F1470-3 F1470-4 F1460-Q F1450 F1510-4-TE .F1510-80-TE 1540-80-TE 1540-80-TE
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-1 FD-470-F-1 FD-480-AF FD-490-F-4-1 FD-490-F-80-AF FD-490-F-80-AF FD-490-F-80-AF FD-500	.(pg. 68) F(pg. 68) TE.(pg. 68)(pg. 68)(pg. 65)(pg. 65)(pg. 65)(pg. 64) E(pg. 68) 0.(pg. 68)(TE(pg. 68) E(pg. 68) E(pg. 68) (pg. 69) F (pg. 70)	1510-80-TE F1510-4 F1510-8-TE F1510-80 F1470-3 F1470-4 F1450 F1510-4-TE .F1510-80-TE F1510-80-TE F1540-80-TE F1560 F1590-90
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF FD-490-F-4-T FD-490-F-80-A FD-490-F-80-A FD-500 FD-520	.(pg. 68) F(pg. 68) TE.(pg. 68)(pg. 68)(pg. 68)(pg. 65)(pg. 65)(pg. 64) E(pg. 68)(pg. 68)(pg. 68)(pg. 69) F (pg. 69) F (pg. 70)	1510-80-TE F1510-4 .F1510-80-TE F1510-80 F1470-3 F1470-3 F1460-Q F1450 F1510-4-TE . F1510-4-6 F1510-80-TE F1540-80-TE F1540-90 F1590-90-3
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-4 FD-470-F-1 FD-480-AF FD-490-F-4-T FD-490-F-80-A FD-490-F-80-A FD-500 FD-520	.(pg. 68) F(pg. 68) TE.(pg. 68)(pg. 68)(pg. 68)(pg. 65)(pg. 65)(pg. 64) E(pg. 68)(pg. 68)(pg. 68)(pg. 69) F (pg. 69) F (pg. 70)	1510-80-TE F1510-4 .F1510-80-TE F1510-80 F1470-3 F1470-3 F1460-Q F1450 F1510-4-TE . F1510-4-6 F1510-80-TE F1540-80-TE F1540-90 F1590-90-3
FD-490-F-4 FD-490-F-80. FD-470-AF-1 FD-470-AF-1 FD-470-F-1 FD-480-AF FD-490-F-4-1 FD-490-F-80-AF FD-490-F-80-AF FD-490-F-80-AF FD-500	.(pg. 68) F(pg. 68) TE.(pg. 68)(pg. 68) (pg. 68) (pg. 68) (pg. 65) (pg. 64) (pg. 68) (pg. 68) TE.(pg. 68) (pg. 68) (pg. 69) F (pg. 69) F (pg. 70) (pg. 71)	1510-80-TE F1510-4. F1510-8-TE F1510-80 F1470-3 F1470-4 F1450 F1510-4-TE F1510-4-6 F1510-80-TE F1510-80-TE F1540-80-TE F1540-80-TE F1590-90-3 F1590-90-4

FLOOR AND AREA DRAINS CON'T

FLUUK AND AKEA	DRAINS CON
WATTS	MIFAB
FD-530-1(pg. 71)	F1590-3
FD-530-4(pg. 71)	F1590-4
$-11_{-5/11}$ (ng /1	1 F158N
FD-540-3(pg. /1)	F1580-3
FD-040-00(pg. / 1)	F100U-4
FD-540-3(pg. 71) FD-540-50(pg. 71) FD-600(pg. 72) FD-600-5-1 .(pg. 72)	. F1000-0-X-1 F1600-C-X5-1*
FD-600-5-1 (pg. 72)	F1600-0-X5-1
FD-600-5-4 .(pg. 72) FD-600-6-1 .(pg. 72) FD-600-8-1 .(pg. 72)	F1600-C-X6-1*
FD-600-8-1 .(pg. 72)	F1600-C-X8-1*
FD-600-A5-1 .(pg. 72)) F1600-C-5-1*
FD-600-A6-1 .(pg. 72)	F1600-C-6-1*
FD-600-A7-1 .(pg. 72) FD-600-A8-1 .(pg. 72)) F1600-C-/-1*
FD-600-A0-1 .(pg. 72)	F1620_C*
FD-620(pg. 72) FD-620-1(pg. 72)	F1620-C-1*
FD-620-4(pg. /2)	F1620-G-4*
FD-750(pg. 75)	F1760-FL
FD-750-1(pg. 75)	F1760-FL-3
FD-750-4(pg. 75)	F1760-FL-4
FD-760 1 (pg. 75)	F1/6U-FL
FD-760(pg. 75) FD-760-1 (pg. 75) FD-760-4(pg. 75) FD-810(pg. 54)	F1760-FL-1
FD-810(pg. 76)	. F1340-C-Y-5*
FD-820(DQ. /4	1)1050
FD-820-G(pg. /4) F1650-G
FD-820-G-1(pg. 7-FD-820-G-1-10 .(pg. 7-FD-820-G-1-10 .	4) F1650-G-1
FD-820-G-1-10 .(pg. /	(4) F1650-6-1
FD-820-1(pg. 74	ł) F100U-1)
FD-820-1-10(pg. 74 FD-830(pg. 78 FD-860(pg. 76) F1030-0-1
FD-860	F1810-50
FD-860-PA(pg. / t	b) F1810-50
FD-860-PA-81 (na 76	3) F1810-81
FD-870(pg. 7/FD-870(pg. 7/FD-870(pg. 7/FD-870-PL(pg. 77	6)F1820
FD-870(pg. 7	6) F1820-81
FD-870-PL(pg. 77) F183U-PL
FD-870-PL-1(pg. 77 FD-870-P-1(pg. 77). F1830-FL-50
E(1) = 8 / (1) = 1 / (2)	(8) F18/III
FD-870-TG-1(pg. 7 FD-870-TG-3(pg. 7 FD-870-TG-4(pg. 7	78) F1840-1
FD-870-TG-3(pg.	78) F1840-3
FD-870-TG-4(pg. 7	78) F1840-4
FD-880(Da. 72)F1b2U
FD-900(pg. 69 FD-910(pg. 69) F1540 1 F1550
FD-920 (pg. 68)	F1530
FD-920(pg. 68 FD-940(pg. 54) FD-940-1(pg. 54).	F1330C-5
FD-940-1(pg. 54).	F1330C-5-1
FD-940-3 (ng 54)	F1330C-5-3
FD-940-4(pg. 54). FD-1030-F(pg. 49 FD-1030-F-1(pg. 49 FD-1030-F-4(pg. 49	F1330U-5-4
FD-1030-F(pg. 49)) F11406 3) F1140C-1
FD-1030-F-4 (ng 49)) F1140C-4
FI = 1 1 1 1 1 1 - Δ (DO 32)	F
FD-1100-B5 (pg. 32). FD-1100-B6 (pg. 32). FD-1100-C (pg. 32). FD-1100-C-L (pg. 32). FD-1100-C-L-5-3 (pg. 32).	F1000-C-5-3*
FD-1100-B6 .(pg. 32).	F1000-C-6-3*
FD-1100-C(pg. 32)	F1000-C-3*
FD-1100-G-L (pg. 32)	F1000-6-55-3^ N F1000-C-S5-3*
FD-1100-C-L-6-3.(pg. 32) F1000-C-S6-3*
FD-1100-C-L-6-3.(pg. 32 FD-1100-C-5-3. (pg. 32 FD-1100-C-6-3. (pg. 32) F1000-C-5-3*
FD-1100-C-6-3. (pg. 32	!) F1000-C-6-3*
FD-1100-L(pg. 32). F	1000-6-55-3"
FD-1100-L5.(pg. 32) FD-1100-L6.(pg. 32) F	1000-C-SS-3*
FD-1100-M (ng 32	7) F1000-S
FD-920(pg. 68	s) F1530
FD-920(pg. 68 FD-1160(pg. 32 FD-1200-A(pg. 32	"X"
FD 1000 B (7.00)	2) F1000-3
FD-1200-B(pq. 32	2) F1UUU-5-3
FD-1200-6-3(pg. 32 FD-1200-L/M(pg. 32	7 F1000-0-3 P) F1000-85-3
FD-1200-L-5-3 (pg. 32	2). F1000-S5-3
FD-1200-L-5-3 (pg. 32 FD-1200-L-6-3 (pg. 32	2). F1000-S6-3
FD-1390(pg. 6	6) F1490

FLOOR AREA AND SPECIAL PURPOSE DRAIN OPTIONAL VARIATIONS

WATT	S MIFAB
-1	Nickel bronze1
	Polished bronze2
	.Stainless steel3
	Ductile iron4
-5	.Sediment bucket5
-6	6
6"	.6" No hub outlet 6
-7	Trap seal primer tapping7
	. Backwater valve8
-9	.Hinged grate9
	.Secured Top STANDARD
-11	.Acid rst.epoxy coating11
-12	.Galvanized top only12
	.All Galvanized13
	.Non tilt grate14 .Extension15
16	Square top16
-18	Dome grate20
	.Secondary dome strainer -20
-21	.Secondary flat strainer21
	.Less grate22
	.Secured solid cover24
	.Hinged solid NB cover25-1
-26	Hinged locking grate6
-28	.All Stainless Steel (304)28
-29	.All Stainless Steel (316)29
-31	Flange33
-32	Anchor Flange & clamp32
-34	34
	.SS mesh screen bucket35
	Garbage can assembly36
	38
-39	.Full flow grate39
-40	.Deck clamp40
	.Sump receiver41 .Perforated standpipe42
42	.Standpipe over 8"43
-43	1-1/2" or 2" aux inlets44
	48
	.Chr.Pl. str. Asbly49
-50	.Cast iron50
	.PVC Body w/socket outlet-30
	.ABS Body w/socket outlet-31
-63	.Wood deck floor flangeWF
-81	.Bronze top81
-113M.	.3M epoxy finish3M
-B	Sump receiverB
-C	.Membrane Clamp
	.Deck ClampD
-F4	.4" funnelF4
	.4" Nickel bronze funnel -F4-1
-F4-50	4" Cast iron funnelF4-50
-F6-1	.6" nickel bronze funnelF6-1
-10-50	6" cast iron funnelF6-50
	.4" X 9" funnelG
	.4" X 9" NB funnelG-1 .4" X 9" cast iron funnelG-50
	.5X17 Oval NB funnel "X"
	.5X17 Oval OI funnel "X"
-,J-1	6" x 3" NB funnelJ-1
P	Push on outletP
-S0	.Side outlet90
	Threaded outlet T
	.Inside caulk outletX
	.Extended wide flangeZ

Design and dimensions are subject to modification. Prices do not include applicable taxes.



SANITARY FLOOR, AREA AND
INDIRECT WASTE DRAINS

WATTS	MIFAB
FS-710(pg. 97)	FS1520
FS-710-1(pg. 97)	FS1520-1
FS-710-3(pg. 97)	
FS-720(pg. 102)	FS1750
FS-720-1(pg. 102)	
FS-720-3(pg. 102)	
FS-730(pg. 99)	
FS-730-1(pg. 99)	
FS-730-3(pg. 99)	
FS-740(pg. 100)	
FS-740-1(pg. 100)	
FS-740-3(pg. 100)	
FS-750(pg. 101)	
FS-750-1(pg. 101)	
FS-750-3(pg. 101)	
FS-760(pg. 103)	
FS-760-1(pg. 103)	FS1760-1
FS-760-3(pg. 103)	FS1760-3
FS-770(pg. 98)	
FS-780(pg. 106)	
FS-790(pg. 106)	
FS-800(pg. 58) I	
FS-850(pg. 104)	
FS-890(pg. 74)	
FS-900(pg. 105)	F31790

SANITARY FLOOR, AREA AND INDIRECT WASTE DRAIN **OPTIONAL VARIATIONS**

OI IIOIME WIIIMIIOIO		
WATTS MIFAB		
-FAnchor flange		
-FCAnchor fl & clampFLC		
-F4-14" Dia. NB FunnelF4-1		
-F6-16" Dia. NB FunnelF6-1		
-G-14" x 9" oval NB funnelG-1		
PPush on outletP		
STDNo hub outlet Standard		
XInside caulk outletX		
-3SS rim and grate3		
-5Sediment bucket5		
-6Vandal proof6		
-7Trap seal primer tapping7		
-21Secondary flat strainer21		
-22Less grate22		
-1282-1/2" center opening51		
-150Half grate150		
-1753/4 grate175		
WALL AND ODOLIND LIVEDANTO		

WALL AND GROUND HYDRANIS
WATTS MIFAE
HY-300(pg. 249) MHY-45
HY-300-3/4(pg. 249) MHY-45
HY-300-1(pg. 249) MHY-45
HY-300-2(pg. 249) MHY-45
HY-330(pg. 248) MHY-35
HY-330-3/4(pg. 248) MHY-35
HY-330-1(pg. 248) MHY-35
HY-420(pg. 247) MHY-10
HY-430(pg. 248) MHY-30
HY-500(pg. 253) MHY-60
HY-500 - 3/4", 1" .(pg. 253). MHY-60
HY-500 - 1 1/4", 1 1/2", 2". (pg. 253) MHY-61
HY-600(pg. 254) MHY-65
HY-600 - 3/4", 1"(pg. 254). MHY-65
HY-600 - 1 1/4", 1 1/2", 2". (pg. 254) MHY-66
HY-700(pg. 249) MHY-45
HY-700-2(pg. 249) MHY-45
HY-725(pg. 247) MHY-20
"X"Contact MIFAB

HYDRANT OPTIONAL VARIATIONS

WATTS M	IFAB
(A-1) Hose storage boxHSE	,
for 3/4 & 1"	
-KCylinder key lock	K
-VBVacuum breaker, 3/4".Sta	andard
-1Union elbow inle	"X"
-1"1" hose connection	C
-31Anchor flange 3/4" & 1"	FL
-32 Anchor flange & clamp	-FLC
for 1 1/4", 1 1/2", 2".	
-88Wall clamp	WC

INTERCEPTORS

MIEAR

STTVW

WATTS		MIFAB
GE	.(pg. 201)	MI-E-G
GE-115	(pg. 201)	MI-E-G-3
GF-120	(pg. 201)	MI-F-G-4
CE 120	(pg. 201) (pg. 201)	
GE-120-L.	(pg. 201)	IVII-E-G-L-20
GE-125	(pg. 201)	IVII-E-G-5
GE-135	(pg. 201)	MI-E-G-6
GE-135-L.	(pg. 201)	MI-E-G-L-35
GE-150	(pg. 201)	MI-E-G-7
GF-150-L	(pg. 201)	MI-F-G-I -50
GF-175	(pg. 201)	XI_MI_F_G_0
GE 210	(pg. 201)	VI MIEGI
OF 015	(pg. 201)	VI MI E O O
	(pg. 201)	
GI-K	(pg. 188)	XL-IVII-G
GI-75-K	(pg. 188)	XL-MI-G-0
GI-100	(pg. 188) (pg. 187)	MI-G
GI-100-A	(pg. 190)	MI-G-SDH
GI-100-AH	(pg. 190)	MI-G-SDH
	(1.3	W/MI-CSD
CI 100 K	(na 199)	YI MI C
CI 100 I	(pg. 188) (pg. 187)	MI C I
GI-100-L	(µy. 107)	IVII-U-L
GI-100-LA	(pg. 190)	MI-G-L-SDH
GI-104	(pg. 187)	MI-G-0
GI-107	(pg. 187)	MI-G-1
GI-107-A	(pg. 190) I	MI-G-SDH-1
GI-107-AH	(pg. 190)	MI-G-SDH-1
		W/MI-CSD-7
GI-110	(pg. 187)	
CI 110	(pg. 107) (pg. 190) l	MIC CDU 2
CI 110 A II	(pg. 130) i	MI C CDII O
GI-TTU-AH	(pg. 190)	
	V	//MI-CSD-10
GI-115	(pg. 187)	MI-G-3
GI-115-A	(pg. 190) l	MI-G-SDH-3
GI-115-AH	(pg. 190)	MI-G-SDH-3
		//MI-CSD-15
GI-120	(pg. 187)	
GI-120-A	(pg. 190) I	MI_G_SDH_4
GI-120-AH	(pg. 130)1	MI-G-SDH-4
GI-120-AII		WII-G-SDH-4
		//MI-CSD-20
GI-120-L	(pg. 187)	MI-G-L-20
GI-120-LA.	(pg. 190) MI- (pg. 187)	-G-L-SDH-20
GI-125	(pg. 187)	MI-G-5
GI-125-A	.(pg. 190) I	MI-G-SDH-5
GI-125-AH	.(pg. 190)	MI-G-SDH-5
GI 120 7111	۱۸/ ۱۸۷	//MI-CSD-25
CI 125	(pg. 187)	MI C 6
01-100	(pg. 107)	IVII-U-U
	.(pg. 190) l	
GI-135-AH	(pg. 190)	
		//MI-CSD-35
GI-135-L	(pg. 187)	MI-G-L-35
GI-135-LA	(pg. 190) MI-	-G-L-SDH-35
GI-150	(pg. 190) MI- (pg. 187)	MI-G-7
GI-150-A	.(pg. 190) l	MI-G-SDH-7
J. 100 / 1	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	0 00111
ntion Drings d	o not include an	nlicable tayes
auon. Fiices u	o not include ap	piicabie laxes.

INTERCEPTORS CON'T

INTERCEPTORS CONT				
WATTS MIFAB				
GI-150-AH(pg. 190) MI-G-SDH-7				
W/MI-CSD-50				
GI-150-K(pg. 188) XL-MI-G-3				
GI-150-L(pg. 187) MI-G-L-50				
GI-150-LA. (pg. 190) MI-G-L-SDH-50				
GI-175(pg. 188) XL-MI-G-0				
GI-175-A(pg. 190) MI-G-SDH-8				
GI-175-AH MI-G-SDH-8				
W/MI-CSD-75 GI-200-K(pg. 188) XL-MI-G-4				
GI-200-K(pg. 188) XL-MI-G-4 GI-210(pg. 188) XL-MI-G-1				
GI-215(pg. 188) XL-MI-G-3				
GI-220(pg. 188) XL-MI-G-4				
GI-225(pg. 188) XL-MI-G-5				
GI-230(pg. 188) XL-MI-G-6				
GI-235(pg. 188) XL-MI-G-7				
GI-240(pg. 188) XL-MI-G-8				
GI-250(pg. 188) XL-MI-G-9				
GI-250-K(pg. 188) XL-MI-G-5				
GI-260(pg. 188) XL-MI-G-10				
GI-300-K(pg. 188) XL-MI-G-6 GI-400-K(pg. 188) XL-MI-G-8				
GI-500-K(pg. 188) XL-MI-G-9				
GX Series(pg. 188) XL-MI-G				
LI-800(pg. 198) MI-LINT				
LI-803(pg. 198) MI-LINT-1				
LI-807(pg. 198) MI-LINT-3				
LI-810(pg. 198) MI-LINT-4				
LI-820(pg. 198) MI-LINT-6				
LI-830(pg. 198) MI-LINT-7				
LI-840(pg. 198) MI-LINT-8				
LI-850(pg. 198) MI-LINT-9 0E-300(pg. 202) MI-E-0				
OE-310(pg. 202) MI-E-O-A				
OE-315(pg. 202) MI-E-O-B				
OE-320(pg. 202) MI-E-O-C				
0E-325(pg. 202) MI-E-0-1				
OE-335(pg. 202) MI-E-O-2				
OE-350(pg. 202) MI-E-O-3				
0E-375(pg. 202) MI-E-0-4				
0E-400(pg. 202) MI-E-0				
OE-410(pg. 202) MI-E-0-5 OE-415(pg. 202) MI-E-0-7				
OE-415(pg. 202) MI-E-O-7 OE-500(pg. 202) MI-E-O*				
OE-515(pg. 202) MI-E-O-B*				
OE-520(pg. 202) MI-E-O-C*				
OE-525(pg. 202) MI-E-0-1 *				
0E-535(pg. 202) MI-E-0-2 *				
OE-550(pg. 202) MI-E-0-3 *				
0E-575(pg. 202) MI-E-0-4 *				
0E-600(pg. 202) MI-E-0 * 0F-610 (pg. 202) MI-F-0-5 *				
OE-610(pg. 202) MI-E-0-5 * OE-615(pg. 202) MI-E-0-7 *				
OE-620(pg. 202) MI-E-0-8 *				
OE-625(pg. 202) MI-E-0-9 *				
0E-630(pg. 202) MI-E-0-10 *				
0E-635(pg. 202) MI-E-0-11 *				
0E-640(pg. 202) MI-E-0-12 *				
0E-650(pg. 202) MI-E-0-14 *				
0E-660(pg. 202) MI-E-0-15 *				
* WITH FYTERNAI				

* WITH EXTERNAL HOLDING TANK

UI	(pg.	192)	IVII-U
01-	K(pg.	192)	MI-0
01-	10(pg.	192)	MI-0-A
01-	15(pg.	192)	MI-0-B
01	(pg.	192)	MI-0

0I-20	(pg. 192)	. MI-0-C
	(pg. 192)	
OI-35	(pg. 192)	. MI-0-2
OI-50	(pg. 192)	. MI-0-3
0I-75-K	.(̈pg. 192́)	. MI-0-4
OI-100-K	(pg. 192)	. MI-0-5
OI-150-K	(pg. 192)	. MI-0-7
0I-200-K	(pg. 192)	. MI-0-8
0I-250-K	(pg. 192)	. MI-0-9
01 000	/== 100\v	RAL O

.....(pg. 192)

Ol-K(pg. 192)..... MI-O OI-10(pg. 192)...... MI-0-A OI-15(pg. 192)...... MI-O-B

01-25 OI-300(pg. 192)..... MI-0 OI-300-K(pg. 192)...... MI-0-10 OI-310(pg. 192)...... MI-O-A ..(pg. 192)........ MI-O-B ..(pg. 192)....... MI-O-C OI-315 OI-325(pg. 192)..... MI-0-1 OI-335(pg. 192)........ MI-0-2 .(pg. 192)..... MI-0-3 OI-350...... (pg. 192)..... MI-0-4 OI-375(pg. 192)..... MI-0 OI-400 0I-400-K(pg. 192)...... MI-0-12 0i-410(pg. 192)..... MI-0-5 OI-415(pg. 192)..... MI-0-7 OI-420(pg. 192)...... MI-0-8 OI-425(pg. 192)..... MI-0-9 OI-430(pg. 192)..... MI-0-10 .(pg. 192)..... MI-0-11 OI-435 OI-440(pg. 192)...... MI-0-12 OI-450(pg. 192). . MI-0-14 OI-460(pg. 192)...... MI-0-15 OI-500(pg. 193)...... MI-0-HU OI-500-K(pg. 192)..... MI-0-14

OI-515(pg. 193)...... MI-O-HU-B 0I-520 0I-525(pg. 193)...... MI-O-HU-C (pg. 193). MI-O-HU-1 OI-535(pg. 193)..... MI-O-HU-2 OI-550(pg. 193)..... MI-O-HU-3 (pg. 193)..... MI-O-HÚ-3 OI-575(pg. 193)...... MI-O-HU-4 .(pg. 193). OI-600 MI-0-HU .(pg. 193). OI-610 MI-0-HU-5 MI-0-HU-7 OI-615(pg. 193).

MI-0-HU-8

MI-0-HU-9

OI-630(pg. 193). MI-0-HU-10 .(pg. 193). OI-635 MI-0-HU-11 OI-640(pg. 193).... MI-0-HU-12 MI-SAND SA(pg. 196)...... MI-SAND SI-740(pg. 194)...... MI-SOLID MI-SOLID-L SI-740-L(pg. 194)..... SI-742......(pg. 194)..... MI-SOLID-S SI-742-L....(pg. 194)..... MI-SOLID-L

(pg. 193)

(pg. 193).

01-620 OI-625 ...

SI-750......(pg. 194)...... .. MI-HAIR SI-762......(pg. 194).... MI-SOLID-LB WD...... (pg. 187)..... MCL-G WD-A.......(pg. 190)....... MI-G-SDH WD-AH(pg. 191) MI-CSD+MI-G-SDH WD-L......(pg. 187)..... MCL-G-L WD-LA......(pg. 190)..... MI-G-L-SDH

INTERCEPTORS OPTIONAL **VARIATIONS**

WATTS	MIFAB
-BSediment bucket	SB
-DIDual Inlets	DI
-EExtension "C" as requi	iredC
-HDCHeavy duty cover	HD
-FAnchor flange	FL
-FCAnchor flange & clamp	
-MEFC.NH conn. flow control	Std.
-0Conn. other than stand	dardF
-SSStainless Steel	SS
-TThreaded connection	T-
-TEFCThreaded connection .	FLCT
external flow control	
-THDThreaded connection .	T
-XCover for recessed ins	tall Std

Design and dimensions are subject to modification. Prices do not include applicable taxes.



ROOF DRAINS

\4/4TTO	MEAD
WATTS	MIFAB
RD-100 (pg. 12	b) R1200
RD-100-A(pg. 127 RD-100-A1(pg. 127) R1200-F
RD-100-A1(pg. 127	') R1200-F1
RD-100-A2(pg. 127	') R1200-F2
RD-100-B(pg. 125	5) R1200-B
RD-100-BE(pg. 125	i) R1200-E
RD-100-BED .(pg. 12	6) R1200-EU
RD-100-BVD (pg. 126	S) R1200-BUV
RD-100-C(pg. 12	5) R1200-C
RD-100-CH(pg. 128	R1200-HC
RD-100-CJ(pg. 128) R1200IC
RD-100-CP(pg. 129	n) R1200-PR
RD-100-CP-1 (pg. 12	9) R1200-PR-1
DD 100 OF 1 (pg. 12	0) D1200 FR 1
RD-100-CP-3 (pg. 12 RD-100-CP-4 (pg. 12	0) D1200-111-3
DD 100 CD 15" (pg. 12	0). 111200-F11-4
RD-100-CP-15"-1(ng. 129	9) R1200-0-F1113
RD-100-CP-15" (pg. 129 RD-100-CP-15"-1 (pg. 12 RD-100-CP-15"-3 (pg. 12	9). R1200-PR15-3
RD-100-CP-15"-4(pg. 12	9). R1200-PR15-4
RD-100-D(pg. 125)	R1200-U
RD-100-EL (pg. 126)	R1200-BUV-B
RD-100-F(pg. 125).	R1200-JD-STR
RD-100-GSS(pg. 12	27) R1200-G
RD-100-K (ng 12	25) R1200-M
RD-100-K(pg. 12 RD-100-O(pg. 13	13) 111200 W
DD 100 D (pg. 10	20) D1200 D
RD-100-R(pg. 13	2) D1200-11
RD-100-SO(pg. 13	3) h 1200-90
RD-100-W(pg. 132	2) K I Z U U - W
RD-100-Z(pg. 13 RD-110-BD	2) K1200-Z
KD-110-BD	"X"
RD-200(pg. 12 RD-200-A1(pg. 12	0) R1100
RD-200-A1(pg. 12	1) R1100-F1
RD-200-A2(pg. 12	1) R1100-F2
RD-200-A2(pg. 12 RD-200-B(pg. 12 RD-200-BE(pg. 12	0) R1100-B
RD-200-BE(pg. 12)	0) R1100-E
RD-200-BED .(pg. 12 RD-200-C(pg. 12	0) R1100-EU
RD-200-C(pg. 12	0) R1100-C
RD-200-CJ(pg. 122	2) R1100-JC
RD-200-CP (pg. 122	2) R1100-PR
RD-200-CP-1 (pg. 12	2). R1100-PR-1
RD-200-CP-3 (pg. 12	2). R1100-PR-3
RD-200-CP-3 (pg. 12 RD-200-CP-4 (pg. 12	2). R1100-PR-4
RD-200-D(pg. 120)) R1100-U
RD-200-GSS (pg. 12	1) R1100-G
RD-200-K(pg. 12	n) R1100-M
RD-200-R(pg. 12	0) 111100 W
RD-200-SO(pg. 12	/) R1100-00
DD 200 W (pg. 12	n) D1100-30
RD-200-W(pg. 120 RD-220(pg. 134	u) n i i i i i i i i i i i i i i i i
RD-220(pg. 134	+) K122U
RD-220-A(pg. 134 RD-220-A1(pg. 134	i) K122U-F1
RD-220-A1(pg. 134	l) K1220-F2
RD-220-A2(pg. 134	l) K1220-F2
RD-220-B(pg. 13	4) R1220-B
RD-220-BE(pg. 13-	4) R1220-E
RD-220-BED .(pg. 13	4) R1220-EU
RD-220-BVD (pg. 134	
RD-220-C(pg. 13-	4) R1220-C
RD-220-CH(pg. 134	4) R1220-HC
RD-220-CJ(pg. 13	5) R1220-JC
RD-220-CP-1 (pg. 13	5). R1220-PR-1
RD-220-CP-1 (pg. 13 RD-220-CP-3 (pg. 13	5). R1220-PR-3
RD-220-CP-4 (pg. 13	5). R1220-PR-4
RD-220-CP-15"-1 (pg. 1)	29) R1200-PR15-1
RD-220-CP-15"-3 (pg. 1	29) R1200-PR15-3
RD-220-CP-15"-3 (pg. 1 RD-220-CP-15"-4 (pg. 1	29) R1200-PR15-4
RD-220-D(pg. 13	34) R1220-U
RD-220-GSS .(pg. 13	4) R1220-G

RD-220-CP-15"-1 (pg. 129) R1200-PR15-1 RD-220-CP-15"-3 (pg. 129) R1200-PR15-3 RD-220-CP-15"-4 (pg. 129) R1200-PR15-4 RD-220-D (pg. 134)...... R1220-U RD-220-GSS .(pg. 134)...... R1220-G RD-220-K(pg. 134)...... R1220-M RD-220-R(pg. 135)...... R1220-R RD-220-S(pg. 134)..... R1220-90 RD-220-V(pg. 134)...... R1220-V RD-220-W(pg. 134)...... R1220-W RD-220-Z(pg. 134)...... R1220-Z RD-230(pg. 145)...... R1420 RD-230-81 ...(pg. 145)... R1420-2RB RD-230-A.....(pg. 145)... R1420-2RB RD-230-14 ..(pg. 145)... R1420-14-1 RD-230-H-81 (pg. 145). R1420-HM-2RB RD-240(pg. 144)..... R1400 RD-240-81 .(pg. 144)..... R1400-2RB RD-240-1 ...(pg. 144)...... R1400-1 RD-240-14..(pg. 144)....R1400-14-1 RD-250(pg. 124)...... R1150 RD-260(pg. 124).. R1150-SPEC RD-260-B(pg. 124).. R1150-SPEC RD-270(pg. 142)...... R1300 RD-270-1(pg. 142)...... R1300-1 RD-270-50 ..(pg. 142)..... R1300-50 RD-270-A(pg. 142)..... R1310-50 RD-270-A-1 .(pg. 142)...... R1310-1 RD-270-A-50 (pg. 142)..... R1310-50 RD-270-T(pg. 142)...... R1300T RD-280(pg. 120)...... R1100 RD-280-SO ..(pg. 124)..... R1100-90 RD-290(pg. 143)...... R1320 RD-290-1(pg. 143)...... R1320-1 RD-290-50 ..(pg. 143)..... R1320-50 RD-290-A(pg. 143)..... R1330-50 RD-290-A-1 ..(pg. 143)...... R1330-1 RD-290-A-50 (pg. 143)..... R1330-50 RD-300(pg. 136)...... R1260 RD-300-CH ... (pg. 128).... R1200-HC RD-300-CH-K(pg. 128).R1200-M-HC RD-300-CP15(pg. 129). R1200-PR15 RD-300-F..(pg. 125).. R1200-JD-STR RD-300-GSS ..(pg. 127)..... R1200-G RD-300-GSS-K(pg. 127)..R1200-M-G RD-300-K(pg. 125)..... R1200-M RD-300-R......(pg. 136)..... R1260-R RD-300-W.....(pg. 136)..... R1260-W RD-400(pg. 130)...... R1200-RS RD-410.....(pg. 123)...... R1100-RS RD-500.....(pg. 136)..... R1260 RD-640(pg. 147)..... R1640 RD-641(pg. 147)..... R1640-8 RD-642(pg. 147)...... R1640-13 RD-643(pg. 147)...... R1640-17 RD-644(pg. 147)...... R1640-22 RD-680-VC(pg. 149)...... R1930 RD-900(pg. 149)...... R1900 RD-940(pg. 150)...... R1940 RD-940-1...(pg. 150).....R1940-NH-1 RD-940-T-1 ...(pg. 150)..... R1940-1 RD-950......(pg. 152)...... R1960 RD-970......(pg. 146)...... R1510 RD-980..... (pg. 146)...... R1520 "X".....Contact MIFAB

Design and dimensions are subject to modification. Prices do not include applicable taxes.



ROOF DRAIN OPTIONAL VARIATIONS

WATTS	MIFAB
-1	Nickel Bronze(pg. 319,320)1
_2	Polished Bronze .(pg. 319,320)2
2	Stainless Steel(pg. 319,320)3
-J	Stalliless steel(pg. 319,320)3
-4	Ductile Iron(pg. 319,320)4
-5	Sediment Bucket (pg. 319,320)5
-6	Vandal Proof(pg. 319,320)6
-8	Backwater valve (pg. 319,320)8
-9	Hinged Grate(pg. 319,320)9
-11	Acid Resistant Epoxy (pg. 319,320) -11
-12	Galvanized Top.(pg. 319,320)12
-13	All Galvanized(pg. 319,320)13
-14	All Galvanized(pg. 319,320)13 Flat Grate(pg. 319,320)14
-15	Extension(pg. 319,320)E
-60	PVC Body(pg. 319,320)30
-61	ABS Body(pg. 319,320)31
-80	Aluminum Dome (pg. 319,320) -80
-81	Bronze Dome(pg. 319,320)81
-82	SS Mesh Screen(pg. 319,320) -83
	over cast dome
00	SS Mesh Screen(pg. 319,320) -83
-03	over east dome
1101/	over cast dome3M Epoxy(pg. 319,320)3M
- 1 1 3 IVI	Weir(pg. 319,320)F
-A	Single Slot Weir (pg. 319,320) -F1
-A1	Siliyle Slot Well (pg. 319,320) -F1
-AZ	Two Slot Weir(pg. 319,320) -F2
-B	Sump Receiver (pg. 319,320)B
-6	Secondary Clamp .(pg. 319,320)C
-D	Underdeck Clamp .(pg. 319,320)U
-E	Adjustable Extension (pg. 319,320)E
-სააა	SS Ballast Guard (pg. 319,320) -G
-K	Ductile Iron Dome . (pg. 319,320)M Galvanized dome. (pg. 319,320)M-13
-N-13	dalvallized dollie. (pg. 319,320)W-13
-IX-0U	Aluminum dome .(pg. 319,320) -M-80 Vandal Proof Dome .(pg. 319,320)6
-L	Push On Outlet(pg. 319,320) P
_R	2" High Water Dam (ng. 310 320) -B
STD	No Hub outlet (ng. 319,320)It
T	
-\/	Fixed Gasketed Fxt (ng. 310 320) -V
-W	Adi Internal Water Dam (ng 319 320) -W
-W-1	Water Proofing Flange. (pg. 319.320) -W-1
X	Inside Gaulk Outlet (bd. 319.320) X
-Z	Elastomeric flange (pg. 319,320)-Z

TRAP SEAL PRIMERS AND MISC **SPECIALTIES**

WATTS		MIFAB
A-200	(pg. 268).	MI-TSP-2
A200S	.(pg. 268).	MI-TSP-1
		MI-TSP-2
		MI-TSP-1
		MI-600-50
		MI-GRILL
		SD-7000
	(1-5 - /	

TRENCH DRAINS

WATTS	(n.n. 05)	MIFAE
DEAD LEVEL	(pg. 85)	114UL
TD-900 TD-900-4	(py. 01)	11130-4 71150 /
TD-900-4-1		
TD-900-4-3	(pg. 01) (ng. 81)	T1150-4-3 T1150-4-3
TD-900-28		
TD-900-B	(pg. 81)	T1150-F-4
TD-900-B-4	(pg. 81)	T1150-F-4
TD-900-B-4-1	(pg. 81)	T1150-F-4-3
TD-900-B-4-3	(pg. 81)	T1150-F-4-3
TD-900-B-28	(pg. 81)	T1150-F-28
TD-900-C	(pg. 81)	T1200-F2-4
TD-900-C2-4	(pg. 81)	T1200-F2-4
TD-900-C2-4-1	(pg. 81)	T1200-F2-4-3
TD-900-C2-4-3		
TD-900-C2-28		
TD-910		
TD-910-B	(pg. 81)	1 1 ZUU-F-4
TD-920 TD-940	(µy. 0∠) (ng. 82)	T1220 FL-FAC
800	(pg. 02) (ng. 82)	T1350-FL-FAC
000	(pg. 04)	I I U U U - I L

TRENCH DRAIN OPTIONAL **VARIATIONS**

WATTS	MIFAB
-1	Nickel bronze (pg. 319,320)1
-3	Stainless steel(pg. 319,320)3
-4	Ductile iron(pg. 319,320)4
-5	Sediment bucket .(pg. 319,320)5
-6	Vandal proof(pg. 319,320)6
-8	Backwater valve per outlet (pg. 319,320)-8
-12	Galvanized grate only (pg. 319,320) -12
-13	All galvanized(pg. 319,320)13
-20	Secondary dome strainer (pg. 319,320)-20
-21	Secondary flat strainer (pg. 319,320) -21
-28	All 304 S.S. Body.(pg. 319,320) -28
	Anchor fl. & mem clamp (pg. 319,320) -FLC
-38	Solids retainer baffle (pg. 319,320) -38
-11	3M epoxy finish .(pg. 319,320)3M
-F	Anchor flange(pg. 319,320)FL
P	Push on outlet(pg. 319,320) P
S	No hub side outlet (pg. 319,320) -90
T	Threaded outlet(pg. 319,320) T
	Inside caulk outlet(pg. 319.320). X

WATER HAMMER ARRESTORS

WATTS		MIFAE
SG-050	(pg. 274)	MWH-A
SG-075	(pg. 274)	MWH-E
SG-100	(pg. 274)	MWH-0
SG-125	(pg. 274)	MWH-E
SG-150	(pg. 274)	MWH-E
SG-200	(pg. 274)	MWH-F
SG-A		
SG-B	(pg. 274)	WHB-B
SG-C	(pg. 274)	WHB-C
SG-D	(pg. 274)	WHB-D
SG-E	(pg. 274)	WHB-E
SG-F	(pg. 274)	WHB-F
SS-A	(pg. 274)	WHB-A
SS-B	(pg. 274)	WHB-B
SS-C	(pg. 274)	WHB-C
SS-D	(pg. 274)	WHB-D
SS-E	(pg. 274)	WHB-E
SS-F	(pg. 274)	WHB-F

MODULAR PARTS COMPARISON GUIDE B2 CAST IRON BODIES

WATTS	MIFAB
B2-2	2" No hub CI(pg. 276) A2-2NH-7
B2-3	3" No hub CI(pg. 276) A2-3NH-7
B2-4	4" No hub Cl(pg. 276) A2-4NH-7
B2-6	6" No hub CI(pg. 276) A2-6NH-7
B2-8	8" No hub CI(pg. 276) A2-8NH-7
B2-2P	2" Push on Cl(pg. 276) A2-2P-7
B2-3P	3" Push on Cl(pg. 276) A2-3P-7
B2-4P	4" Push on Cl(pg. 276) A2-4P-7
B2-2X	2" Inside caulk(pg. 276) A2-2X-7
B2-3X	3" Inside caulk(pg. 276) A2-3X-7
B2-4X	4" Inside caulk(pg. 276) A2-4X-7

B2 PVC AND ABS BODIES

WATTS		MIFAB
B2-2-602"	PVC socket .(pg.	276) A2-2-30-7
B2-3-603"	PVC socket .(pg.	276) A2-3-30-7
B2-4-604"	PVC socket .(pg.	276) A2-4-30-7
B2-2-612"		
B2-3-613"	ABS socket .(pg.	276) A2-3-31-7
B2-4-614"	ABS socket .(pg.	276) A2-4-31-7

B3 CAST IRON BODIES

WATTS	MIFAB
B3-2	2" No hub Cl (pg. 276) A1-2NH-7
B3-3	3" No hub Cl(pg. 276) A1-3NH-7
B3-4	4" No hub Cl(pg. 276) A1-4NH-7
B3-6	6" No hub Cl(pg. 276) A1-6NH-7
B3T-2NH	2" No hub Cl(pg. 276) A1-2NH-7
B3T-3NH	3" No hub Cl(pg. 276) A1-3NH-7
B3T-4NH	4" No hub Cl(pg. 276) A1-4NH-7
B3T-2P	2" Push on CI(pg. 276) A1-2P-7
B3T-3P	3" Push on Cl(pg. 276) A1-3P-7
B3T-4P	4" Push on Cl(pg. 276) A1-4P-7
B3-2P	2" Push on CI(pg. 276) A1-2P-7
B3-3P	3" Push on CI(pg. 276) A1-3P-7
B3-4P	4" Push on CI(pg. 276) A1-4P-7
B3-2X	2" Inside caulk(pg. 276) A1-2X-7
B3-3X	3" Inside caulk(pg. 276) A1-3X-7
B3-4X	4" Inside caulk(pg. 276) A1-4X-7
B3-2T	2" Threaded(pg. 276) A1-2T-7
B3-3T	3" Threaded(pg. 276) A1-3T-7
B3-4T	4" Threaded(pg. 276) A1-4T-7

B3 PVC AND ABS BODIES

WATTS M	IFAB
B3-2-602" PVC socket (pg. 276) A1-2	-30-7
B3-3-60 3" PVC socket (pg. 276) A1-3	-30-7
B3-4-604" PVC socket .(pg. 276) A1-4	4-30-7
B3-2-612" ABS socket .(pg. 276) A1-2	2-31-7
B3-3-613" ABS socket .(pg. 276) A1-3	3-31-7
B3-4-614" ABS socket .(pg. 276) A1-4	4-31-7

B4 CAST IRON BODIES

WATTS	MIFAB
B4-2	2" No hub Cl(pg. 276). A1-2NH-7
B4-34-2	2" No hub CI(pg. 276). A1-2NH-7
B4-3	3" No hub Cl(pg. 276). A1-3NH-7
B4-34-3	3" No hub CI(pg. 276). A1-3NH-7
B4-4	4" No hub Cl(pg. 276). A1-4NH-7
B4-34-4	4" No hub CI(pg. 276). A1-4NH-7
B4-2P	2" Push on Cl(pg. 276) A1-2P-7
B4-34-2P	2" Push on Cl(pg. 276) A1-2P-7
B4-3P	3" Push on Cl(pg. 276) A1-3P-7
B4-34-3P	3" Push on Cl(pg. 276) A1-3P-7
B4-4P	4" Push on Cl(pg. 276) A1-4P-7
B4-34-4P	4" Push on Cl(pg. 276) A1-4P-7

B4 PVC AND ABS BODIES

WATTS		MIFAB
B4-3-60(pg	g. 276) 3" PVC socket	. A1-3-30-7
B4-4-60(pg	j. 276) 4"' PVC socke	t A1-4-30-7
B4-3-61(pg	j. 276) 3" PVC socket	. A1-3-31-7
B4-4-61(pg	j. 276) 4"' PVC socke	t A1-4-31-7

MEMBRANE CLAMP FOR FLOOR DRAINS

WATTS		MIFAB
B3-C1	Low rough-in(pg.	277)A1-C1
	membrane clamp	

ROUND STRAINERS FOR FLOOR DRAINS

WATTS		MIFAB
A5-1	5" Dia. NB	(pg. 46) 5-1
A6-1	6" Dia. NB	(pg. 46) 6-1
A7-1	7" Dia. NB	(pg. 46) 7-1
A8-1	8" Dia. NB	(pg. 46) 8-1
5-1	5" Dia. HD NB	(pg. 47) X5-1
6-1	6" Dia. HD NB	(pg. 47) X6-1
8-1	8" Dia. HD NB	(pg. 47) X8-1
	5" Dia. DI	
5-3	5" Dia. HD SS	(pg. 46) 5-3
6-3	6" Dia. HD SS	(pg. 46) 6-3



SQUARE STRAINERS FOR FLOOR DRAINS

WATTS	MIFAB
L5-15" x 5" HD NB (pg. 47)	XS5-1
L6-16" x 6" HD NB(pg. 47)	XS6-1
L8-18" x 8" HD NB(pg. 47)	XS8-1
L5-35" x 5" HD SS(pg. 47)	S5-3
L6-36" x 6" HD SS(pg. 47)	S6-3
M5-15" x 5" NB(pg. 47)	S5-1
M6-1(pg. 47)	S6-1
M8-18" x 8" NB(pg. 47)	S8-1

AREA DRAIN TOP ASSEMBLIES

WATTS MIFAB
FD-300-17" Dia. NB(pg. 46) N7-1
FD-300-47"Dia. DI(pg. 281) F1300-TA-4
FD-320-1 9" Dia. NB(pg. 46) N9-1
FD-320-508" Sq. DI(pg. 281) F1320-TA-4
FD-320-Y8" Sq. DI(pg. 281) F1320-TA-4
FD-330-18" Sq. NB(pg. 281) F1420-TA-1
FD-330-508" Sq. Dl(pg. 281) F1420-TA-4
FD-340-112" Dia. NB(pg. 281) F1340-TA-1
FD-340-5012"Dia. Dl(pg. 281) F1340-TA-4
FD-340-Y-112" Dia. NB(pg. 281) F1340-TA-1
FD-340-Y-5012" Dia. Dl(pg. 281) F1340-TA-4
FD-360-416" Dia. Dl(pg. 281) F1360-TA-4
FD-450-AF-116" Sq. NB(pg. 281) F1460-TA-1
FD-450-AF-416" Sq. DI(pg. 281) F1460-TA-4
FD-460-AF-112" Sq. NB(pg. 281) F1440-TA-1
FD-460-AF-412" Sq. DI(pg. 281) F1440-TA-4
FD-460-F-112" Sq. NB(pg. 281) F1440-TA-1
FD-460-F-412" Sq. DI(pg. 281) F1440-TA-4

REPLACEMENT FLOOR AND AREA DRAIN GRATES AND CLEANOUT COVERS

WATTS	MIFAB
A5PG-1(pg. 280)	5PG-1
A6PG-1(pg. 280)	6PG-1
5PG-1(pg. 280)	5PG-3
FD-300-PG-1(pg. 280)	
FD-300-PG-4(pg. 281)	F1300-PG-4
FD-320-PG-1(pg. 280)	N9-PG-1
FD-320-PG-4(pg. 281)	F1320-PG-4
FD-340-PG-1(pg. 281)	
FD-340-PG-4(pg. 281)	F1340-PG-4
FD-450-AF-PG-4(pg. 281)	
FD-450-AF-PG50-1(pg. 281)	F1460-PG-1
FD-460-AF-PG-4(pg. 281)	F1440-PG-4
FD-460-AF-PG-1(pg. 281)	F1440-PG-1
R5G-1(pg. 285)	5PC-1
RXPG-1(pg. 285)	X5PC-1
RXPG-4(pg. 285)	
(, 5 /	

ADJUSTABLE EXTENSION FOR FLOOR DRAINS

WATTS		MIFAB
B3-XY	small CI extension(po	g. 46) DD-50
DD-1	small NB extension .(p	g. 46) DD-1
DD-XY-50	small CI extension(p	g. 46) DD-50

SEDIMENT BUCKET FOR FLOOR DRAINS

WATTS		MIFAB
B1B	Plastic sed. bucket .(pg.	281). A1-PB
B2B	Large CI sed. Buck(pg.	281) A2-MB
B3B	Small CI sed. Buck. (pg.	281) A1-MB

FUNNELS FOR FLOOR DRAINS

WATTS	MIFAB
EF-1	4" round NB funnel (pg. 46). EF4-1
EF-50	4" round CI funnel(pg. 46) EF4-50
EF6-1	6" round NB funnel .(pg. 46). EF6-1
EF6-50	6" round CI funnel(pg. 46) EF6-50
EG-1	4" x 9" NB funnel(pg. 46) EG-1
EG-50	4" x 9" CI funnel(pg. 46). EG-50
F4-1	4" round NB funnel only .(pg. 46) F4-1
F4-50	4" round CI funnel only (pg. 46) F4-50
G-1	4" x 9" oval NB funnel only (pg. 46) G-1
G-50	4" x 9" oval CI funnel only (pg. 46) G-50

HARDWARE PACKS

WATTS	MIFAB
FC-1	.3 cap screws(pg. 278) HS-1
	with integral washers
FC-2	.3 bolts, washers(pg. 278) HS-2
	and nuts for roof drains
FC-3	.3 bolts, washers(pg. 278) HS-3
A	and nuts for deck clamp
	.3 bolts, washers and (pg. 278) HS-3
	nuts for extensions

PRE-ASSEMBLED ECONOMY FLOOR DRAINS

WATTS		MIFAB
FD-390-E-1	(pg. 51)	F1230-1
FD-390-E-4	(pg. 51)	F1230-4
FD-390-E-63-1	(pg. 51)	. F1230-WF-1
FD-390-F-63-4	(ng. 51)	F1230-WF-4

CLEANOUT TOP ASSEMBLIES

WATTS	MIFAB
R-1	5" Dia. NB CO top(pg. 285) R-1
R-3	5" Dia. SS CO top(pg. 285) R-3
RX-3	5" Dia. SS CO top(pg. 285) R-3
RC-1	5" Dia. NB CO top car/mar (pg. 285) RC-1
RX-1	5" Dia. NB Co top(pg. 285) R-3
RX-4	5" Dia. D.I. CO top (pg. 285) R-4
S-1	5" x 5" NB CO top(pg. 285) S-1
S-3	5" x 5" SS CO top(pg. 285) S-3
T-1	5" Dia. NB CO top for tile (pg. 285) T-1
TS-1	5" x 5" NB CO top for tile (pg. 285) TS-1
	5" Dia. NB CO top for terr.(pg. 285) U-1
US-1	5" x 5" NB CO top for terr (pg. 285) US-1

ROOF DRAIN DOMES

WATTS			MIFAB
B2 DM	R1200 p	ooly(pg. 284)	A2-PD
B2 KDM-L-4.	R1200 I	low DI.(pg. 284).A	\2-MDL-80
B2 KDM-4	R1200 I	DI dome(pg. 28-	4). A2-MD
B2 KDM-80	R1200 a	alum.(pg. 284) . A	\2-MDL-80
B3 DM	R1100 p	ooly(pg. 284)	A1-PD
B3 KDM-80	R1100 a	alum(pg. 284)	A1-MD

ROOF DRAIN CLAMP RINGS FOR RD-100

WATTS	MIFAB
B2-FLGR1200 membrane clamp (pg	j. 277) A2-C3
and underdeck clamp	
B2-FLG-W-80R1200 Al Dome .(pg. 27)	7) A2-C3-W
w/ABS standpipe (pg. 284) v	w/A2-MDL-80
B2-FLG-D2" high water dam.(pg. 2	77).A2-WD
B2-SR1200 sump receive(pg.	284).A2-BP

ROOF DRAIN FIXED EXTENSIONS

WATTS		MIFAB
B2-V2	2" fixed extension - R1200 (pg.	279) A2-V2
B2-V3	3" fixed extension - R1200 (pg.	279) A2-V3
B2-V4	4" fixed extension - R1200 (pg.	279) A2-V4

ROOF DRAIN CLAMP RINGS FOR RD-200

WATTS		MIFAB
B3-FLG	R1100 membrane clamp	(pg. 277) A1-C3
	and underdeck clamp	
B3-FLG-W-80	R1100 al. Dome (pg. 277)) A1-C3 w/ A1-MD
	w/ABS standpipe and	A1-W
B3-S	R1100 sump receiver	(pg. 284) A1-BP

ROOF DRAIN ACCUTROL WEIRS

WATTS		MIFAB
B2-A1	R1200 1 weir Accutrol	(pg. 284) A2-F1
B2-A2	R1200 2 weir Accutrol	(pg. 284) A2-F2
B3-A1	R1100 1 weir Accutrol	(pg. 284) A1-F1
B3-A2	R1100 2 weir Accutrol	(pg. 284) A1-F2
B3-A3	R1100 3 weir Accutrol	(pg. 284) A1-F3

ROOF DRAIN BALLAST GUARDS

WATTS	MIFAB
B2-GSS	R1200 S.S. ballast guard (pg. 284) A2-BG
B2-H	R1200 SS ballast guard .(pg. 284) A2-BG
B3-GSS	R1100 SS ballast guard .(pg. 284) A1-BG



71	п	MC	
21	JΙ	าเท	

ZUIIN	
ZURN	MIFAB
Z100(pg. 125)	R1200
Z100-AC(pg. 125)	R1200-U
Z100-AR(pg. 125). Z100-AW(pg. 132).	R1200-11
Z100-AW(pg. 132)	K1200-W
Z100-BS(pg. 125). Z100-C(pg. 125).	K1200-IVI-83
Z100-0(pg. 125)	K I Z U U - U
Z100-DE(pg. 125). Z100-DP(pg. 125).	R1200-B-EU
Z100-DR(pg. 126).	R1200-D
Z100-DX(pg. 120).	R1200-7
Z100-E(pg. 125)	R1200-V
Z100-EA(pg. 125)	R1200-E
Z100-EA-C(pg. 126)	R1200-EU
Z100-EB(pg. 125)	R1200-E
Z100-EC(pg. 125)	R1200-UV
Z100-FG(pg. 129)	R1200-PR
Z100-G(pg. 125)	R1200-M-13
Z100-GD(pg. 125) Z100-HD(pg. 125) Z100-R(pg. 125)	K1200-M-12
Z100-HD(pg. 125)	R 1200-W-80
Z100-SC(pg. 125)	D1200-D
Z100-SE(pg. 128)	R1200-C
Z100-SS(pg. 125)	R1200-110
Z100-SSM(pg. 125)	R1200-M-83
Z100-ST(pg. 125) I	R1200-M-SP
Z100-TC(pg. 125)	R1200-TC
7100-VP (ng. 125)	R1200-6
Z100-W(pg. 132)	R1200-W
Z100-W2(pg. 132)	K1200-W2
Z100-W3(pg. 132) Z100-W4(pg. 132)	R1200-W3
Z100-W4(pg. 132)	R1200-W4
Z100-XJ .(pg. 125) R12	200 w/R1900
Z100-84(pg. 127)	K1200-G
Z100-85(pg. 128) Z100-89(pg. 130)	K1200-JU
Z100-99(pg. 133)	n 1200-n
ZA100(pg. 125)	h 1200-90 R1200-M-80
ZC100(pg. 125)	R1200-M
ZRB100(pg. 125)	R1200-81
Z101(pg. 136)	R1260
Z101(pg. 136) Z101-AR(pg. 136)	R1260-11
Z101-DP .(pg. 136)	R1260-B
Z101-E(pg. 136) Z101-G(pg. 136)	R1260-E
Z101-G(pg. 136)	R1260-M-13
Z101-R(pg. 136) Z101-W2(pg. 136)	R1260-B
Z101-W2(pg. 136)	R1260-W2
Z101-W3(pg. 136)	K1260-W3
Z101-W4(pg. 136)	K1260-W4
Z101-89(pg. 136) Z103(pg. 131)	
Z103-45(pg. 131) R	1200-30
Z104(pg. 136)	
Z104-AC(pg. 136)	R1250-U
Z104-AR(pg. 136)	
Z104-AW(pg. 136)	R1250-W
Z104-BS(pg. 136) I	R1250-M-83
Z104-C(pg. 136)	R1250-U
Z104-DX(pg. 136)	R1250-Z
Z104-E(pg. 136)	R1250-V
Z104-EA(pg. 136)	R1250-E
Z104-EA-C(pg. 136).	K125U-EU
Z104-EB(pg. 136).	K125U-E
Z104-ES(pg. 136) Z104-FG(pg. 136)	. N I Z DU-U-V DD N A C L D
Z104-FG(pg. 136)	IN 1200-PR R1250-M 12
Z104-GD(pg. 136)	R1250-W-13
Z104-GD(pg. 136)	R1250-M-80
Z104-R(pg. 136)	R1250-B
Z104-SC(pg. 136)	R1250-C
Z104-SS(pg. 136)	R1250-M-83

Z104-W2 ...(pg. 136)...... R1250-W2 Z104-W3 ...(pg. 136)...... R1250-W3 Z104-W4 ...(pg. 136)...... R1250-W4 Z104-XJ .(pg. 136)... R1250 w/R1900 Z104-84..(pg. 136)...... R1250-G Z104-85...(pg. 136)...... R1250-JC Z104-89..(pg. 136)..... R1250-R ZA104(pg. 136)...... R1250-M-80 ZC104(pg. 136)..... R1250-M ZRB104 ...(pg. 136)..... R1250-81 Z105(pg. 127)..... R1200-F Z105-C ...(pg. 127)..... R1200-F-U Z105-DE .. (pg. 127)..... R1200-F-B-EU Z105-DP ..(pg. 127)...... R1200-F-B Z105-DR ..(pg. 127)...... R1200-F-EU Z105-DX ..(pg. 127)..... R1200-F-Z Z105-E(pg. 127)...... R1200-F-V Z105-EA....(pg. 127)...... R1200-F-E Z105-EA-C..(pg. 127)..... R1200-F-EU Z105-EA-R-C.(pg. 127)... R1200-F-EU Z105-EC(pg. 127)..... R1200-F-UV Z105-ERC .. (pg. 126).... R1200-BUV-F Z105-G(pg. 127).. R1200-F-M-13 Z105-R(pg. 127)...... R1200-F-B Z105-SC.....(pg. 127)...... R1200-F-C Z105-TC(pg. 127)..... R1200-F-TC Z105-VP(pg. 127)....... R1200-F-6 Z105-XJ.(pg. 127). R1200-F w/R1900 Z105-1.....(pg. 127)...... R1200-F Z105-90.....(pg. 127)...... R1200-F-90 ZA105(pg. 127)... R1200-F-M-80 ZC105(pg. 127)...... R1200-F-M ZRB105(pg. 127)...... R1200-F-81 Z107 (pg. 132)...... R1200-Z Z107-AC(pg. 132)...... R1200-Z-U Z107-AR(pg. 132)..... R1200-Z-11 Z107-AW....(pg. 132)...... R1200-Z-W Z107-BS(pg. 132)...R1200-Z-M-83 Z107-C(pg. 132)...... R1200-Z-U Z107-E(pg. 132)...... R1200-Z-V Z107-EA.....(pg. 132)...... R1200-Z-E Z107-FG(pg. 132)...... R1200-Z-P Z107-G(pg. 132)...R1200-Z-M-13 Z107-GD(pg. 132)...R1200-Z-M-12 Z107-HD(pg. 132)...R1200-Z-M-80 Z107-SS(pg. 132)...R1200-Z-M-83 Z107-VP(pg. 132)...... R1200-Z-6 Z107-W2 ...(pg. 132)..... R1200-Z-W2 Z107-W3 ...(pg. 132)..... R1200-Z-W3 Z107-W4 ...(pg. 132)..... R1200-Z-W4 Z107-XJ (pg. 132). R1200-Z w/R1900 Z107-84.....(pg. 132)...... R1200-Z-G Z107-85.....(pg. 132...... R1200-Z-JC Z107-89.....(pg. 132)...... R1200-Z-R ZA107(pg. 132)...R1200-Z-M-80 ZC107(pg. 132)...... R1200-Z-M ZRB107(pg. 132)..... R1200-Z-81 Z108(pg. 130)...... R1200-RS Z108-AR ...(pg. 130).... R1200-RS-11 Z108-C(pg. 130)..... R1200-RS-U Z108-DE ... (pg. 136). R1250-RS-B-EU Z108-DP ...(pg. 130)..... R1200-RS-B Z108-DR(pg. 130)... R1200-RS-EU Z108-E(pg. 130)..... R1200-RS-V Z108-EA.....(pg. 130)..... R1200-RS-E Z108-EB(pg. 130)..... R1200-RS-E Z108-DX(pg. 130)..... R1200-RS-Z Z108-E(pg. 130).... R1200-RS-V Z108-EA......(pg. 130).... R1200-RS-E Z108-FG(pg. 130).... R1200-RS-P Z108-G....(pg. 130).. R1200-RS-M-13 Z108-HD(pg. 130)...... R1200-RS

Z108-R(pg. 130)... R1200-RS-B Z108-TC.....(pg. 130).. R1200-RS-TC Z108-90.....(pg. 130).. R1200-RS-90 Z111 ...(pg. 277)...A2-C3-W+A2-MD Z121(pg. 134)...... R1220 Z121-A(pg. 134).....R1220-W-1 Z121-AR(pg. 134)...... R1220-11 Z121-BS(pg. 134)... R1220-M-83 Z121-C(pg. 134)...... R1220-U Z121-DP(pg. 134)...... R1220-B Z121-DR(pg. 134)..... R1220-EU Z121-E(pg. 134)...... R1220-V Z121-EA......(pg. 134)...... R1220-E Z121-EA-C....(pg. 134)..... R1220-EU Z121-EB(pg. 134)...... R1220-E Z121-EC(pg. 134)..... R1220-UV Z121-ERC(pg. 134)... R1220-BUV Z121-ES(pg. 134).... R1220-C-V Z121-FG(pg. 135)..... R1220-PR Z121-G(pg. 134). R1220-M-13 Z121-R(pg. 134)...... R1220-B Z121-SC(pg. 134)...... R1220-C Z121-SE(pg. 134)..... R1220-HC Z121-SS(pg. 134). R1220-M-83 Z121-SSM(pg. 134). R1220-M-83 Z121-TC.....(pg. 134)..... R1220-TC Z121-VP(pg. 134)...... R1220-6 Z121-XJ..(pg. 134).. R1220 w/R1900 Z121-84......(pg. 134)...... R1220-G Z121-85......(pg. 135)..... R1220-JC Z121-89......(pg. 135)...... R1220-R Z121-90......(pg. 134)..... R1220-90 ZA121(pg. 134). R1220-M-80 ZCF121(pg. 134)...... R1220-F ZCF121-A(pg. 134). R1220-F-W-1 ZCF121-AR....(pg. 134).. R1220-F-11 ZCF121-C(pg. 134).... R1220-F-U ZCF121-E(pg. 134).... R1220-F-V ZCF121-EA(pg. 134).. R1220-F-E ZCF121-EA-C .(pg. 134) R1220-F-EU ZCF121-EB(pg. 134).. R1220-F-E ZCF121-G .(pg. 134).. R1220-F-M-13 ZCF121-R(pg. 134).. R1220-F-B ZCF121-SSM .(pg. 134). R1220-F-83 ZCF121-VP(pg. 134)... R1220-F-6 ZCF121-84(pg. 134)... R1220-F-G ZCF121-90 ...(pg. 134).. R1220-F-90 ZACF121 ... (pg. 134)... R1220-F-M-80 ZRB121.....(pg. 134)...... R1220-81 Z122 (pg. 135)...... R1220-RS Z122-AR(pg. 135).. R1220-RS-11 Z122-C(pg. 135).... R1220-RS-U Z122-DP(pg. 135).... R1220-RS-B Z122-E(pg. 135).... R1220-RS-V Z122-EB.....(pg. 135).... R1220-RS-E Z122-G ...(pg. 135). R1220-RS-M-13 Z122-HD ...(pg. 135)...... R1220-RS Z122-R(pg. 135).... R1220-RS-B Z122-TC.....(pg. 135).. R1220-RS-TC Z122-90.....(pg. 135).. R1220-RS-90 Z125(pg. 120)...... R1100-M Z125-A(pg. 120).. R1100-M-W-1 Z125-AR ... (pg. 120).... R1100-M-11 Z125-BS(pg. 120).... R1100-M-83 Z125-C(pg. 120)..... R1100-M-U Z125-EB.....(pg. 120)..... R1100-M-E Z125-FG....(pg. 122)...... R1100-PR Z125-DP ...(pg. 120)..... R1100-M-B Z125-DR(pg. 120)... R1100-M-EU Z125-E(pg. 120)..... R1100-M-E Z125-ERC ..(pg. 120).. R1100-M-E-U Z125-ES(pg. 120).. R1100-M-E-U Z125-G(pg. 120).... R1100-M-13

Z125-R(pg. 120)..... R1100-M-B Z125-SC(pg. 120)..... R1100-M-C Z125-SS(pg. 120)... R1100-M-83 Z125-SSM ..(pg. 120)... R1100-M-83 Z125-TC.....(pg. 120)..... R1100-M-B Z125-VP(pg. 120)..... R1100-M-6 Z125-XJ (pg. 120) R1100-M w/R1900 Z125-84.....(pg. 121)..... R1100-M-G Z125-85.....(pg. 122).... R1100-M-JC Z125-89.....(pg. 120)..... R1100-M-R Z125-90....(pg. 124).... R1100-M-90 ZA125(pg. 120)..... R1100-M-80 ZRB125.....(pg. 120)...... R1100-81 Z127(pg. 123)...... R1100-RS Z127-AR ...(pg. 123)... R1100-RS-11 Z127-C(pg. 123)..... R1100-RS-U Z127-DP ...(pg. 123)..... R1100-RS-B Z127-E(pg. 123)..... R1100-RS-E Z127-EB.....(pg. 123)..... R1100-RS-E Z127-G ...(pg. 123).. R1100-RS-M-13 Z127-HD(pg. 123)...... R1100-RS Z127-R(pg. 123)..... R1100-RS-B Z127-TC.....(pg. 123)... R1100-RS-TC Z127-90.....(pg. 123)... R1100-RS-90 Z130(pg. 140)...... R1200-SR Z130-DR....(pg. 140)... R1200-SR-EU Z130-EB(pg. 140)..... R1200-SR-E Z130-84.....(pg. 140).... R1200-SR-G Z131.....(pg. 140).... R1200-SR-R Z131-DR...(pg. 140). R1200-SR-R-EU Z131-EB...(pg. 140)...... R1200-SR-E Z131-VP...(pg. 140)...... R1200-SR-6 Z135-6......(pg. 78).....F1840 Z135-6-A(pg. 78)... F1840-M-W-1 Z135-6-C(pg. 78)...... F1840-40 Z135-6-G(pg. 78)...... F1840-13 Z135-6-R(pg. 78)...... F1840-41 Z135-6-T(pg. 78)...... F1840-16 Z135-6-Y(pg. 78)...... F1840-5 ZN135(pg. 78)..... F1840-1 Z150(pg. 129)...... R1200-PR Z150-A ...(pg. 129). R1200-PR-4-W-1 Z150-AR ..(pg. 129).. R1200-PR-4-11 Z150-C(pg. 129)... R1200-PR-4-U Z150-DB .(pg. 136)...... R1250-PR-4 Z150-DE.(pg. 129). R1200-PR-4-B-EU Z150-DG...(pg. 129)..... R1200-PR-4 Z150-DP .. (pg. 129)... R1200-PR-4-B Z150-DR...(pg. 129). R1200-PR-4-EU Z150-DT(pg. 129)... R1200-PR15 Z150-DX....(pg. 129)... R1200-PR-4-Z Z150-E(pg. 129)... R1200-PR-4-E Z150-EA....(pg. 129)... R1200-PR-4-E Z150-EB....(pg. 129)... R1200-PR-4-E Z150-ES (pg. 129) R1200-C-PR-4-EU Z150-G ..(pg. 129) R1200-PR-4-M-13 Z150-HF.....(pg. 129)..... R1200-PR-4 Z150-R(pg. 129).... R1200-PR-4-B Z150-S ..(pg. 129)..... R1200-PR-4-21 Z150-SC .(pg. 129).... R1200-PR-4-C Z150-TC....(pg. 129.. R1200-PR-4-TC Z150-TS ...(pg. 129)... R1200-PR-4-6 Z150-VP ...(pg. 129)... R1200-PR-4-6 Z150-XJ(pg. 129)R1200-PR-4 w/R1900 Z150-Y.....(pg. 129)... R1200-PR-4-5 Z150-85....(pg. 129). R1200-PR-4-JC Z150-90....(pg. 129). R1200-PR-4-90 ZB150(pg. 129)..... R1200-PR-1 ZN150(pg. 129)..... R1200-PR-1 Z154(pg. 135)...... R1220-PR

Design and dimensions are subject to modification. Prices do not include applicable taxes.



71							
	51	۸D	(na	125)	D100	U DD 1	11
- '	04.	·MII	(pg.	100).	. 11122	0-PR-4	- 1 1
Ζ1	54-	·C	(pa.	135)	R1220)-PR-4-l	U
71	E 1	DC	(na	105)	D1	מת חמי	1
۷ ا	34-	υu.	(µg.	100)	n 14	22U-PN-	4
Z1	54-	-DP	(pa.	135)	R1220	220-PR-)-PR-4- 1220-P	В
71	E /	DT	(pg	105)	D	1000 0	_ D
۷ ا	54-	יו ט-	(py.	100)	n	1220-P	n
71	54-	-G (r	na. 13	5). R1	220-PI	R-4-M-1	3
74	F 4	D /l	/	105	D400	0 00 4	n
۷1	54-	·К	(pg.	135)	. K122	0-PR-4-	-B
71	54.	.ς	(na	135)	R1220	-PR-4-2	1
-:	- 1	0	··(Þ9·	100).	D4000	111 12	. '
۷1	54-	SC	.(pg. ⁻	135)	K1220)-PR-4-	Ü
71	5/1	Ţς	(na	135)	R1221	0-PR-4-	6
-:			·(pg.	100)	111221	0 111 7	9
71	54-	٠٧٢.	(pg.	135)	. K122	0-PR-4-	6
71	54-	X I/r	n 13	5)R12	20_PR_	4 w/R19	nn
	- 1	,,o,(F	/g. 10	0,1112	D4000	1 W/III	-
۷1	54-	-Y	.(pg. 1	35)	K1220)-PR-4-)
71	54-	-85	(na	135)	R1220	-PR-4-J	C
74	E 1	00	(pg.	105).	D1000	-PR-4-9 20-PR- 20-PR-	'n
ΔI	54-	90.	(pg.	135).	K1220	-PK-4-9	U
7F	315	4	.(na.:	135)	R12	20-PR-	1
71	14 5	1	(pg	105)	D10	מת חמי	4
Z۱۱	113	4	(µg.	100)	n 12	.20-Ph-	I
۷1	58		(pa.	122)	K	1100-P	ĸ
71	50	۸D	(na :	≀າວາ′ ເ	21100	PR-4-1	1
۷.	50.	-A11	·(þy.	122). 1	11100-	T 11-4-1	
۷1	58-	·C	.(pg. 1	122)	K1100)-PR-4-I	U
71	58.	.ng	(na	1221	R1:	100-PR-	.4
7,	E0.	DT.	(Py.	100		1100 0	
۷1	DQ.	וע	(pg.	122)	K	1100-P 0-PR-4-	ń
71	58-	-F	(na.	122).	R110	0-PR-4-	F
71	E0	C /	na 11) D 1	100 0	D / N/ 1	2
۷ ۱	00-	· u .(py. 12	(22) ni	100-61	R-4-M-1	J
Z1	58-	-R	(pa.	122)	. R110	0-PR-4-	-B
71	50	22	(na ·	เววา์	D1100	0-PR-4-)-PR-4-	^
۷.	50.	-00	.(þy.	122)	111100)-F1\-4-	0
Z 1	58-	·IS.	.(pg.)	122)	. K1100	J-PK-4-	6
71	58.	.\/P	(na	122)	R110	0-PR-4- 0-PR-4-	6
	-00	VI.	··(pg.	0) D 4 4		4/D40	0
ΔI	58-	·XJ(þ)g. 12	2)KIII	JU-PK-	4 w/R19	JUU
Z1	58-	Y	.(pg. 1	22)	R1100)-PR-4-	5
71	E0	0.5	(pg	1001	D1	100 01	1
۷ ا	00-	·00.	(µg.	123)	n i	100-PJ-	4
Ζ1	58-	-90	(pg.	122).	R1100	-PR-4-9	0
75	115	Q	(ng	122)	D11	00-PR-	1
20	10	o	.(py.	122)	n i i	00-FN-	!
ZΝ	115	8	(pg.	122)	R11	00-PR-	1
71	60		(na	142)		R130	ın
74	00		(pg.	1 12)		D400	0
ΔI	ЬΙ		(pg.	142)		R130	IU
Z1	63		(na	1071		D107	'n
				13/1		n 12 <i>1</i>	U
71	62	۸D	(pg.	13/) 127\		R127	1
Z1	63-	-AR	(pg	. 137)	F	R1270-1	1
Z1 Z1	63- 63-	-AR -AW	(pg (pg	ı. 137) . 137)	F 	R1270-1 R1270-\	1 N
Z1 Z1	63- 63-	-AR -AW	(pg (pg	ı. 137) . 137)	F 	R1270-1 R1270-\	1 N
Z1 Z1 Z1	63- 63- 63-	-AR -AW -BS	(pg (pg (pa	ı. 137) . 137) . 137)	F l R12	R1270-1 R1270-\ 270-M-8	1 N 33
Z1 Z1 Z1	63- 63- 63-	-AR -AW -BS	(pg (pg (pa	ı. 137) . 137) . 137)	F l R12	R1270-1 R1270-\ 270-M-8	1 N 33
Z1 Z1 Z1	63- 63- 63-	-AR -AW -BS	(pg (pg (pa	ı. 137) . 137) . 137)	F l R12	R1270-1 R1270-\ 270-M-8	1 N 33
Z1 Z1 Z1	63- 63- 63-	-AR -AW -BS	(pg (pg (pa	ı. 137) . 137) . 137)	F l R12	R1270-1 R1270-\ 270-M-8	1 N 33
Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -FA	pg) (pg) (pg. (pg. (pa	i. 137) . 137) . 137) . 137). . 137). . 137)	F R12 R12	R1270-1 R1270-\ 270-M-8 70-M-E R1270- R1270-	1 N 33 U V F
Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -FA	pg) (pg) (pg. (pg. (pa	i. 137) . 137) . 137) . 137). . 137). . 137)	F R12 R12	R1270-1 R1270-\ 270-M-8 70-M-E R1270- R1270-	1 N 33 U V F
Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -FA	pg) (pg) (pg. (pg. (pa	i. 137) . 137) . 137) . 137). . 137). . 137)	F R12 R12	R1270-1 R1270-\ 270-M-8 70-M-E R1270- R1270-	1 N 33 U V F
Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -FA	pg) (pg) (pg. (pg. (pa	i. 137) . 137) . 137) . 137). . 137). . 137)	F R12 R12	R1270-1 R1270-\ 270-M-8 70-M-E R1270- R1270-	1 N 33 U V F
Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -FA	pg) (pg) (pg. (pg. (pa	i. 137) . 137) . 137) . 137). . 137). . 137)	F R12 R12	R1270-1 R1270-\ 270-M-8 70-M-E R1270- R1270-	1 N 33 U V F
Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -FA	pg) (pg) (pg. (pg. (pa	i. 137) . 137) . 137) . 137). . 137). . 137)	F R12 R12	R1270-1 R1270-\ 270-M-8 70-M-E R1270- R1270-	1 N 33 U V F
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -EA. -G -SC -SS	(pg (pg (pg. (pg. (pg. (pg. (pg.	. 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137)	F R12 R12 R12 R12	R1270-1 R1270-\ R1270-M-E R1270- R1270- R1270- R1270-\ R1270-\ R1270-\ 70-M-8	1 N 33 U V E 3 2 C 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -EA. -G -SC -SS	(pg (pg (pg. (pg. (pg. (pg. (pg.	. 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137)	F R12 R12 R12 R12	R1270-1 R1270-\ R1270-M-E R1270- R1270- R1270- R1270-\ R1270-\ R1270-\ 70-M-8	1 N 33 U V E 3 2 C 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63- 63- 63- 63-	-AR -AW -BS -DR -E -EA. -G -SC -SS	(pg (pg (pg. (pg. (pg. (pg. (pg.	. 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137)	F R12 R12 R12 R12	R1270-1 R1270-\ R1270-M-E R1270- R1270- R1270- R1270-\ R1270-\ R1270-\ 70-M-8	1 N 33 U V E 3 2 C 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63- 63- 63- 63- 63-	-AR -AW -BS -DR -EA. -GD -SC -SS -VP -W3	(pg (pg (pg. (pg. (pg. (pg. (pg. (pg. (pg.	. 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137)	F R12 R12 R12 R12	R1270-1 R1270-N- R1270-M-E R1270- R1270- R1270-M-1 R1270-I R1270-I R1270-U	1 N 3 U V E 3 2 C 3 6 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63- 63- 63- 63- 63- 63- 63- 63- 63-	AR AW BS DR E GD SC SS VP W3 W4	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137) . 137)	F R12 R12 R12 R12 R12	R1270-1 R1270-N R1270-M-E R1270- R1270- R1270-M-1 R1270-I R1270-W-8 R1270-W1270-W1270-W1270-W1270-W	1 N 33 U V E 3 2 C 3 6 3 4
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63-63-63-63-63-63-63-63-63-63-63-63-63-6	-AR -AW -BS -DR -E -EA. -G -SC -SS -VP -W3 -W4 -XJ	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F R12 R12 R12 R12 R12	R1270-1 R1270-N P70-M-E R1270- R1270- R1270- R1270-M-1 R1270-M-8 R1270- R1270-W W/R190	1 N 3 U V E 3 2 C 3 6 3 4 0
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E GD SC SS VP W3 W4 XJ	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F R12 R12 R12 R12 R12 R R1270	R1270-1 R1270-N P70-M-E P1270- R1270- R1270- P1270-H R1270- 1270-W W/R190 R1270-W	1 N 3 U V E 3 2 C 3 6 3 4 0 G
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E GD SC SS VP W3 W4 XJ	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F R12 R12 R12 R12 R12 R R1270	R1270-1 R1270-N P70-M-E P1270- R1270- R1270- P1270-H R1270- 1270-W W/R190 R1270-W	1 N 3 U V E 3 2 C 3 6 3 4 0 G
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E GD SC SS VP W3 W4 XJ	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F R12 R12 R12 R12 R12 R R1270	R1270-1 R1270-N P70-M-E P1270- R1270- R1270- P1270-H R1270- 1270-W W/R190 R1270-W	1 N 3 U V E 3 2 C 3 6 3 4 0 G
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E GD SC SS VP W3 W4 XJ	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F R12 R12 R12 R12 R12 R R1270	R1270-1 R1270-N P70-M-E P1270- R1270- R1270- P1270-H R1270- 1270-W W/R190 R1270-W	1 N 3 U V E 3 2 C 3 6 3 4 0 G
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E GD SC SS VP W3 W4 XJ	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F R12 R12 R12 R12 R12 R R1270	R1270-1 R1270-N P70-M-E P1270- R1270- R1270- P1270-H R1270- 1270-W W/R190 R1270-W	1 N 3 U V E 3 2 C 3 6 3 4 0 G
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-63-64	AR AW BS DR E GD SC SS VP W3 W4 XJ 84 85	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F	R1270-1 R1270-N-8 R1270-M-E R1270- R1270- 70-M-1 70-M-8 R1270- 1270-W W/R190 R1270-L 1270-J 1270-A	1 W 3 U V E 3 2 C 3 6 3 4 0 G C R 5
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-63-64-64-	-AR -AW -BS -DR -E -EA. -GD -SC -SS -VP -W3 -W4 -W4 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W3 -W3 -W3 -W3 -W3 -W3 -W3 -W3 -W3	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F	R1270-1 R1270-N-8 R1270-M-E R1270- R1270- 70-M-1 70-M-8 R1270- 1270-W W/R190 R1270- \$1270-J \$1270-A \$1270-A	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-63-64-64-	-AR -AW -BS -DR -E -EA. -GD -SC -SS -VP -W3 -W4 -W4 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W4 -W3 -W3 -W3 -W3 -W3 -W3 -W3 -W3 -W3 -W3	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F	R1270-1 R1270-N-8 R1270-M-E R1270- R1270- 70-M-1 70-M-8 R1270- 1270-W W/R190 R1270- \$1270-J \$1270-A \$1270-A	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-	AR AW. BS DR E EA. GD SC SS WP W3 W4 XJ 85 AR BS	(pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg (pg	. 137) . 137)	F12R12R12R12R1270	R1270-1 R1270-N-8 R1270-M-E R1270- R1270- 70-M-1 70-M-8 R1270- 1270-W w/R190 R1270-J R1270-J R1270-A5-1 70-A5-1	1 N 3 U V E 3 2 C 3 6 3 4 10 G C R 5 1 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-	AR AW. BS DR E EA. GD SC SS WP W3 W4 XJ 85 AR BS E	(pg 	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270- R1270- R1270-M-1 R1270-M-8 R1270- 1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-A R1270-A5-1	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-	AR AW. BS DR E EA. GD SC SS WP W3 W4 XJ 85 AR BS E	(pg 	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270- R1270- R1270-M-1 R1270-M-8 R1270- 1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-A R1270-A5-1	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW. BS DR EA. GD SC SS VP W3 W4 XJ AR BS E	(pg 	. 137) . 137)	R12R12R12R12R12R12R12R12R12R12R12R12R12	R1270-1 R1270-N-E R1270-M-E R1270- R1270- R1270-M-1 R1270-M-8 R1270- H1270-W H1270-W H1270-W H1270-H1270-J R1270-A5-1 R1270-A5-8 R1270-A5-C-	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR EA. GD SC SS VP W3 W4 XJ AR BS ES G	(pg 	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270- R1270-M-1 R1270-M-1 R1270-M-8 R1270-W R1270-W R1270-W R1270-W R1270-W R1270-B R1270-A	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E GD SC SS VP W4 XJ AR BS E AR BS SC SC	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-M-1 R1270-M-8 R1270-W R1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-8 R1270-A5-1 R1270-A5-8	1 N 3 U V E 3 2 C 3 6 3 4 10 G C R 5 1 3 V V 3 C
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E GD SC SS VP W3 W4 XJ AR BS E SC SC SS	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-W-1 R1270-M-8 R1270-W R1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-8 R1270-A5-8 R1270-A5-8	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E GD SC SS VP W3 W4 XJ AR BS E SC SC SS	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-W-1 R1270-M-8 R1270-W R1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-8 R1270-A5-8 R1270-A5-8	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E GD SC SS VP W3 W4 XJ AR BS E SC SC SC SC SC SC SC SC SC SC SC SC SC	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-W-1 R1270-M-8 R1270-W R1270-W R1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-8 R1270-A5-8 R1270-A5-8	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E GD SC SS VP W3 W4 XJ AR BS E SC SC SC SC SC SC SC SC SC SC SC SC SC	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-W-1 R1270-M-8 R1270-W R1270-W R1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-8 R1270-A5-8 R1270-A5-8	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR EA. GD SC SS VP W3 W4 XJ AR BS ES SC SC SS VP W4 XJ AR BS SC SC SC W4 XJ AR SC SC SC SC SC SC SC SC SC SC SC SC SC	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-W-1 R1270-M-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-W-1 R1270-A5-A5-A R1270-A5-A5-A R1270-A5-A5-A5-A5-A5-A5-A5-A5-A5-A5-A5-A5-A5-	1 N 3 U V E 3 2 C 3 6 3 4 10 G C R 5 1 3 V V 3 C 3 6 00
Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR EA. GD SC SS VP W3 W4 XJ AR BS ES SC SC SS VP W4 XJ AR BS SC SC SC SS W4 W4 W4 W4 W4 W5 SC SC SC SC SC SC SC SC SC SC SC SC SC	(pg	. 137) . 137)	F. R122 R127 R128 R129 R129 R129 R129 R121 R127 R127 R127 R127 R127 R127 R127 R127 R127	R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R1270-M-1 R1270-M-8 R1270-I R1270-W-R1270-W-I R1270-W-R1270-W-I R1270-W-R1270-W-R1270-W-R190-A5-I R1270-A5-R R1270-A5-R R1270-A5-R R R R R R R R R R R R R R R R R R R	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 0 G
Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E GD SC SS VP -W3 -W4 -W4 -W3 -W4 -W5 -W6 -W6 -W6 -W6 -W6 -W6 -W6 -W6 -W6 -W6	(pg	. 137).		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R1270-M-1 R1270-M-8 R1270-I R1270-W-R1270-W-I R1270-W-R1270-W-I R1270-W-R190-W-R190-W-R190-W-R190-W-R190-W-R190-W-R190-W-R190-A5-1 R1270-A5-I	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 0 G C
Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E. G. GD SC SS WP W3 W4 XJ AR BS E. SC SC SC SC SC SC SC SC SC SC SC SC SC S	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R1270-M-1 R1270-M-1 R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-A R15-S R1270-A R15-S R15-S R15-S R15-S R15-S	1 N 3 U V E 3 2 C 3 6 3 4 10 G C R 5 1 3 V V 3 C 3 6 0 G C 10
Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E. G. GD SC SS WP W3 W4 XJ AR BS E. SC SC SC SC SC SC SC SC SC SC SC SC SC S	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R1270-M-1 R1270-M-1 R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-A R15-S R1270-A R15-S R15-S R15-S R15-S R15-S	1 N 3 U V E 3 2 C 3 6 3 4 10 G C R 5 1 3 V V 3 C 3 6 0 G C 10
Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E. G. GD SC SS WP W3 W4 XJ AR BS E. SC SC SC SC SC SC SC SC SC SC SC SC SC S	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R1270-M-1 R1270-M-1 R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-A R15-S R1270-A R15-S R15-S R15-S R15-S R15-S	1 N 3 U V E 3 2 C 3 6 3 4 10 G C R 5 1 3 V V 3 C 3 6 0 G C 10
Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-64-64-64-64-64-64-64-	AR AW BS DR E. G. GD SC SS WP W3 W4 XJ AR BS E. SC SC SC SC SC SC SC SC SC SC SC SC SC S	(pg	. 137) . 137)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R1270-M-1 R1270-M-1 R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-W-R R1270-A R15-S R1270-A R15-S R15-S R15-S R15-S R15-S	1 N 3 U V E 3 2 C 3 6 3 4 10 G C R 5 1 3 V V 3 C 3 6 0 G C 10
Z1 Z	63-63-63-63-63-63-63-64-64-64-64-64-64-65-65-65-65-65-63-63-63-63-63-63-63-63-63-63-63-63-63-	AR AW BS DR EA. GGD SC SS VP W3 W4 XJ AR BS ES GSC SS VP W3 AR BS BS AR BS BS AR BS BS BS BS BS BS BS BS BS BS BS BS BS	(pg	. 137) . 124) . 124) . 124) . 124)		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R R1270-R R1270-W-I R1270-W-I R1270-W-I R1270-W-I R1270-W-I R1270-W-I R1270-W-I R1270-A R1150-A R1150-A R1150-A	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 0 G C 0 1 83
Z122122122122122122122122122122122122122	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR EA. GGD SC SS VP W3 W4 XJ 85 BS ES SC SS VP XJ (84 85 BS ES BS ES BS ES BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS BS	(pg.	. 137). . 124). . 124).		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R R1270-R R1270-R R1270-R R1270-R R1270-R R1270-W R R1270-W R R1270-W R R1270-W R R R R R R R R R R R R R R R R R R R	1 N 3 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 0 G C 0 1 83 V
Z121212212212212212212212212212212212212	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E A. GD SC SS VP W3 W4 W4 W4 W4 W8 W8 W8 W9 W9 W9 W9 W9 W9 W9 W9 W9 W9	(pg	. 137) 124) 124) 124) 124).		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-M-1 R1270-M-8 R1270- 1270-W-1 1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-1 R1270-A5-8 R1270-A5-1 R1270-A5-1 R1270-A5-1 R150-H R150-H R150-H R150-H R150-H R150-H	1 N 33 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 00 G C 0 1 83 V 13
Z121212212212212212212212212212212212212	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E A. GD SC SS VP W3 W4 W4 W4 W4 W8 W8 W8 W9 W9 W9 W9 W9 W9 W9 W9 W9 W9	(pg	. 137) 124) 124) 124) 124).		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-M-1 R1270-M-8 R1270- 1270-W-1 1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-1 R1270-A5-8 R1270-A5-1 R1270-A5-1 R1270-A5-1 R150-H R150-H R150-H R150-H R150-H R150-H	1 N 33 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 00 G C 0 1 83 V 13
Z121212212212212212212212212212212212212	63-63-63-63-63-63-63-63-63-63-63-63-63-6	AR AW BS DR E A. GD SC SS VP W3 W4 W4 W4 W4 W8 W8 W8 W9 W9 W9 W9 W9 W9 W9 W9 W9 W9	(pg	. 137) 124) 124) 124) 124).		R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270- R1270-M-1 R1270-M-8 R1270- 1270-W-1 1270-W R1270-W R1270-W R1270-A5-8 R1270-A5-1 R1270-A5-8 R1270-A5-1 R1270-A5-1 R1270-A5-1 R150-H R150-H R150-H R150-H R150-H R150-H	1 N 33 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 00 G C 0 1 83 V 13
Z1 Z	63-63-63-63-63-63-63-63-64-64-64-64-65-65-65-65-65-65-65-65-65-65-65-65-65-	AR AW. BS -E EA	(pg	. 137) 124) 124) 124) 124) 124) 124) 124) 124) 124) 124) 124) 124) 124) 124) 124) 124).	F. I.	R1270-1 R1270-N-E R1270-M-E R1270-M-E R1270-R R1270-R R1270-R R1270-R R1270-R R1270-R R1270-W R R1270-W R R1270-W R R1270-W R R R R R R R R R R R R R R R R R R R	1 W 33 U V E 3 2 C 3 6 3 4 0 G C R 5 1 3 V V 3 C 3 6 00 G C 0 1 83 V 13 - C 83

3	KE	FERENC	_
71	35_Y I	(pg. 124)R1	150 w/R1000
71	SE 01	(pg. 124) (pg. 124)	D1150 C
71	00-04.	(pg. 124) (pg. 149) (pg. 144) (pg. 144)	D-00117
211	00	(pg. 149)	K1930
Z18	30	(pg. 144)	R1400
Z18	80-FS	(pg. 144)	R1400-14
410	ნს-Ს	(pg. 144)	K1400-13
Z18	80-HD	(pg. 144) (pg. 144)	R1400-HM
718	RO-VP	(ng 144)	R1400-6
71	RN_4	(pg. 144)	R1400
71	00 T	(pg. 144)	D1/100
7D	100	(py. 144)	D1400
ZB	100	(pg. 144)	K1400-2
ZN	180	(pg. 144) (pg. 144)	K1400-1
ZR	B180	(pg. 144)	R1400-2RB
Z18	81	(pg. 144)	R1400
ZB	181	(pg. 144)	R1400-2
ΖN	181	(pg. 144)	R1400-1
718	81-BS	(pg. 144)	R1400-83
71	R1-C	(pg. 38)F1	100-C-K-40*
71	81_FQ	(pg. 144)	R1/100-1/
71	01-10. 01 C	(pg. 144)	D1400-14
210	o I - G	(pg. 144)	1400-13
210	מו-וט	(pg. 144) (pg. 38). F1100	K1400-HIVI
Z18	81-R	(pg. 38). F1100)-C-K-40-41*
Z18	81-VP	(pg. 144)	R1400-6
Z18	81-8	(pg. 144)	R1400
Z18	82	(pg. 145)	R1420
7B	182	(pg. 145)	R1420-2
7N	182	(pg. 145)	R1420-1
7R	R182	(pg. 145)	R1/20_2RR
711	D 102	(pg. 145)	D1420-211D
210	52-F5.	(pg. 145)	K142U-14
Z10	82-G	(pg. 145)	R1420-13
Z18	32-HD	(pg. 145)	R1420-HM
Z18	82-VP	(pg. 145)	R1420-6
Z18	82-45.	(pg. 145)	R1410
Z18	85	(pg. 145)	R1420
ZB	185	(pa. 145)	R1420-2
7N	185	(pg. 145) (pg. 145)	R1420-1
71	100 85	(ng 145)	R1420
71	05 EC	(pg. 145) (pg. 145)	D1/20 1/
71	00-10	(pg. 145)	D1420-14
210	55-G	(pg. 145)	K142U-13
Z18	85-HD	(pg. 145)	K1420-HM
Z18	85-VP	(pg. 145)	R1420-6
Z18	85-45.	(pg. 145) (pg. 142)	R1410
Z18	87	(pg. 142)	R1300
Z18	87-BS	(pg. 142) (pg. 143)	R1300-83
718	87-FG	(ng. 143)	R1320
71	87-G	(pg. 142)	R1300-13
71	97 TC	(pg. 142)	D1200 6
71	07-10	(pg. 142)	D.4040
210	57-V	(pg. 258)	
218	87-VP	(pg. 142)	R1300-6
ZB	18/		R1300-2
ZN	187	(pg. 142)	R1300-1
ZR	B187	(pg. 142)	R1300-2RB
Z18	39		R1330
Z18	89-BS	(pg. 143)	R1330-83
718	89-G		R1330-13
71	80 <u>-</u> 08	(pg. 142)	R1310
71	00 TC	(pg. 142) (pg. 143)	R1330-6
210	59-VP	(pg. 143)	R1330-6
ZIV	189-90		R1330T
ZB	189	(pg. 143)	R1330-2
ΖN	189	(pg. 143)	R1330-1
Z19	90	(pg. 149)	R1900
Z19	91		R1520
Z19	91-CA		R1520-CA
710	91-G	(pg. 146)	
710	31_RN		R1530
710	מו-וט. מם-11	(ру. 147) -G(рд. 147)	R1530-13
71	วา-เปบ :	-u(µy. 147)	
41	ປ∠ ວດ ດ	(pg. 146)	KIDIU
71	52-は 20 40	(pg. 146)	KIDIU-IJ
۷1	92-12.	(pg. 146)	KIDIU-12

ROOF DRAIN OPTIONAL VARIATIONS

Z......Poly dome Std.

MIFAB

SUFFIX

ZURN

PREFIX

Z Std.
ZA M-80
ZABPB2
ZANBNB1
ZARBBronze body/grate2RB
ZARBBronze body/grateZRB
ZBPB dome/grate2
ZCCast iron dome
ZN1
ZRBBronze dome/grate81
ZIID DI UIIZE UUIIIE/ YI'ale0 I
ZUDN GUEENVEG MIEAD
ZURN SUFFIXES MIFAB
-ACDeck clampU
-ARAcid res. epoxy coating11
-AWAdjustable water damW
-BSSS mesh scr. over dome-83
-CUnderdeck clampU
DD Doop ourse hady D1050
-DBDeep sump body R1250
-DEDeck ExtensionB-EU
-DGDuctile iron grate4
-DPRoof deck plateB
-DR Top Set drain riserEU
-DSDeep sump body R1250
-DXExtended wide flangeZ
-EFixed extensionV
-EAAdjustable extensionE
-EBExtensionE
-F14
-FGFlush grateR1320/R1330
-FSFlat strainer14
-G13
-GDGalvanized metal domeM-12
-HDAluminum dome strainer-M-80
-ICX
-IP Threaded connection T
-NHNo hub connection Std.
-NLPush on connection P
-RSump receiverB
-RDRound inlet and outlet R1530
-SSecondary strainer21
-SCSecondary clampC
-SDStandpipeW
-SSSS mesh covered dome83
-SSMSS mesh covered dome83
-T16
-TCPush on gasket w/ test capTC
-TSVandal proof6
VP Vandal proof 6

-VP.....Vandal proof.. -6 -W2....2" Internal water dam.....-W2

-W33" Internal water damW3
-W44" Internal water damW4
-XJR1900
-Y5ediment bucket5
-10Parabolic weir
-84Ballast guard
-85Ballast grd with sec.clamp -JC
-892" external water damR
-90Threaded side outlet body90

FLOOR AND AREA DRAINS

ZURN	MIFAB
Z210(pg. 276)	A1 body
Z211(pg. 276)	A1 body
Z211-G(pg. 276)	A1-13 body
Z211-P(pg. 276)	
Z211-210(pg. 276)	Δ1 hody
ZN211-B(pg. 33)	E1100 1
ZN211-B-G(pg. 33)	E1100 1 12
ZN211-B-P(pg. 33)	E1100-1-13
ZN211-D-P(py. 33)	. F1100-1-7
ZN211-B-VP(pg. 33)	. F1100-1-0
ZN211-B-X(pg. 33)	. F1100-1-8
ZN211-B-Y(pg. 33)	. F1100-1-5
ZN-211-B-210(pg. 33) F1100-1
ZN211-B-210-WD (pg. 43)) F1100-1-Z
ZN211-BE(pg. 35)	F1100-EF-1
ZN211-BE-G .(pg. 35). F1	100-EF-1-13
ZN211-BE-P(pg. 35) F	1100-EF-1-7
ZN211-BE-VP(pg. 35). F	1100-EF-1-6
ZN211-BE-X(pg. 35) F	1100-EF-1-8
ZN211-BE-Y(pg. 35) F	1100-EF-1-5
ZN211-BE-210(pg. 35)	. F1100-EF-1
ZN211-BF(pg. 35)	F1100-EG-1
ZN211-BF-G(pg. 35). F1	100-EG-1-13
ZN211-BF-P(pg. 35) F	1100-EG-1-7
ZN211-BF-VP .(pg. 35) F	1100-EG-1-6
ZN211-BF-X(pg. 35) F	1100-FG-1-8
ZN211-BF-Y(pg. 35) F	1100-FG-1-5
ZN211-BF-210(pg. 35).	F1100-FG-1
ZN211-F(pg. 35)	F1100-FG-1
ZN211-F-G(pg. 35) F1	100-FG-1-13
ZN211-F-P(pg. 35) F	1100 EG 1 7
7N211 E VD (pg. 05) I	1100-LG-1-7
ZN211-F-VP(pg. 35) F ZN211-F-X(pg. 35) F	1100-LG-1-0
ZN211-F-A(pg. 33) F	T1100-EG-1-0
ZN211-F-210(pg. 35)	. F1100-EG-1
ZN211-Y(pg. 39)	. 11100-5-1
ZN211-Y-G(pg. 39) F	1100-8-1-13
ZN211-Y-P(pg. 39)	F1100-S-1-7
ZN211-Y-VP(pg. 39)	F1100-S-1-6
ZN211-Y-X(pg. 39)	F1100-S-1-8
ZN211-Y-Y(pg. 39)	F1100-S-1-5
ZN211-Y-210(pg. 39)	F1100-S-1
ZX211-A(pg. 33)	F1100-4
ZX211-A(pg. 33) ZX211-A5(pg. 33)	F1100-5-4
ZX211-A-G(pg. 33)	F1100-4-13
ZX211-A-P(pg. 33)	F1100-4-7

"X" Contact MIFAB

Design and dimensions are subject to modification. Prices do not include applicable taxes.



FLOOR AND AREA DRAINS CON'T

ZURN MIFAB ZX211-A-VP ...(pg. 33)..... F1100-4-6 ZX211-A-X(pg. 33).... F1100-4-8 ZX211-A-Y(pg. 33)... F1100-4-5 ZX211-A-210 ...(pg. 33)..... F1100-4 ZX211-Y ...(pg. 39)...... F1100-S8-4 ZX211-Y-G ..(pg. 39). F1100-S8-4-13 ZX211-Y-P(pg. 39). F1100-S8-4-7 ZX211-Y-VP .(pg. 39).. F1100-S8-4-6 ZX211-Y-X ..(pg. 39).... F1100-S8-4-8 ZX211-Y-Y(pg. 39).. F1100-S8-4-5 ZX211-Y-210(pg. 39)..... F1100-S8-4 ZXN211-A(pg. 42)...... F1100-X-1 ZXN211-A5 ..(pg. 42)..... F1100-X5-1 ZXN211-A6 ..(pg. 42)..... F1100-X6-1 ZXN211-A-G .(pg. 42), F1100-X-1-13 ZXN211-A-P ..(pg. 42)... F1100-X-1-7 ZXN211-A-VP .(pg. 42).. F1100-X-1-6 ZXN211-A-X ...(pg. 42).. F1100-X-1-8 ZXN211-A-Y ...(pg. 42).. F1100-X-1-5 ZXN211-A-210 .(pg. 42)... F1100-X-1 ZXN211-H ...(pg. 43).... F1100-XS6-1 ZXN211-H-G.(pg. 43).F1100-XS6-1-13 ZXN211-H-P .(pg. 43). F1100-XS6-1-7 ZXN211-H-VP.(pg. 43). F1100-XS6-1-6 ZXN211-H-X(pg. 43). F1100-XS6-1-8 ZXN211-H-Y(pg. 43). F1100-XS6-1-5 ZXN211-H-210(pg. 43) F1100-XS6-1 ZXN211-Y(pg. 43)... F1100-XS8-1 ZXN211-Y8 ..(pg. 43)... F1100-XS8-1 ZXN211-Y-G.(pg. 43) F1100-XS8-1-13 ZXN211-Y-P.(pg. 43). F1100-XS8-1-7 ZXN211-Y-VP (pg. 43). F1100-XS8-1-6 ZXN211-Y-X .(pg. 43). F1100-XS8-1-8 ZXN211-Y-Y .(pg. 43). F1100-XS8-1-5 ZXN211-Y-210 (pg. 43). F1100-XS8-1 Z221 (pg. 52)..... F1240 Z221-G(pg. 52)...... F1240-13 Z221-P(pg. 52)...... F1240-7 Z221-VP(pg. 52)...... F1240-6 Z221-X(pg. 52)...... F1240-8 Z221-Y(pg. 52)...... F1240-5 Z300pg. 74)...... F1650-G ZB300(pg. 74)..... F1650-G-1 ZN300(pg. 74)..... F1650-G-1 ZN300-C(pg. 74)..... F1650-G-1 ZN300-DX(pg. 74)... F1650-G-1-Z ZN300-FG.....(pg. 74)... F1650-G-1-A ZN300-IG(pg. 74)... F1650-G-1-6 ZN300-NE "X" ZN300-ST "X" ZN300-VP(pg. 74)... F1650-G-1-6 ZN300-WB....(pg. 74)...... See F1670 Z310F1650 ZB310 (pg. 74)..... F1650-1 ZN310(pg. 74)..... F1650-1 ZN310-C(pg. 74)..... F1650-1 ZN310-DX.....(pg. 74)...... F1650-1-Z ZN310-FG....(pg. 74)...... F1650-1-A ZN310-IG(pg. 74)...... F1650-1-6 ZN310-ST....."X" ZN310-VP(pg. 74)...... F1650-1-6 ZN310-WB ...(pg. 74)...... see F1670 Z315(pg. 53).... F1320-25-1 ZB315(pg. 53)..... F1320-25-1 ZN315(pg. 53)..... F1320-25-1 ZN315-G(pg. 53).. F1320-25-1-13 ZN315-HL .(pg. 53).... F1320-25-1-6

ZN315-P(pg. 53).... F1320-25-1-7 ZN315-TC ...(pg. 53)... F1320-25-1-TC ZN315-V(pg. 53).... F1320-25-1-8 Z319 F1660 ZB319(pg. 74)..... F1660-1 ZN319 (pg. 74)..... F1660-1 ZN319-DX ..(pg. 74)...... F1660-1-Z ZN319-G(pg. 74)...... F1660-1-13 ZN319-P(pg. 74)..... F1660-1-7 ZN319-V(pg. 74)...... F1660-1-8 ZN319-VP ..(pg. 74)..... F1660-1-6 ZN319-WB .(pg. 74)..... see F1670 ZN319-Y(pg. 74)..... F1660-1-5 Z320...(pg. 74) F1650-ER9-HG5-3-11 ZB320 .(pg. 74).F1650-ER9-HG5-3-11 ZN320.(pg. 74).F1650-ER9-HG5-3-11 ZN320-DC .(pg. 74). F1650-ER9-HG5-3 ZN320-G (pg. 74) F1650-ER9-HG5-3-11-13 ZN320-V (pg. 74) F1650-ER9-HG5-3-8-11 ZN320-VP (pg. 74) F1650-ER9-HG5-3-6-11 ZN320-WB.....(pg. 74)...... see F1670 Z325 (pg. 75)..... F1790 Z325-DB(pg. 75)...... F1790-21 Z325-G(pg. 75)...... F1790-13 Z325-S(pg. 75)...... F1790-21 Z326(pg. 75)..... F1780 Z326-AR(pg. 75)...... F1780-11 Z326-DB(pg. 75)...... F1780-21 Z326-G(pg. 75)...... F1780-13 Z326-S(pg. 75)...... F1780-21 Z328-4.......(pg. 46)...... F4-50 Z328-6.....(pg. 46)..... F6-50 ZB328-4(pg. 46)..... F4-1 ZB328-6(pg. 46)..... F6-1 ZN328-4(pg. 46)..... F4-1 ZN328-6(pg. 46)..... F6-1 Z328-AR(pg. 46)...... F4-50-11 Z328-G(pg. 46)..... F4-50-11 Z329(pg. 46).....G Z329-9......(pg. 46)...... G-50 ZB329-7(pg. 46)..... J-1 ZB329-9(pg. 46)...... G-1 ZN329-7(pg. 46).................. J-1 ZN329-9(pg. 46)..... G-1 Z329-AR(pg. 46)...... G-50-11 Z329-G......(pg. 46)...... G-50-11 Z348 (pg. 76)..... F1820 ZB348 (pg. 76)...... F1820-81 Z348-G(pg. 76)..... F1820-13 Z348-TC(pg. 76)...... F1820-TC Z349(pg. 77).... F1830-PL-50 ZB349(pg. 77)...... F1830-PL ZN349(pg. 77)...... F1830-PL ZN349-C ...(pg. 77).... F1830-PL-3-40 ZN349-G ...(pg. 77).... F1830-PL-3-13 ZN349-SD .(pg. 77).... F1830-PL-3-79 ZN349-SS .(pg. 77).... F1830-PL-3-83 Z350(pg. 77)..... F1830-P ZB350(pg. 77)..... F1830-P-3 ZN350(pg. 77)..... F1830-P-3 ZN350-C ...(pg. 77)..... F1830-P-3-40 ZN350-G ..(pg. 77)..... F1830-P-3-13 ZN350-P(pg. 77)...... F1830-P-3-7 ZN350-PL ..(pg. 77)..... F1830-P-3 ZN350-PS(pg. 77).. F1830-P-3-43 ZN350-SD(pg. 77)... F1830-P-3-79 ZN350-SS ...(pg. 77)... F1830-P-3-83 Z352 (pg. 76)..... F1810 Z352-G(pg. 76)..... F1810-13

Z352-VP (pg. 76)...... F1810-6 Z352-45......(pg. 76)...... F1810-45 Z352-90......(pg. 76)...... F1810-90 ZRB352(pg. 76)...... F1810-81 Z355 (pg. 49)..... F1160 ZB355(pg. 49)...... F1160-1 ZN355 (pg. 49)..... F1160-1 ZN355-CP(pg. 49)...... F1160-49 ZN355-G(pg. 49).... F1160-1-13 Z356(pg. 50)..... F1170 ZB356(pg. 50).... F1170-C-5-1* ZN356(pg. 50).... F1170-C-5-1* ZN356-BP(pg. 50)F1170-C-5-1-34B* ZN356-G .(pg. 50).F1170-C-5-1-13* ZN356-J ..(pg. 50)..... F1170-C-5-1* ZN356-J2 .(pg. 50).... F1170-C-5-1* ZN356-J3 .(pg. 50).... F1170-C-5-1* ZN356-VP.(pg. 50).. F1170-C-5-1-6* Z400-M(pg. 46)...... 5-1-TFB Z400-N(pg. 46).....N Z400-7N(pg. 46).....N7 Z400-9N(pg. 46).....N9 Z400-SR(pg. 140)....-SR Z400-SR(CLPB).......MI-STAND Z400-U(pg. 46)...... DD-50 Z400-18......(pg. 47).....SPR ZB400-B(pg. 46)...... 5-1 ZB400-5B(pg. 46)..... 5-2 ZB400-6B(pg. 46)..... 6-1 ZB400-7B(pg. 46)...... 7-1 ZB400-8B(pg. 46)...... 8-1 ZB400-10B(pg. 46)...... 10-1 ZB400-BL(pg. 47)..... Z5-1 ZB400-C(pg. 46)...... HG-3 ZB400-D(pg. 47)...... VD-3 ZB400-E(pg. 46)..... EF-1 ZB400-G(pg. 46)..... K-1 ZB400-H (pg. 46). FC-1 (specify dia.) ZB400-I .(pg. 46). ER-1 (specify dia.) ZB400-J.(pg. 46). RS-1 (specify size) ZB400-K(pg. 46)..... AS-1 ZB400-M(pg. 46)...... 5-2-TFB ZB400-N ..(pg. 46).N-1 (specify dia.) ZB400-0(pg. 46)..... FT6-1 ZB400-P(pg. 47)...... WD-3 ZB400-S (pg. 47).S5-1 (specify size) ZB400-5S(pg. 47)...... S5-2 ZB400-6S(pg. 47)...... S6-1 ZB400-7S(pg. 47)..... S8-1 ZB400-8S(pg. 47)..... S8-1 ZB400-9S(pg. 47)...... S10-1 ZB400-10S(pg. 47)...... S10-1 ZB400-SC......(pg. 47)........... SD6-3 ZB400-SH (pg. 47). SHG-3 (specify size) ZB400-SL(pg. 47)...... ZS-1 ZB400-T ..(pg. 47).. T-3 (specify dia.) ZN400-5B(pg. 46)...... 5-2 ZN400-6B(pg. 46)...... 6-1 ZN400-7B(pg. 46)...... 7-1 ZN400-8B(pg. 46)...... 8-1 ZN400-10B(pg. 46)..... 10-1 ZN400-BF(pg. 46)..... EG-1 ZN400-BL(pg. 47)...... Z5-1 ZN400-BZ(pg. 47).....5-1-CL ZN400-C(pg. 46)...... HG-3 ZN400-D(pg. 47)...... VD-3 ZN400-E(pg. 46)..... EF-1 ZN400-F(pg. 46)..... EG-1 ZN400-G(pg. 46)..... K-1 ZN400-H (pg. 46).FC-1 (specify dia.) ZN400-I..(pg. 46). ER-1 (specify dia.) ZN400-J .(pg. 46) RS-1 (specify size)

ZN400-K (pg. 46)..... AS-1 ZN400-M......(pg. 46)...... 5-1-TFB ZN400-N .. (pg. 46). N-1 (specify dia.) ZN400-0(pg. 46)..... FT6-1 ZN400-P(pg. 47)...... WD-3 ZN400-R(pg. 46)..... FC-1 ZN400-S (CAN) ...(pg. 46)...... DD-1 ZN400-S (USA)(pg. 47).S5-1 (spec.size) ZN400-5S(pg. 47)...... S5-1 ZN400-6S(pg. 47)...... S6-1 ZN400-7S(pg. 47)...... S8-1 ZN400-8S(pg. 47)...... S8-1 ZN400-9S(pg. 47)...... S10-1 ZN400-10S(pg. 47)...... S10-1 ZN400-SC(pg. 47).....SD6-3 ZN400-SH (pg. 47) SHG-3 (specify size) ZN400-SL......(pg. 47)...... ZS-1 ZN400-T .. (pg. 47).. T-3 (specify size) ZN400-Y (pg. 47). S5-1 (specify size) ZS400-B .. (pg. 46).. 5-3* (Spec. dia.) ZS400-5B......(pg. 46)...... 5-3 ZS400-6B......(pg. 46)...... 6-3 ZS400-8B(pg. 46)..... 8-3 ZS400-10B(pg. 46)..... 10-3 ZS400-S.(pg. 47)... S5-3 (Spec. size) ZX400-A(pg. 46)..... 5-4 ZX400-Y(pg. 47)..... S8-4 ZXN400-A (pg. 47). X-1 (specify size) ZXN400-H(pg. 47)...... XS6-1 ZXN400-Y(pg. 47)...... XS8-1 Z414 (pg. 46)..... F-50 Z414-1.......(pg. 46)...... G-50 Z414-4.....(pg. 46)..... F4-50 Z414-6......pg. 46)...... F6-50 ZN414 (pg. 46)..... F-1 ZN414-1(pg. 46)..... G-1 ZN414-4(pg. 46)..... F4-1 ZN414-6(pg. 46)..... F6-1 Z415 body(pg. 276) A1 body w/A1-C2 Z415(pg. 33)..... F1100-C* Z415-B.....(pg. 33)..... F1100-C* Z415-BL(pg. 43)..... F1100-C-Z* Z415-BZ(pg. 33)...... F1100-C* Z415-C.....(pg. 37)... F1000-C-HG* Z415-D......(pg. 41).... F1000-C-VD* Z415-E(pg. 35)..... F1100-C-EF* Z415-G(pg. 38)..... F1100-C-K* Z415-H(pg. 36).... F1100-C-FC* Z415-I(pg. 36).....F1100-C-ER* Z415-J(pg. 39).... F1100-C-RS* Z415-K......(pg. 34).... F1100-C-AS* Z415-M.(pg. 33).. F1100-C-5-3-TFB* Z415-N(pg. 38)...... F1100-C-N* Z415-0(pg. 37)..... F1100-C-FT6* Z415-P(pg. 42)..... F1100-C-WD* Z415-S (CAN).(pg. 34) F1100-C-DD* Z415-S (USA)..(pg. 39).. F1100-C-S* Z415-SC ...(pg. 40)... F1100-C-SD6* Z415-SH ...(pg. 40)... F1000-C-SHG* Z415-SL ...(pg. 44)..... F1100-C-ZS* Z415-T(pg. 41)...... F1000-C-T* ZN415-B ...(pg. 33)..... F1100-C-5-1* ZN415-BL .(pg. 43)... F1100-C-Z5-1* ZN415-C ...(pg. 37).. F1000-C-HG-3* ZN415-D...(pg. 41)... F1000-C-VD-3* ZN415-E .. (pg. 35).... F1100-C-EF-1* ZN415-G .(pg. 38)..... F1100-C-K-1* ZN415-H..(pg. 36).. F1100-C-FC7-1*

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit **www.mifab.com** for the most recent product information.

"X" Contact MIFAB



ZN415-I ..(pg. 36)...... F1100-C-ER-1* ZN415-J .(pg. 39).... F1100-C-RS-1* ZN415-K (pg. 34)..... F1100-C-AS-1* ZN415-M (pg. 33) F1100-C-5-3-TFB* ZN415-N .(pg. 38)..... F1100-C-N-1* ZN415-0 (pg. 37)... F1100-C-FT6-1* ZN415-P .(pg. 42)....F1100-C-WD-3* ZN415-S .(pg. 39)..... F1100-C-S-1* ZN415-SC (pg. 40). F1100-C-SD6-3* ZN415-SH.(pg. 40) F1000-C-SHG-3* ZN415-SL .(pg. 44)... F1100-C-ZS-1* ZN415-T ...(pg. 41)..... F1000-C-T-3* ZN415-M (pg. 33) F1100-C-5-1-TFB* ZN415-Y ... (pg. 43)... F1000-C-XS-1* ZX415-A .. (pg. 33)..... F1100-C-5-4* ZS415-B ...(pg. 32)..... F1000-C* ZS415-S(pg. 39)...... F1000-C-S* ZX415-Y8 .(pg. 43). F1100-C-XS8-4* ZXN415-A .(pg. 43) F1100-C-XSG-1* ZXN415-H .. (pg. 43) F1100-C-XS6-1* Z420......(pg. 51)..... F1210C Z450(pg. 48)..... F1120-C* Z450-B(pg. 48)..... F1120-C* ZB450-B ...(pg. 48)...... F1120-C-1* ZN450-B ..(pg. 48)...... F1120-C-1* Z453(pg. 48)..... F1120-C* Z453-B(pg. 48)..... F1120-C* ZB453-B(pg. 48)...... F1120-C-1* ZN453-B(pg. 48)...... F1120-C-1* Z455(pg. 48)..... F1130C Z455-B(pg. 48)..... F1130C ZB455-B(pg. 48)..... F1130C-1 ZN455-B(pg. 48).....F1130C-1 Z456(pg. 48)..... F1130C Z456-B(pg. 48)..... F1130C ZB456-B(pg. 48)..... F1130C-1 ZN456-B(pg. 48).....F1130C-1 Z503 (pg. 59)..... F1360-Y ZB503(pg. 59)..... F1360-Y-1 ZN503(pg. 59)...... F1360-Y-1 Z504(pg. 56)..... F1340-Y-Q-14-4 ZN504 ... (pg. 56) F1340-Y-Q-14-1 Z504-T ..(pg. 63)..... F1440-Y-Q-14-4 Z505(pg. 54)...... F1340-Y-14-4 ZN505 ..(pg. 62)..... F1440-Y-14-4 Z505-T ..(pg. 54)...... F1340-Y-14-1 Z506(pg. 56). F1340-Y-Q-14-90-4 Z507(pg. 52)...... F1300-C-Y-4* ZB507 ...(pg. 52)...... F1300-C-Y-1* ZN507 ...(pg. 52)...... F1300-C-Y-1* Z508(pg. 53)...... F1320-C-Y-4* ZB508 ...(pg. 53)...... F1320-C-Y-1* ZN508 ...(pg. 53)...... F1320-C-Y-1* Z509......(pg. 56).... F1340-C-Y-Q-4* Z509-T ...(pg. 63)...... F1440-Y-Q-4 ZB509(pg. 56).... F1340-C-Y-Q-1* ZN509 ... (pg. 56) F1340-C-Y-Q-1* Z511(pg. 54).....F1330C-4 ZB511 ...(pg. 54)..... F1330C-1 ZN511 ...(pg. 54)..... F1330C-1 Z512(pg. 54)..... F1340-Y-4 ZN512 ...(pg. 54)..... F1340-Y-1 Z512-T(pg. 62)...... F1440-Y-14-4 Z513(pg. 61)..... F1430C-5-4 ZB513(pg. 61)...... F1430C-5-1 ZN513(pg. 61)...... F1430C-5-1 Z516(pg. 54).... F1340-C-14-4* Z517(pg. 54)...... F1330C-33-4 ZB517(pg. 54)...... F1330C-33-1 ZN517(pg. 54)...... F1330C-33-1 Z520(pg. 53)..... F1320-C-4* Z520-T ...(pg. 61)..... F1420-C-4* Z521(pg. 54)..... F1340-4

Z521-T(pg. 62)..... F1440-4 ZB521(pg. 54)..... F1340-1 ZB521-T(pg. 62)..... F1440-1 ZN521 (pg. 54)..... F1340-1 ZN521-T(pg. 62)..... F1440-1 Z525(pg. 53)..... F1320-C-14-4* ZN525(pg. 53)..... F1320-C-14-1* Z525-T ...(pg. 61)...... F1420-C-Y-4* Z526(pg. 54)..... F1340-14-4 ZN526(pg. 54)..... F1340-14-1 Z526-T ...(pg. 62)...... F1440-Y-14-4 Z529(pg. 53)..... F1320-25-1 ZB529(pg. 53)..... F1320-25-1 ZN529(pg. 53)..... F1320-25-1 Z530(pg. 53).. F1320-Y-14-Z-4-5 ZB530(pg. 53).. F1320-Y-14-Z-1-5 ZN530(pg. 53).. F1320-Y-14-Z-1-5 Z531(pg. 53)...... F1320-C-Z-4* ZB531(pg. 53)...... F1320-C-Z-1* ZN531 ...(pg. 53)...... F1320-C-Z-1* Z532......(pg. 54)..... F1340-14-5-Z-4 ZB532.....(pg. 54)..... F1340-14-5-Z-1 ZN532....(pg. 54)..... F1340-14-5-Z-1 Z533(pg. 68)..... F1530 ZB533 ...(pg. 68)..... F1530-1 ZN533(pg. 68)..... F1530-1 Z534 (CAN) ...(pg. 54)...... F1340-4 ZN534 (CAN) .(pg. 54)...... F1340-1 ZB534 (CAN) .(pg. 54)...... F1340-1 Z534 (USA)....(pg. 69)...... F1540-4 ZB534 (USA) .(pg. 69)...... F1540-1 ZN534 (USA) ...(pg. 69)...... F1540-1 Z535(pg. 68)...... F1510-80 Z536 (CAN)..(pg. 53) F1320-C-14-4* ZN536 (CAN).(pg. 53)F1320-C-14-1* Z536 (USA)(pg. 69)..... F1550 ZB536 (USA) ...(pg. 69)...... F1550-1 ZN536 (USA) ... (pg. 69)...... F1550-1 Z537(pg. 69)..... F1550-16 ZB537(pg. 69)...... F1550-16-1 ZN537(pg. 69)...... F1550-16-1 Z538 (CAN) ..(pg. 53).... F1320-C-4* ZN538 (CAN) .(pg. 53)... F1320-C-1* Z538 (USA).(pg. 58) F1350-C-TFB-4* ZB538 (USA)(pg. 58)F1350-C-TFB-1* ZN538 (USA)(pg. 58)F1350-C-TFB-1* Z539(pg. 58).... F1350-C-4-5* ZB539(pg. 58).... F1350-C-1-5* ZN539(pg. 58).... F1350-C-1-5* Z540(pg. 55)..... F1340-C-TFB-4* ZB540 ...(pg. 55)..... F1340-C-TFB-1* ZN540 ...(pg. 55)..... F1340-C-TFB-1* Z541 ...(pg. 54).. F1340-C-Y-14-5-4* ZB541 .(pg. 54).. F1340-C-Y-14-1-5* ZN541 .(pg. 54).. F1340-C-Y-14-1-5* Z543 ...(pg. 60).. F1370-C-Y-14-5-4* ZB543 .(pg. 60).. F1370-C-Y-14-5-1* ZN543 ..(pg. 60). F1370-C-Y-14-5-1* Z544(pg. 59)..... F1360-Y-5 Z545(pg. 59).... F1360-C-Y-14-4* Z546 "X" Z547....."X" Z548(pg. 60)...... F1370-17-4 ZB548(pg. 60)...... F1370-17-1 ZN548(pg. 60)...... F1370-17-1 Z550(pg. 53).... F1320-C-Y-14-4* ZB550 ...(pg. 53).... F1320-C-Y-14-1* ZN550 ..(pg. 53).... F1320-C-Y-14-1* Z551(pg. 53)..... F1320-Y-14-4 ZB551 ..(pg. 53)..... F1320-Y-14-1

2533...... (pg. 53)..... F1320-14 Z554(pg. 53)... F1320-C-TFB-4* ZB554(pg. 53)... F1320-C-TFB-1* ZN554(pg. 53)... F1320-C-TFB-1* Z555(pg. 52)..... F1300-C-4* ZN555(pg. 52)..... F1300-C-1* Z556 (CAN) ...(pg. 53).... F1300-C-4* Z556 (USA) (pg. 53) F1320-C-Y-14-4* ZN556 (CAN) ..(pg. 53)... F1300-C-1* ZN556 (USA)(pg. 53) F1320-C-Y-14* Z560 "X" Z566-GT(pg. 78)..... F1860-16-4 ZB566(pg. 78)..... F1860-1 ZB566-GT ...(pg. 78)..... F1860-16-1 ZN566(pg. 78)..... F1860-1 ZN566-GT ...(pg. 78)..... F1860-16-1 Z568(pg. 78)..... F1870 Z568-GT(pg. 78)..... F1870-16-4 ZB568(pg. 78)..... F1870-1 ZB568-GT ...(pg. 78)..... F1870-16-1 ZN568(pg. 78)..... F1870-1 ZN568-GT ...(pg. 78).... F1870-16--1 Z572 (pg. 75)..... F1720 ZB572(pg. 75)..... F1720-1 ZN572(pg. 75)..... F1720-1 Z573(pg. 46)...... RS48-NH-1 Z574(pg. 46)...... RS412-NH ZB574(pg. 46)..... RS412-NH-1 ZN574(pg. 46)..... RS412-NH-1 Z575.....(pg. 75).. F1760-FL-4-22 ZB575(pg. 75).. F1760-FL-1-22 ZN575(pg. 75).. F1760-FL-1-22 Z576(pg. 75)..... F1760-FL-4 ZB576(pg. 75)...... F1760-FL-3 ZN576(pg. 75)......F1760-FL-3 Z585(pg. 61).... F1430-C-Y-4-5* ZB585(pg. 62)...... F1440-Y-14-4 ZN585 ...(pg. 62)...... F1440-Y-14-4 Z586(pg. 75)..... F1760-FL ZN586 ...(pg. 75)..... F1760-FL-3 Z587(pg. 62)..... F1440-Y-4 Z609(pg. 61)... F1420-C-Y-14-4* ZB609 ...(pg. 61)... F1420-C-Y-14-1* ZN609 ...(pg. 61)... F1420-C-Y-14-1* Z610(pg. 62)..... F1440-C-Y-5-4* ZB610 ...(pg. 62)..... F1440-C-Y-5-1* ZN610 ... (pg. 62)..... F1440-C-Y-5-1* Z610-H(pg. 62)..... F1440-Y-4 ZN610-H(pg. 62)...... F1440-Y-1 Z610-H-ADJ ...(pg. 62)..... F1440-C* ZN610-H-ADJ .(pg. 62).. F1440-C-1* Z611(pg. 61)..... F1430C-Y-4 ZB611(pg. 61)..... F1430C-Y-1 ZN611(pg. 61)..... F1430C-Y-1 Z624(pg. 72)..... F1620-C-4 ZB624(pg. 72)..... F1620-C-1 ZN624(pg. 72)..... F1620-C-1 Z625 (pg. 72)..... F1600-C* ZB625(pg. 72)..... F1600-C* ZN625(pg. 72)..... F1600-C* ZAL625-HY....(pg. 68)...... F1510-80 Z626(pg. 161)......C1200-C-R* ZB626(pg. 161)..... C1200-C-R-1* ZN626(pg. 161).... C1200-C-R-1* Z627(pg. 72)..... F1620-C ZB627 ...(pg. 72)..... F1620-C-1* ZN627 ...(pg. 72)..... F1620-C-1* Z629(pg. 258)...... BV1210 ZB629 ..(pg. 258)..... BV1210-1

ZN629(pg. 258 Z645(pg. 70). ZB645(pg. 70). ZB645(pg. 70). ZN645(pg. 70). Z662(pg. 65). Z662(pg. 65). Z662-HF(pg. 65). Z664(pg. 82). Z8664(pg. 82). Z8665(pg. 82). Z8665(pg. 82). Z8665(pg. 82). Z8667(pg. 82). Z8667(pg. 82). Z8667(pg. 82). Z8667(pg. 82). Z8667(pg. 82). Z8667(pg. 75). Z868(pg. 75). Z8670(pg. 78). Z8670(pg. 62). Z8676(pg. 62). Z8676(pg. 62). Z8679(pg. 62). Z8679(pg. 73). Z8679(pg. 73). Z8690(pg. 49) Z8730(pg. 49) Z8730(pg. 49) Z8730(pg. 49) Z8730(pg. 49) Z8730(pg. 49)	F1560 F1560-3 F1560-3 F1560-3 F1560-3 F1460-C-Y-5-4* F1460-C-Y-5* F1460-C-Y-5* T1320-FL-4 T1320-FL-3 T1350-FL-3 T1350-FL-3 T1320-FL-3 T1320-FL-3 T1320-FL-3 F1760-FL F1840-42 F1580-FL-3-5 F1440-5-4 F1440-1 F1640-1 F1640-1 F1640-1 F1640-1 F1370-18 F1140C-9-1
Z690(pg. 60)	F1370-18
ZB730(pg. 49)	F1140C-9-1
ZN730(pg. 49) Z742(pg. 49)	
Z753(pg. 50) Z761(pg. 175)	F1170-C-N9*
۲٬۵۱(py. ۱/۵)	J G 1 000-1VI

FLOOR AND AREA DRAIN OPTIONAL VARIATIONS

PREFIXES	SUFFIXES
ZCI with cast iron t	op Std
ZANBNB body w/ NB to	p"X"
ZARBPB body w/ NB to	p"X"
ZBCl body w/ PB top	01
ZNCI body w/ NB to	
ZNCI body w/ SS to	p3
-AAux. vent connect	tion "X"
-AAAcid resistant epo	
-ARAcid resistant epo	xy11
-BBackwater valve .	8
-BPVandal proof	6
-BSSS scr. over dom	e83
-BTBell trap bucket	
-CMembrane clamp	
-CICast iron grate	4
-CPChrome plated top	49
-DDome grate	
-DB Bottom dome stra	ainer20
-DCLess Dura-Coated	d int"X"
-DFDeflector grate	Std
-DGDuctile iron grate	4
-DPDecorative polish	
-DSDuctile iron solid	cover "X"
-DXExtended wide fla	ngeZ
-E1" Top extension .	TE
-EF3/16" Exterior frai	
-ES12" Extension sec	tion "X"
-FExtension frame .	A2-XY
-FCExt. frame and c	collar"X"
-FGFree set grateFYFree standing buc	"X"
-FYFree standing buc	ket "X"
"X"Con	tact MIFAB

Design and dimensions are subject to modification. Prices do not include applicable taxes.



FLOOR AND AREA DRAIN OPTIONAL VARIATIONS CON'T

OPTIONAL VARIATIONS CON'T
ZURN MIFAB
-FSFloating slab"X"
-GAll galvanized13 -GGGalvanized grate12
-GTTop grate16
-H(Z-504) Hinged grate9
-HDHeavy duty slotted grateStd -HLHinged locking grate "X"
-HP Heel-proof grate Std
-HTSquare, hinged grate9
-IGIntegral grate21
-JAux. inletJ -J11 Aux. inlet 1-1/2" or 2"J1
-J22 Aux. inlets1-1/2" or 2" J2 -J33 Aux. inlets1-1/2" or 2"J3
-J33 Aux. Inlets1-1/2" or 2"J3
-J44 Aux. inlets1-1/2" or 2"J4 -J54 Aux. inlets1-1/2" or 2"J5
-KAnchor flange
-KCAnch. fl. with memb ClFLC -LLocking device6
-LGLess grate"X"
-LVLess backwater valve "X"
-LG. Less grate "X" -LV. Less backwater valve "X" -LY. Less bucket "X" -M. Side outlet adaptor. "X"
-INE Spark proof X
Non-conductive top
-OF6" x 3" x1" funnelJ -PTrap primer tapping7
-PDPromenade deck drain "X"
-PH3/8" Dia. Open Std
-PSPerforated standpipe42 -RSump receiver41
-Rd66" Dia. 304 SS top6-3 -Rd77" Dia. 304 SS top7-3
-Rd77" Dia. 304 SS top7-3 -Rd88" Dia. 304 SS top8-3
-Rd1010" Dia. 304 SS top10-3
-SSecondary strainer21
-SBShallow drain body "X" -SCSolid cover25-
-SBShallow body"X"
-SDLonger standpipe "X" -SGSolid gasktd cover25-1-G
-SHFour securing holes "X"
-SNBSolid nickel bronze grate"X"
-SQ66" Sq. 304 SS top S6-3 -SQ88" Sq. 304 SS top S8-3
-SSSS mesh screen dome83
-SSMSSmesh scr. over dome"X"
-STSolid top24 -SWSpanner wrench H-1040
-T16
-TGTractor grate Standard
-TSTop sec. with sl. screws6 -UExtension adapter15
-VBackwater valve8
-VPVandal proof6 -WWater closure plug34
-WBF1660
-WSWide slotted grate "X"
-XSqueeze in bw valve8 -XJExpansion joint R1900
-Y5
-YAAluminum sed. bucket "X"
-44" Diameter funnelF4 -90Side outlet body90
* Includes "-C" membrane clamp
memnrane ciamn

* Includes "-C" membrane clamp in areas with waterproof membrane. As a recommended alternate, use F1100 in non membrane areas, delete "-C" membrane clamp.

TRENCH DRAINS

ZURN MIFAB
Z780 (pg. 81) T1000
Z782(pg. 81) T1100-4
Z782-F or -L(pg. 81) T1100-F-4
Z784(pg. 81) T1200-4-3
ZAB784(pg. 81) T1200-4-3
ZANB784(pg. 81) T1200-4-3
ZARB784(pg. 81) T1200-4-3
Z784-F or -L(pg. 81) T1200-F-4-3
ZAB784-F or -L (pg. 81). T1200-F-4-3
ZANB784-F or -L . (pg. 81).T1200-F-4-3
Z792(pg. 81) T1200-F-4
ZAB792(pg. 81) T1200-F-4-3
ZANB792(pg. 81) T1200-F-4-3
ZARB792(pg. 81) T1200-F-4-3
Z792-F or -L(pg. 81) T1200-F-4
ZAB792-F or -L (pg. 81). T1200-F-4-3
ZANB792-F or -LT(pg. 81) 1200-F-4-3
Z793(pg. 81) T1200-4
Z793-F or -L(pg. 81) T1200-F-4
Z794(pg. 81) T1200-4
ZAB794(pg. 81) T1200-4-3
ZANB794(pg. 81) T1200-4-3
ZARB794(pg. 81) T1200-4-3
Z794-F or -L(pg. 81) T1200-F-4
ZAB794-F or -L .(pg. 81). T1200-F-4-3
ZANB794-F or -L .(pg. 81). T1200-F-4-3
Z796(pg. 81)T1200-F2
ZF799-75(pg. 70) F1570A-4
ZF799-75-AF(pg. 70) F1570-4
ZF799-76(pg. 70) F1570A-4-SIT
ZF799-76-AF .(pg. 70). F1570A-4-SIT

TRENCH DRAIN OPTIONAL VARIATIONS

⁻¹ ZURN ^C PREFIXES	MIFAB
^C PREFIXES	SUFFIXES
ZCl grate w/st	eel frame4
ZABPB grate and	frame4-3
ZANBPol.NB grate	& SS Fr4-3
ZARBBronze grate	& frame4-3

ZURN	MIFAE
SUFFIXES	SUFFIXES
-DGDI slotted grate .	Std
-GGalvanized grate	e13
-HPHeel proof grate	Std
-LCCI long. slotted	gr4
-LDDI long.slotted g	jr4
-TSTop sec. w/slot.	Screws6
-VPVandal proof top	6

TRAPS AND PRIMERS

ZURN	MIFAE
Z1000(pg. 261)	MI-950
Z1005(pg. 175)	C1600
Z1012(pg. 175)	C1600
Z1019(pg. 261)	. MI-950-F
ZAB1019(pg. 261) N	/II-950-F-1
ZANB1019(pg. 261) N	ИI-950-F-1
Z1020(pg. 269)	MI-100
Z1021(pg. 271)	MI-750
Z1022(pg. 268)	MI-TSF
Z1022.5SF(pg. 268)	. MI-TSP-1
Z1022.5IP(pg. 268)	. MI-TSP-2
Z1022.5SFU(pg. 268)	MI-TSP-3
Z1022.5IPU(pg. 268)	. MI-TSP-3

Z1023(pg. 270)	. MI-600-50
Z1024(pg. 262)	MI-CAG
Z1024-1(pg. 262)N	II-CAG-10T
Z1024-2(pg. 262)N	II-CAG-10T
Z1024-3(pg. 262) N	II-CAG-10T
Z1024-4(pg. 262) N	II-CAG-15T
Z1024-5(pg. 262) N	II-CAG-15T
Z1025(pg. 262)	
Z1025-2(pg. 262). MI-	-CAG-20NH
Z1025-3(pg. 262). MI-	-CAG-30NH
Z1030(pg. 263)	
Z1032	
Z1033(pg. 263)	MI-800
Z1034(pg. 263)	
Z1035(pg. 140)	
Z1035-Q(pg. 140)	SR
Z1036	
Z1040(pg. 263)	MI-850
Z1042(pg. 263)	MI-860
Z1043(pg. 263)	MI-860

TRAP AND PRIMERS OPTIONAL VARIATIONS

ZURN	MIFAB
-ARAcid resistant epoxy.	11
-CMembrane clamp	C
-CPChrome plated	49
-DSDome strainer	20
-DU22 outlet unit	MI-DU
-DU33 outlet unit	MI-DU
-DU44 outlet unit	MI-DU
-FCAdjustable floor CO	Std.
-FLFlushing connection	G
-F66" funnel	F6
-GGalvanized	
-LCLess cleanout & plus	g "X"
-PTrap primer connecti	on7
-VBackwater valve	
-33/4" female conn	"X"
-33/4" T.P. Conn	3/4"
-77" long adapter	

BACKWATER VALVES

ZURN	MIFAB
Z1088(pg. 260)	BV1300
Z1090(pg. 257)	BV1000
Z1091(pg. 259)	BV1280
Z1095(pg. 257)	BV1000
Z1095-15(pg. 257)	
Z1099(pg. 258)	BV1260

BACKWATER VALVES OPTIONAL VARIATIONS

ZURN	MIFAB
-BCBolted cover	Std
-BVBronze flapper valve .	Std
-GGalvanized cast iron.	13
-WHWheel handle	WH
-XNickel bronze	1
-1212" extension	12
-2412" extension	24
"X"Contact	MIFAB

GREASE INTERCEPTORS

GREASE IN	TERCEPTORS
ZURN	MIFAB
Z1160(pg.	CLPB)MCL-G
Z1160-100(pg.	CLPB) MCL-G-0
71160-200(pg.	CLPB) MCL-G-1 CLPB) MCL-G-2
Z1160-400(pg.	CLPB) MCL-G-3
Z1160-500(pg.	CLPB) MCL-G-4
Z1160-600(pg.	CLPB) MCL-G-5
Z1160-/00(pg.	CLPB) MCL-G-6 CLPB) MCL-G-7
71165 (ng 187)	MI-G w/ MI-SOLID
Z1170(pg.	187) MI-G
Z1170-100(pg.	. 187) MI-G-0
Z1170-200(pg.	. 187) MI-G-1 . 187) MI-G-2
Z1170-300(pg. Z1170-400(pg.	. 187) MI-G-2 . 187) MI-G-3
Z1170-500(pg.	. 187) MI-G-4
Z1170-600(pa.	. 187) MI-G-5
Z1170-700(pg.	. 187) MI-G-6
Z1170-UN(pg Z1170-900(pg	. 187) MI-G-HLA . 188) XL-MI-G-0
7S1170 (na	187) MI-G-SS
ZS1170-100(pa	. 187) MI-G-0-SS
7S1170-200(pg	. 187) MI-G-1-SS
ZS1170-300(pg ZS1170-400(pg	. 187) IVII-G-2-55 197) MI G 2 CC
ZS1170-500(pg	. 187) MI-G-4-SS
ZS1170-600(pg	. 187) MI-G-5-SS
ZS1170-700(pg	. 187) MI-G-6-SS
ZS1170-800(pg	. 187) MI-G-7-SS 188). XL-MI-G-0-SS
71171 (ng	187) MI-G-I
Z1171-500(pg.	187) MI-G-L . 187) MI-G-L-20
Z1171-700(pg.	. 187) MI-G-L-35
Z1171-800(pg.	. 187) MI-G-L-50
Z1171-TD(pg. 71171-TD-500 (pg.	190) MI-G-L-SDH 190) MI-G-I-SDH-20
Z1171-TD-700 (pg.	187) MI-G-L-35 187) MI-G-L-50 190) MI-G-L-SDH 190) MI-G-L-SDH-20 190) MI-G-L-SDH-35 190) MI-G-L-SDH-35
Z1171-TD-800 (pg.	190) MI-G-L-SDH-50 188) XL-MI-G
Z1172(pg. Z1172-900(pg	
Z1172-1000(pd	ı. 188) XL-MI-G-1
/11/9 1100 (no	1 1991 YI MIC 9
Z1172-1200(pg	j. 188) XL-MI-G-3
Z11/2-1300(pg 71172-1400 (no	j. 188) XL-MI-G-4 j. 188) XL-MI-G-5
Z1172-1700(pg Z1172-1200(pg Z1172-1300(pg Z1172-1400(pg Z1172-1500(pg	ı. 188) XL-MI-G-6
Z11/2-1600(D0	1. T881 XL-IVII-G-/
Z1172-1700(pg	j. 188) XL-MI-G-8
71172-1800(pg	j. 188) XL-MI-G-8 188)XL-MI-G-HLA
71173 (ng	189) MI-G-SD
Z1173-200(pg.	189) MI-G-SD-1
Z11/3-300(pg.	189) MI-G-SD-2
Z1173-400(pg. Z1173-500(pg.	189) MI-G-SD-3 189) MI-G-SD-4
Z1173-600(pg.	189) MI-G-SD-5
Z1173-700(pg.	189) MI-G-SD-6
Z1173-800(pg.	189) MI-G-SD-7
Z1173-900(pg. Z1173-TD(pg.	189) MI-G-SD-8 190) MI-G-SDH
Z1173-TD-200.(pg	g. 190) MI-G-SDH-1
Z1173-TD-300.(pg	g. 190) MI-G-SDH-2
Z1173-TD-400.(pg	g. 190) MI-G-SDH-3
Z1173-TD-500.(pg Z1173-TD-600.(pg	j. 190) MI-G-SDH-4
Z1173-TD-700.(pc	a. 190) MI-G-SDH-6
Z1173-TD-800.(pg	g. 190) MI-G-SDH-7
Z1173-TD-900.(pg	g. 190) MI-G-SDH-8
Z1174(pg. Z1174-100(pg.	187) MI-G-BDU 187) MI-G-O-BDU
Z1174-200(pg.	
Z1174-300(pg.	. 187) MI-G-2-BDU
Z1174-400(pg.	. 187) MI-G-3-BDU
Z1174-500(pg. Z1174-600(pg.	
Z1174-600(pg. Z1174-700(pg.	
Z1174-800(pg.	

Design and dimensions are subject to modification. Prices do not include applicable taxes.



GREASE INTERCEPTOR OPTIONAL VARIATIONS

ZURN MIFAB
-ALAluminum coverAL
-CC8" Cleanout coverStandard
-DIDual high-low inletDI
-EARE coated extensionC
-EPEnzyme port in coverStd
-HDHeavy duty coverHD
-KAnchor flange
-KCAnchor fl. with cl. Collar -FLM
-LAngle type flow control "X"
-RRecessing receiver
MI-CS/MI-CSD
-REReces. receiver encl. type
MI-CS-EN/MI-CSD-EN
-TCover recessed for tileTL
-75Sediment bucketSB

SOLID INTERCEPTORS

SOLID INTERCEPTO	RS
ZURN	MIFAB
Z1175(pg. 194) ZAB1175(pg. 194) N	MI-HAIR
ZAB11/5(pg. 194) N 71176 (pg. 194)	/II-HAIK-2 MI_HΔIR
Z1176(pg. 194) M ZAB1176(pg. 194) M Z1180(pg. 194) M	I-HAIR-2
Z1180(pg. 194) MI	-SOLID-S
/A1180 (no 194) MI-SO	l II)-S-CP
ZSS1180(pg. 194). MI-SO Z1181(pg. 194) MI	ะเบ-จ-จจ -SOLID-L
Z1182(pg. 195) MI-S	SOLID-SA
ZS1182(pg. 195) MI-S Z1183(pg. 195) MI-S	SOLID-SA
Z1183-100.(pg. 195) MI-SC	SULID-IA) ID-TA-0
Z1183-200.(pg. 195). MI-SC)LID-IA-1
Z1183-300.(pg. 195). MI-SC	LID-TA-2
Z1183-400.(pg. 195). MI-SC Z1183-500.(pg. 195). MI-SC)LID-IA-3)I ID-TA-4
Z1183-600.(pg. 195). MI-SC)LID-TA-5
Z1183-700.(pg. 195). MI-SC	LID-TA-6
Z1183-800.(pg. 195). MI-SC Z1183-900.(pg. 195). MI-SC	LID-TA-7
Z1183-DF(pg. 195) MI-SC	SOLID-TA-0
Z1183-FC(pg. 195) MI-	SOLID-TA
Z1183-100 .(pg. 195) MI-SOLII ZS1183-200 (pg. 195) MI-SOLI	D-TA-SS-0
ZS1183-300 (pg. 195) MI-SOLI	D-TA-SS-2
ZS1183-300 (pg. 195) MI-SOLI ZS1183-400 (pg. 195) MI-SOLI	D-TA-SS-3
ZS1183-500 (pg. 195) MI-SOLI ZS1183-600 (pg. 195) MI-SOLI	D-TA-SS-2
ZS1183-700 (pg. 195) MI-SOLI	D-TA-SS-6
ZS1183-800 (pg. 195) MI-SOLI ZS1183-900 (pg. 195) MI-SOLI	D-TA-SS- <i>1</i>
Z1184(pg. 194) MI-S	SOLID-LB
Za1184(pg. 194) MI-S Z1185(pg. 198)	SOLID-LB
Z1185(pg. 198) N	. IVII-LIIVI ∕II-I INT-1
Z1185-7(pg. 198) N Z1185-10(pg. 198) N	II-LINT-3
Z1185-10(pg. 198) N	II-LINT-4
Z1185-20(pg. 198) N Z1185-30 (pg. 198) N	/II-LIN I-6 /II-I INT_7
Z1185-20(pg. 198) N Z1185-30(pg. 198) N Z1185-40(pg. 198) N	II-LINT-8
Z1185-50(Dd. 198) N	/II-LIN I-9
Z1188-ST-350 (pg. 193) MI-	.0-HU-11 ∩ HU 12
Z1188-ST-400 (pg. 193) MI- Z1188-ST-450 (pg. 193) MI-	·0-HU-12
Z1189(pg. 194)	MI-0S
Z1189-12(pg. 194)	MI-0S-1
Z1192(pg. 200) Z1192-400(pg. 200) M	I-G-AD-3
Z1192-500(pg. 200) M	I-G-AD-4
71192-600(pg. 200) M	I-G-AD-5
Z1192-700(pg. 200) M Z1194(pg. 187)	ı-G-AD-6 ∠HI ∆
Z1199(pg. 200)	HEA .MI-G-AD
,. . ,	

SOLID INTERCEPTOR OPTIONAL VARIATIONS

ZURN M	IFAE
-CPChrome plated	CP
-CSCustom screen	CS
-RSRepl. perf. Scr. for buc	RS
-SSSS perf. screen	-SSM
-YReplacement bucket ass	SB
-Y (YR.Replacement SS basket.	SSB

OIL INTERCEPTORS

Zι	JRN	MIFAB
71	186 (ng 192)	MI-O
- · 71 ·	196 200 (pg. 102)	MIOA
∠ I 74.	JRN 186(pg. 192) 186-300(pg. 192)	IVII-U-A
41	186-400(pg. 192)	IVII-U-B
Z1 1	186-400(pg. 192) 186-500(pg. 192)	MI-0-C
71	186-600(pg. 192) 186-700(pg. 192) 186-800(pg. 192) 186-8T(pg. 193) 186-ST(pg. 193)	MI-O-1
- I 71 -	106 700 (pg. 102)	IVI
۷I	100-700(pg. 192)	1711-0-2
۷1	186-800(pg. 192)	MI-0-3
Z1 1	186-ST(pg. 193)	MI-0-HU
71	186-ST-300 (pg. 193).	MI-O-HU-A
- · 71 ·	186-ST-400 (pg. 193).	MI_O_HII_R
_ I 74 -	100-01-400 (pg. 190).	. IVII-O-I IU-D
۷ I	186-ST-500 (pg. 193).	. IVII-U-HU-U
Z1 ⁻	186-ST-600 .(pg. 193)	MI-0-HU-1
Z1 1	186-ST-700 .(pg. 193) 186-ST-800 .(pg. 193)	MI-0-HU-2
71 -	186-ST-800 (ng 193)	MI-O-HII-3
- · 71 ·	188(pg. 192)	MI O
۷I	100(þy. 192)	
۷1	188-75(pg. 192)	IVII-U-4
Z1 1	188-100(pg. 192)	MI-0-5
Z1 ⁻	188-125(pg. 192)	MI-0-6
71 -	188-150 (ng 192)	MI-O-7
- I 71 -	100 100(pg. 102)	NAI O O
۷.	100-200(pg. 192)	IVII-U-0
۷1	188-250(pg. 192)	MI-0-9
Z1 1	188-300(pg. 192)	MI-0-10
Z1 ⁻	188-350(pg. 192)	MI-0-11
71 -	188-400 (ng 192)	MI-0-12
_ 71 -	100 400(pg. 102)	MI O 12
۷I حما	100-430(pg. 192)	IVII-U-13
41	188-500(pg. 192)	IVII-U-14
Z1 1	188-ST(pg. 193)	MI-0-HU
Z1 ⁻	188 (pg. 192) 188-75 (pg. 192) 188-100 (pg. 192) 188-125 (pg. 192) 188-200 (pg. 192) 188-250 (pg. 192) 188-250 (pg. 192) 188-300 (pg. 192) 188-350 (pg. 192) 188-450 (pg. 192) 188-450 (pg. 192) 188-450 (pg. 192) 188-50 (pg. 192) 188-50 (pg. 192) 188-50 (pg. 192) 188-50 (pg. 193)	MI-0-HU-4
74 -	100 CT 100 (pg 100)	MIOILLE
- · 71 ·	188-ST-100 .(pg. 193) 188-ST-125 .(pg. 193) 188-ST-150 .(pg. 193) 188-ST-200 .(pg. 193) 188-ST-250 .(pg. 193) 188-ST-300 .(pg. 193)	MI_O_HII_6
_ I 74 -	100-01-120 (pg. 190)	1411-0-110-0
۷.	100-51-100 .(pg. 195)	IVII-U-ПU-1
۷1	188-51-200 .(pg. 193)	MI-U-HU-8
Z1 1	188-ST-250 .(pg. 193)	MI-0-HU-9
Z1 1	188-ST-300 (pg. 193)	.MI-0-HU-10
71	188-ST-350 (ng. 193)	MI-0-HU-11
- · 71 ·	188-ST-400 .(pg. 193)	MI_O_HII_12
_ I 74 -	100-01-400 (pg. 190)	MI O III 12
۷.	188-ST-450 .(pg. 193)	.IVII-U-HU-13
۷1	188-ST-500 .(pg. 193)	.IVII-U-HU-14
Z1 1	189(pg. 194)	MI-0S
Z1 ⁻	189-12(pg. 194)	MI-0S-1
71-	189-60(pg. 194)	MI-OS-2
- I 71 -	180 100 (pg. 101)	MI OC 2
_ I 74 -	189-100(pg. 194) 189-200(pg. 194)	IMI OC 4
۷!	189-200(pg. 194)	1411-05-4
۷1	183-DF(pg. 195) 188-ST-350.(pg. 193).	MI-SULID-IA
Z1 1	188-ST-350.(pg. 193).	MI-0-HU-11
Z1 ⁻	188-ST-400.(pg. 193). 188-ST-450.(pg. 193).	MI-0-HU-12
71 -	188-ST-450 (ng. 193)	MI_O_HII_13
⊆ I 74 -	188-ST-500.(pg. 193).	MI O HU 14
۷I حما	100-31-300.(pg. 193).	IVII-U-ПU-14
۷1	189(pg. 194)	IVII-US
Z1 ⁻	189-12(pg. 194).	MI-0S-1
Z1 ⁻	192(pg. 200)	MI-G-AD
71	192-400(pg. 200)	MI-G-AD-3
- : 71 -	192-500(pg. 200)	MI-G AD 4
∟ 74 -	102-000(pg. 200)	IVII-G-AD-4
41	192-600(pg. 200)	IVII-G-AD-5
Z11	192-700(pg. 200)	MI-G-AD-6
Z1 1	192-800(pg. 200)	MI-G-AD-7
Z1 ⁻	196(pg. 202)	MI-E-0
71 ·	196-300(pg. 202)	MI-F-O-A
- I 71 -	196-400(pg. 202)	
<u>ا</u> ∟	1 20-400(pg. 202)	ivii-⊏-U-B

Z1196-600 (pg. 202)	MI-E-0-1
Z1196-700(pg. 202)	MI-E-0-2
Z1196-800(pg. 202)	MI-E-0-3
Z1198(pg. 202)	MI-E-0
Z1198-75(pg. 202)	MI-E-0-4
Z1198-100(pg. 202)	MI-E-0-5
Z1198-125(pg. 202)	MI-E-0-6
Z1198-150(pg. 202)	MI-E-0-7
Z1198-200(pg. 202)	MI-E-0-8
Z1198-250(pg. 202)	MI-E-0-9
Z1198-300(pg. 202)	MI-E-0-10

OIL INTERCEPTOR OPTIONAL VARIATIONS

ZURN MIFAB
-ARAcid rest. coated finish Std
-EAcid res. coated extC
-HDHD traffic coverHD
-HTHolding tank
-K+Anchor flange
-KCAnch. flange w/clampFLM
-SISolids Interceptor MI-SOLID
-LSLess Solids Interceptor "X"
-RPRigid draw off pipe "X"

SAND INTERCEPTORS

SAND INTERCEPTORS OPTIONAL VARIATIONS

ZURN	MIFAE
-ARAcid rest finish	Std
-DGDuctile iron grate	Std
-E6" Extension	C
-HDHD reinforced cover	HD
-KAnchor flange	FL
-KAnch. fl. W/clamp	FLM
-NHNHinlet and outlet	Std
-VPVandal proof screws	6

FIXTURE CARRIERS

ZURN	MIFAB
Z1203(pg. 2	212) MC-10
Z1203-HD4(pg. 2	212) MC-10D-HS
Z1203-HD5(pg. 2	212) "X"
Z1203-HL4(pg.	
Z1203-HL5(pg.	212)"X"
Z1203-HR4(pg. 2	212) MC-10R-HS
Z1203-HR5(pg.	. 212) "X"
Z1203-N-X(pg.	212) MC-10
Z1203-ND4(pg	ı. 212) MC-10D
Z1203-N-XB(pg.	213) MC-10-HDX
Z1203-NL4(pg.	212) MC-10L
Z1203-N-XH (pg. 2	212)MC-10-HD-750
Z1203-NR4(pg.	212) MC-10R
ZE1203(pg. 216	i) MC-10-27-37
"X"C	ontact MIFAB

ZE1203-HL4 (pg. 216) MC-10L-27-37-HS ZE1203-HR4 (pg. 216)MC-10R-27-37-HS ZE1203-HD4 (pg. 216)MC-10D-27-37-HS ZE1203-NL4 (pg. 216) MC-10L-27-37 ZE1203-NR4(pg. 216) MC-10R-27-37 ZE1203-ND4 (pg. 216)MC-10D-27-37 ZF1203-N(pg. 212).......MC-10 ZN1203-N4(pg. 212)....... MC-10 ZN1203-ND4(pg. 212)......MC-10D Z1204(pg. 218)...... MC-12* Z1204-HD6 Z1204-1HD4 .(pg. 221). MC-13D-HS Z1204-1HD64 Z1204-1HD65 Z1204-1HL64 "X" Z1204-1HL65 "X" Z1204-1HL65 "X" Z1204-1HL65 (pg. 221). MC-13R-HS Z1204-1HR54 (pg. 221). "X" Z1204-2H55 Z1204-2HD54 "X" Z1204-2HD55 "X" Z1204-1NL54 "X" Z1204-1NR54 "X" Z1204-1NL55 Z1204-1NR55 Z1204-1NL64 Z1204-1NR64 Z1204-1NL65 Z1204-1NL65 "X"
Z1204-1NR65 "X"
Z1204-1ND4...(pg. 220).... MC-13D
Z1204-1ND43.(pg. 220)MC-13D-1x3
Z1204-1ND55 "X"
Z1204-1ND55 "X"
Z1204-2N44(pg. 220).... MC-13-2
Z1204-2N43. (pg. 220).MC-13-2-1x3
Z1204-2N44 (x"
Z1204-2N55 "X"
Z1204-2N64 "X" Z1204-2N64 Z1204-2N65 ZF1204-N......(pg. 220)..... MC-13 ZN1204-N4(pg. 220)...... MC-13 ZN1204-ND4 ...(pg. 220)......MC-13D

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit www.mifab.com for the most recent product information.

Z1196-500.....(pg. 202)..... MI-E-O-C



Z1207	(pg. 214)	MC-10-EXT
Z1207-ND4	(pg. 214)	MC-10D-EXT
Z1207-NL4	(pg. 214)	MC-10L-EXT
Z1207-NR4	(pg. 214)	MC-10R-EXT
Z1208	(pg. 222)	MC-14
Z1208-H42	(pg. 222) (pg. 222)	. MC-14-4-V2-HS
Z1208-H44	(pg. 222)	. MC-14-4-V4-HS
	(pg. 222)	
Z1208-N42	(pg. 222)	MC-14-4-V2
Z1208-N44	(pg. 222)	MC-14-4-V4
Z1209	(pg. 223)	MC-15
Z1209-ND4	(pg. 223)	MC-15D
Z1209-NL4	(pg. 223)	MC-15L
Z1209-NR5	(pg. 223)	MC-15R
Z1209-HD4	(pg. 223)	MC-15D-HS
	(pg. 223)	
Z1209-HR4	(pg. 223)	MC-15R-HS
ZN1209-N4	(pg. 223)	MC-15
ZN1209-ND4.	(pg. 223)	MC-15D
Z1212	(pg. 224)	MC-21
	(pg. 224)	
Z1214	(pg. 225)	MC-26
Z1215	(pg. 225)	MC-27
	(pg. 225)	

WATER CLOSET CARRIER PREFIXES

ZURN		MIFAB
Z	.Dura coated system with	Std
	ZZ coupling	
ZQ	.Coupling system forcutting to required length after	

WATER CLOSET CARRIER SUFFIXES

VV /\	LII ULUULI	UMINILIN SUL	IXLO
ZURN			MIFAB
Α	Aux. suppo	ort assembly	10
		ent connection	
		oe fixt. support	
-CC	Corrosion	resistant 6" long	G
	cast iron c	ounling	
-CL	Nipple len.	great, than 12"	"X"
-CV	2" NH cente	er vent conn	"X"
-D	Double (ba	ck to back)	D
-F	Floor mtd.	outlet cl. Conn	MC-21
-F0	Main fitting	only	"X"
-F2	Z-1208 fitti	only ing w/ 2" vent .MC	-62-4-V2
-F4	Z-1208 fitti	ing w/ 4" ventMC	-62-4-V4
		assembly	
-G	Galvanized	cast iron	17
-H	Hub & spig	ot stack conn	HS
		aux. inlet	
-JC	2" Auxiilary	/ inlet	27
-JJ	Two 2" aux	iliary inlets	31
-JL	2" left hand	d aux. inlet	26
-JR	2" right han	d aux. inlet	25
-JS	2" aux. inle	t stack side	23
-JV	2" aux. inle	t, vent side upport for P	24
-M	Aux. foot s	upport for P	10
	dimension	10" - 18"	
		supporting	"X"
	system		""
-PA	Adjustable	coupling conn	"X″
	for penal fi	xture	"X"
-PB	Coupling C	onnection for	X
	penal fixtu	onn. with 4"	"V"
-PU	oloopuit fo	or penal fixtures	^
DNI	MH coup (Conn. with 4"	"Y"
-r IV	cleanout fo	or penal fixtures	^
_T	Threaded e	tack conn	"Y"
_\/I	Imbaaba s	ent connection	
-VL	Vandal nroo	f trim	A
		for women's ur	
		00lb carrier	
-X3	3" extensio	n	"X"
-X4	4" extension	n	Specify
Υ	Foot suppor	t system	10
		or womans ur	
		00lb carrier	
-X4	4"extension	1	"X"

-Y	Food support system	10
-29	Mechanical test cap ass	13
-45	Fin. Frsiphon jet closet	01
-45B	Finishing fr blowout clos	01
-50	Flush valve supply support	20
-57	4" neo-seal clos. gask. Kit	01
-60	Wrench for vp screws	"X"
-61	Adj. wrench for ZZ coup	-19
-74	Bowl saver washer	. "X"
-79	Parapelligic rough-in	. "X"

LAVATORY, URINAL AND SINK CARRIERS

ZURN		MIFAB
Z1217	(pg. 236)	MC-62-4-V2
Z1218	(pg. 236)	MC-61-T
ZX1220-BM3	(pg. 236)	MC-62-3-V2
ZX1220-BM4	(pg. 236)	MC-62-4-V2
Z1221	(pg. 226)	MC-31
Z1221-D	(pg. 226)	MC-31D
	(pg. 226)	
Z1222-D	(pg. 226)	MC-32D
Z1223	(pg. 227)	MC-33
Z1224	(pg. 226)	MC-31
Z1224-D	(pg. 226)	MC-31D
Z1225	(pg. 226)	MC-32
Z1225-BL	(pg. 227)	MC-33
Z1225-D	(pg. 226)	MC-32D
Z1229	(pg. 227)	MC-34D
Z1231	(pg. 230)	MC-41
Z1231-EZ	(pg. 229)	MC-41-TF
Z1231-D	(pg. 231)	MC-41D
Z1231-EZR	(pg. 229)	MC-41-TR
Z1231-EZ-D	(pg. 229)	MC-41D-TR
Z1231-EZR-D	(pg. 229)	MC-41D-TR
Z1236	(pg. 230)	MC-40
	(pg. 230)	
Z1251	(pg. 235)	MC-54
Z1253	(pg. 235)	MC-53
Z1254	(pg. 234)	MC-51
Z1255	(pg. 235)	MC-55
	(pg. 236)	
Z1257	(pg. 236)	MC-56-LF
Z1258	(pg. 236)	MC-56
	(pg. 228)	
Z1259-BP	(pg. 228)	MC-37
Z1259-D	(pg. 228)	MC-38D
Z1259-DB	(pg. 228)	MC-39D
Z1259-SP	(pg. 228)	MC-39D
Z1259-2	(pg. 228)	MC-36-2
LAVATORY,	URINAL AND SI	NK CARRIERS

LAVATORY, URINAL AND SINK CARRIERS OPTIONAL VARIATIONS

ZURN		
PREFIX		SUFFIX
Z	Dura coated cast iron	Std.
ZURN		.MIFAB
-AL	Adaptor lug	88
-B	Blow out fixture support .	Std.
-BL	Bi-Livel cooler support	MC-33
	Bottom body plate with	
	bearing jacks	
-BR	Bracket support valve plat	teH
-BS	Bar support valve plate	F
-CC	Cast iron support up to 7'	'CI
-CL	Cast iron coupling over 7	" "X"
-CU	Floor to ceiling upright	В
-D	Back to back system	D
-DB	Back to back top & bottor	nStd.
	plates with bearing jacks	
-E2	Chrome plated concealed	E2
	arm escutceons 2" long	
-E4	Chrome plated & conc	E4
	Arm escutchems 4" long	

-E6	Chrome plated & concealed	E6
	arm escutcheons 6" long	
	Z1208 fitting with 2" vent	
	Z1208 fitting with 4" vent	
-FP	Top, front, back plate	Std.
-G	Galvanized	17
-L	Stud or sleeve length	"X'
	greater than standard	
L2	Less bearing plate ass	"X"
	Stud length over 6"	
-VP	Vandal proof trim	14
	Wall support valve plate	
	6" wide support plate	
-XH	Extra HD 500 lb carrier	HD
-X3	3" extension	"X"
-X4	4" extension	"X"
	Foot support system	
-ZR	Tubular sup. for long studs	R
-1	Longer than standard	W
	urinal / sink lavatory	
-2	Bearing plate assembly	Std.
-5	Corner lavatory support	C
	Cast Iron coupling up to 6"	
-29	Mechanical test cap	13
	Flush valve sup. for urinals	
	Paraplegic Rough-in	
RESID	DENTIAL WATER CLOSET SUP	PORT

RESIDENTIAL WATER CLOSET SUPPOR SYSTEM

ZURN		MIFAB
Z1280	(pg. 224)	MC-24
	(pg. 224)	
	(pg. 224)	
Z1280-N4	(pg. 224)	MC-24
	(pg. 224)	
Z1282-H4-2	(pg. 224)	MC-24
	(pg. 224)	
	(pg. 224)	
Z1284-N4	(pg. 224)	MC-21N
Z1285	(pg. 224)	MC-24
	(pg. 237)	

RESIDENTIAL WATER CLOSET OPTIONAL VARIATIONS

PREFIX	ES SUF	FIXES
-Z	dura coated plate sys	Std.
ZURN		MIFAB
-CL	Coup. len. Great. than 4"	"X"
-HT	Hangar type clos. adp	"X"
-X4	4" foot extension	"X"
-Y	Foot support system	10

ZURN	HYDRANTS	MIFAB
Z1300	(pg. 247)	MHY-20
Z1305	(pg. 247)	MHY-25
Z1310	(pg. 247)	MHY-10
Z1315	(pg. 247)	MHY-15
Z1320	(pg. 247)	MHY-26
Z1320-C	(pg. 247)	MHY-26
Z1320-EZ	(pg. 247)	MHY-26-RB
Z1321	(pg. 247)	MHY-16
	(pg. 247)	
Z1322	(pg. CLPB)	HY-2000
Z1325	(pg. 249)	MHY-45
Z1327	(pg. 249)	MHY-45
Z1327	(pg. 249)	MHY-45
	(pg. 248)	
	Con	



HYDRANTS CON'T

Z1333 Z1334- Z1334- Z1335 Z1341 Z1341- Z1342- Z1342- Z1342- Z1345- Z1346- Z1350- Z1350- Z1350- Z1360- Z1365- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375- Z1375-	EZ(p(pq(pq(pq(pg	j. 248) (pg. 2-2 (pg. 2-2 (pg. 2-2) 25, 25, 25, 25, 25, 25, 25, 25, 25, 25,)	. MHY-3C HY-3C MHY-3C MHY-3C MHY-9C . MHY-9E . HY-1 . HY-1 . HY-1 . MHY-55 . MHY . M	'-30)-52 '-35 '-35 '-95 '-95 5-52 000 000 '-50 '-55 -RE 6-RE (-60 '-61 HSE '-65
Z1370	(pg	. 253)	MH	Y-60-	HSE
	(pg. r	253). na 254		. IVIHY MHY	-60 '-65
Z1388	(og. 252	2)	. MHY	'-58
Z1390	(j	og. 254	4)	. MHY	-66
Z1395	(j	og. 254	4)	. MHY	'-68
Z1397	(ĵ	Jy. ∠54	4)	. MHY	-08

HYDRANT OPTIONAL VARIATIONS

VANIATIONS
ZURN MIFAB
-ACAl. casing guard42
-ANAngled hose conn"X"
-BCBronze casing Std.
C Coot iron hav 50
-CCast iron box50
-CLCylinder key lock
-DP11/2" Drain port in box9
-DP141/4" Drain port in box10
-DP383/8" Drain port in box11
-DUComb. 3/4" female and 1"."X"
male pipe thread conn.
-HDHeavy duty cover "X"
-KAnchor Flange
-KCAnchor Flange with clampFLM
-LKLoose key MHY-9004
-NBPolished NB box1
-PBPolished bronze box1
-PLPlain rough bronze box7
-PX1/2" pex tubing connection-PX
-RCRough chrome finish49
-RKHydrant parts repair kitMHY-CIA
-SBStatuary bronze face1
-SBDStat. Br. face - dark finish1
-SBLStat. Br. face - light finish1
-SBMStat. Br. face - med. finish1
-SSSS box and cover3
-VB3/4" adaptor vb Std.
-VD3/4 auaptul VD 5tu.
-WCWall clampWC -WHWheel handle MHY-9002
-WhWriter nations Why-9002
-WRWater cast onto cover "X"
-1"1" hose connection0
-13/4" IP str.Fem. Inl. adap "X" -33/4" solder fem. inlet adap5
-33/4" solder tem. inlet adap5
-4Wall clampWC
-53/4" adaptor with vb8
-6Less polished bronze face"X"
-7Plain bronze box1
-8Less dura coated CI box50
-10Polished NB box1
-11Statuary bronze face1
-12Cylinder key lock
-133/4" IP 90 degree inlet6
elbow with union nut

-171/4" drain port in box9
-18Wheel handleMHY-9002
-20Aluminum casing guard42
-213/8" drain port in box10
-221/2" drain port in box11
-34EL3/4" 90 deg. solder inlElb.Std
-34FIP.3/4" Fem. pipe thr. Conn"X"
-34FS3/4" Fem. solder inl. ConnStd.
-34MIP3/4" male pipe thr. conn"X"
-34UN3/4" IP 90 deg. inlet elbow6

CLEANOUTS

MIFAB

ZURN

Z1400(pg. 156)	C1100-R
Z1400-K(pg. 156)	C1100-R
7N1400 (ng 156)	C1100-R-1
ZN1400(pg. 156) Z1402(pg. 164)	C1230
7D1402 (pg. 104)	C1220 1
ZB1402(pg. 164)	01230-1
ZN1402(pg. 164)	61230-1
Z1404(pg. CLPB)	6230-15-1
ZB1404(pg. CLPB)	0230-15-1
ZN1404(pg. CLPB)	
Z1406(pg. 160)	C1100-XR
ZB1406(pg. 160)	C1100-XR-1
ZN1406(pg. 160)	C1100-XR-1
Z1440(pg. 170) Z1441(pg. 171)	C1450
Z1441(pg. 171)	C1450-RD
ZB1441(pg. 171)	C1450-RD
Z1443(pg. 171)	C1450-S
ZB1443(pg. 171)	C1450-S
ZN1443(pg. 171)	C1450-S
ZN1443(pg. 171) Z1444(pg. 170)	C1450-R
ZN1444(pg. 170)	C1450-R-1
Z1445(pg. 172)	C1460
Z1446(pg. 173)	C1/160_RD
7R14/6 (pg. 173)	C1/60 PD
ZB1446(pg. 173) Z1447(pg. 173)	C1460 C
Z1447(pg. 173)	01400-3
ZB1447(pg. 173) ZN1447(pg. 173)	61400-5
ZN1447(pg. 173)	61460-5
Z1448 (pg. 172) C146	0 W/C1300-R
ZB1448. (pg. 172). C1460	W/C1300-R-1
ZN1448.(pg. 172). C1460	W/U1300-R-1
Z1449(pg. 164)	01230
Z1454(pg. 156)	C1100-C-R*
ZB1454(pg. 156) C1	1100-C-R-1*
ZN1454(pg. 156)C	1100-C-R-1*
Z1455 (pg. 156)C1	100-C-R-Z*
ZB1455(pg. 156) C1	
	I100-C-R-1*
ZN1455(pg. 156) C ⁻¹	1100-C-R-1*
ZN1455(pg. 156) C ⁻¹	1100-C-R-1*
ZN1455(pg. 156) C ⁻¹	1100-C-R-1*
ZN1455(pg. 156) C ⁻ Z1456(pg. 175) ZAB1456(pg. 175)	1100-C-R-1* C1500 C1500-1
ZN1455(pg. 156) C ⁻ Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175)	1100-C-R-1* C1500 C1500-1 C1500-1
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165)	1100-C-R-1* C1500 C1500-1 C1500-1 C1300-R
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165)	1100-C-R-1* C1500 C1500-1 C1500-1 C1300-R . C1300-R-1
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1457(pg. 165)	1100-C-R-1* C1500 C1500-1 C1500-1 C1300-R . C1300-R-1
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1457(pg. 166) Z1460(pg. 166)	1100-C-R-1* C1500 C1500-1 C1500-1 C1300-R . C1300-R-1 . C1300-R-1 . C1400-S
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) Z1460(pg. 166) ZAB1460(pg. 166) ZAB1460(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) Z1460(pg. 166) ZAB1460(pg. 166) ZAB1460(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1450(pg. 166) ZAB1460(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) Z1461(pg. 166) Z1461(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1450(pg. 166) ZAB1460(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) Z1461(pg. 166) Z1461(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1457(pg. 165) ZANB1450(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) ZANB1461(pg. 166) ZAB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1457(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) ZANB1461(pg. 166) ZANB1462(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1457(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) ZANB1461(pg. 166) ZAB1461(pg. 166) ZAB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1462(pg. 166) ZAB1462(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1457(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) ZANB1461(pg. 166) ZAB1461(pg. 166) ZANB1461(pg. 166) ZANB1462(pg. 166) ZAB1462(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C ² Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) Z1460(pg. 166) ZAB1460(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1462(pg. 166) ZANB1462(pg. 166) ZANB1462(pg. 166) ZANB1462(pg. 166) ZANB1463(pg. 166)	1100-C-R-1*
ZN1455(pg. 156) C [*] Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) Z1460(pg. 166) ZAB1460(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZAB1461(pg. 166) ZANB1462(pg. 166) ZAB1462(pg. 166) ZANB1462(pg. 166) ZANB1462(pg. 166) ZANB1463(pg. 165)	1100-C-R-1*
ZN1455(pg. 156) C [*] Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) ZANB1457(pg. 166) ZANB1460(pg. 166) ZANB1460(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZANB1462(pg. 166) ZANB1462(pg. 166) ZANB1463(pg. 165) ZANB1463(pg. 165) ZANB1463(pg. 165)	1100-C-R-1*
ZN1455(pg. 156) C [*] Z1456(pg. 175) ZAB1456(pg. 175) ZANB1456(pg. 175) Z1457(pg. 165) ZAB1457(pg. 165) ZANB1457(pg. 165) Z1460(pg. 166) ZAB1460(pg. 166) ZANB1461(pg. 166) ZANB1461(pg. 166) ZAB1461(pg. 166) ZANB1462(pg. 166) ZAB1462(pg. 166) ZANB1462(pg. 166) ZANB1462(pg. 166) ZANB1463(pg. 165)	1100-C-R-1*

ZS1464 (pg. 74)..... F1670

ZS1467
ZN1474(pg. 166) C1300-MF-3 Z1475"X"
Z1602(pg. 156) C1100-R ZN1602(pg. 156) C1100-R-1 ZN1612(pg. 160) C1100-XR-1 Z1615(pg. 170) C1450 Z1616(pg. 170) C1450 Z1666(pg. 168) C1440 Z1666-1(pg. 169) C1440-RD

CLEANOUT OPTIONAL

CLLANUUT OF HUNAL
VARIATIONS
PREFIXES
-NW/ internal cleanoutC1230
ZCast iron body and top4
ZBPolished bronze top1
ZNNickel bronze top1
ZS304 stainless steel top3
ZABPolished bronze top1
ZANBNickel bronze top1
SUFFIXES
-ARaised head plug
-ARAcid resistant epoxy11
-BPBronze plug34B
-CMembrane clampC
-CFCarpet flange coverRFC
-CHCleanout Acc. Housing "X"
-CMCarpet markerRC
-CPChrome plated49
-DCPuctile iron4
-DXExtended wide flangeZ
-G13
-HCHinged cover "X"
-HDHeavy duty topX
-HHHandle hole "X"
-ICInside caulk connection X
-INInternal cleanout "X"
-KFL
-KCAnchor fl. and clampFLC
-LCLess pipe clamp with "X"
mounting holes in flange
-LMLess internal mixing valve-LM
assembly -NHNo hub outlet Std.
-NHPush on outlet P
-PWPlug wrench "X"
-SCScoriated cover Std.
-SGStoriated cover Std.
-SLLonger screw87
-SMSpecial marking95
stampedon top
-STSmooth top
-SWSpanner wrench H-1040
T Causes ton T

-TXSquare top recessed forTS
tile
-VPVandal proof6
-XRound top recessed forT
tile
-ZRound top recessed forUR

WATER HAMMER ARRESTORS

ZURN	MIFAB
Z1700(pg. 274)	WHB
Z1700-100(pg. 274)	WHB-A
Z1700-200(pg. 274)	WHB-B
Z1700-300(pg. 274)	WHB-C
Z1700-400(pg. 274)	WHB-D
Z1700-500(pg. 274)	WHB-E
Z1700-600(pg. 274)	WHB-F
Z1705(pg. 274)	MWH
Z1705-A(pg. 274)	
Z1705-B(pg. 274)	MWH-B
Z1705-C(pg. 274)	MWH-C
Z1705-D(pg. 274)	MWH-D
Z1705-E(pg. 274)	
Z1705-F(pg. 274)	MWH-F
Z1712(pg. 275)	

STAINLESS STEEL DRAINS

ZURN			IFAB
Z1715(pg.	125)	R1200	-28-M
ZC1715(pg.	125)	R1200)-28-M
ZM1715(pg. Z1717(pg.	125)	R1200	-29-M
Z1717(pg.	125)	R12	00-28
Z1719(pg. 4	∤3) F	1000-8-3	3-28-Z
Z1720(p	og. 78).		F1880
Z1721(p	og. 78).		F1890
Z1721(pg. ²	16)	RS48-3-	28-NH
Z1724	(pg. 46))	F-3
Z1724-4(
Z1724-6(pg. 46)		. F6-3
ZC1724-4	(pg. 46))	F4-3
ZC1724-6	(pg. 46))	F6-3
ZM1724	(pg. 46))	F-3-29
Z1725(pg. 46)		G-3
ZC1725(pg. 46)		G-3
ZM1725	(pg. 46))(G-3-29
Z1726(pg.	32)	F100	0-3-28
ZC1726(pg.	32)	F1000)-3-28
ZM1726(pg.	32)	F100	0-3-29
ZM1726(pg. Z1727(pg. ZC1727(pg.	32)	F1000-8	5-3-28
ZC1/2/(pg.	32)	F1000-	5-3-28
ZM1727(pg.	32)	F1000-8	5-3-29
Z1730(pg.	32)	F1000-8	3-3-28
ZC1730(pg. ZM1730(pg.	32)	F1000-8	3-3-28
ZIVI1/30(pg. 7	32)	F1000-8	3-3-29
Z1731(pg.	32)	F1000-8	3-3-28
ZC1731(pg.	32)	F1000-6	3-J-Z0
ZM1731(pg. Z1732(pg. Z1732	პ∠)	F1000-0	3-3-29
ZC1732(pg(pg(pg	ວ∠) ວວ\	E1000-0	0-0-20 0 0 00
ZM1732(pg. : ZM1732(pg. :	ວ∠) ໑໑៶	E1000-0	2 2 20
Z1735(pg	52) 51)	E12/)-J-28 N 28 2
ZC1735(pg. ZC1735(pg.	54)	E12/1	0-20-3 1 28 3
ZM1735(ρg. ZM1735(ρς	54) 154)	F13/1	Ი-20-3 ∩-20-3
Z1736(pg	5/1)	F13/	0-23-3 0-23-3
21730(μy 701736 (ng	. 54) 54)	F13//	0-20-3 1-28-3
ZC1736(pg. ZM1736(pg	54)	F1340	, <u>20-</u> 3 N-29-3
71737 to 71740	. 57 <i>j</i>	1 104	"X"
Z1737 to Z1740 Z1745(pg. 1	59) (C1000-T6	3-3-28
"X"	Con	tact M	IFAR

Design and dimensions are subject to modification. Prices do not include applicable taxes.

Visit www.mifab.com for the most recent product information.

-15......3 box and cover.....-3



STAINLESS STEEL DRAIN OPTIONAL VARIATIONS

	*/1111/1110110	
ZURN		MIFAB
PREFIXI		
	Type 304 SS	
	ype A-27 carbon steel	
ZM	Type 316 SS	29
SUFFIXE		
-C	Galv. deck clamp	C-13
-BW	Butt welded	"X"
	Dome grate	
-DB	SS dome strainer	20-28
	Roof deck plate	
	Extended wide flange	
	Galv. extension	
	Flush grate	
	XHD top frame and grate	
-HP	Heel proof grate	Std
-IP	Female threaded outlet	T
	Auxiliary inlet	
-K	Anchor flange	-FI
-KC	Anchor fl. with clamp	-FI C
	1/2" Trap primer conn	
	Galv.sump receiver	
	6" dia. stainless steel top	
	7" dia. stainless steel top	
	8" dia. stainless steel top	
-RD10	10" dia. stainless steel top	10-3
	5" square stainless steel top	
	8" square stainless steel top	
-SC	Solid secured cover	"X"
-SF	Satin finish top	"X"
-SG	Solid gasketed cover	"X"
-SP	SS cleanout plug	34-28
	Top secured with slotted	
	screws	
-V	Bronze backwater valve	"X"
-VP	Vandal proof	6
-Y	SS Sediment bucket	5-28
-YM	Fabricated mesh bucket	"X"
-30	Bronze closure plug	34B
-31	Plastic closure plug	34
-33	Type 304 SS plug	34-28
-34	Bronze closure plug with	"X"
	3/4" test plug	
-90	90 degree side outlet	90

FLOOR SINKS

ZURN		MIFAB
Z1749	(pg. 106)	FS1920-FL
	(pg. 106)	
ZM1752	(pg. 106)	FS1940-PL-29
Z1753	(pg. 106)	FS1920-FL
ZS1762		Proformer
Z1762		Proformer
Z1763		Proformer
ZS1763		Proformer
Z1900	(pg. 99)	FS1720
ZN1900	(pg. 99)	FS1720-1
Z1901	(pg. 100)	FS1730
ZN1901	(pg. 100)	FS1730-1
	(pg. 101)	
	(pg. 101)	
Z1910	(pg. 97)	FS1520
	(pg. 97)	

	(. 0	FS1770
Z1926	(pg. 105)	FS1770-FL
Z1930	(pg. 98)	FS1530
		FS1530-1
Z1940		"X"
Z1950	(pg. 103)	FS1760
ZN1950	(pg. 103)	FS1760-1
Z1960	(pg. 102)	FS1750
ZN1960	(pg. 102)	FS1750-1
Z1970	(pg. 38)F1	100-C-N9-50-11*
ZA1970	(pg. 38) F	1100-C-N9-1-11*
		F1350-Y-36-3
Z1995	(pg. 105)	FS1790
ZN1995	(pg. 105)	FS1790-1

FLOOR SINK OPTIONAL VARIATIONS

MIFAB

ZURN

PREFIXES Z	Type 304 Stainless steel	-28
-		20
L	Cl body, A.R.E. Interior	"X"
ZM	Type 316 Stainless steel	29
SUFFIXES	6	
-C	Membrane clamp	C
-DX	Dexotex flange	Z
-HD	Extra heavy duty grate	. "X"
-HP	Heel proof grate	"X"
·IP	Female threaded outlet	T
	Anchor flange	
-KC	Anchor flange with clamp-FLC	
LBT	Less bell trap	. "X"
-LD	Less dome botom strainer	"X"
LS	Less secondary strainer	"X"
-LY	Less sediment bucket	"X"
P	.1/2" Trap primer conn	7
	Secondary strainer	
SR	1/2" thick sanitary rim	. "X"
Т	Square frame + round gr	"X"
VP	Vandal proof	6
	Sediment bucket	
	Suspended sediment buck	
.1	Less grate	22
	1/2 grate	
	3/4 grate	
4	Full grate with center open	"X"
5	Grate with 4" funnel	F4
	Grate with 6" funnel	
7	Grate with 6"x3"x1" funn	J
	Grate with 4"x 9" funnel	
9	Angle frame and grate	"X"
11	Vandal proof	6
12	Depressed alum. Grate	"X"
·15	Solid cover	. "X"
·16	1/2 solid cover	"X"
17	3/4 solid cover	"X"
18	Solid cover with center op	"X"
19	Full hinged grate	9
	Aluminum bucket	
	White A.R.E. bucket	
31	SS mesh liner for bucket	. "X"
	Aluminum dome strainer	
-33	White A.R.E. anti-splash	"X"
	Bottom dome strainer	
-34	N.B. anti-splash	. "X"
	bottom dome strainer	
"X"	Contact MI	FAB

SUFFIX LISTING

SUFFIX LISTING			
Suffix	Description		
01	Neoprene bowl gasket (MC-10-PBG)		
-1	Nickel bronze (drains and cleanouts)		
-1	Tiling frame (carriers) (MC-10-1-PTFK)		
-2 -3	Polished brass Stainless steel (Type 304) (drains)		
-3	Rear anchor support (carriers) (MC-10-3-PRSFK)		
-4	Ductile iron		
-5	Sediment bucket		
-5 -6	3/4" female solder adapter (hydrants) Security screws (floor and area drains,		
-0	cleanouts)		
-6	Vandal proof dome (roof drains)(H-1029)		
-6	3/4" IPS 90 degree elbow and union nut		
7	(hydrants)		
-7 -8	Trap seal primer tapping Backwater valve (drains)(BV1250 Series)		
-8	3/4" adapter vacuum breaker (hydrants)		
Ü	(HY-9005-CP)		
-9	Hinged grate (drains)		
-9	1/4" drain port in box (hydrants)		
-10	Decorative polished top		
10	(10 piece minimum) (drains)		
-10 -10	Àuxiliary support (carriers) (MC-10-AFS) 3/8" drain port in box (hydrants)		
-10	Acid resistant epoxy coating		
-11	1/2" drain port in box (hydrants)		
-12	Galvanized metal domè (roof drains)		
-12	Galvanized grate and frame		
40	(floor and area drains) (MC-10-PN12-31)		
-12 -12	12" tapered thread ABS nipple (carriers)		
-12 -12A	Wheel handle (hydrants) (HY-9003) Galvanized body and membrane clamp		
IZA	(roof drains)		
-13	Galvanized body (floor and area drains)		
-13	Galvanized body, membrane clamp		
10	and dome (roof drains)		
-13	Test plug for custom and cast iron nipples (carriers)		
-14	Flat strainer (drains)		
-14	Vandal proof finish trim (carriers)		
	(MC-10-PFH-14)		
-15	Extension		
-16 -17	Square top assembly		
-17	with trap and cleanout (MI-OS Series) All galvanized (carriers)		
-18	with trap and oil cone and cleanout		
	(MI-OS Series)		
-19	Nipple wrench (carriers) (MC-10-PCW)		
-20	Secondary dome strainer (drains)		
-20	(FD-9600 Series) Flush valve support (carriers) (MC-10-FVS)		
-20 -21	Secondary flat stainless steel		
	strainer (2", 3", 4") (FD-9600 Series)		
-22	Less grate (drains)		
-22	Less fitting (carriers)		
-23 -23	Chained grate (drains) 45 degree auxiliary inlet (MC-28)		
-23 -24	Solid secured cover		
-25	2" auxiliary inlet, right side		
-26	2" auxiliary inlet, left side		
-25-1	Solid secured hinged nickel bronze cover		
-26 -27	Locking device (Same as -6) Rough bronze dome with stainless steel		
-21	mesh screen		
-28	Stainless steel body (Type 304)		
-29	Stainless steel body (Type 316)		
-30	PVC socket connection body (2", 3", 4") ABS socket connection body (2", 3", 4")		
-31	ABS SOCKET connection body (2", 3", 4")		
-31 -32	Two 2" auxiliary inlets (carriers) Integral deep seal trap (2", 3", 4")		
JZ.	(MI-950 Series)		
-32	No hub nipple with 4" cleanout for		
	penal fixtures (MC-28)		
-32	Foot pedal mounting plate (carriers)		
-33 -34	Less flange, deduct Closure plug (C1440 Series)		
-0 1	Closure plug (C1440 Series)		



MIFAB SUFFIX LISTING

Suffix	Description	Suffix	Description
-34B	Brass closure plug (A4-34B)	-HSB	Hose storage box (hydrants)
·35 ·38	Stainless steel mesh over bucket Solids retaining baffle	-HT	Holding tank (interceptors)
	Underdeck clamp (drains)	-l	3/8" threaded eye bolts for cast iron lavatories (carriers)
	1" brass casing (hydrants)	-J	6" x 3" x 1" funnel
41	Sump receiver (drains)	-JC	Ballast guard with secondary clamp
11 11	3/8" brass operating rod (hydrants)	-K	Cylinder key lock
	Perforated standpipe (drains)	-M	Less anchor flange
	Decorative casing guard (hydrants)		-A HY-1000 hydrant repair kit
	Solid standpipe	-M-80	Low profile aluminum dome
-44	2" no hub side inlet (specify location)	NH	No hub outlets
	1 1/2" no hub side inlet (specify location)	-0 OD0	1" hose connection
	Chrome plated	-0R8 -0R12	8" rolling thread ABS nipple 12" rolling thread ABS nipple
-50	Cast iron	-0h12 P	Push on outlet
-51	2 1/2" round center grate opening (floor sinks)	-PD	Polydome
-69	Stainless steel sediment bucket (F1000 and F1100 Series)	-PF	Prefabricated carrier bank, per carrier
-79	Standpipe over 8", per inch	-R	2" external water dam
-80	Low profile aluminum dome	-RB	Replacement bucket (interceptors)
-81	Rough bronze dome	-RSSB	Replacement stainless steel baffle (interceptors)
-83	Stainless steel mesh screen over dome	S	End side outlet (T1320 and T1350 Series)
-87	Screw longer than 3 1/2", per inch	-S	1" x 1/4" slots (includes 4 mounting brackets) (hydrants)
-90	Threaded side outlet (2", 3", 4")	-SB	Sediment bucket (interceptors)
-90NH	No hub side outlet (2", 3", 4")	-SS	Stainless steel (interceptors)
-91	Stainless steel standpipe (W-3)	-SSB	Replacement stainless steel sediment bucket (interceptors
	Client logo	-SSM	Stainless steel mesh screen on bucket (interceptors)
-150 -175	Half grate (floor sinks) Three guarter grate (floor sinks)	T	Threaded outlet
-175 -A	Three quarter grate (floor sinks) Loose set grate (drains)	-TE	2" extension (F1510 Series)
-A -A	Stud length over 8" (specify), Add per inch (carriers)	-TL	Tile recess in lid (interceptors)
-A -AH8	8" ABS nipple with adjustable horn (MH-10-PN8AH-31)	-U	Underdeck clamp
-AH12	12" ABS nipple with adjustable horn (MH-10-PN12AH-31)	-U3	Underdeck clamp with cutaway side
-B	Sump receiver (drains)	-V	Fixed extension (2", 3", 4")
-B	Floor to ceiling uprights (carriers)	-VG	Galvanized fixed extension (2", 3", 4")
-B	Cast brass box (hydrants)	-W	Adjustable water dam
-B	Integral bottom plate (backwater valves)	-WC	Wall clamp (hydrants)
-B-49	Chrome plated brass box (hydrants)	-W-1 -W2	Water proofing flange 2" internal water dam
-BK	Cast brass box with cylinder key lock (hydrants)	-w2 -W3	3" internal water dam
-BK-49	Chrome plated brass box with cylinder key lock (hydrants)	-w3 -W4	4" internal water dam
-C	Membrane clamp (floor and area drains)	X	Inside caulk outlet
-C	Secondary clamp (roof drains)	-X	Invert extension "C" dimension (F1560)
-C	Extension (interceptors)	-XH	Extra heavy duty ductile iron grates (1 1/2" x 12" x 12")
-CI-4	4" rolling thread cast iron nipple (MC-10-PN4R-50)	-Y	Non adjustable top (area drains)
-CI-6	6" rolling thread cast iron nipple	-Z	Extended wide elastomeric flange on top
-CI-8	8" rolling thread cast iron nipple	-Z	Add per each foot over 3' of upright (carriers)
-CI-12 -CI-24	12" rolling thread cast iron nipple		
-01-24 -01	24" rolling thread cast iron nipple Low profile membrane clamp		
-01 -CP	Chrome plated (interceptors)		
-61 -E	Adjustable extension		
-EB	External strainer basket assembly (interceptors)		
-EG	Galvanized adjustable extension		
-E2	2" chrome plated escutcheons (pair)		
-F	Bar support valve plate (carriers)		
	Accuflow parabolic weir		
-F4	4" diameter funnel		
-F6	6" diameter funnel		
-FL	Anchor flange		
-FLC	Anchor flange with membrane clamp		
-G	4" x 9" funnel (floor and area drains)		
-G	Ballast guard (roof drains)		
-G	Trap with flushing connection (F1660 Series)		
-G	Wall support valve plate (carriers)		
-GS	Grounding strap		
-HC	Adjustable ballast guard with secondary clamp		
IID	Heavy duty re-enforced lid (interceptors)		
-HD			
-HD	500 lb. Rated heavy duty (carriers)		



MIFAB BINDER AND PRICE BOOKS




COMPLETE MIFAB BINDER (with all product booklets inside) Lit # 001B



MPB-2014-CAN Lit # 066



NH-2014 Lit # 044



CLPB-2012 Lit # 048



BEECO 2014

Lit # 032



AD-2012-CAD TSP-2014 Lit # 051 Lit # 062



TD-2013 Lit # 046



TDLP-2013-CAN Lit # 046-PB-CAN



ACV Lit # 059



DB-2014 Lit # 070

Design and dimensions are subject to modification. Prices do not include applicable taxes.







RIVIFAB®

MPB-2014-CAN



Engineered Plumbing and Drainage Products Price Guide

LIT-066

MIFAB, Inc. Toll Free 1-800-387-3880, Fax 1-773-341-3049 www.mifab.com sales@mifab.com



