


☐ DOMESTIC

☐ NON-DOMESTIC

SUBMITTAL: C110 MECHANICAL JOINT PRODUCT

(Current revisions for the noted Standards apply)

SIZES:	2" - 48"
STANDARDS:	ANSI/AWWA C110/A21.10, NFPA 13/24, 3" - 12" UL listed and approved (File - Tyler Union)
MATERIAL:	Cast of ASTM A536 qualified ductile iron. Date code is cast on and required for traceability.
PRESSURE RATING:	*Flanged fittings rated at 250 psi. Mechanical joints 2" - 24" rated at 350 psi and 30" - 48" at 250 psi. *Note: With rubber annular ring flange gasket, 2" - 24" Flanged fittings can be rated at 350 psi. Note: Wyes over 12" are not pressure rated. Contact Tyler Union for rating in your application.
DEFLECTION:	Joint deflection 5° max for 2"- 12" and 3° max for 14"- 48". Reduces by 50% at nominal pipe & fitting diameters
NSF-61 & NSF372:	Meets all requirements including Annex G, Tyler Union's Underwriters Laboratory listing MH16439.
ASPHALT COATING:	Per ANSI/AWWA C104/A21.4 and ANSI/AWWA C110/A21.10.
CEMENT LINING:	Per ANSI/AWWA C104/A21.4, with double cement lining available upon request.
EPOXY COATING:	Fusion bonded epoxy per ANSI/AWWA C116/A21.16. Additional coatings available upon request.
BARE FITTINGS:	Available upon request.
FASTNERS:	High strength low alloy weathering steel per ANSI/AWWA C111/A21.11 and ASTM A242
INSTALLATION:	Install per AWWA C600/C651 using pipe conforming to ANSI/AWWA C151/A21.51 or AWWA C900/905.

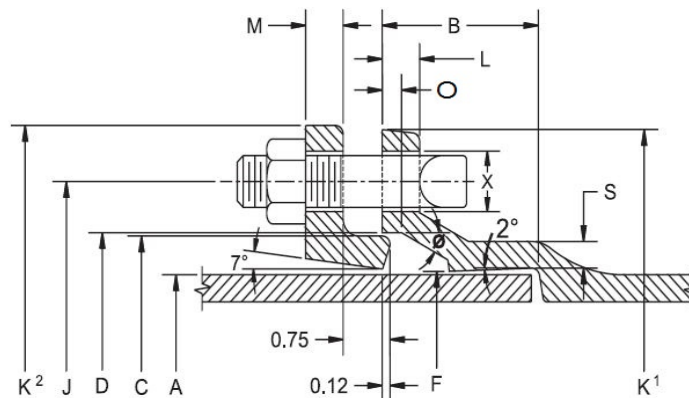

NOMINAL JOINT DIMENSIONS IN INCHES

Size Inches	A Dia. DI Pipe	B Hub Depth	C Dia. GLAND	D Dia.	F Dia.	Ø	X	J Dia. GLAND	K ¹ Dia.	K ² Dia. GLAND	L	M GLAND	O	S	Qty. BOLTS
2	2.51	2.50	3.39	3.50	2.61	28°	3/4	4.75	6.25	6.25	0.73	0.62	0.31	0.44	2
3	3.96	2.50	4.84	4.94	4.06	28°	3/4	6.19	7.69	7.69	0.94	0.62	0.31	0.52	4
4	4.80	2.50	5.92	6.02	4.90	28°	7/8	7.50	9.12	9.12	1.00	0.75	0.31	0.65	4
6	6.90	2.50	8.02	8.12	7.00	28°	7/8	9.50	11.12	11.12	1.06	0.88	0.31	0.70	6
8	9.05	2.50	10.17	10.27	9.15	28°	7/8	11.75	13.37	13.37	1.12	1.00	0.31	0.75	6
10	11.10	2.50	12.22	12.34	11.20	28°	7/8	14.00	15.69	15.62	1.19	1.00	0.31	0.80	8
12	13.20	2.50	14.32	14.44	13.30	28°	7/8	16.25	17.94	17.88	1.25	1.00	0.31	0.85	8
14	15.30	3.50	16.40	16.54	15.44	28°	7/8	18.75	20.31	20.25	1.31	1.25	0.31	0.89	10
16	17.40	3.50	18.50	18.64	17.54	28°	7/8	21.00	22.56	22.50	1.38	1.31	0.31	0.97	12
18	19.50	3.50	20.60	20.74	19.64	28°	7/8	23.25	24.83	24.75	1.44	1.38	0.31	1.05	12
20	21.60	3.50	22.70	22.84	21.74	28°	7/8	25.50	27.08	27.00	1.56	1.44	0.31	1.12	14
24	25.80	3.50	26.90	27.04	25.94	28°	7/8	30.00	31.58	31.50	1.62	1.56	0.31	1.22	16
30	32.00	4.00	33.29	33.46	32.17	20°	1-1/8	36.88	39.12	39.12	1.81	2.00	0.38	1.50	20
36	38.30	4.00	39.59	39.76	38.47	20°	1-1/8	43.75	46.00	46.00	2.00	2.00	0.38	1.80	24
42	44.50	4.00	45.79	45.96	44.67	20°	1-3/8	50.62	53.12	53.12	2.00	2.00	0.38	1.95	28
48	50.80	4.00	52.09	52.26	50.97	20°	1-3/8	57.50	60.00	60.00	2.00	2.00	0.38	2.20	32

C110 DUCTILE IRON FULL BODY FITTINGS

SAMPLE SPECIFICATIONS

(Current ANSI/AWWA revisions apply)

Mechanical joint watermain fittings with accessories 2" through 48" shall be manufactured from ductile iron in accordance with and meet all applicable terms and provisions of standards ANSI/AWWA C110/A21.10 and ANSI/AWWA C111/A21.11. Ductile iron mechanical joint fittings 2" through 24" shall be rated for 350 psi working pressure. All ductile iron mechanical joint fittings 30" through 48" shall be rated for 250 psi working pressure. Flanged ductile iron fittings in 24" (610 mm) and smaller sizes may be rated for 350 psi (2,413 kPa) with the use of special (annular ring or comparable) gaskets.


NOTE: EXCEPTIONS: Mechanical joint fittings with flanged branches and 14" and larger caps and plugs are rated for water pressure of 250 PSI.

NOTE: Installation per AWWA C600 and AWWA C651, current revision.

NOTE: Fittings are cement lined and seal coated in accordance with ANSI/AWWA C104/A21.4. Fittings are also available double cement lined, bare or epoxy coated. Coated and lined fittings meet requirements of NSF-61, NSF-372 & Annex G.


Nominal Joint Dimensions in Inches															
Size	A	B	C	D	F	ø	X	J	K1	K2	L	M	N	O	S
*2	2.50	2.50	3.39	3.50	2.61	28°	3/4	4.75	6.25	6.25	0.75	0.62	1.12	0.31	0.44
3	3.96	2.50	4.84	4.94	4.06	28°	3/4	6.19	7.69	7.69	0.94	0.62	1.37	0.31	0.52
4	4.80	2.50	5.92	6.02	4.90	28°	7/8	7.50	9.12	9.12	1.00	0.75	1.50	0.31	0.65
6	6.90	2.50	8.02	8.12	7.00	28°	7/8	9.50	11.12	11.12	1.06	0.88	1.63	0.31	0.70
8	9.05	2.50	10.17	10.27	9.15	28°	7/8	11.75	13.37	13.37	1.12	1.00	1.75	0.31	0.75
10	11.10	2.50	12.22	12.34	11.20	28°	7/8	14.00	15.69	15.62	1.19	1.00	1.75	0.31	0.80
12	13.20	2.50	14.32	14.44	13.30	28°	7/8	16.25	17.94	17.88	1.25	1.00	1.75	0.31	0.85
14	15.30	3.50	16.40	16.54	15.44	28°	7/8	18.75	20.31	20.25	1.31	1.25	2.00	0.31	0.89
16	17.40	3.50	18.50	18.64	17.54	28°	7/8	21.00	22.56	22.50	1.38	1.31	2.06	0.31	0.97
18	19.50	3.50	20.60	20.74	19.64	28°	7/8	23.25	24.83	24.75	1.44	1.38	2.13	0.31	1.05
20	21.60	3.50	22.70	22.84	21.74	28°	7/8	25.50	27.08	27.00	1.50	1.44	2.19	0.31	1.12
24	25.80	3.50	26.90	27.04	25.94	28°	7/8	30.00	31.58	31.50	1.62	1.56	2.31	0.31	1.22
30	32.00	4.00	33.29	33.46	32.17	20°	1 1/8	36.88	39.12	39.12	1.81	2.00	2.75	0.38	1.50
36	38.30	4.00	39.59	39.76	38.47	20°	1 1/8	43.75	46.00	46.00	2.00	2.00	2.75	0.38	1.80
42	44.50	4.00	45.79	45.96	44.67	20°	1 3/8	50.62	53.12	53.12	2.00	2.00	2.75	0.38	1.95
48	50.80	4.00	52.09	52.26	50.97	20°	1 3/8	57.50	60.00	60.00	2.00	2.00	2.75	0.38	2.20

*Not included in AWWA C110.

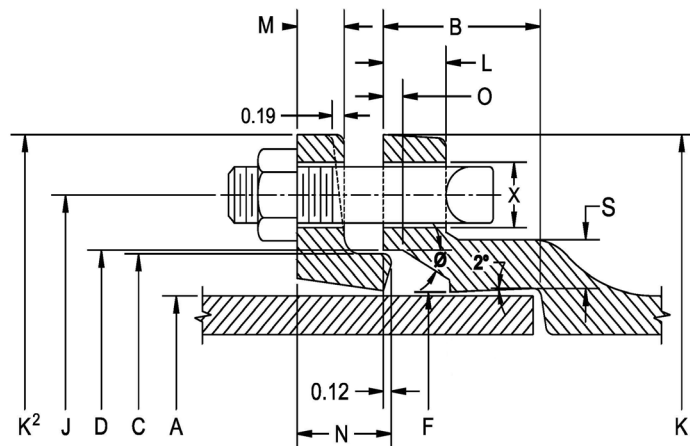


ANSI/AWWA C110 Mechanical Joint Fittings


C110 DUCTILE IRON FULL BODY FITTINGS




MJ Tees AND MJxPExMJ Tees



MJxFE Tees




Cross



MJ Tapped Tees (2" TAP)

TEES AND CROSSES (Continued)

Size Run	Branch	X	Y	Z	MJ	Weight		
						MJXPEXMJ	MJxMJxFE	Cross
36	6	20.00	26.00	—	2439	—	—	—
36	8	20.00	26.00	—	2444	—	—	—
36	10	20.00	26.00	—	2535	—	2550	—
36	12	20.00	26.00	—	2541	—	—	—
36	14	20.00	26.00	—	2570	—	2450	—
36	16	20.00	26.00	—	2585	—	—	4370
36	18	20.00	26.00	—	2610	—	—	3420
36	20	20.00	26.00	—	2635	—	2660	3455
36	24	20.00	26.00	—	2792	—	—	3495
36	30	28.00	28.00	—	3545	—	—	3535
36	36	28.00	28.00	—	3450	—	—	3590
42	12	23.00	30.00	—	3555	—	—	3690
42	14	23.00	30.00	—	3575	—	—	4815
42	16	23.00	30.00	—	3595	—	—	6430
42	18	23.00	30.00	—	3615	—	—	6920
42	20	23.00	30.00	—	3640	—	—	4665
42	24	23.00	30.00	—	3690	—	—	4695
42	30	31.00	31.00	—	4650	—	—	4735
42	36	31.00	31.00	—	4880	—	—	4775
42	42	31.00	31.00	—	6320	—	—	4825
48	12	26.00	34.00	—	4870	—	—	—
48	14	26.00	34.00	—	4885	—	—	—
48	16	26.00	34.00	—	4905	—	—	—
48	18	26.00	34.00	—	4925	—	—	—
48	20	26.00	34.00	—	4950	—	—	—
48	24	26.00	34.00	—	4995	—	—	4920
48	30	26.00	34.00	—	5140	—	—	5210
48	36	34.00	34.00	—	6280	—	—	6500
48	42	34.00	34.00	—	8130	—	—	8530
48	48	34.00	34.00	—	8420	—	—	9095

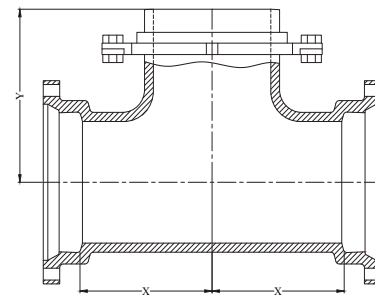

MJxMJxSwivel Tees

MJ TAPPED TEE (2" TAP)

Domestic				Import			
size	L	Max. Tap	Weight	T	L	Max. Tap	Weight
3	8.00	2	40	0.33	6.00	2	18
4	8.00	2	51	0.34	6.00	2	24
6	8.00	2	73	0.36	6.00	2	42
8	8.00	2	104	0.38	6.00	2	52
10	8.00	2	130	0.40	6.00	2	64
12	8.00	2	180	0.42	6.00	2	81

Tyler Union does not recommend the use of wedge action restraints on plain end fittings

MJ X MJ X SWIVEL TEE

Size	X	Y	Weight
6	8.00	10.50	150
8x6	9.00	11.50	199
8	9.00	11.50	210
10x6	11.00	13.50	267
12x6	12.00	14.50	346
16x6	15.00	17.50	619
16x8	15.00	17.50	649
30x6	18.00	24.50	2070

All weights shown include the swivel gland.