



Class 125 (Standard)

FIG. 3358R

Reducing Tee



For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil® Sales Representative.

FIGURE 3358R - REDUCING TEE

| Nominal Size 1 x 2 x 3 | Max. Working Pressure▲ | Dimensions | | | Approx. Wt. Each |
|------------------------------------|------------------------------|-----------------|-----------------|-----------------|---------------------|
| | | A | B | C | |
| <i>In. (mm)</i> | <i>PSI (kPa)</i> | <i>In. (mm)</i> | <i>In. (mm)</i> | <i>In. (mm)</i> | <i>Lbs. (kg)</i> |
| 1 x 1/2 x 1 25 x 15 x 25 | 300 2065 | 1.50 38.10 | 1.36 34.54 | 1.50 38.10 | 1.08 0.49 |
| 1 x 3/4 x 1 25 x 20 x 25 | 300 2065 | 1.50 38.10 | 1.45 36.83 | 1.50 38.10 | 1.18 0.54 |
| 1 x 1 x 1/2 25 x 25 x 15 | 300 2065 | 1.26 32.00 | 1.26 32.00 | 1.36 34.54 | 0.95 0.43 |
| 1 x 1 x 3/4 25 x 25 x 20 | 300 2065 | 1.37 34.79 | 1.37 34.79 | 1.45 36.83 | 1.10 0.50 |
| 1 x 1 x 1 1/4* 25 x 25 x 32 | 300 2065 | 1.67 42.418 | 1.67 42.418 | 1.58 40.132 | 1.52 0.69 |
| 1 x 1 x 1 1/2* 25 x 25 x 40 | 300 2065 | 1.8 45.72 | 1.8 45.72 | 1.65 41.91 | 1.73 0.78 |
| 1 1/4 x 1 x 1/2 32 x 25 x 15 | 300 2065 | 1.34 34.03 | 1.26 32.00 | 1.53 38.86 | 1.17 0.53 |
| 1 1/4 x 1 x 3/4 32 x 25 x 20 | 300 2065 | 1.45 36.83 | 1.37 34.79 | 1.62 41.14 | 1.38 0.63 |
| 1 1/4 x 1 x 1 32 x 25 x 25 | 300 2065 | 1.58 40.13 | 1.50 38.10 | 1.57 39.87 | 1.47 0.67 |
| 1 1/4 x 1 x 1 1/4 32 x 25 x 32 | 300 2065 | 1.75 44.45 | 1.67 42.41 | 1.75 44.45 | 1.80 0.82 |
| 1 1/4 x 1 x 1 1/2* 32 x 25 x 40 | 300 2065 | 1.88 47.752 | 1.8 45.72 | 1.82 46.228 | 2.05 0.93 |

▲ Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/ULC, and FM pressure ratings versus pipe schedule, please visit anvilintl.com or contact your local Anvil Representative.

* Part supplied as "Bull Head Tee".

MATERIAL SPECIFICATIONS

Dimensions: ASME B16.4 Class 125

Material: ASTM A126

Finish: Black or Hot Dip Galvanized per ASTM A153 Class A

Threads: NPT per ASME B1.20.1

Agency Approvals: All cast iron threaded fittings are UL/ULC Listed and FM Approved.

FIGURE 3358R - REDUCING TEE

| Nominal Size 1 x 2 x 3 | Max. Working Pressure▲ | Dimensions | | | Approx. Wt. Each |
|--|------------------------------|-----------------|-----------------|-----------------|---------------------|
| | | A | B | C | |
| <i>In. (mm)</i> | <i>PSI (kPa)</i> | <i>In. (mm)</i> | <i>In. (mm)</i> | <i>In. (mm)</i> | <i>Lbs. (kg)</i> |
| 1 1/4 x 1 1/4 x 1/2 32 x 32 x 15 | 300 2065 | 1.34 34.03 | 1.34 34.03 | 1.53 38.86 | 1.37 0.62 |
| 1 1/4 x 1 1/4 x 3/4 32 x 32 x 20 | 300 2065 | 1.45 36.83 | 1.45 36.83 | 1.62 41.14 | 1.54 0.70 |
| 1 1/4 x 1 1/4 x 1 32 x 32 x 25 | 300 2065 | 1.58 40.13 | 1.58 40.13 | 1.67 42.41 | 1.65 0.75 |
| 1 1/4 x 1 1/4 x 1 1/2* 32 x 32 x 40 | 300 2065 | 1.88 47.752 | 1.88 47.752 | 1.82 46.228 | 2.21 1.00 |
| 1 1/4 x 1 1/4 x 2* 25 x 25 x 40 | 300 2065 | 2.1 53.34 | 2.1 53.34 | 1.9 48.26 | 2.55 1.16 |

PROJECT INFORMATION


APPROVAL STAMP

| | |
|------------------------|--|
| Project: | <input type="checkbox"/> Approved |
| Address: | <input type="checkbox"/> Approved as noted |
| Contractor: | <input type="checkbox"/> Not approved |
| Engineer: | Remarks: |
| Submittal Date: | |
| Notes 1: | |
| Notes 2: | |

Class 125 (Standard)

FIG. 3358R

Reducing Tee

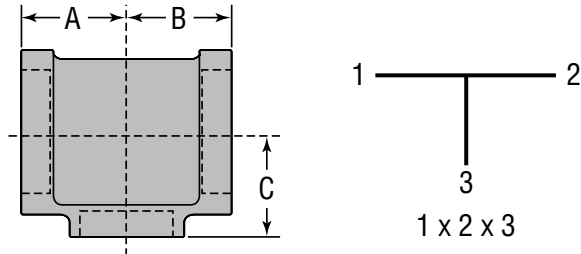

| FIGURE 3358R - REDUCING TEE | | | | | |
|------------------------------|------------------------------|----------------|---------------|----------------|---------------------|
| Nominal Size 1 x 2 x 3 | Max. Working Pressure▲ | Dimensions | | | Approx. Wt. Each |
| | | A | B | C | |
| In. (mm) | PSI (kPa) | In. (mm) | In. (mm) | In. (mm) | Lbs. (kg) |
| 1½ x 1 x ½ 40 x 25 x 15 | 300 2065 | 1.41 35.81 | 1.34 34.03 | 1.66 42.16 | 1.41 0.64 |
| 1½ x 1 x ¾ 40 x 25 x 20 | 300 2065 | 1.52 38.60 | 1.37 34.79 | 1.75 44.45 | 1.65 0.75 |
| 1½ x 1 x 1 40 x 25 x 25 | 300 2065 | 1.65 41.91 | 1.50 38.10 | 1.80 45.72 | 1.65 0.75 |
| 1½ x 1 x 1¼ 40 x 25 x 32 | 300 2065 | 1.82 46.22 | 1.67 42.41 | 1.88 47.75 | 2.00 0.91 |
| 1½ x 1 x 1½ 40 x 25 x 40 | 300 2065 | 1.94 49.27 | 1.8 45.72 | 1.94 49.27 | 2.30 1.04 |
| 1½ x 1¼ x ½ 40 x 32 x 15 | 300 2065 | 1.41 35.81 | 1.34 34.03 | 1.66 42.16 | 1.58 0.72 |
| 1½ x 1¼ x ¾ 40 x 32 x 20 | 300 2065 | 1.52 38.60 | 1.45 36.83 | 1.75 44.45 | 1.72 0.78 |
| 1½ x 1¼ x 1 40 x 32 x 25 | 300 2065 | 1.65 41.91 | 1.58 40.13 | 1.80 45.72 | 1.85 0.84 |
| 1½ x 1¼ x 1¼ 40 x 32 x 32 | 300 2065 | 1.82 46.22 | 1.75 44.45 | 1.88 47.75 | 2.22 1.00 |
| 1½ x 1¼ x 1½ 40 x 32 x 15 | 300 2065 | 1.94 49.27 | 1.88 47.75 | 1.94 49.27 | 2.45 1.11 |
| 1½ x 1¼ x 2* 40 x 32 x 40 | 300 2065 | 2.16 54.864 | 2.1 53.34 | 2.02 51.308 | 2.80 1.27 |
| 1½ x 1½ x ½ 40 x 40 x 40 | 300 2065 | 1.41 35.81 | 1.41 35.81 | 1.66 42.16 | 1.76 0.80 |
| 1½ x 1½ x ¾ 40 x 40 x 20 | 300 2065 | 1.52 38.60 | 1.52 38.60 | 1.75 44.45 | 1.87 0.85 |
| 1½ x 1½ x 1 40 x 40 x 25 | 300 2065 | 1.65 41.91 | 1.65 41.91 | 1.80 45.72 | 1.94 0.88 |
| 1½ x 1½ x 1¼ 40 x 40 x 32 | 300 2065 | 1.82 46.22 | 1.82 46.22 | 1.88 47.75 | 2.29 1.04 |

| FIGURE 3358R - REDUCING TEE | | | | | |
|------------------------------|------------------------------|----------------|----------------|----------------|---------------------|
| Nominal Size 1 x 2 x 3 | Max. Working Pressure▲ | Dimensions | | | Approx. Wt. Each |
| | | A | B | C | |
| In. (mm) | PSI (kPa) | In. (mm) | In. (mm) | In. (mm) | Lbs. (kg) |
| 1½ x 1½ x 2* 40 x 40 x 50 | 300 2065 | 2.16 54.864 | 2.16 54.864 | 2.02 51.308 | 3.28 1.41 |
| 2 x 1 x 2 50 x 25 x 50 | 300 2065 | 2.25 57.15 | 2.02 51.30 | 2.25 57.15 | 3.40 1.54 |
| 2 x 1¼ x 2 50 x 32 x 50 | 300 2065 | 2.25 57.15 | 2.10 53.34 | 2.25 57.15 | 2.80 1.27 |
| 2 x 1½ x ½ 50 x 40 x 15 | 300 2065 | 1.49 37.84 | 1.41 35.81 | 1.88 47.75 | 2.09 0.95 |
| 2 x 1½ x ¾ 50 x 40 x 20 | 300 2065 | 1.60 40.64 | 1.52 38.60 | 1.97 50.03 | 2.40 1.09 |
| 2 x 1½ x 1 50 x 40 x 25 | 300 2065 | 1.73 43.94 | 1.65 41.91 | 2.02 51.30 | 2.54 1.15 |
| 2 x 1½ x 1¼ 50 x 40 x 32 | 300 2065 | 1.90 48.26 | 1.82 46.22 | 2.10 53.34 | 2.85 1.30 |
| 2 x 1½ x 1½ 50 x 40 x 40 | 300 2065 | 1.49 37.84 | 1.41 35.81 | 1.88 47.75 | 2.24 1.02 |
| 2 x 1½ x 2 50 x 40 x 50 | 300 2065 | 2.25 57.15 | 2.16 54.86 | 2.25 57.15 | 3.75 1.70 |
| 2 x 2 x ½ 50 x 50 x 15 | 300 2065 | 1.49 37.84 | 1.49 37.84 | 1.88 47.75 | 2.60 1.18 |
| 2 x 2 x ¾ 50 x 50 x 20 | 300 2065 | 1.60 40.64 | 1.60 40.64 | 1.97 50.03 | 2.71 1.23 |
| 2 x 2 x 1 50 x 50 x 15 | 300 2065 | 1.73 43.94 | 1.73 43.94 | 2.02 51.30 | 2.97 1.35 |
| 2 x 2 x 1¼ 50 x 50 x 32 | 300 2065 | 1.90 48.26 | 1.90 48.26 | 2.10 53.34 | 3.32 1.51 |
| 2 x 2 x 1½ 50 x 50 x 40 | 300 2065 | 2.02 51.30 | 2.02 51.30 | 2.16 54.86 | 3.72 1.69 |
| 2 x 2 x 2½* 50 x 50 x 60 | 300 2065 | 2.6 66.04 | 2.6 66.04 | 2.39 60.706 | 5.10 2.31 |

▲ Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/UCL, and FM pressure ratings versus pipe schedule, please visit anvilintl.com or contact your local Anvil Representative.

* Part supplied as "Bull Head Tee".