


## S33 SERIES

### 1/3 HP Submersible Sump Pumps



#### SPECIFICATIONS

Applications	Basement Sumps, Dewatering	
Capacities	32 GPM	121 LPM
Shut-off Head	25'	7.62 m
Operation:	On	10.31"
	Off	3.31"
Pump-down Range	7"	178 mm
Solids Handling	1/4"	6.4 mm
Liquids Handling	drain water	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Motor	1/3 HP, PSC	
Electrical Data	3000 RPM, 115V, 6.5A, 1Ø, 60Hz	
Acceptable pH Range	6–9	
Shaft Seal	type 11A, carbon & ceramic, secondary lip seal	
Housing	cast iron	
Power Cord	10', 20'	
Discharge, NPT	1-1/2"	38.1 mm
Min. Sump Diameter		
Float:	18"	457 mm
Vertical:	10-1/2"	267 mm

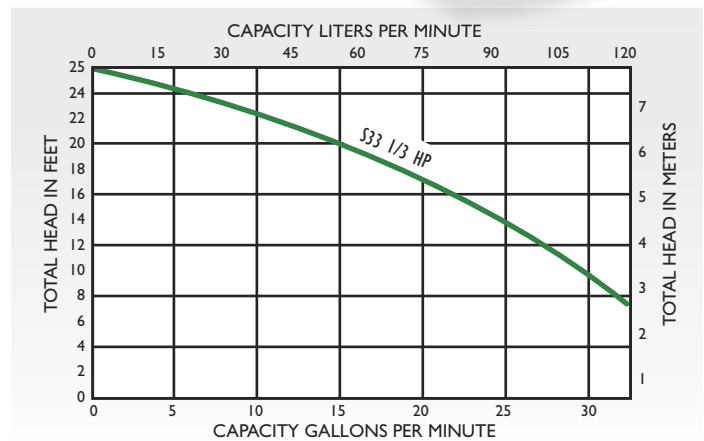

#### FEATURES

- Versatility for many light-duty jobs
- Designed for drain water removal or permanent applications with small amounts of debris
- Maintenance-free operation
- Wide-angle or vertical mechanical switch for small 10-1/2" diameter sumps
- Dual ball-bearing motor and additional lip seal provide durability and longer pump life
- Durable PSC motor for years of service
- Oil-filled PSC motor for maximum heat dissipation, continuous bearing lubrication
- Recessed vortex impeller for free flow of liquids and solids
- Thermal overload protection with automatic reset
- CSA Listed

