


BFPLUG

1. Locate the switch on the top corner of the unit.
2. Change the switch from 230 volt to 115 volt configuration.
3. Loosen the screw securing the junction box cover and remove the cover.
4. Pull out the four wires marked L1, L2, N, and G.
5. Connect with the supplied wire connectors the black L1 wire from the unit to the non ribbed L1 wire from the power cord. Connect with the supplied wire connectors the red L2 and white N wires from the unit to the ribbed or neutral from the power cord. Connect a wire connector to the green ground wire from the unit.
6. Ensure that all wire connections are tight.
7. Install the junction box cover and tighten the screw.

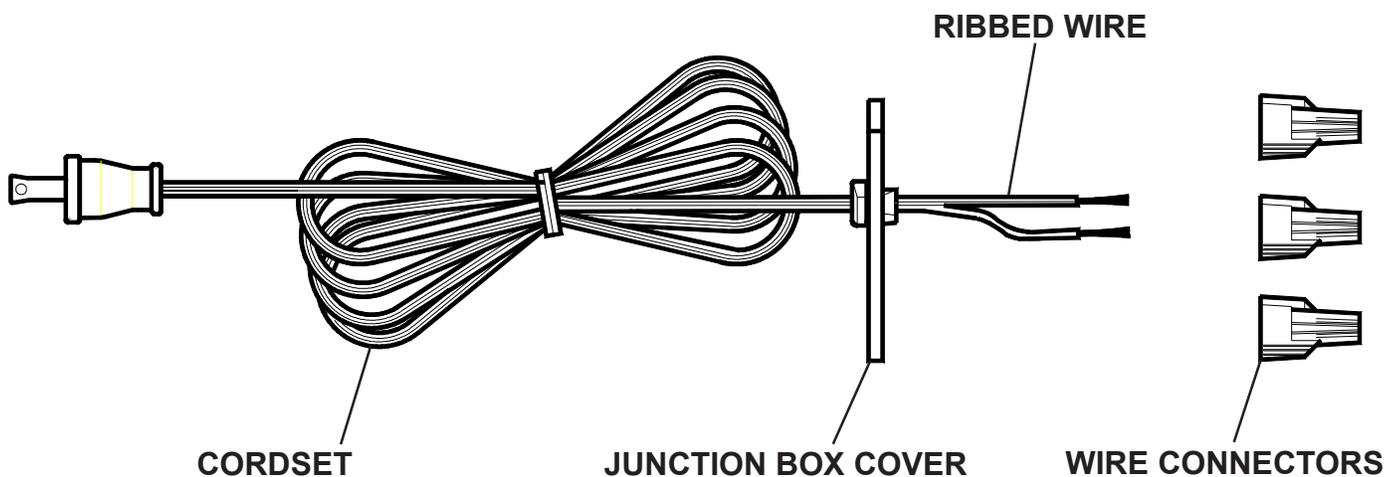

Dimplex

North America Limited

7206050100

1367 Industrial Road, Cambridge, Ontario N1R 7G8 Telephone: (519) 650-3630 fax: (519) 650-3651