



# Tercet® 5' Whirlpool Bath K-1160-CD



## Features

- Center drain.
- Integral lumbar support and armrests for comfort.
- Textured bottom surface.
- 60" (1524 mm) x 60" (1524 mm) x 21" (533 mm)

## Hydrotherapy

- Single-speed whirlpool offers six fully adjustable hydro-massage jets for water flow and direction.
- Pump with air switch for whirlpool.
- Multiple pump location options give you more choices for installation and access.

## Installation

- Drop-in

## Recommended Accessories

- K- 11677 Bath Drain
- K- 1491 Bath/Whirlpool Pillow
- K- 1601 Bath/Whirlpool Footstop
- K- 9696 Whirlpool 6-Jet Trim Kit



## Codes/Standards




ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
Greenguard UL 2818 - Gold  
CARB P2


## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes


*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond


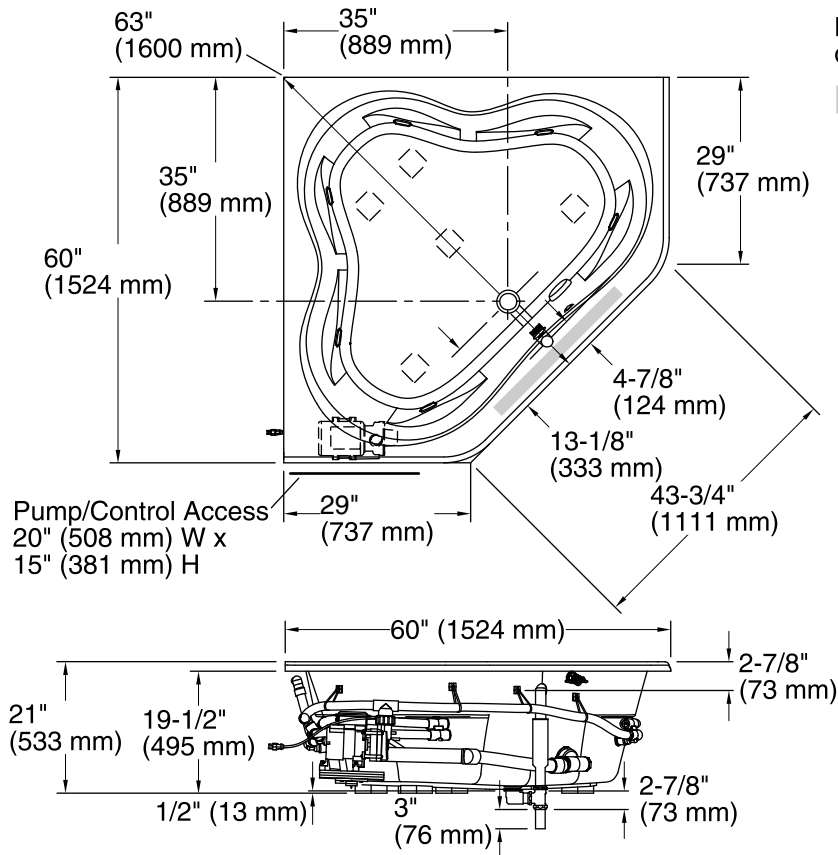


No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Recommended faucet area



Drop-In Rim Style Cut-Out Detail

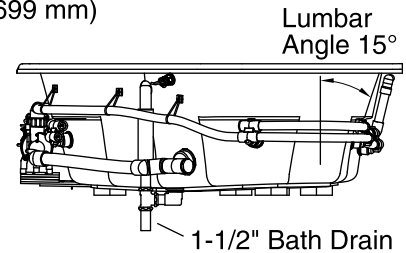

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

## Technical Information

All product dimensions are nominal.

Installation: Drop-in  
Drain location: Center  
Basin area, bottom: 52" x 38-3/4" (1321 mm x 984 mm)  
Basin area, top: 61" x 46-1/4" (1549 mm x 1175 mm)  
Weight: 127 lbs (57.6 kg)  
Minimum floor load: 39 lbs/ft² (190.4 kg/m²)  
Water depth: 15" (381 mm)  
Water capacity: 96 gal (363.4 L)  
Electrical component rating: Pump: 120 V, 7.5 A, 60 Hz  
Pump speed: Single

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.