

# OCTRON® CURVALUME® ECOLOGIC®

## Portfolio of Six-Inch U-bend Fluorescent Lamps



### Key Features & Benefits

- T8 u-bend options for 2' x 2' luminaires
- 700 and 800 Series lamps:
  - Up to 28,000 hours life (programmed rapid start)
  - Up to 24,000 hours life (instant start)
- 800XP **EX**tended Performance lamps:
  - Superior performance than 700 and 800 series lamps
  - Higher initial lumens, mean lumens and CRI
  - Up to 30,000 hours life (programmed rapid start)
  - Up to 26,000 hours life (instant start)
- 800XP SUPERSAVER lamps:
  - Energy saving replacement options for existing 32W T8 U-bend lamps
- 800XPS lamps:
  - Highest initial and mean lumens
  - Meet Consortium for Energy Efficiency (CEE) specifications qualify for utility incentives
- ECOLOGIC:
  - Designed to pass the Federal TCLP Test\*
- Lead-free glass, RoHS-Compliant\*\*
- Optimally paired with SYLVANIA QUICKTRONIC ballasts
  - QUICK 60+® system warranty

SYLVANIA OCTRON CURVALUME ECOLOGIC lamps are T8 U-bend lamps available in a choice of performance options to satisfy the needs of most general 2' x 2' lighting applications. OCTRON CURVALUME ECOLOGIC 700 Series lamps offer standard performance with CRI of 75 and up to 28,000 hours average rated life. OCTRON CURVALUME ECOLOGIC 800 Series lamps deliver higher initial and maintained lumens than 700 series lamps with CRI of 82 making them suitable for applications where improved color and light levels are desired. The 700 and 800 Series lamps are available in 32 watt types in an assortment of color temperatures.\*

OCTRON CURVALUME ECOLOGIC 800XP® lamps offer **EX**tended Performance with higher initial and mean lumens than 800 Series lamps, up to 20% longer lamp life and a CRI of 85. These lamps are also available in a choice of SUPERSAVER® 30W, 28W and 25W types that are energy saving replacements for the full wattage lamps. The excellent lumen maintenance of the XP lamps assures light levels will remain consistent over the life of the lamps.

OCTRON CURVALUME ECOLOGIC 800XPS® lamps yield over 8% higher lumens than standard 700 Series lamps and are available in a 5000K option for applications where a higher color temperature lamp is desired.

All SYLVANIA OCTRON CURVALUME ECOLOGIC lamps are designed to pass the Federal TCLP test criteria for classification as non-hazardous waste in most states. The lamps are optimally paired with QUICKTRONIC® electronic ballasts and covered by the QUICK 60+® System Warranty, the industry's first and most comprehensive lamp and ballast warranty.

\*700 Series lamps do not meet the minimum lumens per watt efficacy requirements of the Department of Energy 2009 General Service Fluorescent Rulemaking and will no longer be manufactured after July 14, 2012. The 800 Series lamp will be the base lamp type after this date.



\*SYLVANIA OCTRON T8 ECOLOGIC fluorescent lamps pass the Federal Toxicity Characteristic Leaching Procedure (TCLP)<sup>1</sup> criteria for classification as non-hazardous waste in most states<sup>2</sup>.

\*\* Comply with European Union Restriction of Hazardous Substances Directive (Directive/2002/EC)

<sup>1</sup> TCLP test results are based on NEMA LL Series standards and are available on request.

<sup>2</sup> Lamp disposal regulations may vary; check your local & state regulations.

### Product Family

Lamp	CRI	Color Temperature
FB032/700/6/ECO	75	3000K, 3500K, 4100K, 5000K
FB032/800/6/ECO	82	3000K, 3500K, 4100K
FB032/800XP/6/ECO	85	3000K, 3500K, 4100K, 5000K
FB032/800XPS/6/ECO	85	5000K
FB030/800XP/SS/6/ECO	85	3000K, 3500K, 4100K
FB028/800/XP/SS/6/ECO	85	3000K, 3500K, 4100K
FB025/800XP/SS/6/ECO	85	3500K, 4100K



## Specification Data

Fixture Description:	Type
Project/Job:	
SYLVANIA lamp:	
SYLVANIA ballast:	
Notes:	

## Application Information

### Applications

Recessed 2 x 2 luminaire

### Application Notes

1. Lamp starting is dependent on ballast. Operation below 50°F may affect lumen output or lamp operation.
2. For cold temperature applications, use in enclosed luminaires to maximize lumen output.

## Ordering Information

Item Number	Ordering Abbreviation	Watts	Bulb	Base	Leg Spacing	Rated Life				Initial Lumens <sup>1</sup>	Mean Lumens <sup>2</sup>	CCT	CRI
						Instant Start 3 hrs/start	Instant Start 12 hrs/start	Programmed 3 hrs/start	Rapid Start 12 hrs/start				
<b>FB032/700/6/ECO</b>													
22046	FB032/730/6/ECO	32	T8	Medium bi-pin	6"	15,000	24,000	20,000	28,000	2,750	2,475	3000K	75
22051	FB032/735/6/ECO	32	T8	Medium bi-pin	6"	15,000	24,000	20,000	28,000	2,750	2,475	3500K	75
22052	FB032/741/6/ECO	32	T8	Medium bi-pin	6"	15,000	24,000	20,000	28,000	2,750	2,475	4100K	75
22053	FB032/750/6/ECO	32	T8	Medium bi-pin	6"	15,000	24,000	20,000	28,000	2,625	2,365	5000K	75
<b>FB032/800/6 ECO</b>													
21663	FB032/830/6/ECO	32	T8	Medium bi-pin	6"	15,000	24,000	20,000	28,000	2,850	2,620	3000K	82
21670	FB032/835/6/ECO	32	T8	Medium bi-pin	6"	15,000	24,000	20,000	28,000	2,850	2,620	3500K	82
21671	FB032/841/6/ECO	32	T8	Medium bi-pin	6"	15,000	24,000	20,000	28,000	2,850	2,620	4100K	82
<b>FB032/800XP/6/ECO</b>													
22054	FB032/830XP/6/ECO	32	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,900	2,755	3000K	85
22055	FB032/835XP/6/ECO	32	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,900	2,755	3500K	85
22057	FB032/841XP/6/ECO	32	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,900	2,755	4100K	85
<b>FB032/800XPS/6/ECO</b>													
22168	FB032/850XPS/6/ECO <sup>3</sup>	32	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,980	2,800	5000K	85
<b>FB030/800XP/SS/6/ECO</b>													
22170	FB030/830XP/SS/6/ECO	30	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,800	2,630	3000K	85
22171	FB030/835XP/SS/6/ECO	30	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,800	2,630	3500K	85
22172	FB030/841XP/SS/6/ECO	30	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,800	2,630	4100K	85
<b>FB028/800XP/SS/6/ECO</b>													
22303	FB028/830XP/SS/6/ECO	28	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,590	2,435	3000K	85
22304	FB028/835XP/SS/6/ECO	28	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,590	2,435	3500K	85
22305	FB028/841XP/SS/6/ECO	28	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,590	2,435	4100K	85
<b>FB025/800XP/SS/6/ECO</b>													
22444	FB025/835XP/SS/6/ECO	25	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,350	2,210	3500K	85
22445	FB025/841XP/SS/6/ECO	25	T8	Medium bi-pin	6"	18,000	26,000	24,000	30,000	2,350	2,210	4100K	85

1. Initial lumens measured at 100 hours of operation.

2. Mean lumens measured at 40% of rated life


3. Consortium for Energy Efficiency (CEE) Qualified

## Ordering Guide

FB0	32	/	8	35	XP	/	SS	/	6	/	ECO
Fluorescent	Wattage:		8 = 82 or 85 CRI	35 = 3500K	XP = <b>E</b> Xtended		SUPERSAVER®		6" leg		ECOLOGIC®
Bent	25, 28, 30 or 32 Watts		7 = 75 CRI	30 = 3000K	Performance				spacing		
OCTRON®				41 = 4100K	XPS = <b>E</b> Xtended						
				50 = 5000K	Performance <b>S</b> uper						


## Dimensions

Lamp Type	(A) Maximum Overall Length (in.)	(B) Max. Base to Top of Lamp (in.)	(C) Leg Spacing Pin to Opposite Pin (in.)
FB032	23	22.6	6.0

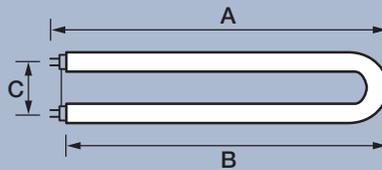

## Technical Information

Typical Fluorescent Lamp Mortality

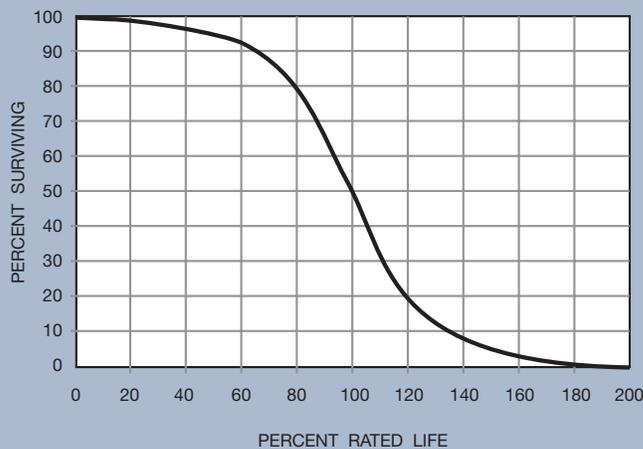

## Sample Specification

Lamp(s) shall be OCTRON® CURVALUME® (FB032, FB030, FB028, FB025) ECOLOGIC® lamps with 6-inch leg spacing. Lamps(s) shall be designed to pass the Federal TCLP test criteria. Lamp(s) shall have medium bi-pin bases. Lamp(s) shall have a color temperature of (3000K, 3500K, 4100K, or 5000K) and a CRI of (75, 82, or 85). Lamps shall have an average rated life of (15,000, 18,000, 20,000, or 24,000) hours when operated 3 hours/ start on (instant start, rapid start, programmed rapid start or PSX) ballasts. Lamps shall be operated on QUICKTRONIC® or QUICKTRONIC Professional electronic ballasts. Both lamp(s) and ballast(s) shall be covered by the QUICK 60+® warranty program.

### Warranty Information

QUICK 60+ warranty for SYLVANIA lamp and ballast combinations. Limited 30 or 36 month lamp warranty and 5 year ballast warranty is available if both lamps and ballasts are provided by OSRAM SYLVANIA. See the QUICK 60+ warranty for details and restrictions.

### United States

**OSRAM SYLVANIA**  
100 Endicott Street  
Danvers, MA 01923

### Trade

Phone: 1-800-255-5042  
Fax: 1-800-255-5043

### National Accounts

Phone: 1-800-562-4671  
Fax: 1-800-562-4674

### OEM/Special Markets

Phone: 1-800-762-7191  
Fax: 1-800-762-7192

### Display/Optic

Phone: 1-888-677-2627  
Fax: 1-800-762-7192

### SYLVANIA Lighting Services

Phone: 1-800-323-0572  
Fax: 1-800-537-0784

### Canada

**OSRAM SYLVANIA LTD.**  
2001 Drew Road  
Mississauga, ON L5S 1S4

### Trade

Phone: 1-800-263-2852  
Fax: 1-800-667-6772

### OEM/Special Markets/Display/Optic

Phone: 1-800-265-2852  
Fax: 1-800-667-6772

### SYLVANIA Lighting Services

Phone: 1-800-663-4268  
Fax: 1-866-239-1278

### Mexico

**OSRAM MEXICO**  
Headquarters  
Tultitlan/Edo de Mexico  
011-52-55-58-99-18-50

www.sylvania.com