


5225

15 Amp, 120 Volt, Duplex Style Single-Pole / 5-15R AC Combination Switch, Commercial Grade, Grounding, Side Wired, - Brown

With Leviton's extensive assortment of combination devices, you can fill a one-gang space with two switches, a switch and receptacle, even a switch and GFCI. From sensor guide lights to multi-purpose styles and Tamper-Resistant receptacles, we accommodate your every need. These devices come in a range of colors and are backed by a limited two-year warranty. Built to last and designed to save space, these attractively styled devices are at home in any setting.

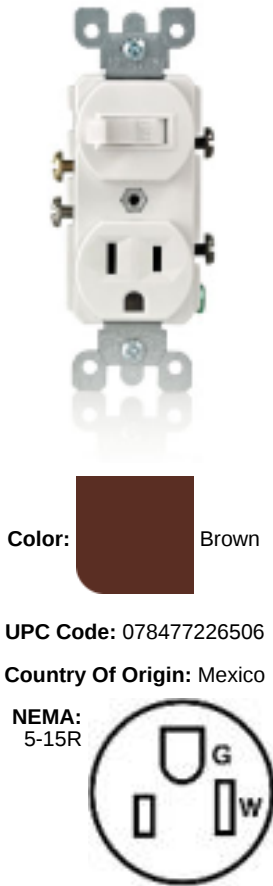

Color: Brown

UPC Code: 078477226506

Country Of Origin: Mexico

NEMA:
5-15R



Technical Information

AC Horsepower Ratings

HP Rating: 1/2HP-120V

Max. Amperage: 12 Amp

Electrical Specifications

Dielectric Voltage: Withstands 1500V for 1 minute

Grounding: Grounding

Overload UL20 Test: 100 cycles of OL at 4.8 times rated current

Receptacle Amperage: 15 Amp

Receptacle Voltage: 125V AC

Switch Amperage: 15 Amp

Switch Voltage: 120V AC

Temperature Rise: Maximum 30 degrees C rise

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 65°C

Material Specifications

Actuator Material: Thermoplastic

Body Material: Thermoplastic

Color: Brown

Strap Material: Steel

Mechanical Specifications

Product ID: Stamped on Strap

Terminal Accom.: 14-12 AWG

Terminal ID: Brass-Hot Black-Hot White-Neutral Green-Gnd

Termination: Side

Torque Range: 12-14 inch pounds

Product Features

Amperage: 15 A

Color: Brown

NEMA: 5-15R

Type: Duplex Style Combination Switch

Voltage: 120 VAC

Warranty: 2 Year Limited

Standards and Certifications

ANSI: C-73

CSA C22.2 No. 111: File #152105

NEMA: WD-1 & WD-6

NOM: 057


UL Standard: UL 20

Warranty: 2 Year Limited

Features and Benefits

- AC quiet switches have silver-cadmium oxide contacts and receptacles have double-wipe contacts for maximum conductivity
- All devices have grounding screw
- Side wired with terminal screws that accept up to #12 copper or copper-clad wire
- Fit standard wallboxes
- Break-off tabs on devices with AC quiet switches permit conversion to separate feeds
- Backed by a Limited Two-Year Warranty

Dimensional Diagram

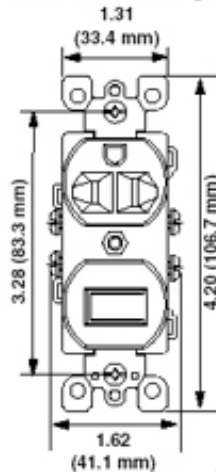

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

