



Buy it for looks. Buy it for life.®

*There is more than 1 version of this model.  
Page down to identify the version you have*

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes optional hot and cold temperature indicators
- Includes matching finish side spray
- Duralock™ quick connect installation

## OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open and clockwise to close
- Rotate cold side handle clockwise to open and counterclockwise to close


## FLOW

- Spout flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

## CARTRIDGE

- 1234 cartridge design with nonmetallic/nonferrous and stainless steel materials


## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

# Specifications

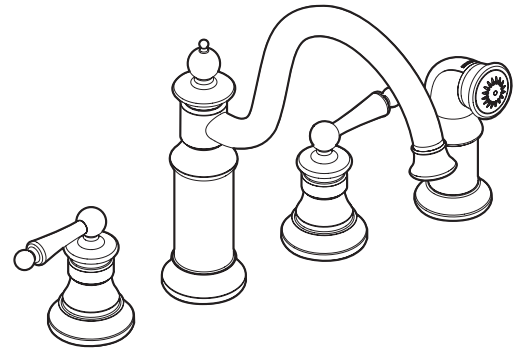


**WATERHILL™**  
**Two-Handle Kitchen Faucet**

**Models:** S712 series

**NOTE:** FOR DECK THICKNESS 1-1/2" to 3", USE SERVICE KIT #175709. VALVES INSTALL THROUGH 1-1/4" DIA. HOLE.

**NOTE:** SPOUT INSTALLS THROUGH 1-1/8" MIN. DIA. HOLE. VALVES INSTALL THROUGH 1-1/8" MIN. DIA. HOLE.

**NOTE:** MAXIMUM HOLE DIA. 1-1/2"

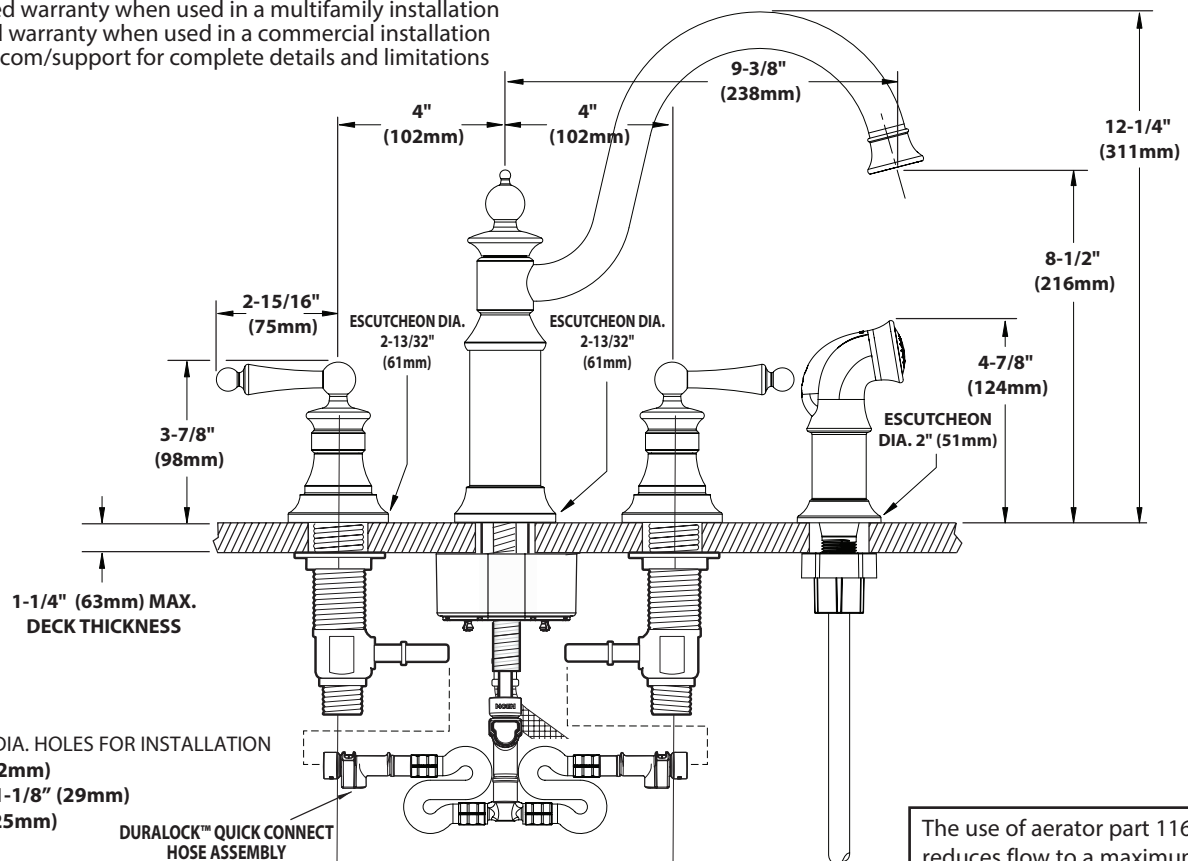

**NOTE:** MINIMUM DIA. HOLES FOR INSTALLATION

Spout = 1-1/4" (32mm)

Handle Valves = 1-1/8" (29mm)

Side Spray = 1" (25mm)

DURALOCK™ QUICK CONNECT  
HOSE ASSEMBLY

**CRITICAL DIMENSIONS**  
(DO NOT SCALE)

The use of aerator part 116711 reduces flow to a maximum of 1.5 gpm (5.7L/min.)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

**[www.moen.com](http://www.moen.com)**



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes optional hot and cold temperature indicators
- Includes matching finish side spray
- Quick connect installation

## OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open and clockwise to close
- Rotate cold side handle clockwise to open and counterclockwise to close


## FLOW

- Spout flow is limited to 2.0 gpm (7.6 L/min) at 60 psi

## CARTRIDGE


- 1224 cartridge design with nonmetallic/nonferrous and stainless steel materials

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handle


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

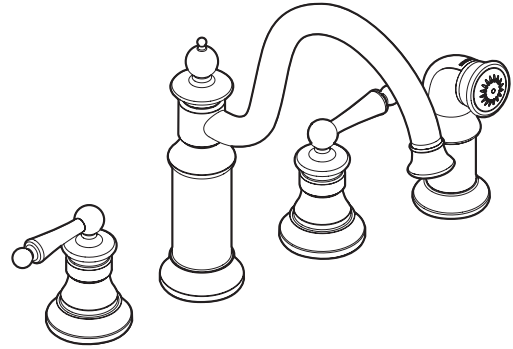

## WATERHILL™ Two-Handle Kitchen Faucet

Models: S712 series

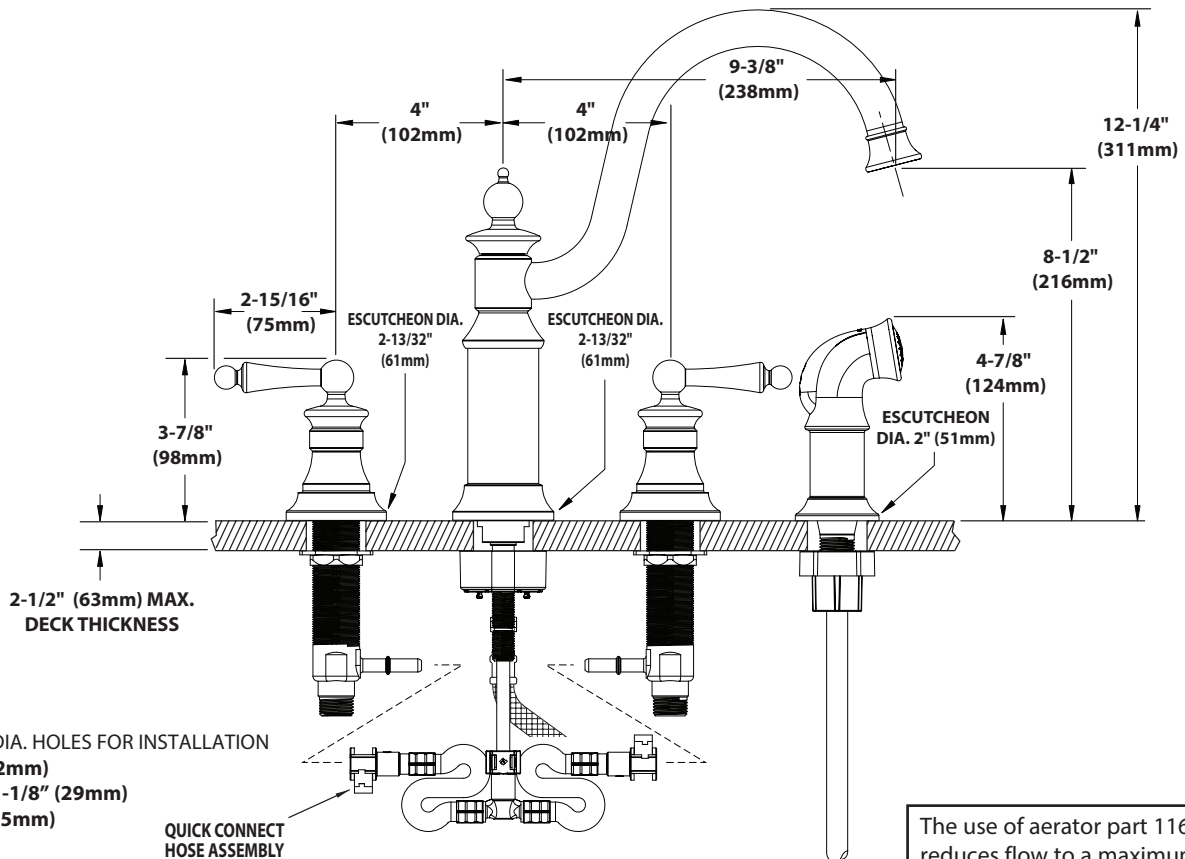

**NOTE:** MINIMUM DIA. HOLES FOR INSTALLATION

Spout = 1-1/4" (32mm)

Handle Valves = 1-1/8" (29mm)

Side Spray = 1" (25mm)

QUICK CONNECT  
HOSE ASSEMBLY

## CRITICAL DIMENSIONS (DO NOT SCALE)

The use of aerator part 116711 reduces flow to a maximum of 1.5 gpm (5.7L/min.)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)