



14" AND LARGER RESILIENT WEDGE VALVES KS-RW

KENNEDY VALVE

KENNEDY VALVE AWWA Resilient Wedge Gate Valves Meet or Exceed the Requirements of AWWA Standard C515

Size Range	Water Working Pressure psi	Bubble Tight Test psi	Hydrostatic Shell Test psi
AWWA 14"-24"	250	250	500
* UL/FM 14"-16"	200	200	400

* (NRS style only)

Available in either non-rising stem or outside screw & yoke.

Available End Connections & Size Range		Figure No.
FLG End (NRS)	14"-24"	7561SS
M.J.	14"-24"	7571SS
FLG & M.J.	14"-24"	7572SS
FLG End (OS&Y)	14"-24"	7566SS
M.J. for Tapping	14"-24"	7950SS
Tyton for D.I. & C900 PVC	16"	7901SS

Note: 18" and larger valves require gearing

Accessories

Indicator Posts	2" sq. Operating Nuts
Enclosed Gearing (14"-24")	Handwheels
"T" Handles	Extension Stems
Stem Guides	Floor Boxes
Electric Motor Actuators	Chain Wheels

Floorstands (non-rising stem)

MODEL KS-RW/2638 AWWA C515 REDUCED WALL DUCTILE IRON


Complies with applicable
requirements of AWWA C515

14"-16" R/W VALVE MJ ENDS GENERAL DIMENSION

KENNEDY VALVE

MODEL KS-RW/2638

7571SS

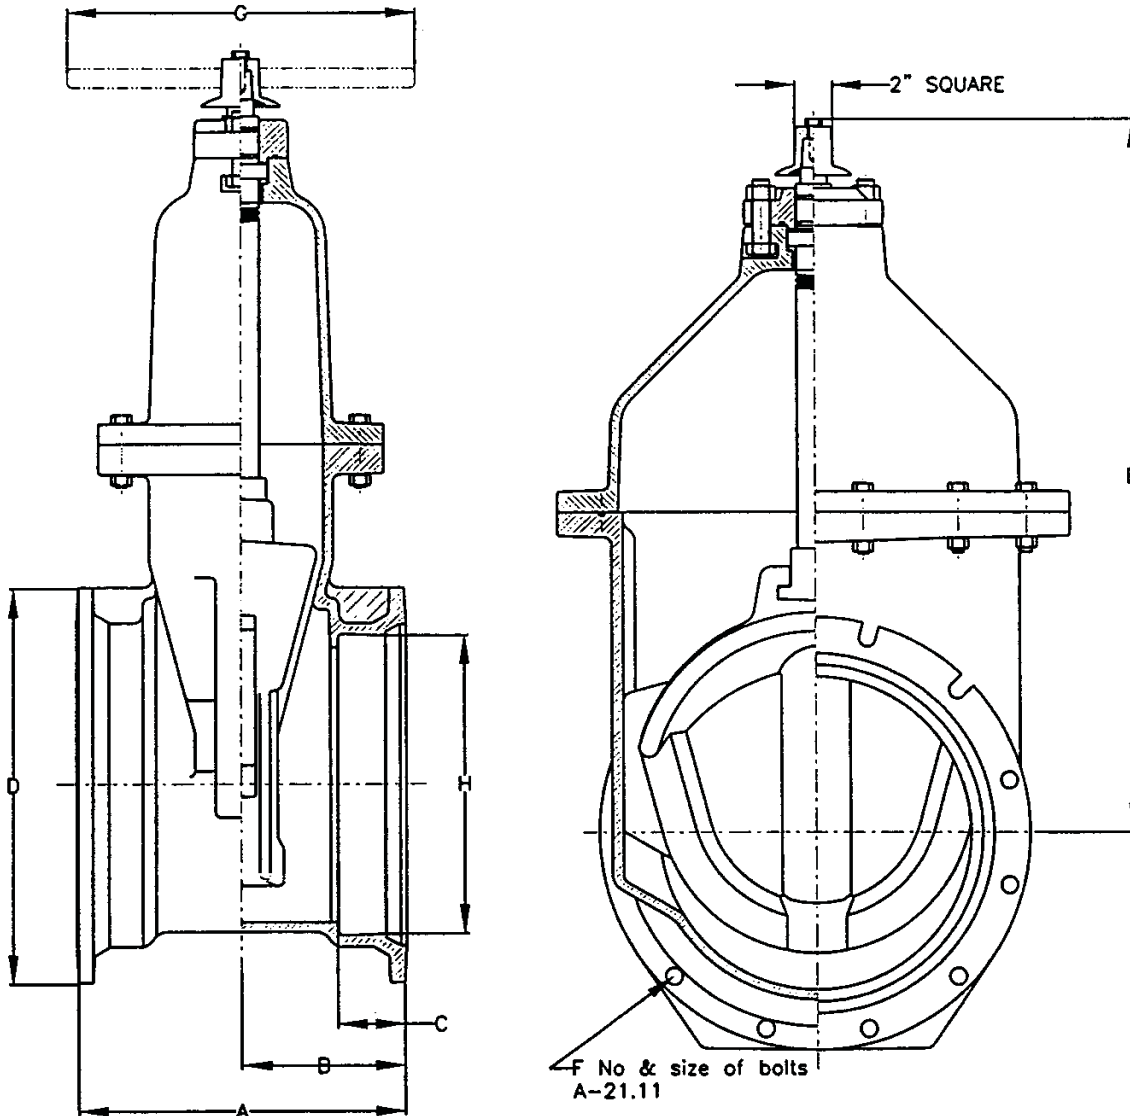

VALVE SIZE	A	B	C	D	E	F	G	H
14	17	8.5	3.5	20.25	37.75	10 3/4	18	14 1/4
16	17	8.5	3.5	22.5	37.75	12 3/4	18	16 1/4