



Consonance®

6' Whirlpool Bath

K-1111-VLN



Features

- End drain.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Two pillows for added comfort.
- 69-1/4" (1759 mm) x 69-1/4" (1759 mm) x 24" (610 mm)

Material

- Acrylic

Hydrotherapy

- Two variable-speed pumps for adjusting hydromassage intensity.
- Two built-in 1500 W heaters.
- Six fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Twenty sequencing Bodyssage™ backjets.
- Effervescent bubbles with eight ports.
- Two lighted keypad controls.
- Two remote controls.

Installation

- Drop-in or under-mount.
- Corner layout minimizes footprint without compromising bathing area.

Required Accessories

K- 9696 Whirlpool 6-Jet Trim Kit

Recommended Accessories

K- 588 Under-mount Installation Kit

K- 1601 Bath/Whirlpool Footstop

7167-AF



Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

CSA C22.2 No. 218.2

Greenguard UL 2818 - Gold



KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit

No change in measurements if connected with drain illustrated. (K-7167-AF)

Recommended faucet area.

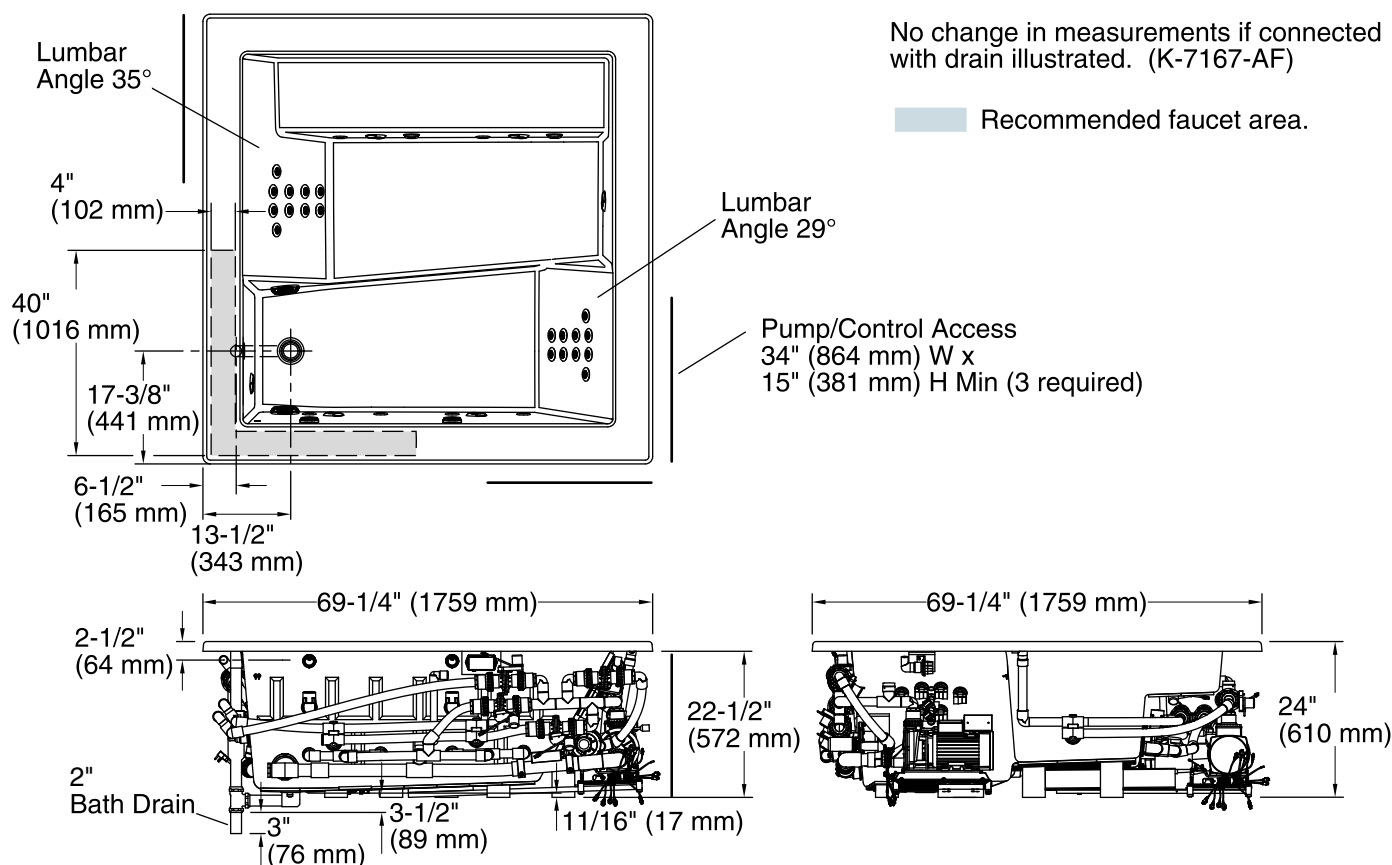

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 220-240 V, 20 A, 50/60 Hz

Pump, Heater: 220-240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Corner, Drop-in, Under-mount

Drain location: End

Basin area, bottom: 45" x 43" (1143 mm x 1092 mm)

Basin area, top: 57" x 57" (1448 mm x 1448 mm)

Weight: 340 lbs (154.2 kg)

Minimum floor load: 54 lbs/ft² (263.7 kg/m²)

Water depth: 19-1/2" (495 mm)

Water capacity: 170 gal (643.5 L)

Cutout: Drop-in, 68" x 68" (1727 mm x 1727 mm)

Electrical component rating: Pump: 220-240 V, 11 A, 50/60 Hz
Heater: 220-240 V, 6.25 A, 50/60 Hz

Pump: 220-240 V, 11 A, 50/60 Hz
Heater: 220-240 V, 6.25 A, 50/60 Hz

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.