

Whether you're looking for a below ground septic or cistern tank or an above ground water tank, you're sure to find it among our wide selection.

Our rotational molding process allows for a one-piece, seamless tank that is rugged and impact resistant. Our tanks are manufactured to strict quality guidelines to ensure years of high-performance use.

Quality, price, product line and leading edge technology make

NORWESCO

North America's largest manufacturer of rotationally molded tanks.

THE WORLD'S LEADING MANUFACTURER of polyethylene tanks, NORWESCO has been producing polyethylene septic tanks since 1980. With that kind of experience, NORWESCO offers you proven products that you can count on for years of dependable, trouble-free service. NORWESCO septic tanks are backed by a full three-year warranty and have been approved by state and local health departments from coast to coast. Where applicable, NORWESCO septic tanks have been approved by both IAPMO™ and CSA™.

Please consider the following features when you are looking to purchase a septic tank and you'll find that NORWESCO tanks will exceed your expectations when it comes to performance and longevity.

✔ EASE OF INSTALLATION

For septic system replacement and new home construction, NORWESCO's polyethylene septic tanks are designed for durability and quick, easy installation. Any NORWESCO septic tank can be transported to the job site in a pickup truck and carried by just two people. This enables you to install the tank on your schedule.

✔ ROTATIONALLY MOLDED, ONE-PIECE CONSTRUCTION

NORWESCO septic tanks are manufactured by means of the rotational molding process which produces a one-piece, seamless, watertight tank.

✔ SUPERIOR STRENGTH DESIGN

The rib design and rib placement provide superior structural integrity to the tank.

✔ EXCELLENT CHEMICAL RESISTANCE

Polyethylene is unaffected by soil chemicals and by the chemicals and gases present in sewage, so NORWESCO septic tanks will not rust or corrode and require no additional coatings as other tanks do. NORWESCO's strict quality guidelines ensure an environmentally safe septic tank.

✔ SINGLE OR DOUBLE COMPARTMENT

We offer tanks in both single and double compartment (2/3 - 1/3). Prior to installing any septic tank, you should check with your local health department for specific requirements that your county or state may enforce.

✔ READY FOR INSTALLATION


NORWESCO septic tanks (750 gallons and larger) are shipped to you ready for installation. Our pre-plumbed tanks include tee assemblies installed at the inlet and outlet. Tees are sized/cut according to each state code so the tank that you receive will be ready for installation.

✔ WATERTIGHT LID

NORWESCO septic tanks come outfitted with a watertight lid. This improved design is significantly stronger than other lid designs. When leaving our factory, the lid is attached to the tank with stainless steel screws and comes standard with a gasket between the lid and the tank. The gasket provides a watertight seal at the lid area.

✔ ACCESSORIES AVAILABLE

Manhole extensions and lid-riser combinations are available to bring tank access to grade and to meet code specifications.

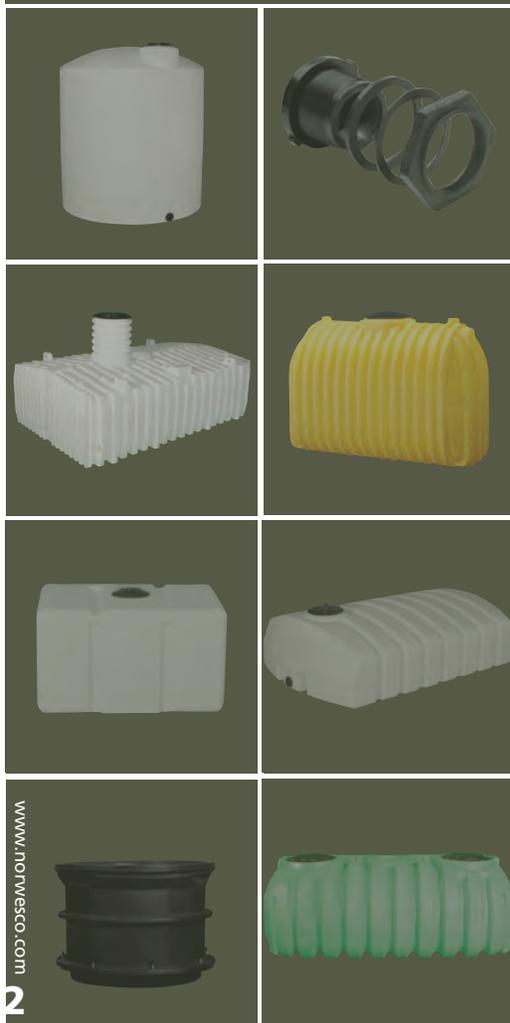

Strength, Convenience, Value

NEW One Piece, Seamless Low Profile Septic & Cistern Tanks

NORWESCO Low Profile Septic Tanks are molded in one piece, requiring no additional assembly, reducing installation time and effort.

- Rotationally molded rugged, one-piece tank with no seams to leak.
- No assembly required, reducing installation time and effort.
- No special backfill or water filling required during installation.
- May be pumped dry during pump-outs.
- May be installed with 6" to 36" of cover.
- Suitable for use as a septic tank or pump tank and may also be used for non-potable water.
- Access openings and lids accept NORWESCO manhole extension, double-wall corrugated pipe and ribbed PVC pipe.
- Tanks are available with PVC tees and gaskets supplied loose or with installed PVC tees and septic adapters.
- For installation details, please visit www.norwesco.com.

LOW PROFILE SEPTIC TANKS

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	MANHOLE DIAMETER	COMPARTMENT AVAILABILITY
500	97"	48"	42"	1-20" (62408)	Single
750	92"	60"	51"	2-20" (63672)	Single or Double
1000	127"	60"	51"	2-20" (63672)	Single or Double
1250	157"	60"	51"	2-20" (63672)	Single or Double
1500	157"	69"	51"	2-20" (63672)	Single or Double

THE BRUISER SEPTIC TANKS

The Bruiser offers the same features as our standard septic tanks but it may be used as a septic tank as well as a holding tank, pump chamber or a potable water tank (single compartment only).

- No special backfill is needed. Native soil may be used.
- Use where delivery of special backfill mixtures and water is next to impossible.
- No need to fill with water during initial installation.
- Pre-plumbed according to state code.
- Accepts 4" effluent filters.
- Suitable for use as a potable water tank (single compartment only).
- For installation details, please visit www.norwesco.com.

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	HEIGHT TO INLET	HEIGHT TO OUTLET	MANHOLE DIAMETER	COMPARTMENT AVAILABILITY
1000	102"	60"	63"	51"	48"	2-20" (62408)	Single or Double
1250	116"	55"	70"	59"	56"	2-20" (62408)	Single or Double
1500	135"	55"	70"	59"	56"	2-20" (62408)	Single or Double

ACROSS THE UNITED STATES AND CANADA there are a number of health code requirements that our tanks must meet. These codes are regulated by the state, county or province where you are located. To aid you in determining which tank you need, please consult with your local health department.

PLEASE NOTE:

Part numbers vary depending upon state approvals. Please contact Norwesco Customer Service for part numbers/information. Tank availability may vary according to manufacturing location. Please contact Norwesco Customer Service or your Norwesco distributor for specific details. Tank dimensions and capacities may vary slightly and are subject to change without notice.



500 1-MH LOW PROFILE

1000 2-MH LOW PROFILE

1250 2-MH LOW PROFILE

1500 2-MH LOW PROFILE

1000 2-MH BRUISER

1500 2-MH BRUISER

ACROSS THE UNITED STATES AND CANADA there are a number of health code requirements that our tanks must meet. These codes are regulated by the state, county or province where you are located. To aid you in determining which tank you need, please consult with your local health department.

LEGACY SEPTIC TANKS

NORWESCO Septic Tanks are for **Below Ground Use Only**. Using the tanks above ground may result in deformation of the tank. These tanks cannot be used as pump tanks and must be kept full at all times.

■ For installation details, please visit www.norwesco.com.

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	HEIGHT TO INLET	HEIGHT TO OUTLET	MANHOLE DIAMETER	COMPARTMENT AVAILABILITY
500	101"	51"	47"	36"	33"	1-20" (62408)	Single
750	96"	52"	62"	54"	51"	1-20" (62408)	Single
750	96"	48"	63"	52"	49"	2-20" (62408)	Single
1000	102"	60"	63"	51"	48"	2-20" (62408)	Single or Double
1250	116"	55"	70"	59"	56"	2-20" (62408)	Single or Double
1500	135"	55"	70"	59"	56"	2-20" (62408)	Single or Double

BELOW GROUND SPHERICAL PUMP TANKS

Our spheres are designed to be used as a holding tank or pump tank. Unlike our Legacy septic tanks, these tanks may remain in the ground when empty. These tanks are furnished with manhole covers and include a molded-in elevated pump stand on the bottom of the tank.

GALLON CAPACITY	DIAMETER	OVERALL HEIGHT	HEIGHT TO INLET	HEIGHT TO OUTLET	MANHOLE DIAMETER	PART NO.
200 Sphere	47"	56"	38"	38"	1-20" (62408)	43745
225 Sphere	48"	50"	39"	39"	1-20" (63672)	43551
300 Sphere	54"	54"	43"	40"	1-20" (62408)	41319
300 Sphere	51"	52"	43"	40"	1-20" (63672)	43552
500 Sphere	64"	67"	56"	53"	1-20" (62408)	40785
525 Sphere	64"	62"	48"	45"	1-20" (63672)	44831

POLYETHYLENE WATER STORAGE TANKS

Ideal for instances when drinking water must be hauled in or if a well does not meet consumption needs. NORWESCO tanks are manufactured using resins that meet FDA specifications to ensure safe storage of potable water. Where applicable, NORWESCO's Water Storage Tanks and Below Ground Cisterns have been certified under ANSI/SNF™ Standard 61. Cistern spheres may remain in the ground when empty. The ribbed tanks (600 gallon and larger) need to be kept ¼ full.

BELOW GROUND STORAGE TANKS

Typically used to store water – both potable and non-potable. They can also be used as a large capacity septic tank or sewage holding tank depending on local codes. The end ribs will accept fittings up to 4" in size. Integral columns in the tank provide excellent structural strength.

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	MANHOLE DIAMETER	PART NO.
2000	126"	98"	51"	1-20" (63672)	44593
2000*	126"	98"	51"	1-20" (62408)	42559
2500	159"	99"	51"	1-20" (63672)	44079
2600	155"	99"	51"	1-20" (63672)	43770
2650**	155"	99"	81"	1-20" (63672)	43771
3525	211"	102"	51"	1-20" (63672)	44390

* Only available out of Washougal, WA. **Tank includes molded on manhole extension.

PLEASE NOTE:

Part numbers vary depending upon state approvals. Please contact Norwesco Customer Service for part numbers/information. Tank availability may vary according to manufacturing location. Please contact Norwesco Customer Service or your Norwesco distributor for specific details. Tank dimensions and capacities may vary slightly and are subject to change without notice.

NEW LOW PROFILE CISTERN TANKS

Our new below-ground low profile cisterns have the same features as our low profile septic tanks.

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	MANHOLE DIAMETER	PART NO.
575 LP Cistern	97"	48"	42"	1-20" (62408)	44360
1175 LP Cistern	127"	60"	51"	2-20" (63672)	44405
1425 LP Cistern	157"	60"	51"	2-20" (63672)	44406
1450 LP Cistern	157"	60"	51"	2-20" (63672)	43549
1725 LP Cistern	157"	69"	51"	2-20" (63672)	44407
1750 LP Cistern	157"	69"	51"	2-20" (63672)	43550

LEGACY CISTERN TANKS

Our below-ground Legacy cisterns have the same features as our Legacy septic tanks.

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	MANHOLE DIAMETER	PART NO.
600 Cistern	101"	51"	47"	1-20" (62408)	41328
1200 Cistern	102"	60"	63"	2-20" (62408)	41329
1400 Cistern	116"	55"	70"	2-20" (62408)	41893
1700 Cistern	135"	55"	70"	2-20" (62408)	41330

BELOW GROUND SPHERICAL CISTERN TANKS

GALLON CAPACITY	DIAMETER	OVERALL HEIGHT	MANHOLE DIAMETER	PART NO.
225 Cistern Sphere	48"	50"	1-20" (63672)	44827
250 Cistern Sphere	47"	56"	1-20" (62408)	43746
300 Cistern Sphere	51"	52"	1-20" (63672)	44828
325 Cistern Sphere	54"	54"	1-20" (62408)	41321
525 Cistern Sphere	64"	62"	1-20" (63672)	44829
550 Cistern Sphere	64"	67"	1-20" (62408)	40856

■ For installation details, please visit www.norwesco.com

BELOW GROUND TANK ACCESSORIES

PART NO.	DESCRIPTION	LOW PROFILE Septic, Cistern	LEGACY Septic, Cistern, Bruiser, Spherical Pump	HOLDING 2000 (44593), 2500, 2600, 3525	HOLDING 2000 (42559)	HOLDING 2650
63514	Manhole extension (6" H x 20" D)		■		■	
62397	Manhole extension (15" H x 20" D)		■		■	
62396	Manhole extension (24" H x 20" D)		■		■	
63832	Manhole extension (6" H x 20" D)	■	■	■	■	
64159	Manhole extension (6" H x 20" D) with 20" safety lid	■	■	■	■	
63833	Manhole extension (15" H x 20" D)	■	■	■	■	
63834	Manhole extension (24" H x 20" D)	■	■	■	■	
62395	Lid and riser combination (25" H riser pipe x 12" D)		■		■	
63830	Lid riser (36" H x 6" D)	■	■	■	■	
63831	Lid riser, offset (23" H x 12" D)	■	■	■	■	
62408	20" Domed tank lid with gasket		■		■	
63672	20" Low profile lid with gasket	■		■		■
62942	Ethafoam gasket for extensions, risers or 62408 domed lid	■	■	■	■	
63839	Self-adhesive rubber gasket for 20" low profile lid (63672)	■		■		■
63870	Stainless steel self-tapping screw, #14 x 1 3/4", for 20" low profile extensions or risers (8 required)	■		■		
62406	Stainless steel self-tapping screw, #14 x 1 1/4", for 20" lids (4 needed for 62408 lid, 6 for 63672 lid, 4 for 63514, 62397 and 62396 extensions)	■	■	■	■	■
63564	Tamper proof screw kit for tanks installed in NM & WI (includes 8 stainless steel self-tapping childproof screws (1/4" x 1 1/4") and 1 square recess bit) for 20" lids*	■	■	■	■	■
63491	4" Tuf-Tite PVC inlet/outlet tee					
63490	4" Inlet/outlet gasket					
61765	SDR35/Schedule 40 gasket kit (2 each)					

*One (1) Tamper proof screw kit needed for 62408 lid. Two (2) Tamper proof screw kits needed for 63672 lid.

PLEASE NOTE:

Tank and accessory availability may vary according to manufacturing location. Please contact Norwesco Customer Service or your Norwesco distributor for specific details. Tank dimensions and capacities may vary slightly and are subject to change without notice.



ABOVE GROUND FLAT BOTTOM UTILITY

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	OUTLET/DRAIN SPECIFICATION	FILL OPENING	PART NO.
NEW 300 Low Profile*	95"	56"	19"	–	8"	44233
NEW 500 Low Profile*	130"	52"	23"	–	8"	44643

*Limited availability. For availability details please visit our website at www.norwesco.com.

ABOVE GROUND LOAF TANKS

GALLON CAPACITY	LENGTH	WIDTH	OVERALL HEIGHT	OUTLET/DRAIN SPECIFICATION	FILL OPENING	PART NO.
50 Loaf α *	41"	27"	17"	–	8"	43610
100 Loaf α *	41"	27"	30"	–	8"	43611
200 Loaf*	48"	36"	29"	–	8"	43612
300 Loaf*	63"	42"	30"	–	8"	43613
500 Loaf*	92"	48"	31"	–	8"	43843

α May ship UPS.

*Limited availability. For availability details please visit our website at www.norwesco.com.

ABOVE GROUND HORIZONTAL TANKS

GALLON CAPACITY	LENGTH	DIAMETER	OVERALL HEIGHT	OUTLET/DRAIN SPECIFICATION	FILL OPENING	PART NO.	BAND PART NO.
35 Horizontal α	29"	20"	23"	$\frac{3}{4}$ "	5"	45223	60520
55 Horizontal α	34"	23"	26"	$\frac{3}{4}$ "	5"	41873	61745
65 Horizontal α	43"	23"	26"	$\frac{3}{4}$ "	5"	45191	61745
125 Horizontal	41"	32"	35"	2"	8"	40298	61744
225 Horizontal	49"	38"	41"	2"	8"	40299	60478
325 Horizontal	68"	38"	43"	2"	16"	40217	60478
525 Horizontal ∞ *	71"	49"	54"	2"	16"	40181	60057
3135 Elliptical Leg*	150"	88"W	80"	3"/2"	16"	40686	‡

Bands are optional, 2 per tank with the **exception of 3135 Elliptical Leg** which requires 4 support bands.

α May ship UPS

∞ The 525 gallon tank requires full length support.

‡This tank requires full length support as well as 4 support bands. Band part number is 62097 (OH, GA) or 63620 (CA, UT, MN, OK, TX).

*Limited availability. For availability details, please visit our website at www.norwesco.com.

ABOVE GROUND PICKUP TANKS

GALLON CAPACITY	TOP WIDTH OR DIAMETER	BOTTOM WIDTH OR DIAMETER	OVERALL HEIGHT	OUTLET/DRAIN SPECIFICATION	FILL OPENING	PART NO.
210 Pickup	60"/51"	48"/39"	29"	2"	8"	40300
325 Pickup	62"	49"	33"	2"	8"	40160
425 Pickup	65"	49"	39"	2"	8"	40102

PLEASE NOTE:

Tank availability may vary according to manufacturing location. Please contact Norwesco Customer Service or your Norwesco distributor for specific details. Tank dimensions and capacities may vary slightly and are subject to change without notice.



200 LOAF



300 LOAF



500 LOAF



55 HORIZONTAL



125 HORIZONTAL



3135 ELLIPTICAL LEG



210 PICKUP

ABOVE GROUND VERTICAL STORAGE TANKS

Vertical storage tanks are most frequently used for bulk storage and mobile nursing applications. Our selection of above-ground vertical tanks feature tie down slots, built-in graduated gallonage indicators, offset fill-well and self-vented, slosh-proof lids. An installed bulkhead fitting is standard on the above-ground vertical tank. Fittings are available in a full range of sizes to help adapt the tank to suit specific applications. Please refer to pages 10 and 11 for accessory items.

GALLON CAPACITY	DIAMETER	OVERALL HEIGHT	OUTLET/DRAIN SPECIFICATION	FILL OPENING	PART NO.
25 Vertical □	18"	29"	¾"	5"	41867
50 Vertical □	18"	53"	¾"	5"	41865
65 Vertical □	23"	43"	1¼"	8"	45192
75 Vertical □	23"	49"	1¼"	8"	41863
100 Vertical □	28"	43"	1¼"	8"	41861
105 Vertical □	23"	63"	2"	8"	40803
120 Vertical*	38"	31"	1¼"	5"	40318
150 Vertical	30"	56"	1¼"	8"	41859
160 Vertical*	28"	69"	2"	8"	44536
165 Vertical	31"	56"	2"	16"	40281
200 Vertical	30"	72"	2"	8"	41856
210 Vertical	32"	67"	2"	16"	47401
220 Vertical*	42"	44"	1¼"	5"	40320
225 Vertical*	31"	77"	2"	8"	44538
250 Vertical	30"	89"	2"	8"	41854
300 Vertical	35"	79"	2"	16"	40213
500 Vertical*	48"	73"	2"	16"	40148
550 Vertical	67"	44"	2"	16"	40023
1000 Vertical*	64"	80"	2"	16"	40152
1100 Vertical	87"	53"	2"	16"	40070
1100 Vertical G*	87"	53"	2"	16"	42591
1550 Vertical	87"	67"	2"	16"	40235
1550 Vertical G*	87"	67"	2"	16"	42595
2100 Vertical*	87"	89"	2"	16"	40178
2500 Vertical	95"	91"	2"	16"	40051
3000 Vertical	95"	109"	2"	16"	40754
5000 Vertical	102"	152"	3"/2"	16"	40164
6100 Vertical*	119"	140"	3"/2"	16"	40659
6500 Vertical*	119"	150"	3"/2"	16"	40224
6500 Vertical*	120"	147"	3"/2"	16"	42315

*Limited availability. For availability details please visit our website at www.norwesco.com.

□May ship UPS. G=Gusset Top.



ABOVE GROUND WATER STORAGE TANKS - BLACK OR DARK GREEN

NORWESCO water tanks are manufactured using resins that meet FDA specifications to ensure safe storage of potable water. The black or green color limits light penetration, which reduces the growth of water-borne algae. These tanks are rated at 8 pounds per gallon, which means that they are for WATER STORAGE ONLY! They should not be used for chemicals, fertilizers or any other product. Where applicable, the tanks will carry the NSF approval. Please contact your distributor for more specific information regarding NSF approval.

GALLON CAPACITY	DIAMETER	OVERALL HEIGHT	FILL OPENING	BOTTOM FITTING	TOP FITTING	BLACK PART NO.	DK GREEN PART NO.	CA GREEN PART NO.
120	38"	31"	5"	2"	1½"	43858	43860	43862
165∞	31"	56"	16"	2"	–	43864	43866	43868
200∞	30"	72"	8"	2"	–	44107	–	44109
220	42"	44"	5"	2"	1½"	43870	43872	43874
305	46"	50"	16"	2"	1½"	40702	40863	41362
500	48"	73"	16"	2"	1½"	43101	43105	43103
550	67"	44"	16"	2"	1½"	40703	40864	41364
600	64"	50"	8"	2"	1½"	43800	43802	–
1000	64"	80"	16"	2"	1½"	40892	41686	43878
1000	72"	66"	16"	2"	1½"	44113	–	44115
1075	87"	51"	16"	2"	1½"	43804	43806	–
1100	87"	53"	16"	2"	1½"	40704	40865	41365
1350	71"	88"	16"	2"	1½"	40860	40858	–
1500	95"	58"	16"	2"	1½"	42038	–	42037
1525	93"	62"	16"	2"	1½"	43808	43810	–
1550	87"	67"	16"	2"	1½"	40627	40866	41368
2000	90"	84"	16"	2"	1½"	44129	44131	–
2100	87"	89"	16"	2"	1½"	44411	44413	44415
2450 NEW	96"	87"	16"	2"	1½"	44656	44658	–
2500	95"	91"	16"	2"	1½"	40631	40867	41370
2500	102"	79"	22"	2"	1½"	42040	44133	42039
2550	93"	95"	16"	2"	1½"	43812	43814	–
2950 NEW	96"	101"	16"	2"	1½"	44660	44662	–
3000	95"	109"	16"	2"	1½"	40635	40868	41372
3000	102"	93"	16"	2"	1½"	42042	42604	–
3000	102"	93"	22"	2"	1½"	43140	44135	42041
3450 NEW	96"	120"	16"	2"	1½"	44664	44666	–
4995 NEW	142"	88"	22"	2"	1½"	44247	44249	–
5000	102"	152"	16"	2"	1½"	40641	40870	41375
5000 Peanut Can	119"	112"	22"	2"	1½"	42044	–	42043
5000 Tuna Can	141"	86"	22"	2"	1½"	40943	–	41377
6500∞	119"	150"	16"	2"	–	43876	–	43880
6600	144"	101"	22"	2"	1½"	44117	–	44119
7750	144"	122"	22"	2"	1½"	44121	–	44123
10000∞	141"	160"	22"	2"	–	43132	41379	–
11000∞	144"	167"	22"	2"	–	44013	44023	–
12000∞ NEW	141"	193"	22"	3"/2"	–	44810	44812	–
15500∞ NEW	141"	244"	22"	3"/2"	–	44814	44816	–

Limited availability. For availability details please visit our website at www.norwesco.com.

∞Includes one bottom fitting only



HIGH DENSITY POLYETHYLENE LIDS

DESCRIPTION	ITEM CODE	PART NO.
22" Lid and ring with air vent		63679
22" Lid, ventless with ring		63863
Vent for 22" lid (63679)		64150
16" Lid and ring with blue snap-in vent	A	63485
16" Lid and ring with 3" center thread		63868
16" Lid, ventless with ring		60367
16" Lid, ventless	B	60365
16" Ring only		60012
Ethafoam gasket for 16" non-hinged lid		62941
Blue snap-in vent for 16" lid (63485)		63539
8" Lid with blue snap-in vent	C	63480
Blue snap-in vent for 8" lid (63480)		63482
5" Lid with ball check air vent	D	63484
5" Lid with 2" FPT (does not include vent cap)		63264
EPDM gasket for 5" lid (63264 or 63484)		60366

HINGED LID

This lid is manufactured from a co-polymer material for strength, durability and excellent chemical resistance. Our unique locking tab allows you to easily slip a padlock through it and secure your lid from theft or spills. The lid is interchangeable with a standard 16" lid and ring assembly if you choose to replace your existing lid.

- Easy open/close – opens a full 180 degrees.
- Comes complete with a baffle vent assembly, allowing for adequate venting when bottom filling your tank.

DESCRIPTION	ITEM CODE	PART NO.
22" Complete lid assembly (hinged lid with ring and vent)	E	63874
16" Complete lid assembly (hinged lid with ring and vent)	E	62532

HINGED LID REPAIR PARTS

DESCRIPTION	PART NO.
16" hinged lid with vent assembly, without ring	62826
16" hinged ventless lid, with ring	63390
Vent assembly	62827
Ring assembly	62828
Hinge assembly	62829
EPDM O-ring gasket for 16" hinged lid	62830
Neoprene O-ring for 16" hinged lid ring	62831

LID ACCESSORIES AND REPAIR KIT

DESCRIPTION	PART NO.
2" MPT vent cap with poly screen	63266
2" MPT vent cap, anti-vortex, without screen	63316
3" MPT vent cap with poly screen	63845
Stainless steel screw for 8" and 16" rings	60081
18" Lanyard for 8" lid and 16" non-hinged lid (tethers lid to tank)	62531
Strainer basket for 16" fill-opening (7" depth)	67374
Poly welding gun and rod	60221
Poly welding rod, natural 30'	61879
Poly welding rod, black 30'	64160

HINGED LID
Shown open
and closed

Strainer
Basket

Poly
Welding
Gun

Lanyard

POLYPROPYLENE BULKHEAD FITTINGS / EPDM OR VITON GASKETS

Norwesco's polypropylene fittings come standard with an EPDM gasket. Viton gaskets are available as an option when EPDM may not be suitable for your application. The 2" stainless steel bulkhead fitting comes standard without a gasket.

DESCRIPTION	HOLE SIZE REQUIRED IN TANK FOR INSTALLATION	ITEM CODE	PART NO.
½" Heavy duty double threaded polypropylene fitting	17/16"	A	62834
¾" Double threaded polypropylene fitting	17/16"	A	60401
EPDM gasket for ½" and ¾" (62834 and 60401)			60402
Type B Viton gasket for ½" and ¾" (62834 and 60401)			60360
¾" Heavy duty double threaded polypropylene fitting	15/8"	A	62798
EPDM gasket ¾" (62798)			62799
Type B Viton gasket for ¾" (62798)			62800
1" Double threaded polypropylene fitting	2¼"	A	60427
1¼" Double threaded polypropylene fitting	2¼"	A	60403
1¼" Anti-vortex polypropylene fitting	2¼"	D	63065
EPDM gasket for 1" and 1¼" (60427, 60403 and 63065)			60404
Type B Viton gasket for 1" and 1¼" (60427, 60403 and 63065)			60361
Anti-vortex adapter for 1¼" (60403)			62398
1½" Standard duty double threaded polypropylene fitting	23/8"	A	63931
EPDM gasket for 1½" (63931)			63938
Type B Viton gasket for 1½" (63931)			63939
1½" Double threaded polypropylene fitting	23/8"	A	60124
Siphon tube, 1½" x 415/16" long			63682
Siphon tube, 1½" x 12" long			63279
2" Double threaded polypropylene fitting	3"	A	60405
2" Double threaded 316 stainless steel fitting, less gasket	3"		61767
EPDM gasket for 1½" and 2" (60124, 60405, 63481 and 61767)			60406
Type B Viton gasket for 1½" and 2" (60124, 60405, 63481 and 61767)			60523
2" Standard duty double threaded polypropylene fitting (maximum tank wall thickness = 3/8")	3"	E	63481
2" Heavy duty double threaded polypropylene fitting	3¼"	B	63683
EPDM gasket for 2" (63683)			60336
Type B Viton gasket for 2" (63683)			60008
Siphon tube, 2" short			60335
Siphon tube, 2" x 12" long			63262
Anti-vortex adapter for 2" bulkhead fitting			62399
2" Polypropylene dust plug			60021
2" Self-aligning double threaded polypropylene fitting (designed to install in dome of vertical tank above the liquid level)	4½"		63668
EPDM gasket for 2" self-aligning (63668)			60331
Type B Viton gasket for 2" self-aligning (63668)			60351
3" Double threaded polypropylene fitting (hex nut as shown in photo C)	4½"	C	62299
EPDM gasket for 3" (62299)			60331
Type B Viton gasket for 3" (62299)			60351
2" Polypropylene reducer for 3"			60330
Siphon tube, 3" short			60327
Siphon tube, 3" x 12" long			63263
Siphon tube extension, 3" x 19-1/2" long			64102
4" Double threaded polypropylene fitting (hex nut as shown in photo C)	5¾"		62171
EPDM gasket for 4" (62171)			62785
Type B Viton gasket for 4" (62171)			62786
Siphon tube for 4"			62714



MANUFACTURING & DISTRIBUTION



WARRANTY – NORWESCO offers a three year warranty from date of manufacture on tanks shown in this brochure. Should a defect appear within the warranty period Norwesco will supply a new, equivalent tank in replacement thereof. Norwesco's liability is limited to the value of the tank itself and specifically excludes the cost of installation and/or removal or consequential damages. Please contact your chemical supplier or Norwesco Customer Service for chemical resistance information. Tank dimensions and capacities may vary slightly and are subject to change without notice.



Norwesco, INC.

4365 Steiner Street
P.O. Box 439
St. Bonifacius, MN 55375-0439
Tel (800) 328-3420
Fax (800) 874-2371

www.norwesco.com