

Elegance • Innovation • Durability



Shower + Bath • Laundry Tubs + Sinks • Mop Basins + Washer Pans



Welcome! E. L. Mustee & Sons, Inc. manufactures products designed to add luxury, convenience, functionality and greater livability to your home. Here you'll find products that present unique design options whether your plans are for building new or remodeling.

Mustee also offers many quality products for commercial, institutional and industrial applications.

Since 1932, Mustee brand products have stood for the best in quality, design, innovation and durability. We invite you to discover what decades of customers already know about Mustee products...they look great, and last.

TABLE OF CONTENTS

| TOPAZ™ Fiberglass Bathtubs | 3 |
|---|-------|
| TOPAZ™ Fiberglass Bathtub Walls | 4-5 |
| VARISTONE™, DURAWALL® Bathtub Walls & DURATRIM™ Window Kits | 6-9 |
| DURAWALL*, DURABASE* & STYLEMATE* Shower Ensembles | 10-15 |
| VARISTONE™ & DURAWALL® Shower Walls | 16-17 |
| STYLEMATE® Shower Enclosures | 18 |
| DURABASE® Shower Floors | 19-21 |
| Easy Access Shower Floors | 22-23 |
| CareGiver® Grab Bars & Fold-Down Seats | 24-25 |
| Laundry/Utility Fiberglass Sinks | 26-28 |
| DURASTALL® Shower Stalls | 29 |
| UTILATUB®, UTILATUB® Combo, UTILATWIN®, DURATUB® Laundry Tubs, BIGTUB™, Lil' TUB™ Utility Tub & Accessories | 30-33 |
| UTILATUB® & UTILATWIN® Combo Laundry Tubs | 34-35 |
| DURAPAN™ Washer & Water Heater Pans | 36-37 |
| Mop Service Basins & Accessories | 38-39 |
| | |

COMPANY PROFILE _____

n 1932, Emil Lawrence Mustee founded the company with a mission to produce the highest quality water heaters, hot plates, and incinerators.

Today, family owned and operated, third and fourth generations of Mustee's still apply our founder's high standards and passion to everything we do. That's why we've become a category leader in nearly all of our product lines. With the ability to offer a variety of product options, proudly made in the USA, we can fit our customers' vision.



OUR PRODUCT LINE INCLUDES: _

DURAWALL® Shower and Bathtub Walls

DURASTALL® Shower Stalls

TOPAZ™ Bathtubs

DURABASE® Shower Floors

STYLEMATE® Shower Enclosures

UTILATUB® and UTILATWIN Laundry Tubs

DURATUB® Laundry Cabinets

VECTOR™ and DURASTONE® Utility Sinks

DURASTONE® Mop Service Basins

DURAPAN™ Washer and Water Heater Pans

CareGiver® Easy-Access Showers, Safety Grab Bars, and Fold-Down Shower Seats





Code Accepted

TOPAZ™Bathtubs meet or exceed performance requirements:

- International Association of Plumbing and Mechanical Officials (IAPMO®)
- American National Standards Institute (ANSI) Specification Z 124-2017 (ANSI)



Features

■ Precision molded from Mustee's premium VARISTONE™ fiberglass

TOPAZ™ FIBERGLASS BATHTUBS


- Apron supported by 2 molded brackets
- Structural bottom and sides to prevent sagging
- Ergonomically contoured back with a 40° lumbar slope
- Proprietary finish creates a deep, long lasting finish and scratch-resistant surface
- Slip-resistant bottom
- One piece molded, with matched metal molds
- Fits standard 30"x 60" alcove
- Available right hand & left hand with an 8½" x 14½" drain offset
- Suitable for use with all popular finished wall treatments
- Easy to clean



See Bathtub Walls: Pages 4-5

Specifications

T6030 TOPAZ™ Fiberglass Bathtubs

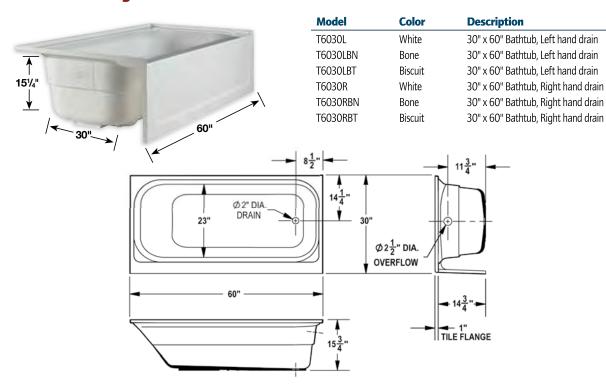

General: Furnish and install as shown on plans, E.L. Mustee & Sons, Inc. TOPAZ™ Fiberglass Bathtub 30" x 60" right or left-handed Model: ______. Construction shall be molded, reinforced fiberglass using matched metal molds under extreme heat and pressure. Shall meet ANSI Specification Z 124-2017. Color: ______ (White, Bone Biscuit). Install in compliance with local codes.

TOPAZ™ Bathtub and Bathtub Wall Combos from E. L. Mustee & Sons, Inc. provide a 4-piece bath/shower solution. With unique features and hardy design, these models bring style and durability to your bathroom.

Features

- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance
- Fits Topaz[™] Bathtubs, as well as standard 30" x 60" bathtubs of others
- Three panel wall system with tongue-and-groove seams to create a watertight wall surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall
- Smooth, colorfast semi-gloss finish, resists scuffs
- Mold and mildew-resistant...easy to clean

| Model | Wall | Bathtub | Color | |
|-------|--------|----------|---------|--|
| | 660WHT | T6030L | White | |
| | 660WHT | T6030R | White | |
| | 660BN | T6030LBN | Bone | |
| | 660BN | T6030RBN | Bone | |
| | 660BT | T6030LBT | Biscuit | |
| | 660BT | T6030RBT | Biscuit | |

| Model | Wall | Bathtub | Color | |
|-------|--------|---------|-------|--|
| | 670WHT | T6030L | White | |
| | 670WHT | T6030R | White | |

Model 660 + T6030







Model 670 + T6030



Two shelves. Tile pattern.





General: Furnish and install as shown on plans, E. L. Mustee & Sons, Inc. Tub/Shower TOPAZ™ Combination Units, semi-gloss, three piece fiberglass wall system and fiberglass bathtub 30" x 60" left for right-hand drain. Construction on units shall be modled reinforced fiberglass using matched metal molds under extreme heat and pressure creating a uniform thinkness. Shall meet ANSI Specification Z 124-2017. Color: __ ____ (White, Bone, Biscuit). Install in compliance with local codes.



Features




- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance
- Fits Topaz[™] Bathtubs, as well as standard 30" x 60" bathtubs of others
- Three panel wall system with tongue-and-groove seams to create a watertight wall surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall
- Smooth, colorfast semi-gloss finish, resists scuffs
- Mold and mildew-resistant...easy to clean

| Model | Wall | Bathtub | Color | |
|-------|--------|---------|-------|--|
| | 680WHT | T6030L | White | |
| | 680WHT | T6030R | White | |



Includes three self-draining selves molded. Stylish tile pattern molded in across the walls.



General: Furnish and install as shown on plans, E. L. Mustee & Sons, Inc. 680 TOPAZ[™] bathtub walls semi-gloss, three-piece wall system and TOPAZ[™] Fiberglass Bathtub 30" x 60" right or left-handed drain. Construction shall be molded, reinforced fiberglass using matched metal models under extreme heat and pressure with a uniform thickness. Shall meet ANSI Specification Z 124-2011. Color: White. Install in compliance with local codes.



VARISTONE™, DURAWALL®, BATHTUB WALLS. **& DURATRIM™WINDOW KITS**

Exceptional bathtub walls from E. L. Mustee & Sons, Inc. are designed with durability and style.

Premium materials paired with a multitude of configurations and sizes, Mustee bathtub wall selections give you abundant options to construct the bathroom you desire.

All bathtub walls systems will fit any standard 30" x 60" bathtub. Select

Mustee bathtub wall systems are also available for other bathtub sizes.



Features

- Adhesive mount and direct-to-stud mount styles available
- Spacious molded-in shelves
- Seamless corner panels with overlapping edges on adhesive mount
- Trimmable DURAWALL® panels simplify installation for out-of-plumb alcoves
- All models available in color-fast white with additional color options
- Semi-gloss finish, mold and mildew-resistant surface

Code Accepted

VARISTONE™ and DURAWALL® Fiberglass Bathtub Walls meet or exceed performance requirements as indicated:

American Society of Testing and Materials (ASTM) — D 635, E-84 and E-162



- American National Standards Institute (ANSI) Specification Z 124-2017 (ANSI)
- Inhalation Toxicity Test to evaluate inhalation health hazards with combustible products
- CAN/ULC S102-07 Burn and Smoke Test

Common Features of the TOPAZ™Bathtub Walls, Models 680, 670, & 660 _



Panels with tongueand-groove seams.




 Reverse side of center panel has clips for securing to bathtub.




■ 11/4" flanges fasten directto-studwalls with screws, drywall conceals flanges.

572T VARISTONE™ Tall Premium Fiberglass Bathtub Walls — Adhesive Mount, Code Accepted



572T VARISTONE™ bathtub walls shown with T6030R bathtub, shower head and valve.


Mustee's VARISTONE™ premium fiberglass, Model 572T bathtub wall surround brings together a classic design, high quality finish and upscale embossed tile pattern across its expansive 72" tall walls.



| Color |
|-------|
| White |
| Bone |
| |

Fits Up to 60" Wide by 34" Deep


680 TOPAZ™ Premium Fiberglass Bathtub Walls - Direct-To-Stud Mounted, Code Accepted .



Features

- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance
- Fits Topaz[™] Bathtubs, as well as standard 30" x 60" bathtubs of others
- Includes three self-draining selves molded
- Stylish tile pattern molded in across the walls
- Three panel wall system with tongue-and-groove seams to create a watertight wall surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall
- Smooth, colorfast semi-gloss finish, resists scuffs
- Mold and mildew-resistant...easy to clean

| Model | Color |
|------------------|--------------|
| 680WHT | White |
| Fits 30" x 60" T | OPAZ™Bathtub |




670 TOPAZ™ Premium Fiberglass Bathtub Walls - Direct-To-Stud Mounted, Code Accepted .



Features

- Embossed 7" x 7" tile pattern
- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance
- Fits Topaz™ Bathtubs, as well as standard 30" x 60" bathtubs of others
- Includes two molded-in self-draining shelves
- Three panel wall system with tongue-and-groove seams to create a watertight wall surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall
- Smooth, colorfast semi-gloss finish, resists scuffs
- Mold and mildew-resistant...easy to clean

| | Model | Color |
|-------------------------------|--------|-------|
| | 670WHT | White |
| Fits 30" x 60" TOPAZ™ Bathtuh | | |



660 TOPAZ™ Premium Fiberglass Bathtub Walls - Direct-To-Stud Mounted, Code Accepted _




Features

- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance
- Fits Topaz[™] Bathtubs, as well as standard 30" x 60" bathtubs of others
- Includes a large, molded-in, self-draining shelf
- Three panel wall system with tongue-and-groove seams to create a watertight wall surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall
- Smooth, colorfast semi-gloss finish, resists scuffs
- Mold and mildew-resistant...easy to clean

| Model | Color |
|--------|---------|
| 660WHT | White |
| 660BN | Bone |
| 660BT | Biscuit |
| | |


Fits 30" x 60" TOPAZ™ Bathtub



General: Furnish and install as shown on plans, TOPAZ™ bathtub walls as manufactured by E.L. Mustee & Sons, Inc. Shall be semi-gloss, three-piece wall. Panels are molded fiberglass using matched metal molds under extreme heat and pressure with a uniform thickness of 125 mils and mount direct-to-studwalls. Includes center panel with molded-in shelf and two side panels. Self-aligning panels use a tongue-and-groove connection. Shall meet ANSI Specification Z 124 2017. Color: _______ (White, Bone, Biscuit). Install in compliance with local codes.

Premium Fiberglass Bathtub Walls - Adhesive Mount, Code Accepted (See page 6)






| Model | Color |
|------------------------------------|----------------------------|
| 350WHT | White |
| 350BN | Bone |
| 350BT | Biscuit |
| Fits 30" x 60" B Caulking and a | athtub dhesive provided |

General: Furnish and install as shown on plans, DURAWALL* Bathtub Walls Model 350, as manufactured by E. L. Mustee & Sons, Inc. The wall system shall be three-piece construction with molded-in shelf. Panels shall include 20% fiberglass reinforced composite material and be manufactured with matched metal molds under extreme heat and pressure with a uniform thickness of 85 mils. Shall be semi-gloss, scuff-resistant surface. Unit shall meet ANSI Specification Z 124-2017. Color: _______ (White, Bone, Biscuit).



500 DURAWALL




500WHT White Fits 30" x 60" Bathtub

General: Furnish and install as shown on plans, DURAWALL* Bathtub Walls Model 500, as manufactured by E. L. Mustee & Sons, Inc. The wall system shall be five-piece construction with three molded-in shelves. Panels shall include 20% fiberglass reinforced composite material and be manufactured with matched metal molds under extreme heat and pressure with a uniform thickness of 85 mils. Shall be semi-gloss, scuff-resistant surface. Unit shall meet ANSI Specification Z 124-2017. Color: White.



557 DURAWALL®



557WHT White

Fits 30" x 60" and 32" x 60" Bathtubs


General: Furnish and install as shown on plans, DURAWALL* Bathtub Walls Model 557, as manufactured by E. L. Mustee & Sons, Inc. The wall system shall be five-piece construction with four molded-in shelves. Panels shall include 20% fiberglass reinforced composite material and be manufactured with matched metal molds under extreme heat and pressure with a uniform thickness of 75 mils. Shall be matte finish, scuff-resistant surface. Unit shall meet ANSI Specification Z 124-2017. Color: White.

Specifications

300.600 DURATRIM™ Fiberglass Window Kit – Code Accepted



Protect window above bathtub. Adhesive-mounted 5-piece fiberglass panels fit windows up to 36" wide with 8" sill depth. May be cut to fit sill and side moldings, easy to install.




300.600W White 300.600BN Bone Adhesive provided. General: Furnish and install as shown on plans, DURATRIM™ Window Trim Kit Model 300.600, as manufactured by E. L. Mustee & Sons, Inc. Made of fiberglass, consists of three 36" by 8" panels and two 8" by 1" corner molding pieces. Adhesive provided. Shall meet ANSI Specification Z 124-2017. Color: ______ (White, Bone).

Deluxe Thermoplastic Bathtub Walls – Adhesive Mount



56 DURAWALL®-

Whirlpool Sized Up To 42" Deep By 72" Wide




| Model | Color |
|-------|-------|
| 56WHT | White |
| 56BN | Bone |

Fit 42"x 72" Bathtub

General: Furnish and install as shown on plans, DURAWALL* Bathtub Wall Model 56, as manufactured by E. L. Mustee & Sons, Inc. The hi-impact thermoplastic wall system shall be 5-piece construction with six formed shelves. One-piece, seamless corner panels with overlapping edges. Uniform color throughout entire thickness of each panel. Color: _____(White, Bone).



53 DURAWALL°




53WHT White

Fit 30"x 60" Bathtub

General: Furnish and install as shown on plans, DURAWALL* Bathtub Wall Model 53, as manufactured by E. L. Mustee & Sons, Inc. The hi-impact thermoplastic wall system shall be 5-piece construction with four formed shelves. One-piece, seamless corner panels with overlapping edges. Uniform color throughout entire thickness of each panel. Color: White.



950 DURAWALL®



950WHT White

Fit 30" x 60" Bathtub


General: Furnish and install as shown on plans, DURAWALL* Bathtub Wall Model 950, as manufactured by E. L. Mustee & Sons, Inc. The white thermoplastic wall system shall be 5-piece construction with four formed shelves. One-piece, seamless corner panels with overlapping edges. Uniform color throughout entire thickness of each panel. Color: White.

Specifications

52.600W DURATRIM™ Thermoplastic Window Trim Kit



Protect window above bathtub. Adhesive mounted, 3-piece thermoplastic panels fit windows up to 36" wide with 8" sill depth. May be cut to fit sill and side moldings, easy to install.



52.600W White Adhesive provided.

General: Furnish and install as shown on plans, DURATRIM™ Window Trim Kit Model 52.600W, as manufactured by E. L. Mustee & Sons, Inc. Made of white, high-impact thermoplastic, consists of three 36" by 8" panels. Color: White.



DURAWALL, DURABASE, STYLEMATE FIBERGLASS SHOWER ENSEMBLES

When looking for the perfect shower ensemble in your bathroom, choose the products "Preferred by the Pros" from E. L. Mustee & Sons.

DURAWALL® fiberglass wall systems, DURABASE® fiberglass shower floors, and STYLEMATE® enclosures are recognized for their universal design, high quality, innovative features, ease of installation, and durability.

From tile patterns to shelves, Mustee's DURAWALL®, DURABASE®, and STYLEMATE® products will help you create the bathroom you desire.



Tongue-andgroove fit



Direct to stud


Features

- DURAWALL* shower walls feature convenient direct-to-stud mounting, innovative leak-proof, tongue-and-groove panels
- DURAWALL® shower wall systems feature multiple, molded-in shelves and a deep gloss, mildew/stain-resistant finish
- DURABASE® floors feature a slip resistant Starburst® floor design and a ribbed underbody for strength & support. See pages 20 and 21 for complete DURABASE* features
- STYLEMATE® enclosures are available in numerous styles and configurations and utilize tempered safety glass. See complete features on page 18

Code Accepted

Fiberglass shower walls meet or exceed performance requirements:













Mustee's shower ensembles are packed in three to four cartons and easily carried through narrow hall/ stairways. Installation can be done within a confined area by one person.

36" CORNER SHOWERS — Double Threshold _



Specifications

736CWHT

DURAWALL® SHOWER WALL White

Model





Color/Glass









STYLEMATE® ENCLOSURE 36.202 Chrome/Clear








See page 10 for valve placement.

General: Furnish and install as shown on plans, a Corner Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:


DURAWALL* Shower Walls - Model 736CWHT shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include corner panel and two side panels with molded-in shelf. Self-aligning panels interlock using a tongueand-groove connection. Shall meet ANSI Specification Z 124-2017. Color: White.


DURABASE* Shower Floor — Model 3636DTM, refer to page 21 for specifications. STYLEMATE* Enclosure - Model 36.202, refer to page 18 for specifications.

SQUARE SHOWERS .



| Shower | | | | | | | |
|-----------|-----|-----|------|-----|-----|--------|--|
| Size | Α | В | C | D | E | F | |
| 32" x 32" | 32" | 32" | 33½" | 16" | 16" | 331/4" | |
| 36" x 36" | 36" | 36" | 37½" | 18" | 18" | 371/4" | |
| | | | | | | | |





Dimensions

Specifications

32"x 32" Showers



Color/Glass Model

DURAWALL[®] SHOWER WALLS



White Bone







DURAWALL[®] SHOWER WALLS

36" x 36" Showers



Model

White Bone

Color/Glass







DURABASE[®] SHOWER FLOOR

3232M 3232BN White Bone






DURABASE* SHOWER FLOOR

3636M 3636BN White Bone









32.705 Chrome/Clear 32.706 Oil-Rubbed Bronze/Clear STYLEMATE[®] PIVOT DOOR — Height 65"

36.403 Chrome/Clear 36.404 Oil-Rubbed Bronze/Clear

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:


DURAWALL* Shower Walls — Model: ______ (732 or 736) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include center panel with molded-in shelf and two side panels, each with molded-in shelf. Self-aligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2017. Color: ______ (White, Bone).

DURABASE* Shower Floors - Model: __ ___ refer to page 20 for specifications.


STYLEMATE* Pivot Door Enclosures – Model: ______ refer to page 18 for specifications.




RECTANGULAR SHOWERS



| Shower | | | | | | | |
|-----------|-----|-----|------|-----|-----|--------|--|
| Size | Α | В | C | D | E | F | |
| 32" x 48" | 48" | 32" | 33½" | 24" | 16" | 331/4" | |
| 34" x 48" | 48" | 34 | 35½" | 24" | 17" | 351/4" | |
| | | | | | | | |





Valve Placement Dimensions

Specifications

32"x 48" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

748-32WHT 748-32BN White Bone





34"x 48" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

748-34WHT 748-34BN White Bone







DURABASE® SHOWER FLOOR

3248M White 3248BN Bone





DURABASE® SHOWER FLOOR

3448M White 3448BN Bone







STYLEMATE® BY-PASS ENCLOSURE — Height 69"

Framed design
48.403 Chrome/Clear
48.404 Brushed Nickel/Clear
48.405 Oil-Rubbed Bronze/Clear

Frameless design

48.406Chrome/Clear48.407Brushed Nickel/Clear48.408Oil-Rubbed Bronze/Clear

STYLEMATE® BY-PASS ENCLOSURE — Height 69"

Framed design

48.403 Chrome/Clear
48.404 Brushed Nickel/Clear
48.405 Oil-Rubbed Bronze/Clear

Frameless design

48.406 Chrome/Clear
48.407 Brushed Nickel/Clear
48.408 Oil-Rubbed Bronze/Clear

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:


DURAWALL* Shower Walls — Model: ______ (748-32 or 748-34) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include center panel with molded-in shelf and two side panels, each with molded-in shelf. Self-aligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2017. Color: ______ (White, Bone).

DURABASE® Shower Floors — Model: ______ refer to page 20 for specifications.


STYLEMATE* By-Pass Enclosures — Model: ______ refer to page 18 for specifications.




NEO-ANGLE SHOWERS



| Shower | | | |
|--------|--------|-----|--------|
| Size | Α | В | C |
| 36" | 37½" | 18" | 371/4" |
| 38" | 391/2" | 20" | 391/4" |
| 42" | 431/2" | 24 | 431/4" |
| | | | |





Valve Placement **Dimensions**

Specifications

36" Showers

Color/Glass Model



736CWHT White 736CBN Bone





38" Showers

Color/Glass Model

DURAWALL® SHOWER WALLS White

738CWHT



42" Showers

Color/Glass Model

DURAWALL® SHOWER WALLS

742CWHT White







DURABASE[®] SHOWER FLOOR

3636CM White 3636CBN Bone





DURABASE® SHOWER FLOOR

3838CM

White



DURABASE® SHOWER FLOOR

4242CM 4242CBN White Bone







STYLEMATE® NEO-ANGLE ENCLOSURE - Height 70"

36.750 Chrome/Obscure Chrome/Clear 36.761 36.762 Brushed Nickel/Clear Oil-Rubbed Bronze/Clear 36.763

STYLEMATE® NEO-ANGLE ENCLOSURE - Height 70"

38.750 Chrome/Obscure Chrome/Clear 38.751 38.752 Brushed Nickel/Clear 38.753 Oil-Rubbed Bronze/Clear

STYLEMATE® NEO-ANGLE ENCLOSURE - Height 70"

42.750 Chrome/Obscure Chrome/Clear 42.751 42.752 Brushed Nickel/Clear 42.753 Oil-Rubbed Bronze/Clear

General: Furnish and install as shown on plans, NEO-ANGLE Shower Ensembles, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL® Shower Walls - Model: _ _ (736C, 738C or 742C) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include corner panel and two side panels with molded-in shelf. Self-aligning panels using a tongueand-groove connection. Shall meet ANSI Specification Z 124-2017. Color: (White, Bone).

DURABASE* Shower Floors - Model: __ __ refer to page 21 for specifications. STYLEMATE* NEO-ANGLE Enclosures - Model: ______ refer to page 18 for specifications.



Photo: ShowerTub shower floor and STYLEMATE By-Pass Enclosure.

Replace your standard 30"x60" bathtub with Mustee's popular 3060 Shower Tub™ or 360 Barrier-Free Shower floor. Then complete the installation with Mustee's stylish 760T-30WHT DURAWALL* shower walls. For 34" deep alcoves, use premium 760T-34WHT DURAWALL* Shower Walls.

The embossed tile pattern on the back and side panels of the premium 760T-30WHT and 760T-34WHT DURAWALL* shower walls deliver exceptional design features, deep glass finish, and Mustee's trademark quality construction.

Features


- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance using matched metal molds under heat and pressure
- Embossed large-tile pattern on back and side panels
- Five-panel wall system with interlocking tongue-and-groove seams that assemble quickly to create a watertight wall surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall or other wall treatment
- Available in white
- Smooth, colorfast deep gloss finish, resists scuffs.
- Mold and mildew-resistant, easy to clean
- Designed to support CareGiver® Grab Bars and Fold-Down Seats as needed

Accessories

572.300 VARISTONE[™] – Shelves (Order Separately)

Order desired number of shelves separately. Sturdy shelf is easy to install. Carton is $12'' \times 7 \ 1/4'' \times 4''$ and weighs 2.5 lbs.


These self-draining 12" x 7" shelves easily mount to the 760T-30 and 760T-34WHT shower wall at any location on the wall. Order multiple shelves to best meet your personal preference.



See page 15 for specifications.

DURAWALL, DURABASE, STYLEMATE, FIBERGLASS SHOWER ENSEMBLES

760T-30WHT

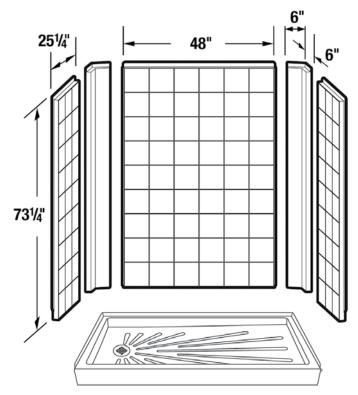

Specifications

30"x 60" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS
760T-30WHT White

760T-30WHT White

SHOWERTUB™ SHOWER FLOORS

3060R White White White

Drain locations: R = Right Hand L = Left Hand

STYLEMATE® BY-PASS ENCLOSURES


Framed design 60.403

60.403 Chrome/Clear
60.404 Brushed Nickel/Clear
60.405 Oil-Rubbed Bronze/Clear

Frameless design

60.406 Chrome/Clear 60.407 Brushed Nickel/Clear 60.408 Oil-Rubbed Bronze/Clear

760T-30WHT 251/4" 48" 6" 6" 731/4"

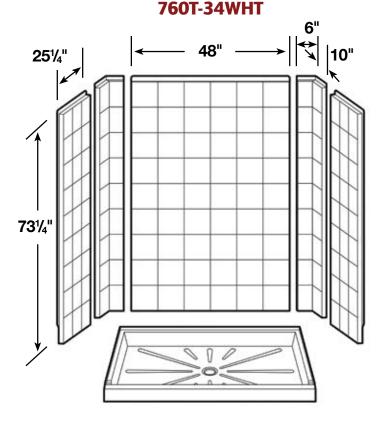

30"x 60" Barrier-Free Shower

Model

Color/Glass



DURAWALL® SHOWER WALLS

760T-30WHT White



360K

360R White 360L White

Drain locations: R = Right Hand L = Left Hand



SHOWERTUB™ SHOWER FLOORS

3060R 3060L



White was Inter

White

Drain locations: R = Right Hand L = Left Hand

ENTRY RAMP 12" x 60"

360.100 White



CAREGIVER® GRAB BARS

See page 24 for Grab Bar options.

CAREGIVER® FOLD-DOWN SHOWER SEAT

See page 25 for Fold-Down Seat options.



General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL* Shower Wall Model: ______ (760T-30WHT, 760T-34WHT). Shall be semi-gloss 5-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Includes center panel and two comer and side panels. Self-aligning panels using an interlocking tongue-and-groove seam. Shall meet ANSI Specification Z 124-2017. Color: White.

34"x 60" Showers

Model

Color/Glass



DURAWALL® SHOWER WALLS

760T-34WHT

White



DURABASE® SHOWER FLOORS

3460M

Whi



STYLEMATE® BY-PASS ENCLOSURES


Framed design



60.403 Chrome/Clear 60.404 Brushed Nickel/Clear 60.405 Oil-Rubbed Bronze/Clear

Frameless design

60.406 Chrome/Clear 60.407 Brushed Nickel/Clear 60.408 Oil-Rubbed Bronze/Clear







Code Accepted

VARISTONE™ Shower/Bathtub Walls meet or exceed performance requirements:

American National Standards Institute (ANSI) — Specification Z 124-2017 (ANSI)

Specifications

572T VARISTONE™ – Shower/Bathtub Walls

Carton contains two side, one center, two corner panels and easy to follow, illustrated installation instructions. Carton is $7\frac{5}{8}$ " x 32" x 76" and weighs 110 lbs.

| | Up to 60" \ | Wide by 34" | Deep | . " | 283/" |
|-----|-------------|-------------|--------|------------|-------|
| T | | | 283/4" | 6" 17" | 20 /4 |
| | | | | | |
| | | | | | |
| | | | | | |
| 72" | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

572T VARISTONE™ SHOWER/BATHTUB FIBERGLASS WALLS

Mustee's VARISTONE™ premium fiberglass, Model 572T combines classic elegance, quality construction and easy installation to make it the preferred choice.

Model 572T walls with their distinctive embossed tile pattern, fit perfectly with Mustee's DURABASE* shower floors and STYLEMATE* shower enclosures. CareGiver™ grab bars and seats can be easily installed as well. Also fits perfectly with Mustee's TOPAZ™ bathtubs and other 30"x 60" and 32"x 60" bathtubs.

Features

- Embossed 85/8" x 93/4" tile pattern on side and back panels
- Seamless corner panels are overlapped by the side and back panel and create a high-quality, watertight wall system
- Adhesive-mounts to drywall or like surfaces
- Colorfast, mold and mildew-resistant finish
- Easily trimmed for out-of-plumb alcoves or to install DURATRIM™ window trim kits
- 5 panel, package...two corners, two side walls and one back panel
- Designed to fit a maximum alcove range up to 39" wide by 42" deep... or up to 60" wide and by 34" deep
- 12" x 7" VARISTONE™ shelves can be used to create handy storage
- Available in white, bone and biscuit

572.300 VARISTONE[™] – Shelves (Order Separately)

572.300

White

Order desired number of shelves separately. Sturdy shelf is easy to install. Carton is $12" \times 7\frac{1}{4}" \times 4"$ and weighs 2.5 lbs.






These self-draining 12" x 7" shelves easily mount to the shower wall at any location on the wall. Order multiple shelves to best meet your personal preference.

General: Furnish and install as shown on plans, VARISTONE™ Shower/Bathtub Shelf Model: 572.300, White, as manufactured by E. L. Mustee & Sons, Inc. Shall be semi-gloss, 1-piece molded shelf using matched metal molds under extreme heat and pressure. Shall meet ANSI Specification Z 124-2017.

| Model | Color |
|---------|-------|
| 572TWHT | White |
| 572TBN | Bone |

Reverse Corner Panels for Deep Alcoves Up to 39" Wide by 42" Deep



General: Furnish and install as shown on plans, fiberglass VARISTONE™ Shower / Bathtub Walls Model 572T as manufactured by E. L. Mustee & Sons, inc. Shall be semi-gloss, 5-piece wall system. Panels are molded using matched metal molds under extreme heat and pressure with a minimum thickness of 125 mils. Shall meet ANSI Specifications Z 124-2017 Colors: ______ (White, Bone)

DURAWALL® SHOWER WALLS

There's nothing like a new shower to dress up a bathroom and make the most of your available floor space. Whatever your plan, Mustee's Model 247, 260 and 265 square & rectangular shower wall systems and the Model 237 NEO-ANGLE/Corner Shower Wall System, give you the freedom to put your design ideas into motion.


Features

- High quality, thermoplastic construction
- Easily adhesive-mounts to drywall or like surfaces
- Six molded-in shelves...Models 247/260; three molded-in shelves...Model 237
- Available in color-fast white and bone
- High gloss, mold and mildew-resistant surface finish
- Trimmable flat panels
- Easily to install and clean
- Adjust for out-of-square walls

Specifications



247 DURWALL® – Square and Rectangular




| Model | Color | Width | Side | Shelves | |
|--------|-------|-----------|-----------|---------|--|
| 247WHT | White | Up to 48" | Up to 42" | Six | |

General: Furnish and install as shown on plans, DURAWALL* Shower Wall Model 247 as manufactured by E. L. Mustee & Sons, Inc. Thermoplastic wall system shall be 5-piece construction with six formed shelves and overlapping corner panels. Uniform color throughout entire thickness of each panel. Color: White.



260 DURAWALL® – Square and Rectangular




260WHT White Up to 60" Up to 40" Six 260BN Bone Up to 60" Up to 40" Six

General: Furnish and install as shown on plans, DURAWALL* Shower Wall Model 260 as manufactured by E. L. Mustee & Sons, Inc. Thermoplastic wall system shall be 5-piece construction with six formed shelves, seamless, overlapping corner panels. Uniform color throughout entire thickness of each panel. Color: _______ (White, Bone).



265 DURAWALL® – Square and Rectangular




265WHT White Up to 69" Up to 40½" Zero*

* Use model # 572.300 to customize shower shelf configuration, see page 16.

General: Furnish and install as shown on plans, DURAWALL* Shower Wall Model 265 as manufactured by E. L. Mustee & Sons, Inc. Thermoplastic wall system shall be 5-piece construction with seamless, overlapping corner panels. Uniform color throughout entire thickness of each panel. Color: White.



237 DURAWALL® - Neo-Angle/Corner



237WHT White Up to 42" Three 237BN Bone Up to 42" Three

General: Furnish and install as shown on plans, DURAWALL*
Shower Wall Model 237 as manufactured by E. L. Mustee & Sons, Inc.
Thermoplastic wall system shall be 3-piece construction with three formed shelves, seamless, overlapping corner panel. Uniform color throughout entire thickness of each panel. Color: ______ (White, Bone).

STYLEMATE SHOWER ENCLOSURES & DOORS

Looking for the best way to finish off your Mustee shower? That's easy... select one of our many decorative STYLEMATE® doors and enclosures to add that finishing touch.

Features

- Rolling doors include rollers with long-life bearings for years of smooth operation
- Chrome, brushed-nickel or oil-rubbed bronze frames are constructed from high-quality engineered aluminum
- Tempered safety glass options include clear or obscure glass
- Pivot doors feature magnetic catch
- Easy to install and clean

Code Accepted

STYLEMATE® Enclosures meet or exceed performance requirements:

American National Standards Institute (ANSI) Specification Z 97.1 (ANSI)





Chrome





Brushed Nickel

Specifications



Pivot Doors – Height 65"

| Model | Opening | Finish | Glass | |
|--------|---------------|-------------------|-------|--|
| 32.705 | 29½"-31¼" | Chrome | Clear | |
| 32.706 | 291/4"-301/4" | Oil-Rubbed Bronze | Clear | |
| 36.403 | 33½"-35¼" | Chrome | Clear | |
| 36.404 | 333/4"-343/4" | Oil-Rubbed Bronze | Clear | |

General: Furnish and install as shown on plans, a STYLEMATE® Pivot Door, as manufactured by E. L. Mustee & Sons, Inc. Model: ___ shall be a swing style door with a (Chrome, Oil-Rubbed Bronze) finish aluminum frame and clear tempered safety glass panel. Continuous-pull handle with magnetic seal. Out-of-plumb conditions up to 1" can be adjusted at latch jamb. Can be installed for right or left opening. Shall meet ANSI Specification Z 97.1.



Neo-Angle Enclosures — Height 70"

| Model | Opening | Finish | Glass |
|--------|---------|-------------------|---------|
| 36.750 | 36" Neo | Chrome | Obscure |
| 36.761 | 36" Neo | Chrome | Clear |
| 36.762 | 36" Neo | Brushed Nickel | Clear |
| 36.763 | 36" Neo | Oil-Rubbed Bronze | Clear |
| 38.750 | 38" Neo | Chrome | Obscure |
| 38.751 | 38" Neo | Chrome | Clear |
| 38.752 | 38" Neo | Brushed Nickel | Clear |
| 38.753 | 38" Neo | Oil-Rubbed Bronze | Clear |
| 42.750 | 42" Neo | Chrome | Obscure |
| 42.751 | 42" Neo | Chrome | Clear |
| 42.752 | 42" Neo | Brushed Nickel | Clear |
| 42.753 | 42" Neo | Oil-Rubbed Bronze | Clear |

General: Furnish and install as shown on plans, NEO-ANGLE Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of: STYLEMATE $^{\circ}$ Enclosure — Model: __(Chrome, Brushed Nickel, Oil-Rubbed with bright_ Bronze) finish. Safety glass panels shall be obscure or clear. Side-wall jambs adjust 3/4" for out-of-plumb walls. Reversible pivot door with continuous-pull handle integrally extruded and magnetic seal. Door can be hung to open left or right. Shall meet ANSI Specification Z 97.1.



By-Pass Framed Door



By-Pass Frameless Door

By-Pass Doors - Height 69"

| Frame 0 48.403 48.404 | design 47" 47" | Chrome Brushed Nickel | Clear Clear | | | |
|------------------------------|-----------------------------|--------------------------|----------------|--|--|--|
| Framel 48.407 | ess design 47" | Brushed Nickel | Clear | | | |
| <i>Framea</i> 60.403 | design | Chrome | Clear | | | |
| 60.404 | 59" | Brushed Nickel | Clear | | | |
| Frameless design | | | | | | |
| | JJJ GCJIGII | | | | | |

General: Furnish and install as shown on plans, a STYLEMATE® By-Pass Enclosure, as manufactured by E. L. Mustee & Sons, Inc. Model: _ with bright (Chrome, Brushed Nickel, Oil-Rubbed Bronze) finish. Shall be by-pass style with aluminum frame and clear tempered safety glass. Out-of-plumb conditions up to 1" can be adjusted. Shall meet ANSI Specification Z 97.1.



Double-Threshold Enclosures – Height 70"

36.202 36" DT Chrome Clear

General: Furnish and install as shown on plans, Double Threshold Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of: STYLEMATE® Enclosure — Model 36.202 with bright Chrome finish aluminum frame. Safety glass panels shall be clear. Side-wall jambs adjust 3/4" for out-ofplumb walls. Reversible pivot door with continuous-pull handle integrally extruded and magnetic seal. Door can be hung to open left or right. Shall meet ANSI Specification Z 97.1.

The BIGGEST thing to happen to showers.

The quality and design you love. Now supersized.

36" Deep Shower Floors

Super LARGE Shower Floors



3642M | 36" D x 42" W



4848M | 48" D x 48" W



3648M | 36" D x 48" W



4248M | 42" D x 48" W



3660M | 36" D x 60" W




4260M | 42" D x 60" W



DURABASE® & SHOWERTUB™— FIBERGLASS SHOWER FLOORS

The strength of a quality shower begins with the floor. Mustee's line of DURABASE* shower floors are solid, stable, quality-constructed and exceed expectations.

Mustee's decades of fiberglass molding experience results in a handsome DURABASE® Square, Rectangle, Neo-Angle, and Corner units that will look great, provide great design options, as well as deliver years of dependable service.

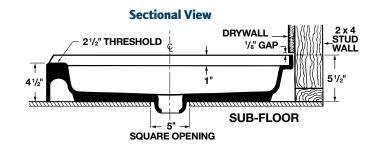


When Ordering Color Models — include suffix BN for Bone or BT for Biscuit (eg. 4242CBN, 3448BT)

Specifications

Square – Single Threshold





| Nom. Size | Model | Colors | Α | В | |
|-----------|-------|----------------------|-----|-----|--|
| 32" x 32" | 3232M | White, Bone | 32" | 16" | |
| 34" x 34" | 3434M | White | 34" | 17" | |
| 36" x 36" | 3636M | White, Bone, Biscuit | 36" | 18" | |
| 42" x 42" | 4242M | White | 42" | 21" | |
| 48" x 48" | 4848M | White | 48" | 24" | |

Drain Seals – For DURABASE Shower Floors


"Standard 2" drain seal included in showers with molded in drain bodies. See these additional models if necessary.

Model

| 32.403 | For 2" soil pipe/ser. wt. |
|--------|---------------------------|
| 32.404 | For 2" copper pipe |
| 32.405 | For 11/2" ABS/PVC pipe |

Rectangular – Single Threshold





| Nom. Size | Model | Colors | Α | В | C | D |
|---------------|-------------|-----------------------|-----|-----|-----|-----|
| 32" x 48" | 3248M | White, Bone, Biscuit | 48" | 32" | 16" | 24" |
| 32" x 54" | 3254M | White | 54" | 32" | 16" | 27" |
| 32" x 60" | 3260M | White | 60" | 32" | 16" | 30" |
| 34" x 42" | 3442M | White, Bone, Biscuit | 42" | 34" | 17" | 21" |
| 34" x 48" | 3448M | White, Bone, Biscuit | 48" | 34" | 17" | 24" |
| 34" x 54" | 3454M | White, Bone | 54" | 34" | 17" | 27" |
| 34" x 60" | 3460M | White, Bone, Biscuit | 60" | 34" | 17" | 30" |
| 36" x 42" | 3642M | White | 42" | 36" | 18" | 21" |
| 36" x 48" | 3648M | White | 48" | 36" | 18" | 24" |
| 36" x 60" | 3660M | White | 60" | 36" | 18" | 30" |
| 42" x 36"* | 4236M | White | 36" | 42" | 21" | 18" |
| 42" x 48" | 4248M** | White | 48" | 42" | 21" | 30" |
| 42" x 60" | 4260M | White | 60" | 42" | 21" | 30" |
| * Threshold o | n 36" side. | ** Available Fall 201 | 8. | | | |

ShowerTub[™] – Shower Floors

| 30" x 60" | 3060L | White | 60" | 30" | 15" | 30" |
|-----------|---------|-------|-----|-----|-----|-----|
| 30" x 60" | 3060LBN | Bone | 60" | 30" | 15" | 30" |
| 30" x 60" | 3060R | White | 60" | 30" | 15" | 30" |
| 30" x 60" | 3060RBN | Bone | 60" | 30" | 15" | 30" |

Drain location see page 22, drain not included

Features

- Study, one-piece compression molded fiberglass with structural underbody
- Integrally molded drain with seal and removable strainer, except Model 3060R/L
- Slip-resistant Starburst® floor design
- Designed for connection to pipe
- Available in all popular sizes for square, rectangular, NEO-ANGLE and corner units
- Engineered to fit all Mustee wall systems (See pages 10 through 17) as well as tile
- Mold and mildew-resistant surface, easy to clean

Code Accepted

DURABASE® and SHOWERTUB™ Shower Floors meet or exceed performance requirements:


- International Association of Plumbing and Mechanical Officials (IAPMO*)
- American National Standards Institute (ANSI) Specification Z 124-2017



■ Warnock Hersey® (Canada) Listed — CSA test standards: Shower Floor






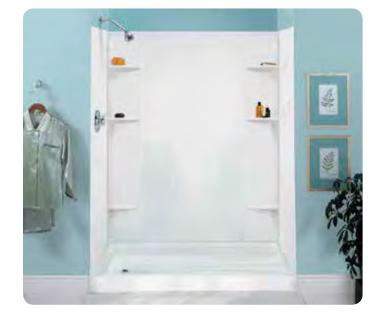

General: Furnish and install as shown on plans, DURABASE* Shower Floor Model: _______, as manufactured by E. L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst* design that does not interfere with the flow of water. Size: _______"x ______". Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124-2017. Color: _______ (White, Bone, Biscuit).

Neo-Angle - Corner Threshold






| Nom. Size | Model | Colors | Α | В | C |
|-----------|--------|----------------------|----------|--------|----------|
| 36" x 36" | 3636CM | White, Bone, Biscuit | 36" | 12" | 18" |
| | | Center lines: | 17½" x | 24%" x | 17½" |
| 38" x 38" | 3838CM | White, Bone, Biscuit | 38" | 12" | 20" |
| | | Center lines: | : 19½" x | 24%" > | (19½" |
| 42" x 42" | 4242CM | White, Bone | 42" | 12" | 24" |
| | | Ce | 23½" x | 24%" > | (231/2" |

Center line varies based upon thickness of side walls.

Corner – Double Threshold





| Nom. Size | Model | Colors | Α | В | |
|-----------|---------|--------|-----|-----|--|
| 34" x 34" | 3434DTM | White | 34" | 17" | |
| 36" x 36" | 3636DTM | White | 36" | 18" | |

Strainers — For DURABASE*Shower Floors

42.326 Plastic/Chrome Plated 42.327 Plastic/Gold Plated



GapSeal-Pro[™] – For all shower floors and bathtubs


The flexible PVC GapSeal-Pro[™] features a strong adhesive strip that allows it to be easily positioned to "extend" tile flange and effectively seal the gap between drywall or like-surfaces on shower floors or bathtubs. Patent pending.

| Model | Size |
|---------|---------------------|
| 60.320A | 132" long x 2" tall |



EASY ACCESS SHOWER FLOORS





The CareGiver® product line of Easy-Access Shower Floors provides quality-built, engineered solutions that enable safe, effortless shower access to those with limited or assisted mobility.

Features

- Slip-resistant surfaces...stain, mildew and mold resistant finish
- High quality molded fiberglass construction
- Uses standard 2" drain
- Easy to install and clean



ADA Accepted

- Americans with Disabilities Act (ADA)
- Code of Federal Regulations July 1, 1997 and July 1, 2007 (ADA)
- American Society of Testing & Materials (ASTM) E-84 Flame Spread
- American National Standards Institute (ANSI) Specification Z 124-2017 (ANSI)
- ICC/ANSI A117

Accessories

See page 23 for Accessories. Grab Bars and Shower Seats on pages 24 & 25.

| Model | Color | Drain | |
|----------|------------|--------------|--|
| TRANSFEI | R SHOWER F | LOOR | |
| 3739M | White | Center Drain | |

General: Furnish and install as shown on plans Transfer Shower Floor Model: ______, as manufactured by E. L. Mustee & Sons, Inc. Floor to be one piece, molded fiberglass made with matched metal molds. Surface to be slip-resistant Starburst* design that does not interfere with the flow of water. Size 37"x 39". Shoulder will be no less than 3" higher or less than 1" wide. Tiling flange will extend not less than 1" high to provide an integral water barrier. Threshold will be ½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS Sanitary drain pipe. Removable strainer. Shall meet ADA, ASTM D635, E-84 and D635, and Code of Federal Regulation July 1, 1997 and July 1, 2007. Color: White.

SHOWERTUB™ SHOWER FLOOR REPLACES 30" x 60" BATHTUB _



Drain

Right Hand

Right Hand

Left Hand

Left Hand

| | Replace a standard 5 Datritub with an easy-access shower—or install new. The showerfub—will le | ιyou |
|---|--|------|
| 1 | achieve eitherwith no need for major re-plumbing or changing the room layout. | |
| | | |

It's excellent for seniors living independently or a beautiful way to create a luxury walk-in shower.

Features

- Fits the same footprint as a standard 30" x 60" bathtub
- High quality molded fiberglass construction
- Drain location offset 8½" x 15"; right and left-hand models
- Accommodates standard 2" drain or 60.300 Drain Kit
- Available in white and bone matched finishes with Mustee wall systems, see pages 13, 15, & 16; as well as tile or like finish

Accessories

See page 23 for Accessories.

General: Furnish and install as shown on plans, ShowerTub™ Model: _____ as manufactured by E. L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, using matched metal molds under extreme heat and pressure. Surface to be slip-resistant design that does not interfere with flow of water. Size: 30" x 60". Flood level rim will not be less than 3" high. Tiling flange will extend not less than 1" higher than the threshold which is an integral molded water barrier. Threshold will be 4½" high. Drain hole offset 8½" by 15" to accept drain kit for 2" PVC, ABS or iron DWV pipe, available left or right hand. Color: _____ (White, Bone).

3060, 360 & 3865 Shower Floor Drains

| Drain Assembly — for 2" DWV Pipe | | |
|---|---|--|
| Model | Description | |
| 42.317A | Drain assembly | |
| Drain Seal | | |
| 42.320 | Optional drain seal for 2" copper (DWV) | |


Drain Assembly – use with 3060R/L and 360R/L to replace tub waste and connect to existing pipe.

| Model | Color |
|-----------|-------|
| 60.300A | White |
| 60.300ABN | Bone |



360.210 Continuous Water Barrier Kit

Optional drain seal for 2" soil pipe (SW)



360.210 Continuous Water Barrier Kit — Creates an effective water barrier for the shower threshold that easily collapses for wheelchairs or walkers then instantly reforms to keep water from escaping. Length 67".

42.321

Model

3060R

3060L

3060RBN

3060LBN

Color


White

Bone

White

Bone

Barrier-Free Shower Floor 30"x 60" and Entry Ramp 12"x 60"

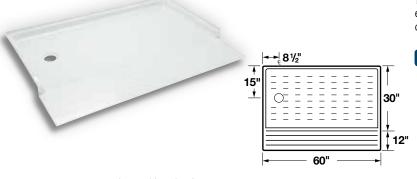

Shown with optional entry ramp, 360.100



The CareGiver® product line of Easy-Access Shower Floors provides quality-built, engineered solutions that enable safe, effortless shower access to those with limited or assisted mobility.

Features

- Produced from high-grade, reinforced, molded fiberglass
- Ideal for new or remodel projects...fits several DURAWALL® Shower Walls as well as ceramic tile or preformed wall kit
- Replaces standard 30" deep by 60" wide bathtubs
- Slip resistant surface...stain, mildew and mold-resistant finish
- Optional drain kits are available; LH or RH drain location (see page 22)

| Model | Color | Drain | Model | Color |
|---------------------------|-------|------------|-----------|-------|
| BARRIER-FREE SHOWER FLOOR | | | ENTRY RAI | MP |
| 360R | White | Right Hand | 360.100 | White |
| 360RBN | Bone | Right Hand | 360.100BN | Bone |
| 360L | White | Left Hand | | |
| 360LBN | Bone | Left Hand | | |


General: Furnish and install as shown on plans DURABASE® Shower Floor Model: _ , as manufactured by E.L. Mustee & Sons, Inc. Floor to be one piece, molded fiberglass made with matched metal molds. Surface to be slip-resistant that does not interfere with the flow of water. Size 30" x 60". Shoulder will be no less than 1" higher or less than 1" wide. Tilling flange will extend not less than 1" high to provide an integral water barrier. Shall meet ADA, ASTM D635, E-84 and D635, and Code of Federal Regulation July 1, 1997. Color: _ (White, Bone).

360.100 Entry Ramp — Furnish and install as shown on plans DURABASE* Shower Floor Entry Ramp Model: _, as manufactured by E. L. Mustee & Sons, Inc. Ramp to be one piece, molded fiberglass made with matched metal molds. Size 12"x 60". Color: _ (White, Bone).




Barrier-Free Shower Floor 38"x 65" and Entry Ramp 12"x 60"





Shown with optional entry ramp, 360.100



Features

- Produced from high-grade, reinforced, molded fiberglass
- Ideal for new or remodel projects
- Fits 65" wide by 38" deep alcove
- Slip resistant surface...stain, mildew and mold-resistant finish
- Meets ADA requirements for a full 36" turning circle
- Suggest 42.317A drain assembly
- Optional drain kits also available (see page 22)

| Model | Color | Drain | Model | Color |
|---------------------------|-------|--------------|----------|-------|
| BARRIER-FREE SHOWER FLOOR | | | ENTRY RA | MP |
| 3865 | White | Center Drain | 360.100 | White |

General: Furnish and install as shown on plans Barrier-Free Shower Floor Model 3865, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one piece, molded fiberglass made with matched metal molds. Surface to be slip-resistant Starburst" design that does not interfere with the flow of water. Size 38" x 65". Shoulder will be no less than 3" higher or less than 1" wide. Tilling flange will extend not less than 1" high to provide an integral water barrier. Threshold will be 1/2" high. Shall meet ADA, ASTM D635, E-84 and D635, and Code of Federal Regulation July 1, 1997 and July 1, 2007. Color: White.

360.100 Entry Ramp - Furnish and install as shown on plans DURABASE* Shower Floor Entry Ramp Model: 360.100, as manufactured by E. L. Mustee & Sons, Inc. Ramp to be one piece, molded fiberglass made with matched metal molds. Size 12"x 60". Color: White.

Accessories

Accessories for all Easy Access Shower Floors



 CareGiver® Safety Grab Bar Model 390.304



CareGiver® Fold-Down **Shower Seats**



DURAWALL® Shower Walls



Drain Assemblies



 GapSeal-Pro™ Model 60.320A



Continuous Water Barrier Kit; 360.210

CAREGIVER® SAFETY GRAB BARS




TWIST-LOCK CONCEALED FLANGE — locking tabs on the flange cover plate. Turn 15 degrees under the matching wedges on the mounting flange.

GRAB BARS — stainless steel, concealed twist-lock flanges, smooth finish

11/2" Straight

| Size | Model |
|--------------------|---------|
| 18" 457 mm | 390.305 |
| 24 " 610 mm | 390.301 |
| 36 " 915 mm | 390.306 |
| 42" 1067 mm | 390.307 |
| 48" 1220 mm | 390.302 |



General: Furnish and install as shown on plans, Straight Safety Grab Bar Model: _____, as provided by E. L. Mustee & Sons, Inc. Grab bar with Twist-Lock concealed flange shall be 1½" diameter, 18 gauge, type 304 satin-finish stainless steel tubing. 14-gauge stainless steel mounting flange shall be Heliarc welded to the tube to form a single structural unit. Grab bar shall comply with applicable building codes. Meets ANSI A117.1.

Grab bars benefit those needing extra stability and support when showering or bathing. Mustee's reputation for excellence in both design features and quality make the company's GareGiver* line of Grab Bars the preferred choice of both healthcare professionals and home owns alike.

Featuring exceptional strength and rigidity, produced from heavy gauge stainless steel, CareGiver® grab bars are manufactured to meet or exceed the most stringent industry and government requirements...

Features

- Smooth stainless steel, 18-gauge tubing, satin finish, 1½" diameter
- Exclusive "Twist-Lock" concealed flange-snaps into place for a secure, tamper-proof mounting
- All bars have a nominal offset distance of 1½" (38 mm)
- Bar can't separate from flange
- Flat contact surface won't cut wall surfaces bar remains stable without further tightening
- 304 Stainless steel mounting flange 14 gauge
- Tested to withstand 500 lbs. of downward load when properly installed
- Meets or exceeds HUD, FHA, VA, ADA and other Federal/Local codes

11/2" Angled

| | A — Size — B | С | Model |
|-------------------------------|---------------------------------------|-------|---------|
| * A | 24 " 610 mm 16 " 430 mm | n 90° | 390.308 |
| 5" (125 mm) B | 32 " 813 mm 16 " 430 mm | n 90° | 390.309 |
| A A | 24" 610 mm 16" 430 mm | n 90° | 390.310 |
| B 5" (125 mm) | 32" 813 mm 16" 430 mm | n 90° | 390.311 |
| A * | 30" 762 mm | 90° | 390.312 |
| | 12" 305 mm No Corner Flange | 120° | 390.313 |
| Rotate for RH or LH use | 16" 430 mm | 120° | 390.314 |
| C° N | 24" 610 mm | 120° | 390.315 |
| Inside Corner Sty | les | | |
| 34" 8 18" | 34 " 863 mm 18 " 457 mm | n 90° | 390.304 |
| 42" 6 20" | -42" 1067 mm 20" 508 mm | n 90° | 390.303 |

General: Furnish and install as shown on plans, Angled Safety Grab Bar Model: _______, as provided by E. L. Mustee & Sons, Inc. Grab bar with Twist-Lock concealed flange shall be $1\frac{1}{2}$ " diameter, 18 gauge, type 304 satin-finish stainless steel tubing. 14-gauge stainless steel mounting flange shall be Heliarc welded to the tube to form a single structural unit. Grab bar shall comply with applicable building codes. Meets ANSI A117.1.



Strong, sturdy and quality built, Mustee offers the most popular seat configurations and styles in both self-supporting and seats with legs.

Besides being a necessity for those who are unsteady on their feet and require assistance in the shower, many others enjoy Mustee premium fold-down shower seats for the convenience and comfort.

CareGiver fold-down seats are the ideal solution for creating a comfortable and sturdy sit space in showers of all types.





Features

- Popular sizes and shapes
- Fire and mildew resistant
- When properly installed, wall-mount units can support up to 400 lbs., and leg-supported units can support up to 400 lbs.
- White cushion filled with high-resilience, high-density foam to maintain original shape
- Smooth cushion edges without corded piping eliminates discomfort for pressure-sensitive bathers
- Rust-resistant stainless steel hardware
- Easy to install & clean stain-resistant surface

Left-Hand Seat - Wall Mount




| Size (A x B) | Model |
|--------------|---------|
| 26" x 21" | 390.402 |
| 32" x 21" | 390.404 |

Right-Hand Seat – Wall Mount




| Size (A x B) | Model |
|--------------|---------|
| 26" x 21" | 390.401 |
| 32" x 21" | 390.403 |

Left-Hand Seat — With Legs



| 26" x 21" | 390.405 |
|-----------|---------|
| 32" x 21" | 390.406 |
| | |

Right-Hand Seat – With Legs




| 26" x 21" | 390.407 |
|-----------|---------|
| 32" x 21" | 390.408 |
| | |

Rectangular Seat - Wall Mount



| 23" x 14½" | 390.413 |
|------------|---------|
| 26" x 14½" | 390.409 |
| 32" x 14½" | 390.410 |
| | |

Rectangular Seat – With Legs



| 26" x 14½" | 390.411 |
|------------|---------|
| - | 000 |
| 32" x 14½" | 390.412 |
| | |
| | |

WALL MOUNTED UNITS:

General: Furnish and install as shown on plans, Fold-down Wall Mounted Shower Seat Model: ______, as provided by E. L. Mustee & Sons, Inc. Shower seat tubing shall be one-inch diameter, 18 gauge, type 304 stainless steel with #4 satin finish. Mounting brackets shall be 12-gauge type 304 stainless steel. Padded vinyl cushion shall have 1½" high density, high-resilience foam, covered with fire and mildew resistant, UV inhibited, marine-grade Naugahyde. White cushion shall have no external piping. Shower seat unit shall comply with applicable building codes. Meets ANSI A117.1.

LEG SUPPORTED UNITS:

General: Furnish and install as shown on plans, Fold-down Leg-Supported Shower Seat Model: _____, as provided by E. L. Mustee & Sons, Inc. Shower seat tubing shall be one-inch diameter, 18 gauge, type 304 stainless steel with #4 satin finish. Shall include a fold-down mechanism with four support legs. Mounting brackets shall be 12-gauge type 304 stainless steel. Padded vinyl cushion shall have 1½" high density, high-resilience foam, covered with fire and mildew resistant, UV inhibited, marine-grade Naugahyde. White cushion shall have no external piping. Shower seat unit shall comply with applicable building codes. Meets ANSI A117.1.

Specifications

2218 Undermount or Top Mount Sink – 3½" Opening



Undermount

It's time to think undermount for your utility sink.

E. L. Mustee & Sons has done just that. Meet the newest VECTOR™ undermount utility sink.

Ideal for home bars, hobby, work, or utility rooms, this utility sink is the best on the market bringing together upscale style and great design. Let us help you discover a multitude of ways in which this utility sink can complement any home environment.

Features

- Mustee's premium, high grade VARISTONE™ fiberglass
- One piece molded with matched metal molds
- Semi-gloss, scratch & stain resistant
- Drain opening for standard 3½" basket strainer (not included)
- Accommodates any faucet, soap dispenser and more that can be surface mounted to the counter top
- Color: White
- Template included for undermount and top mount installation

Code Accepted


Utility Sinks meet or exceed performance requirements:

 International Association of Plumbing and Mechanical Officials (IAPMO®)



- American National Standards Institute (ANSI) Specification Z 124-2017



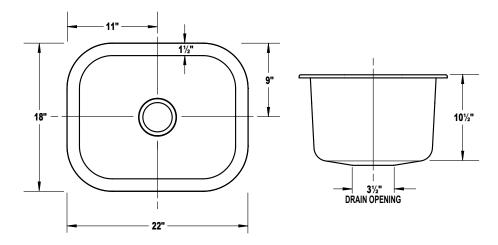



Undermount Cut Out – 15" x 19" with round corners Drop In Cut Out $-15^{1}/_{2}$ " x $19^{1}/_{2}$ "

See template included with sink for exact measurements



Top Mount

General: Furnish and install as shown on plans, an Undermount sink model 2218 as manufactured by E. L. Mustee & Sons, Inc. Material composition shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece, seamless construction with self-rimming edge for Undermount or top mount installation. Shall meet ANSI Specification Z 124-2017. Overall size 18" length x 22" width x 11" depth, weight 16 lbs., Color. White.



LAUNDRY/UTILITY FIBERGLASS SINKS

The new generation of Mustee Utility Sinks are not just for laundry rooms anymore. It's easy to envision these great looking sinks in craft or work rooms or at home bars.

Features

- Molded fiberglass construction
- Self-rimming, easy to install and clean
- Stain-resistant, colorfast surface finish
- Multiple pilot holes to install single or dual handle faucet with 4" or 8" center, soap dispensers or sprayers

Code Accepted

Utility Sinks meet or exceed performance requirements:

International Association of Plumbing and Mechanical Officials




Color

White

Biscuit

Twilight

Prairie Drift






■ American National Standards Institute (ANSI) — Specification Z 124-2017




Specifications

25 VECTOR™ Multi-Task Sink – Includes 1½" Drain for 1½" P-Trap with Stopper 🐯








12-Gallon Capacity

Model **Dimensions** LxWxD* Overall 22" x 25" x 12¾" 25 Inside (top) 151/3" x 22" 25BT Inside (shelf) 15½" x 3½" 25TW Cutout 21" x 24" 25PD

25 Vector Colors (check for availability)



General: Furnish and install as shown on plans, a Countertop Sink Model 25 as manufactured by E.L. Mustee & Sons, Inc. Material composition shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece, seamless construction with self-rimming edge and complete 11/2" drain assembly. Shall meet ANSI Specification Z 124-2017. Overall size 22" length x 25" width x 123/4" depth, weight 16 lbs. Color: _ ___ (White, Biscuit, Twilight, Prairie Drift).

Accessories

Optional Utility Rack – Model 25.300



The optional Utility Rack is the perfect way to realize all the functionality that the VECTOR™ Multi-Task Sink has to offer.

Designed to rest on the shelf and opposite ledge, this strong, VECTOR™ utility rack creates a work surface ideal for rinsing, watering, craft work or drying...the options

Overall

14½" x 21"

White plastic coated steel wire rack will support up to 40 lbs.


| Model | Color |
|--------|-------|
| 25.300 | White |



10 Utility Sink – Includes $1\frac{1}{2}$ " Drain for $1\frac{1}{2}$ " P-Trap, with Stopper







| Dillielisiolis | LAWAD |
|----------------|--------------------|
| | |
| Overall | 22" x 25" x 13¾" |
| Inside Bowl | 15¾" x 21¾" x 13¼" |
| Cutout | 21" x 24" |


Model Color
10 White
10BN Bone
17-Gallon Capacity

General: Furnish and install as shown on plans, a Countertop Sink Model 10 as manufactured by E. L. Mustee & Sons, Inc. Shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece molded construction with self-rimming edge. Complete drain assembly. Overall size: 22" x 25" x 13³/₄". Shall meet ANSI Specification Z 124-2017. Color: ______ (White, Bone).

11 Utility Sink - 3 1/2" Opening







 Overall
 20" x 17" x 10"

 Inside Bowl
 15" x 14" x 9½"

 Cutout
 18½" x 15½"

11 White 11BN Bone 11BT Biscuit 7-Gallon Capacity


General: Furnish and install as shown on plans, a Countertop Sink Model 11 as manufactured by E. L. Mustee & Sons, Inc. Material composition shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece seamless construction with self-rimming edge. 3 ½" drain opening. Overall size: 20" x 17" x 10". Shall meet ANSI Specification Z 124-2017. Color: _______ (White, Bone, Biscuit).



20 Bar Sink – 3 ½" Opening







7" Overall Inside Bov Cutout


 Overall
 15" x 15" x 734"

 Inside Bowl
 10" x 12" x 7"

 Cutout
 13½" x 13½"

20 White20BN Bone3-Gallon Capacity

Available Sink Colors (check for availability)




General: Furnish and install as shown on plans, a Countertop Sink Model 20 as manufactured by E. L. Mustee & Sons, Inc. Shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece construction with self-rimming edge. 3 ½" drain opening. Overall size: 15" x 15" x 7³4". Shall meet ANSI Specification Z 124-2017. Color: ______ (White, Bone).



10C Utility Sink – 3 ½" Opening







 $\begin{array}{lll} \text{Overall} & 22" \, x \, 25" \, x \, 13 \%" \\ \text{Inside Bowl} & 15 \%" \, x \, 21 \%" \, x \, 13 \%" \\ \text{Cutout} & 21" \, x \, 24" \\ \end{array}$

10C White10CBT Biscuit17-Gallon Capacity

General: Furnish and install as shown on plans, a Countertop Sink Model 10C as manufactured by E. L. Mustee & Sons, Inc. Shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece molded construction with self-rimming edge. 3 ½" drain opening. Overall size: 22" x 25" x 13 ¾". Shall meet ANSI Specification Z 124-2017. Color: ______ (White, Biscuit).





Features


- Standard components include...
- Slip-resistant floor with drain
- Shower valve
- Curtain
- Safety railing with molded in soap dish and shampoo holder



- Bases include a PVC drain for connection to a 2" (Sch. 40) ABS, PVC or iron DWV pipe
- Knock-down construction makes portability extremely easy
- Shower stall materials are mold and mildew-resistant







DURASTALL® FREE-STANDING SHOWER STALL .

Few could argue about the benefits of having an extra shower at home, in a cabin, pool side, etc. ...but, only Mustee free-standing shower stall delivers the best in features, benefits, durability and quality!

So wherever you need to add the convenience of an extra shower, make the smart money buy and specify a high quality Mustee shower stall. Available in 30" x 30", 32" x 32" and 36" x 36" sizes.



Specifications

80, 140 DURASTALL®

| Model | Nom. Size | Type Base | A | В | C | D |
|-------|-----------|-----------|----------------------------------|----------------------|--------|-----|
| 80 | 32" x 32" | Standard | 325/," | 75³/ ₈ " | 165/," | 24" |
| 140 | 36" x 36" | Standard | 36 ⁵ / ₈ " | 75³/́ ₈ " | 185/1" | 28" |

General: Furnish and install as shown on plans, a free-standing DURASTALL* Shower Stall Model: _______, as manufactured by E. L. Mustee & Sons, Inc. Consist of three, white high-gloss thermoplastic walls, molded top frame, rigid aluminum front supports, one-piece wrap-around railing with built-in soap dish and container. Skid-resistant floor with drain assembly, shower head and valve, shower curtain and rod, plus assembly hardware.

30, 68 DURASTALL®

| 30 | 30" x 30" | Standard | 30" | 73" | 15" | 24" |
|----|-----------|----------|--------|----------------------------------|--------|-----|
| 68 | 32" x 32" | Standard | 325/。" | 74 ³ / ₄ " | 165/," | 24" |

General: Furnish and install as shown on plans, a free-standing DURASTALL® Shower Stall Model: _______, as manufactured by E. L. Mustee & Sons, Inc. Consist of three, white, high-gloss thermoplastic walls, molded top frame, rigid thermoplastic front supports, one-piece, wrap-around railing with built-in soap dish and container. Skid-resistant floor with drain assembly, shower head and valve, shower curtain and rod, plus assembly hardware.

Accessories

Shower Doors – Install to Open from Either Side


Shower doors are available, featuring aluminum frames with magnetic latch mount to open left or right.

| Model | Opening | Height | Fits DURASTALL Models | |
|-----------|--------------------|-------------------|---------------------------|--|
| GLASS DOO | R — obscure, tempe | ered safety glass | panel with aluminum frame | |
| 88.700 | 24" | 64" | 80 | |
| 48.700 | 28" | 64" | 140 | |

Extended Base Kit – Extension raises the base up 23/4"

Add this kit to the bottom of the standard base included in the Mustee Model 80 or 140 DURASTALL* Shower Stall (bought after 6-01-16) to raise the base up by $2\frac{3}{4}$ ". This will allow you to run a $1\frac{1}{2}$ " PVC pipe (not included) from under the shower floor, on top of the sub-floor to an existing drain. The drain can be positioned so the pipe can come out from under the shower floor in one of four directions.

| Model | Max. Size | Fits DURASTALL Models |
|--------|---|-----------------------|
| 86.500 | 36" x 36" x 2 ³ / ₄ " | 80. 140 |



Kit includes: 4 Extension Blocks 1 82.400A Drain Kit





UTILATUB® & UTILATWIN® LAUNDRY TUBS

The standard of excellence in single and double bowl laundry tubs is UTILATUB* and UTILATWIN*, exclusively from E. L. Mustee & Sons, Inc.

Product innovation and development have positioned our laundry/utility tubs as the brand the pro's specify and install for the best in sizing, selection, features, quality, and user satisfaction

Mustee tubs are molded using premier DURASTONE* structural fiberglass and Co-PolyPure™ polypropylene. There is a size and style to fit any setting.


Features

- Extra deep tubs help retain water...capacities range from 18 to 23 gallons per bowl
- High strength, impact resistant construction
- All models hook up to standard 11/2" P-Trap
- Floor-mount models feature heavy gauge steel legs with levelers
- Wall-mount models feature a heavy gauge steel mounting bracket and hardware
- Stain and mildew-resistant surface, easy to clean
- Twin drain assembly included with all UTILATWIN® models
- Eco-Friendly powder coated legs
- All Mustee laundry tubs accommodate 4" center set faucets. Model 15F/W, 17F/W, 18F/W, 27F/W and 26F/W can also accommodate 8" center set and single-lever faucets

Specifications

Premier Thermoplastic Laundry Tubs







| Model | Mount | Length* | Width* |
|-------------|--------------------------|------------|----------|
| 27F/W L | JTILATWIN [®] I | LAUNDRY TU | JB |
| 27F | Floor | 24" | 40" |
| 27W | Wall | 24" | 40" |
| 38-Gallon C | apacity | | lntertek |

General: Furnish and install as shown on plans, UTILATWIN* Laundry/Utility Tub Model: ______ (27F, 27W), as manufactured by E. L. Mustee & Sons, Inc. Unit shall be one-piece molded construction using cellular structural thermoplastic with matched metal molds under extreme heat and pressure. Complete drain assembly, twin drain waste coupling, recessed divider wall between tubs and floor or wall mounting hardware. Shall meet ANSI Specification Z 124-2017. Color: White.








19F/W UTILATUB® LAUNDRY TUB


| | 0 | c | 0.5 |
|-----------|----------|-----|-----|
| 19F | Floor | 24" | 20' |
| 19W | Wall | 24" | 20" |
| 18-Gallon | Capacity | | |

UTILATOP™ Top Cover Available (See page 33)

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model: _______ (19F, 19W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using structural thermoplastic with matched metal molds under extreme heat and pressure. Tub to include integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124-2017. Color: White.







15F/W UTILATUB® LAUNDRY TUB

 15F
 Floor
 23½"
 23"

 15W
 Wall
 23½"
 23"

19-Gallon Capacity

Built-in scrub board



General: Furnish and install as shown on plans, UTILATUB* Laundry/Utility Tub Model: _______ (15F, 15W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using structural thermoplastic with matched metal molds under extreme heat and pressure. Tub to include built-in scrub board, integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124-2017. Color: White.

Features (Continued)

- Sturdy, one-piece molded design
- Extra deep molded tubs minimize overflow risk
- Leakproof, integrally molded-in drain or drain assembly with stopper







Sturdy, steel legs

Ample shelf

Molded drain

Code Accepted

UTILATUB® and UTILATWIN® Laundry/Utility Tubs meet or exceed performance requirements as listed:

- International Association of Plumbing and Mechanical Officials (IAPMO®)
- Warnock Hersey® (Canada) Listed CSA test standards: Laundry Tray #B45.0 and #B45.5, Drain #B125
- American National Standards Institute (ANSI) Specification Z 124-2017 (ANSI)






Specifications

Premier DURASTONE® Laundry Tubs







| Model | Mount | Length* | Width* |
|-------------|--------------------------|------------|----------|
| 26F/W | UTILATWIN [®] I | LAUNDRY TU | JB |
| 26F | Floor | 24" | 40" |
| 26W | Wall | 24" | 40" |
| 38-Gallon (| Capacity | ٥ | Intertek |

General: Furnish and install as shown on plans, UTILATWIN* Laundry/Utility Tub Model: ______ (26F, 26W), as manufactured by E. L. Mustee & Sons, Inc. Unit shall be one-piece molded construction using natural crushed stone with polyester resin, complete drain assembly, twin drain waste coupling, recessed divider wall between tubs and floor or wall mounting hardware. Shall meet ANSI Specification Z 124-2017. Color: White with marbleized finish.







18F/W UTILATUB® LAUNDRY TUB18F Floor 24"

 18F
 Floor
 24"
 20"

 18W
 Wall
 24"
 20"

 18-Gallon Capacity
 Image: Capacity Capacity
 Image: Capacity Capacity






UTILATOP™ Top Cover Available (See page 33)

General: Furnish and install as shown on plans, UTILATUB* Laundry/Utility Tub Model: ______ (18F, 18W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using natural crushed stone with polyester resin. Tub to include integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124-2017. Color: White with marbleized finish.



* Length (front to back); Width (left to right).



17F/W UTILATUB® LAUNDRY TUB 17F Floor 23½"

Wall

19-Gallon Capacity

17W



231/3"



23"

Built-in scrub board

General: Furnish and install as shown on plans, UTILATUB* Laundry/Utility Tub Model: _______ (17F, 17W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using natural crushed stone with polyester resin. Tub to include built-in scrub board, integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124-2017. Color: White with marbleized finish.

28F Bigith UTILATUB UTILITY TUB _



Great Cor Washing Really Control Cont

If you need a really BIG space to wash your dog, clean off BBQ grates, or ice down all your favorite beverages, then you need the 28F BIGTUB™ UTILATUB* multi-purpose utility tub.



Truly "King-sized," the 28F is one huge 40" wide, single bowl tub that's great addition to any Man Cave, utility room, crafting area, and more.

Features

- One-piece molded tub of impact-resistant polypropylene
- Heavy gauge steel legs, with adjustable levelers
- Large, self-draining back shelf directs water run-off into the tub
- Accommodates single-lever or dual-handle faucet with 4" or 8" center
- Mold and mildew-resistant components
- Easy to assemble and install
- Color-fast, stain-resistant white finish
- Drain stopper
- Eco-Friendly powder coated legs

| Side | e Views | Top V | iews |
|---------------|---------|-------|--|
| 33" PPROX. | | 24" | 8½"—• 20"———————————————————————————————————— |

| Model | Mount | Outside HxWxD | Inside HxWxD |
|-----------------|-------|----------------|----------------|
| 20511711 471158 | | 2.4" 4.0" 2.4" | 12144 26144 15 |

28F UTILATUB* Floor 34" x 40" x 24" 12 ½" x 36 ½" x 17 ½"

36-Gallon Capacity

General: Furnish and install as shown on plans, BIGTUB™ UTILATUB® Utility Tub Model _____(28F) as manufactured by E.L. Mustee & Sons, Inc. Tub shall be one-piece molded polypropylene with matched metal molds. 28CF Combo kit to include: Swivel faucet with 24" long pull-out spout and lever handles; 11½" P-trap with 12" tailpiece; and two flexible, 20" long braided supply lines. 28F to include steel legs with adjustable levelers; a 1½" Molded-in drain and Drain stopper. 36-Gallon capacity. Shall meet ANSI Specification Z 124-2017 Color: White. Weight: 23 lbs.

21F LITTIM UTILATUB UTILITY TUB — Extra Narrow — Just 18" Wide — Fits Where Other Tubs Can't __



Side Views



Top Views



The 21F Lil'TUB brings all the best in Mustee's full size Laundry/Utility Tub features and benefits to an extra-narrow tub that fits in virtually any laundry space. "Preferred by the Pros" for decades, Mustee UTILATUB Laundry/Utility tubs are the quality standard in features, performance and value.

Features

- One piece molded construction
- 15-Gallon capacity, extra deep 13" tub with smooth surface
- Leakproof, integrally molded-in drain with stopper
- Connects to standard 1½" P-Trap
- Accommodates single lever or dual-handle faucet with 4" or 8" center
- Includes finished steel legs with adjustable levelers
- Mold and mildew-resistant components
- Easy to assemble and install
- Color-fast white finish
- Eco-Friendly powder coated legs





| Model | Mount | Width* | Length* | |
|--------------------|-------|--------|---------|--|
| 21F UTILATUB® | Floor | 18" | 231/2" | |
| 15-Gallon Capacity | | | | |

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model 21 as manufactured by E. L. Mustee & Sons, Inc. Model 21 shall be one-piece molded Co-PolyPure™ tub complete with drain and floor hardware. Color: White with satin finish.

14 UTILATUB[®] Laundry Tub



Specifications

Side Views 15" 33" APPROX.



| Model | Mount | Width* | Length* | |
|-------------------|-------|--------|---------|-------|
| 14 UTILATUB | 0 | | | F |
| 14 | Floor | 23" | 25" | |
| 20-Gallon Capacit | Ŋ | | | • 🗸 • |

General: Furnish and install as shown on plans, UTILATUB* Laundry/Utility Tub Model 14 as manufactured by E. L. Mustee & Sons, Inc. Model 14 shall be one-piece molded Co-PolyPure™ tub complete with drain and floor hardware. Shall meet ANSI Specification Z 124-2017 Color: White with satin finish.

12 UTILATUB[®] Laundry Tub



Side Views 15" 33" APPROX.



| Model | Mount | Width* | Length* | |
|--------------------|-------|--------|---------|------|
| 12 UTILATUB® | | | | |
| 12 | Floor | 18" | 231/2" | We . |
| 1/LGallon Canacity | | | | ٠٠٠ |

General: Furnish and install as shown on plans, UTILATUB* Laundry/Utility Tub Model 12 as manufactured by E. L. Mustee & Sons, Inc. Model 12 shall be one-piece molded Co-PolyPure™ tub complete with drain and floor hardware. Shall meet ANSI Specification Z 124-2017 Color: White with satin finish.

Accessories

19.204A UTILATOP™– Laundry Tub Top Cover



Conceals tub interior and provides additional counter space. Heavy-duty, molded UTILATOP™ fits Mustee's 19F (floor), 19W (wall), 18F (floor) and 18W (wall) UTILATUB* Laundry Tubs. White, colorfast surface is easy to clean.

93,600

- Laundry Tub Faucet



Chrome-finish, 4" center set, 6" swing spout with aerator and hose-end.





20,600

- Faucet Block



Deluxe molded faucet block mounts to laundry tub when using a clamp-on faucet with overhead water supply.


One convenient box...everything you need to install a Mustee laundry tub



Specifications







Model Style Width (A) Length (B) Drain (C)

24"

19CF UTILATUB® COMBO

19CF Single 20" 18-Gallon Capacity 10"





19CFT UTILATUB® COMBO WITH TOP COVER*19CFT Single 20" 24" 10"





*Includes Top Cover 19.204A (See page 33)

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model 19CF as manufactured by E. L. Mustee & Sons, Inc. Model 19C shall be one piece molded construction using structural thermoplastic with matched metal molds under extreme heat and pressure. Tub to include integrally molded drain assembly, stopper, floor hardware, faucet, supply lines, P-Trap, top cover and Teflon® tape. Shall meet ANSI Specification Z 124-2017 Color: White.

18-Gallon Capacity







12C UTILATUB® COMBO


12C Single 18" 18-Gallon Capacity 231/2"






General: Furnish and install as shown on plans, UTILATUB* Laundry/Utility Tub Model 12C as manufactured by E.L. Mustee & Sons, Inc. Model 12C—shall be one-piece molded Co-PolyPure™ tub, complete with drain, faucet, supply lines, P-Trap, Teflon* tape. Color: White with satin finish.







14CP UTILATUB® COMBO

14CP Single 23" 20-Gallon Capacity

11

25"





General: Furnish and install as shown on plans, UTILATUB* Laundry/Utility Tub Model 14CP as manufactured by E.L. Mustee & Sons, Inc. Model 14CP—shall be one-piece molded Co-PolyPure™ tub, complete with drain, faucet, supply lines, P-Trap, Teflon* tape. Color: White with satin finish.

One box...everything you need to install.


Purchase one of Mustee's popular UTILATUB® or UTILATWIN® Combo Kit Laundry/ Utility tubs, and you'll enjoy the convenience of having everything you need to install in one box...just add tools!

Preferred by the Pros... Mustee's UTILATUB® and UTILATWIN® Laundry/Utility Tubs have been the quality and performance standard for residential, commercial, institutional and industrial laundry & utility tub applications for decades.



Specifications






Model Style Width (A) Length (B) Drain (C) 28CF BIGTUB" UTILATUB" COMBO 28CF Single 40" 24" 8½" 36-Gallon Capacity

Includes a Pull Out Faucet!

General: Furnish and install as shown on plans, BIGTUB™ UTILATUB™ Utility Tub Model ______(28CF) as manufactured by E.L. Mustee & Sons, Inc. Tub shall be one-piece molded polypropylene with matched metal molds. 28CF Combo kit to include: Swivel faucet with 24" long pull-out spout and lever handles; 1½" P-trap with 12" tailpiece; and two flexible, 20" long braided supply lines. 28CF to include steel legs with adjustable levelers; a 1½" Molded-in drain and Drain stopper. 36-Gallon capacity. Shall meet ANSI Specification Z 124-2017 Color: White. Weight: 23 lbs.






22C UTILATWIN® COMBO 22C Double 36" 23½" 18" 31-Gallon Capacity




General: Furnish and install as shown on plans, UTILATWIN® Laundry/Utility Tub Model 22C, as manufactured by E. L. Mustee & Sons, Inc. Model 22C consists of molded Co-PolyPure™ dual tub, joined by molded bracket, complete with twin drain, faucet, supply lines, P-Trap, Teflon® tape and floor hardware. Color: White with satin finish.





| - 4" - 0 | 7" | 24C UTILATWIN® COMBO 24C Double 46" |
|------------------|-----|--|
| 23" | 25" | 41-Gallon Capacity |





General: Furnish and install as shown on plans, UTILATWIN* Laundry. Utility Tub Model 24C, as manufactured by E. L. Mustee & Sons, Inc. Model 24C consists of molded Co-PolyPure™ dual tub, joined by molded bracket, complete with twin drain, faucet, supply lines, P-Trap, Teflon* tape and floor hardware. Color: White with satin finish.

99 & 98 DURAPAN™ WASHER AND WATER HEATER PANS

Protects your belongings from water damage due to an overflowing clothes washer or hot water heater.

99 and 98 Fiberglass DURAPAN™



Model 99–center drain for installation directly over 2" ABS, PVC (Sch. 40) or iron drain pipe.

Model 98–furnished outlet fitting may be installed on bottom or any side for connection to 1" PVC drain pipe.

Features

- Removable aluminum front to simplify washer placement
- Reinforced design provides strength
- Securable to the floor to prevent movement
- Mold and mildew-resistant, easy to clean



Specifications



Model Drain

99 Centered

Drain

Side

Model

98

Overall LxWxH*
30" x 32" x 2¹/₂"

Overall LxWxH*

30" x 32" x 2¹/₂"


Inside LxWxH*


Inside LxWxH*


28" x 29" x 2'


28" x 29" x 2"














General: Furnish and install as shown on plans, DURAPAN[™] Model: ______, as manufactured by E. L. Mustee & Sons, Inc. Models 99 and 98-one-piece compression molded fiberglass, using matched metal molds under extreme heat and pressure. Size: 30"x32". Shoulder will be no less than 2½" high. Removable aluminum threshold with water tight seal secured by stainless steel screws into threaded brass inserts. Mounting screws and anchors furnished to secure base to floor. Model 99 shall include IAPMO" Listed drain assembly for installation of 2" iron, PVC or ABS DWV (Schedule 40) sanitary waste pipe. Model 98 shall include 1" DWV 90" elbow fitting. Shall meet ASTM D 635, E-84 and E-162. Color: White.

96 Co-PolyPure™ DURAPAN™


Model 96–furnished outlet fitting may be installed on bottom or any side for connection to 1" PVC drain pipe leading to drain.

Features

- Extra large for larger washing machines
- Mold and mildew-resistant
- Easy to clean
- Co-PolyPure[™] thermoplastic







 Model
 Drain
 Overall LxWxH*
 Inside LxWxH*

 96
 Side or Bottom
 31" x 331/2" x 21/8"
 29" x 311/2" x 2"

General: Model 96-one-piece molded Co-PolyPure™, using matched metal molds. Shall include one 1" PVC fitting. Color: White. Install in compliance with local codes.


95 DURAPAN™ Compact Washing Machine Pan


The Mustee 95 DURAPAN™ Washing Machine Pan was designed as a solid washer pan for compact combination and stacked washer/dryers in high rise apartments and condos.

This high strength, impact-resistant molded pan features a $2\frac{1}{4}$ " tall curb with a 1" 90 degree PVC elbow drain fitting for drainage.

Features

- Protects from water damage
- Includes 1" 90 degree PVC elbow drain fitting
- Prevents washer from marring the floor surface
- Mold/mildew resistant and easy to clean
- Installs easily
- Ideal for 2nd/multilevel buildings

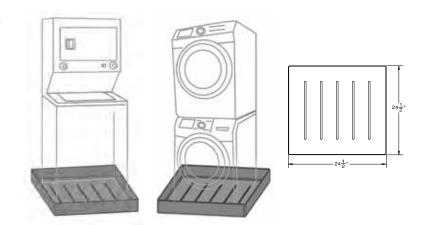





Includes a solvent welded 90 degree PVC elbow which can be positioned anywhere on the side of back walls. The elbow connects with 1" PVC pipe (not included) to enable access to remote drain.

| Model | Drain | Overall LxWxH* | Inside LxWxH* |
|-------|----------------|---|---|
| 95 | Side/Back Wall | 24 ¹ / ₂ " x 24 ¹ / ₂ " x 2 ¹ / ₄ " | 23 ¹ / ₄ " x 23 ⁷ / ₈ " x 2 ¹ / ₄ " |





General: Furnish and install as shown on plans DURAPAN™ Washing Machine Pan, Model 95, as manufactured by E. L. Mustee & Sons, Inc. One-piece molded Structural Thermoplastic. Shoulder will be no less than 2 ¼" high. Shall include drain assembly for connection to 1" 90 degree PVC elbow drain fitting. Color: White.

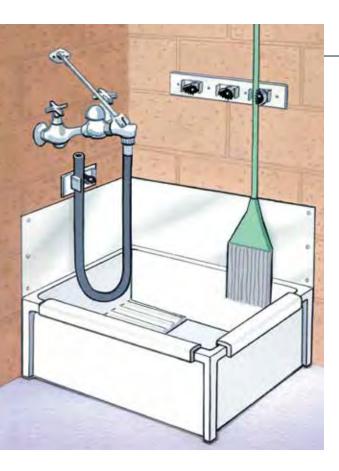

MOP SERVICE BASINS

Mustee's extra-tough mop service basins and companion products have long been the preferred choice of specifying architects and engineers.

Whether installed in a factory, hospital, school, office building or even in a garage, work room or basement, Mustee's line of Mop Service Basins include the features users appreciate most. The rugged, easy to install and perfectly functional...Mustee's line of Mop Service Basins will deliver years of service.



Features

- One-piece molded from high impact resistant DURASTONE* fiberglass
- Elevated, self-draining shelf (Model 65M) and removable strainer
- Integral molded-in drain with seal for 3" ABS, PVC (Sch. 80) or cast iron
- Available drain seals for connecting 2" pipe or 3" soil pipe
- Numerous mop basin accessories are also available

Code Accepted

Mustee's Mop Service Basins meet or exceed performance requirements:


- International Association of Plumbing and Mechanical Officials (IAPMO®) Listed
- Warnock Hersey® (Canada) Listed CSA Test Standards: Mop Basins #B45.0
- American National Standards Institute (ANSI) Specification Z 124-2017
- American Society of Testing and Materials (ASTM) D 635 E-84 and E-162
- CAN/ULC S102-07 Burn and Smoke Test




Specifications

63M Mop Basin – 24" x 24" x 10"









| Model | Length* | Width* |
|-------|---------|--------|
| 63M | 24" | 24" |
| | | |
| | | |
| | | |
| | | |

65M Mop Basin – Elevated Shelf, 24" x 36" x 10"






24" 36"

General: Furnish and install as shown on plans, Mop Service Basin Model: _______, as manufactured by E. L. Mustee & Sons, Inc. Unit to be one-piece molded construction by matched metal molds under extreme heat and pressure using fused natural crushed stone with polyester resin. Models shall have integrally molded drain assembly with drain seal and strainer for connection to 2" or 3" iron, ABS or PVC pipe.

Model 63M-10" high with 1" wide shoulder, drain accommodates 3" pipe.

Model 65M-10" high with 1" wide shoulder and integrally molded self-draining shelf, drain accommodates 3" pipe.

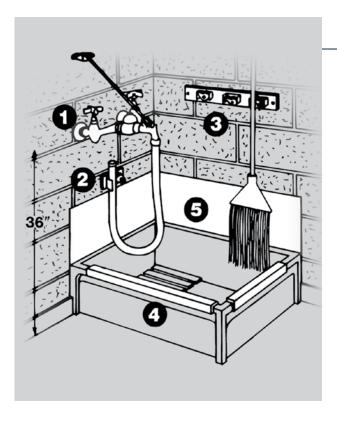

6 OPTIONAL SEALS — For installations with following pipe, order separately.

65.308 - for 2" PVC, ABS and iron

65.309 - for 3" PVC, ABS and iron, included with mop basin

65.311 — for 3" soil pipe (no hub)

MOP SERVICE BASIN ACCESSORIES .


To complete a commercial or residential mop service basin installation, specify and install Mustee's mop service faucet and companion products listed below.

Specifications

1 63.600A SERVICE FAUCET — Chrome plated brass service sink faucet, 1/2" pipe eccentric inlets on 8"



centers. Vacuum breaker integral stops, chrome plated (H&C) handles, 3/4" hose end spout with pail hook, top reinforcing



bar and mounting bracket. Shall meet ANSI Specifications A112.1.1, Section 2.9 and A112.18.1M, CSA Listed. (ANSI

65.700 HOSE and HOSE HOLDER — Heavy-duty 5/8" diameter, reinforced 31" rubber hose with brass couplings on one end. Spring loaded, molded rubber hose holder mounts on stainless steel wall plate.



3 65.600 MOP HANGER – Three spring-loaded rubber holders mounted to 3" x 22" stainless steel wall plate. Wall anchors and mounting screws included.

4 BUMPER GUARDS — Protect rims, snap-on

High impact resistant vinyl

63.401 - 203/4" long white, fits Models 63M and 65M 65.403 - 32 3/4" long white, fits Model 65M

Stainless steel

 $63.403 - 20^{3}$ /" long, fits Models 63M and 65M 65.404 - 32 3/4" long, fits Model 65M

5 DURAGUARD™ WALL GUARDS — Protect wall surfaces, 12" height, 20 gauge, #304 stainless steel.

67.2424 - two panels and bracket for 24"x 24" corner

67.2436 - two panels and bracket for 24" x 36" corner

67.24C - one 24" panel and corner bracket


67.36C - one 36" panel and corner bracket

16 SERVICE MOP SINK _

Wall-mounted mop sink installs anywhere, including the utility room, basement, garage or outdoors. Ideal for cleaning large utensils. Molded-in drain assembly for standard 11/2" trap.

Front View

Specifications



| Model | Length* | Width* |
|-------|---------|--------|
| 16 | 163/4" | 22" |

12-Gallon Capacity

* Length (front to back); Width (left to right).





Quality Products for ___ Residential, Commercial, Healthcare & Institutional Applications

The E.L. Mustee & Sons, Inc. product line meets numerous applications within four broad markets...residential, commercial, healthcare and institutional. We invite you to review the complete line of Mustee products from bathtubs, shower walls and bases to laundry/utility tubs, safety grab bars, and mop service basins.



Residential - from new single-family and cluster homes to older homes and apartment bath renovations.



Healthcare includes hospitals. health care facilities, adult communities, assisted living facilities, apartments and more.



Commercial – includes offices, industrial buildings, hotels and motels.



Institutional includes schools, colleges, libraries, laboratories and more.

Visit us on the web at: **WWW.mustee.com**

Access our website easily from all of your devices.



E. L. Mustee & Sons, Inc.

5431 West 164th St. Brook Park, OH 44142

Phone: 216-267-3100 Fax: 216-267-9997

Email: info@mustee.com









Code Compliance

Code Compliance as indicated, most Mustee products are listed by: International Association of Plumbing and Mechanical Officials (IAPMO*) — United States

Warnock Hersey® – Canada



