

DIAPHRAGM PUMP TANKS

- Pre-pressurized diaphragm operation
- Lightweight, double drawn steel construction
- Heavy duty butyl parabolic diaphragm
- Powder coated exterior finish with high UV resistance
- Fused water chamber with powder coated interior
- Projection welded air valve
- Tank pre-charge 38 psi
- 5-year limited warranty

SPMD SERIES

- Maximum working pressure 100 psi
- Corrosion-resistant polymer base
- NSF 61G/372 galvanized lead-free connection
- In-Line and Horizontal orientations available in select sizes

SSB SERIES

- Maximum working pressure 125 psi
- Exclusive no-weld  steel base design
- 304 stainless steel connection



SPMD Series
Blue Tank Plastic Base



SSB Series
Tan Tank Steel Base




SPMD Series
Blue Tank Horizontal

DIAPHRAGM PUMP TANK SPECIFICATIONS

Model Number	Volume (Gallons)	Connecting NPT Size (Inches)	Dimensions (Inches)			Weight (lbs.)
			A - Overall Height	B - to Center of Water Inlet	C - Diameter	
SPMD Series - Free Standing Plastic Base						
SPMD-14	14	1 (F)	24 3/4	2 1/4	15 3/8	25
SPMD-20	20	1 (F)	32 3/4	2 1/4	15 3/8	30
SPMD-32	32	1 (F)	45 1/2	2 1/4	15 3/8	40
SPMD-36S	36	1 (F)	32 3/8	2 1/4	20	45
SPMD-52	52	1 1/4 (F)	38 5/8	2 1/4	23 3/8	77
SPMD-86	86	1 1/4 (F)	59	2 1/4	23 3/8	105
SPMD-119	119	1 1/4 (F)	61 1/4	2 1/2	26	165
SSB Series - Free Standing Steel Base						
SSB-20	20	1 (F)	32 3/4	2 1/4	15 3/8	30
SSB-32	32	1 (F)	45 1/2	2 1/4	15 3/8	40
SSB-36S	36	1 (F)	32 3/8	2 1/4	20	45
SSB-52	52	1 1/4 (F)	38 5/8	2 1/4	23 3/8	77
SSB-86	86	1 1/4 (F)	59	2 1/4	23 3/8	105
SSB-119	119	1 1/4 (F)	61 1/4	2 1/2	26	165
SPMD(I) Series - In-Line						
SPMDI-2	2	3/4 (M)	2	-	8 1/4	5
SPMDI-5	5	3/4 (M)	5	-	11	8
SPMDI-7	7	3/4 (M)	7	-	11	16
SPMDI-14	14	1 (M)	14	-	15 3/8	25
SPMD(H) Series - Horizontal				B - Overall Length		
SPMDH-7	7	3/4 (M)	7	21 1/8	11	16
SPMDH-14	14	1 (M)	14	21 3/4	21 3/4	25
SPMDH-20	20	1 (M)	20	27 1/8	27 1/8	30

Note:
 M - Male Connection
 F - Female Connection

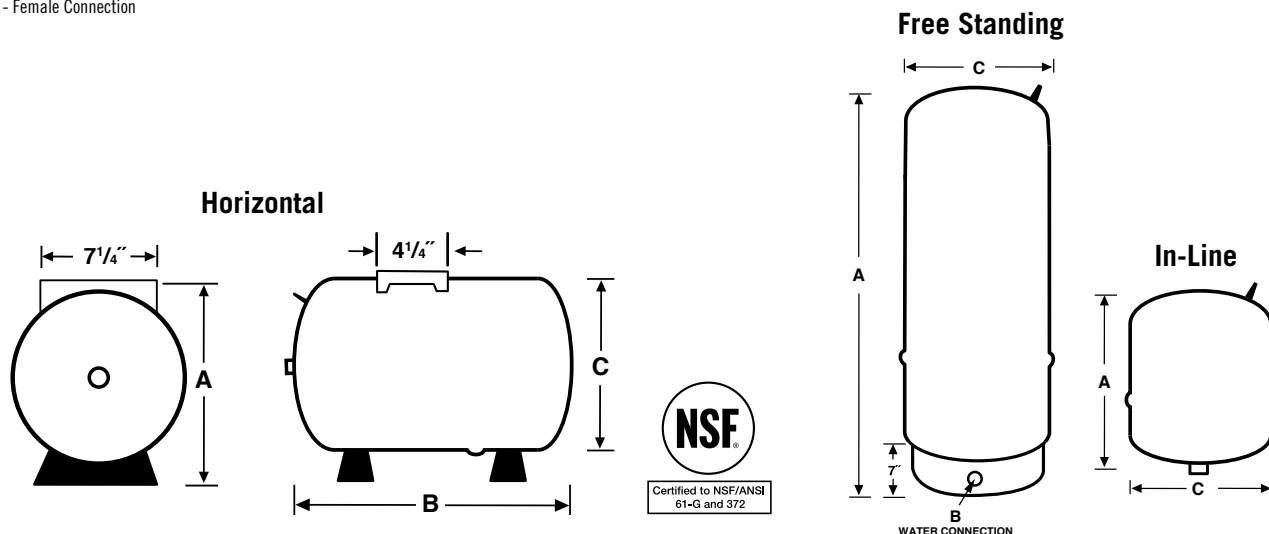

Tank stand and pump mount kit included with horizontal tanks