




Flexible Tap Saddles

The faster & less costly way to make sewer main connections.

One **Fernco** Saddle will fit ALL 6" and larger sewer mains.

TS TECHNICAL SPECS

- Conforms to ASTM D 5926
- Manufactured from a specially formulated high durometer PVC
- Rigid, yet flexible enough for one saddle to fit 6" or larger sewer mains
- Includes special "slip-lock" clamps of 300 series stainless steel that make for fast and simple installations on any type of pipe from 6" to 15"
- Larger apron with locating ring fits 5" or 7" standard shell cutters
- Large band grooves

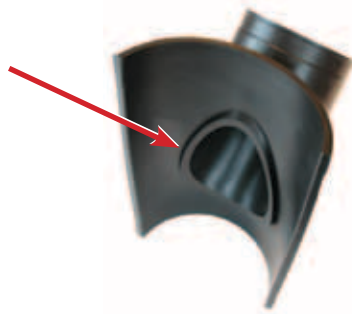

TST-4



TSW-4

Available for all **4" or 6"** plastic or cast iron drain pipe inlets in **Tee or Wye** configurations.

Part No.	Description
TST-4	4" Cast Iron or Plastic Inlet - Tee Tap Saddle
TST-6	6" Cast Iron or Plastic Inlet - Tee Tap Saddle
TSW-4	4" Cast Iron or Plastic Inlet - Wye Tap Saddle
TSW-6	6" Cast Iron or Plastic Inlet - Wye Tap Saddle
312-300	Extension Clamps - For larger than 15" sewer mains

NOTE: Flexible Tap Saddles provide a soil-tight seal. Use Fernco Tap Saddle Pressure Kit TSPK-46 for a water-tight connection.

Tap Saddle Pressure Kit

One size for use with Fernco models: TST-4, TST-6, TSW-4, TSW-6.



Provide your Flexible Tap Saddle installation with a water tight seal.



FLEXIBLE COUPLINGS

TSPK TECHNICAL SPECS

- Bentonite tape provides for a water tight seal
- Pressure tested to hold 10 PSI
- Rubber coated steel reinforcing bars apply even sealing pressure
- Two 300 series stainless steel clamps are "Slip-Lock" for fast and easy installation



Bentonite
tape
applied

Part No.	Description
TSPK-46	Pressure kit for Fernco Flexible Tap Saddles Fits model: TST-4, TST-6, TSW-4 and TSW-6

Special
"Slip-Lock"
band clamps

