



SUMP CHECK



1500 Series



SPCV Series




SC Series



SC SRS



SC125/150DRS

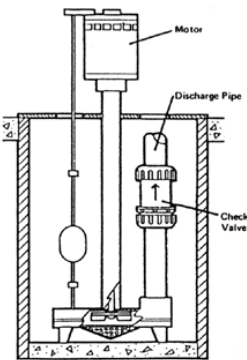

Typical Installation

### Sump Check Features:

- Valve fits 1-1/4" or 1-1/2" IPS size PVC, ABS & Galvanized.
- 4 gaskets furnished with each valve (2)1- 1/4" and (2)1- 1/2".
- Easy installation, no hose clamps, cementing or threading.
- Long lasting EPDM weighted flapper.
- Body length 5 1/4"

### 1500 Series Features:

- Compression PVC Swing Check Valve.
- For IPS plastic or steel pipe.
- Body length is 7 1/2" for 1 1/4"and 1 1/2"; 9 3/4" for 2"

### SPCV Series Features:

- Swing Check Valve, rubber boot x rubber boot
- ABS body, Buna-N flapper, rubber boot w/stainless steel clamps.
- Available in 1-1/4", 1-1/2" and 2".

### SC Series Features:

- Full flow - positive sealing flapper swing check design.
- Durable sonic welded thermoplastic body.
- Available in 1-1/4" & 1-1/2" and combo 1-1/4"-1-1/2".
- Stainless steel clamps provided on the RS models.
- Single (S) or Double (D) reducing rubber sleeves for flexibility.



Part Number	Inlet	Outlet	Ctn Qty
SUMP CHECK	1 1/4" or 1 1/2" IPS	1 1/4" or 1 1/2" IPS	12
1500-12	1 1/4" ips comp	1 1/4" ips comp	12
1500-15	1 1/2" ips comp	1 1/2" ips comp	12
1500-20	2" ips comp	2" ips comp	12
1500-30	3" ips comp	3" ips comp	2
SPCV125	1 1/4" rubber boot	1 1/4" rubber boot	10
SPCV150	1 1/2" rubber boot	1 1/2" rubber boot	10
SPCV200	2" rubber boot	2" rubber boot	12
SC125B	1 1/4" mpt	1 1/4" barb or 1 1/2" slip	20
SC150B	1 1/2" mpt	1 1/4" barb or 1 1/2" slip	20
SC125	1 1/4" mpt	1 1/4" or 1 1/2" slip	20
SC150SRS	1 1/2" mpt	1 1/4" or 1 1/2" rubber boot	10
SC125/150DRS	1 1/4" or 1 1/2" rub boot	1 1/4" or 1 1/2" rubber boot	10