

Specifications

DESCRIPTION

- Metal construction with chrome plated finish
- 1/2" IPS connections
- Includes removable plug button in lift rod hole

OPERATION

- Lever style handles with hot and cold color indicators
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
 • 1.2 gpm max (4.5L/min) at 60 psi

 - 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA (for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




CHATEAU® Two-Handle Lavatory Faucet

Model: 64922 **Bulk Pack Model (12 per Carton)**

NOTE: DESIGNED TO BE INSTALLED THROUGH 3 - 1" MIN. DIA. HOLES 2" ON CENTER



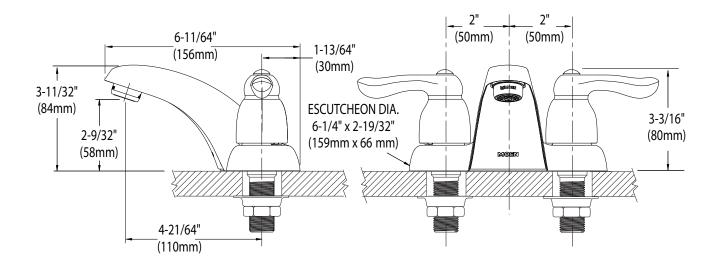

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com