


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxx-x-AH style)





STEEL TAPPING SLEEVE (EPOXY COATED) - 4" TO 16"

Flange - ASTM A36 Carbon Steel - Flat face, recessed for standard tapping valve.

3/4-14 No-Lead Brass Test Plug

Bolts and Nuts - High strength, low alloy

Finish - Fusion-bonded epoxy coating no less than 12 mils thick

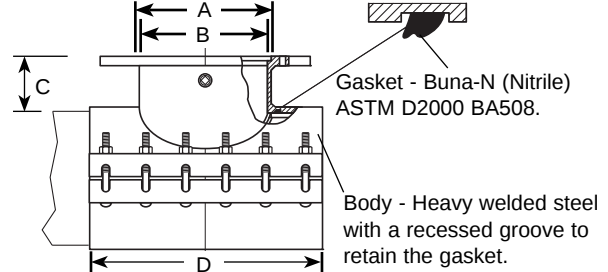

NOM. PIPE SIZE	SLEEVE O.D. RANGE	BY	FLANGE SIZE CODE***	NOMINAL DIMENSIONS - INCHES				No. OF BOLTS	APPROX. Wt. LBS.	SLEEVE NUMBER***	✓ SUBMITTED ITEM(S)
				A	B	C	D				
4"	4.50		3	4-3/64	3-1/16	5-1/16	12	6	45	*FTSC-450-x-AH	
			4	5-3/64	4-1/8	5-3/16					
6"	6.57-6.73		3	4-3/64	3-1/16	5-1/16	12	6	70	*FTSC-673-x-AH	
			4	5-3/64	4-1/8	5-3/16					
	7.20-7.60		6	7-3/64	6-1/4	5-3/16	12	6	75	FTSC-760-x-AH	
8"	7.95-8.05		3	4-3/64	3-1/16	5-1/16	12	6	76	**FTSC-805-x-AH	
			4	5-3/64	4-1/8	5-3/16					
	8.73-9.12		6	7-3/64	6-1/4	5-3/16	12	6	86	FTSC-912-x-AH	
	9.27-9.69		8	9-3/64	8-1/4	5-3/16	16	8	93	FTSC-969-x-AH	
10"	9.95-10.10		3	4-3/64	3-1/16	5-1/16	12	6	84	**FTSC-1010-x-AH	
			4	5-3/64	4-1/8	5-3/16					
	10.45-10.88		6	7-3/64	6-1/4	5-3/16	12	6	93	FTSC-1088-x-AH	
	11.03-11.47		8	9-3/64	8-1/4	5-3/16	16	8	130	FTSC-1147-x-AH	
	11.36-11.80		10	11-3/64	10-1/4	5-3/16	20	10	139	FTSC-1180-x-AH	
12"	11.76-12.20		3	4-3/64	3-1/16	5-1/16	12	6	92	**FTSC-1220-x-AH	
			4	5-3/64	4-1/8	5-3/16					
	12.42-12.88		6	7-3/64	6-1/4	5-3/16	12	6	100	FTSC-1288-x-AH	
	13.13-13.60		8	9-3/64	8-1/4	5-3/16	16	8	140	FTSC-1360-x-AH	
	13.60-14.09		10	11-3/64	10-1/4	5-3/16	20	10	190	FTSC-1409-x-AH	
	14.10-14.58		12	13-3/64	12-1/4	5-3/16	24	12	199	FTSC-1458-x-AH	
14"-16"	14.59-15.08		3	4-3/64	3-1/16	5-3/16	16	6	99	**FTSC-1508-x-AH	
			4	5-3/64	4-1/8	5-3/16					
	15.23-15.72		6	7-3/64	6-1/4	5-3/16	16	6	110	FTSC-1572-x-AH	
	15.73-16.22		8	9-3/64	8-1/4	5-3/16	20	8	152	FTSC-1622-x-AH	
	16.30-16.73		10	11-3/64	10-1/4	5-3/16	20	10	203	FTSC-1673-x-AH	
	16.74-17.26		12	13-3/64	12-1/4	5-3/16	24	12	228	FTSC-1726-x-AH	

* Size on size taps for these units may require a 1/2" under size cutter.

** Size on size for this range not available.

*** To order: Add flange size code to the sleeve number. Example: A 4" flange on 6" cast iron pipe would be FTSC-760-4-AH.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of high strength, low alloy steel per ASTM A242 and AWWA C111
- Ring style gasket is Buna-N (Nitrile) ASTM D2000 BA508
- Fusion-bonded epoxy-coating on body is no less than 12 mils thick
- 4"-12" rated for 250 psi; 14"-24" rated for 200 psi

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/01/15

Submitted By: