



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-U style)




SERIES 1390-C 14" - 36" RESTRAINT DEVICE FOR PVC PIPE OR HDPE BELL AND SPIGOT JOINTS

1300 SPLIT RESTRAINT

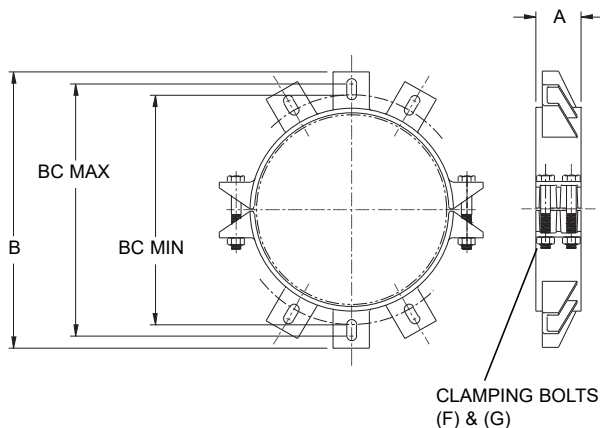

1390 ASSEMBLY

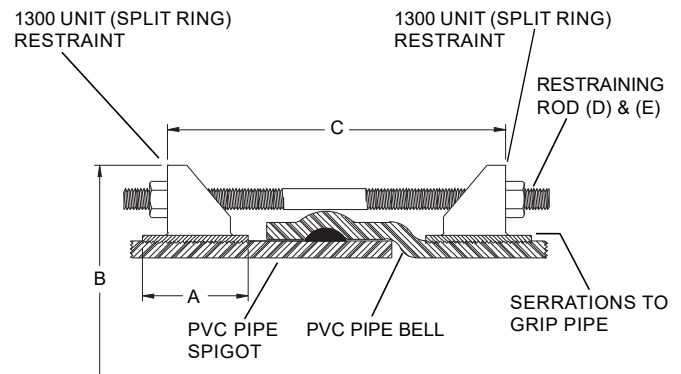

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1390-C		A	B APPROX	C MAX	RESTRAINING RODS		CLAMPING BOLTS		BC MIN	BC MAX	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD	CATALOG No.				QTY. D	SIZE E	QTY. F	SIZE G				
14"	15.30	UFR1390-C-14-U	4"	22-1/2"	24"	6	3/4" x 30"	8	7/8" x 7"	18.50"	20.50"	136	
16"	17.40	UFR1390-C-16-U	4"	24-13/16"	28"	6	3/4" x 30"	8	7/8" x 7"	20.56"	22.56"	147	
18"	19.50	UFR1390-C-18-U	5"	26-25/32"	28"	8	3/4" x 30"	8	1" x 7"	22.63"	24.63"	206	
20"	21.60	UFR1390-C-20-U	5"	29"	28"	8	3/4" x 36"	8	1" x 7"	24.76"	26.76"	263	
24"	25.80	UFR1390-C-24-U	5"	33-11/64"	28"	12	3/4" x 36"	8	1" x 7"	28.90"	30.90"	406	
30"	32.00	UFR1390-C-30-U	10"	40-3/4"	38"	12	1" x 48"	12	1-1/8" x 9"	36.13"	38.13"	600	
36"	38.30	UFR1390-C-36-U	10"	48-3/32"	38"	12	1" x 48"	12	1-1/8" x 9"	42.50"	45.50"	675	

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- 14"-36" sizes: Fabricated from carbon steel per ASTM A36
- Rods (included) - high strength, low alloy steel per ANSI / AWWA C111 / A21.11
- Rated at full-rated pressure of any class of PVC pipe or HDPE, minimum 2:1 safety factor
- Installation on HDPE (SDR9 through SDR 26) requires use of a properly sized insert stiffener
- Coating: Black shop coat - NSF61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



11/05/18

Submitted By: