



SUBMITTAL INFORMATION

Ductile Iron Transition Coupling - (FC2A-xxxx-xxxx-ESH style)



14" - 24" STYLE FC2A COUPLINGS FOR JOINING PIPES WITH DIFFERENT O.D.'S

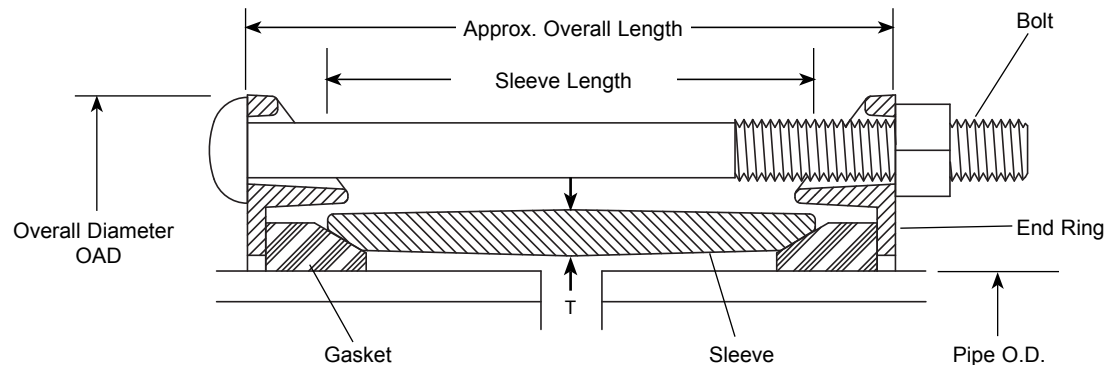

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. #	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. #	END RING COLOR	CENTER SLEEVE		BOLTS		APPROX. OVERALL LGTH.	OAD	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.				
14"	15.30 - 15.70	Blk	X	15.30 - 15.70	Blk	6"	1/2"	5/8"	9"	9	7-1/8"	83	FC2A-1570-1570-ESH	
	15.30 - 15.70	Blk		16.00 - 16.35	Red								FC2A-1570-1635-ESH	
	15.30 - 15.70	Blk		16.40 - 16.88	Wht/Gry								FC2A-1570-1688-ESH	
	16.00 - 16.35	Red		16.00 - 16.35	Red								FC2A-1635-1635-ESH	
	16.00 - 16.35	Red		16.40 - 16.88	Wht/Gry								FC2A-1635-1688-ESH	
	16.40 - 16.88	Wht/Gry		16.40 - 16.88	Wht/Gry								FC2A-1688-1688-ESH	
16"	17.40 - 17.80	Blk	X	17.40 - 17.80	Blk	6"	1/2"	5/8"	9"	10	7-1/8"	103	FC2A-1780-1780-ESH	
	17.40 - 17.80	Blk		18.45 - 18.97	Wht/Gry								FC2A-1780-1897-ESH	
	17.40 - 17.80	Blk		18.90 - 19.20	Wht/Gry								FC2A-1780-1920-ESH	
	18.45 - 18.97	Wht/Gry		18.45 - 18.97	Wht/Gry								FC2A-1897-1897-ESH	
	18.45 - 18.97	Wht/Gry		18.90 - 19.20	Wht/Gry								FC2A-1897-1920-ESH	
	18.90 - 19.20	Wht/Gry		18.90 - 19.20	Wht/Gry								FC2A-1920-1920-ESH	
18"	19.50 - 20.00	Blk	X	19.50 - 20.00	Blk	7"	1/2"	5/8"	10-1/2"	11	8-1/8"	117	FC2A-2000-2000-ESH	
20"	21.60 - 22.06	Blk	X	21.60 - 22.06	Blk	7"	9/16"	5/8"	10-1/2"	12	8-1/8"	137	FC2A-2260-2206-ESH	
24"	25.80 - 26.32	Blk	X	25.80 - 26.32	Blk	10"	11/16"	5/8"	13-1/2"	14	11-1/16"	211	FC2A-2632-2632-ESH	

Note: Flexible Couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Ductile Iron per ASTM A536 (65-45-12)
- End Rings: Ductile Iron per ASTM A536 (65-45-12)
- Bolts and Nuts: 304 Stainless Steel per ASTM A193 and A194, nuts are coated to prevent galling
- Coating: 10 mils of fusion-bonded epoxy. Applied per AWWA C213
- NSF61: NSF 61 approved
- Gasket: Molded SBR rubber per ASTM D2000, M4AA810 and ASTM C564
- Complies with AWWA C219 Standards
- 150 psi working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/16/16

Submitted By: