




FlameGuard® Technical
FlameGuard® Product Weights & Dimensions

TorqueSafe™ Female Sprinkler Head Adapter - Gasket Sealed Brass Thread Insert Style

Socket x Gasket Fipt
With Elastomer Seal - Use NO Thread Sealant




Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
4235-101 G	3/4X1/2	1- 7/8	1-13/32	1- 3/8	17/32	.15
4235-130GS	1X1/2	2-1/32	1-11/16	1- 3/8	17/32	.17
4235-131 G	1X3/4	2	1-11/16	1- 9/16	9/16	.25

Not intended to convey or dispense water for human consumption through drinking or cooking

GripLoc™ TorqueSafe™ Female Sprinkler Head Adapter - Gasket Sealed Brass Thread Insert Style

Socket x Gasket Fipt
With Elastomer Seal - Use NO Thread Sealant

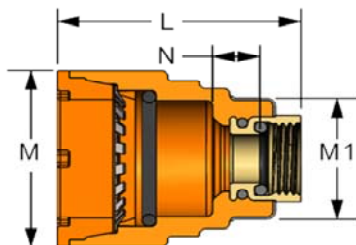


Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
GL4235-130 G	1X1/2	2-7/16	2	1-3/8	15/32	.22

Not intended to convey or dispense water for human consumption through drinking or cooking

Female Adapter - Brass Thread Insert Style

Socket x Fipt



Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
4235-007	3/4	2- 1/8	1-13/32	1- 3/8	3/8	.16
4235-010	1	2-7/32	1- 3/4	1-11/16	11/32	.24
4235-012	1-1/4	2- 3/8	2- 3/32	2- 1/16	1/4	.34
4235-015	1-1/2	2-17/32	2-13/32	2- 7/16	13/32	.48
4235-020	2	2-25/32	2-27/32	3- 3/16	3/8	1.00

Not intended to convey or dispense water for human consumption through drinking or cooking