

Specifications

PF38



Closet/Lavatory PEX Risers

Product Features

- Temperature Rating: 82.2°C/180°F
- Pressure Rating: 100 PSI
- Includes compression sleeve
- IAPMO Certified

Codes and Certifications

- cUPC Listed








PF3812CRX



PF3812LR

Models

✓ For Submittal	Model Number	Description	Length	Length	Remark
	PF3812CRX	3/8" X 12" Clst Pex Sply Tube For Toilet	12"	305 mm +6.35 / -1.5	For Toilet Use
	PF3820CRX	3/8" X 20" Clst Pex Sply Tube For Toilet	20"	508 mm +8.35 / -3.5	For Toilet Use
	PF3812LR	3/8" X 12" Lav Pex Sply Tube For Faucet	12"	305 mm +6.35 / -1.5	For Faucet Use
	PF3820LR	3/8" X 20" Lav Pex Sply Tube For Faucet	20"	508 mm +8.35 / -3.5	For Faucet Use
	PF3830LR	3/8" X 30" Lav Pex Sply Tube For Faucet	30"	762 mm +10 / -4	For Faucet Use
	PF3836LR	3/8" X 36" Lav Pex Sply Tube For Faucet	36"	914 mm +10 / -4	For Faucet Use

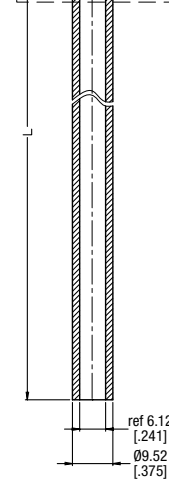

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

Compliance to ASME A112.18.6/CSA B125

