



STAINLESS STEEL  
**DROP-IN SINKS**  
 One Compartment - FOR HAND SINK USE

**Sinks Include Gooseneck Faucet & Drain**



|                  |              |
|------------------|--------------|
| Item #: _____    | Qty #: _____ |
| Model #: _____   |              |
| Project #: _____ |              |

**FEATURES:**

One piece seamless **Deep Drawn** sink bowl design.  
 All sink bowls have a large liberal radii with a minimum dimension of 2" and are rectangular in design for increased capacity.  
 Self-Rim Design. Mounting clips provided accommodates all thicknesses of counter. (Quantity supplied varies based on drop in sink ordered).  
 Includes 4" O.C. **K-52** faucet.  
 Includes 3" Drain Basket Drain\*.  
**\*DI-1-25** Includes 2" Drain with Strainer Plate.

**CONSTRUCTION:**

Unit fabricated from one sheet of stainless steel.  
 All bowls are Sound Deadened.  
 Units feature Advance Tabco's **Smart Finish™**.

**MECHANICAL:**

Faucet supply is 1/2" IPS male thread.  
 Deck mounted faucet is furnished with aerator and 4" O.C.

**MATERIAL:**

20 gauge type 304 series stainless steel.  
 Faucets are brass-nickel plated.  
 Drains are 1-1/2" IPS.



**DI-1-5**



**DI-1-25**



**DI-1-5SP**



**DI-1-10**



**STANDARD MOUNTING CLIPS**

For countertops over 7/8" and up to 2" thick.  
 Replacement # **K-28** (Per Sink)

**New 6"  
Rear & Side  
Splash**



**DI-1-10SP**



**DI-1-35**

| Available Faucets & Accessories            | Model #     | Qty |
|--------------------------------------------|-------------|-----|
| Deck Mounted 3 1/2" Gooseneck. 4" O.C.     | <b>K-52</b> |     |
| Deck Mounted 8 1/2" Gooseneck. 4" O.C.     | <b>K-55</b> |     |
| Deck Mounted Swing w/Spray. 8" O.C.*       | <b>K-58</b> |     |
| Deck Mtd. X.H.D. 3 1/2" Gooseneck. 4" O.C. | <b>K-62</b> |     |
| Mounting Clips (Bag of 4).                 | <b>K-28</b> |     |

\*REQUIRES **K-472** FAUCET HOLE REVISION



**WARNING:** Faucets on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).



**Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.**

For Orders & Customer Service:

Email: [customer@advancetabco.com](mailto:customer@advancetabco.com) or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: [smartfab@advancetabco.com](mailto:smartfab@advancetabco.com) or Fax: 631-586-2933


# DIMENSIONS and SPECIFICATIONS

TOL  $\pm .125"$

Supplied with K-52 Faucet


ALL DIMENSIONS ARE TYPICAL

## DI-1-5

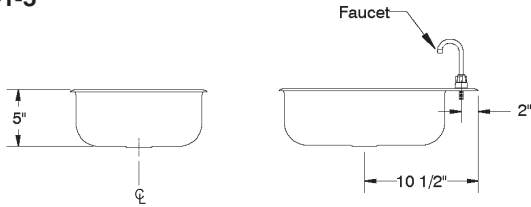


Approx. Wt. 12 lbs.

## DI-1-5SP

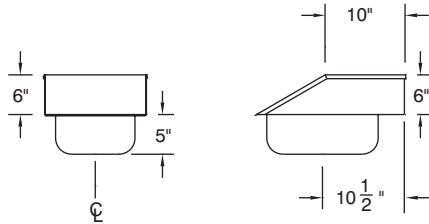


Approx. Wt. 16 lbs.

## DI-1-10

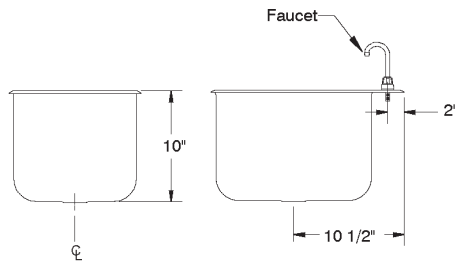


Approx. Wt. 14 lbs.

## DI-1-10SP

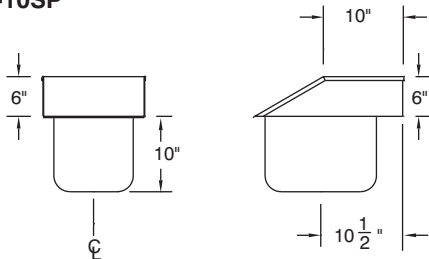


Approx. Wt. 18 lbs.

### TOP VIEW FOR DI-1-5 & DI-1-10




**Cut-Out Size**  
12 1/4" x 18 1/4"  
1 1/4" radius corners

### TOP VIEW FOR DI-1-5SP & DI-1-10SP




## DI-1-25



**Cut-Out Size**  
11 1/4" x 13 1/4"  
1 1/4" radius corners

Approx. Wt. 8 lbs.


## DI-1-35

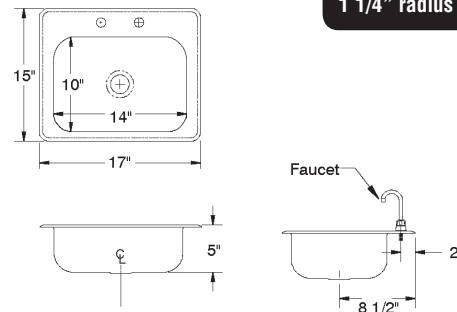

**Cut-Out Size**  
16 1/4" x 14 1/4"  
1 1/4" radius corners

Approx. Wt. 10 lbs.

### TYPICAL INSTALLATION

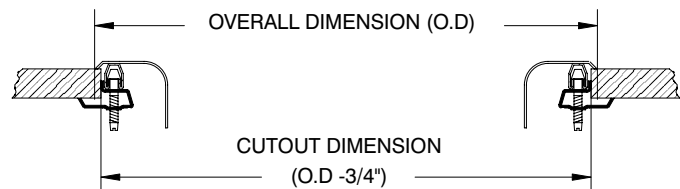

**Cut-Out Size = L to R x F to B**

**Standard Mounting Clips Fit Countertops  
Over 7/8" & Up To 2" Thick.**

