




* Part is flexible and will stretch or tighten down approx. 5% of ID size.

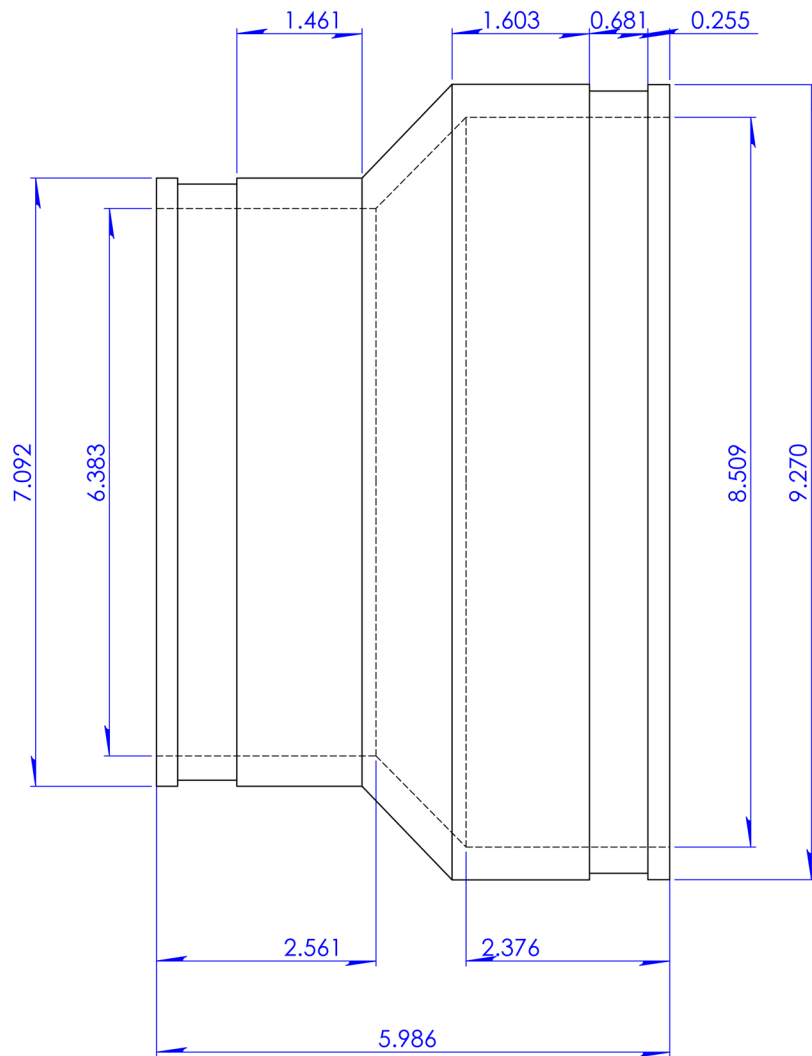

NOTES:
 -SOME HIDDEN LINES NOT SHOWN
 -BREAK ALL SHARP CORNERS
 -REPORT ALL CHANGES TO ENGINEERING

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

Part Weight	
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC
Installation Torque	60" Lbs.
Conforms to ASTM	D5926, C1173
Box Quantity	40
Clamps used	300 Series

TOLERANCES:
 .X= Fractional ±
 .XX= ±.02
 .XXX= ±.030
 ANG.= ±0.5°
 UNLESS OTHERWISE SPECIFIED

DESCRIPTION:

Coupling 8" C. I. /Plastic x 6"
 Cast Iron/Plastic

1056-86

UNITS: INCHES
 SIZE: A
 3RD ANGLE PROJECTION
 DO NOT SCALE DRAWING

DESIGNER:
 D. Brady

CHECKER:

DATE: 8/26/2008

SCALE
 not to scale

SHEET 1 OF 1