

ADJUSTABLE CLEANOUT

» 852 SERIES

SPECIFICATION

Sioux Chief 852 Series adjustable cleanout shall be used where necessary in drainage systems. Cleanout shall have an MIP thread connection, for attachment to FIP fitting. Cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a slotted, polypropylene cleanout plug.

MATERIALS

Ring/cover: nickel-bronze, 301 stainless steel, cast iron, tenzallo or ABS
Thread body: ABS
Cleanout plug: slotted polypropylene

COVER LOAD RATING

Nickel-bronze: 4,000 lbs. (medium duty)
Stainless steel: 4,000 lbs. (medium duty)
Cast iron: 7,500 lbs. (heavy duty)
Tenzalloy: 750 lbs. (light duty)
ABS: 750 lbs. (light duty)


DIMENSIONS

	Round Pattern	Square Pattern	Cast Iron
A: ring/cover diameter			
2" cleanout	4½"	—	—
3" cleanout	5½"	5⅝"	6⅛"
4" cleanout	6½"	6¼"	6⅝"
B: height	2⅞"	2⅞"	3⅜"
C: plug			
2" cleanout	1½" MIP	—	—
3" cleanout	2½" MIP	2½" MIP	2½" MIP
4" cleanout	3½" MIP	3½" MIP	3½" MIP

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



852-3LNR

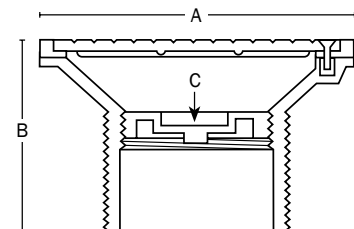

Create Item Number

852-ABC

e.g. **852-4LSQV:** 4" MIP thread cleanout with square stainless steel cover and vandal-resistant screws

CONNECTION SIZE **A**

- 2** = 2" MIP thread¹
- 3** = 3" MIP thread
- 4** = 4" MIP thread

RING & COVER **B**

- LNR** = round nickel-bronze
- LNQ** = square nickel-bronze
- LSR** = round stainless steel
- LSQ** = square stainless steel
- Li** = round cast iron
- LTR** = round tenzallo
- LP** = round ABS²

OPTIONS (FACTORY INSTALLED) **C**

- V** = vandal-resistant cover screws
- S** = stamped cover, specify letters³

¹2" is only available with round nickel-bronze or stainless steel ring and cover.

²ABS thread body provides integral cover ring

³NOT available with cast iron ring & cover