


# **Technical Product Specifications**


Bathroom Vent - 3" (7.6 cm) Supurr-Vent® Louvered Vent Hood, pipe & collar






SVHAW3, SVHAB3, SVHUW3, SVHUB3

HS3W/48, HS3B/48

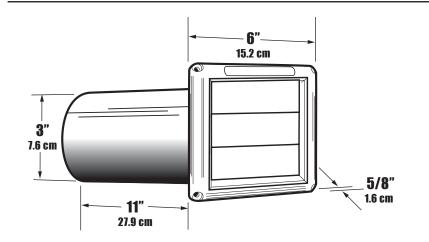



## Performance Data

for all plastic molded 3" (7.6 cm) Bath Fan Vents

#### Hood

- Polypropylene
- Melting point: 325° F+ (163° C approx.)
- UV Inhibitor added

### **Pipe**

Aluminum

#### Collar

Styrene


### **General Information**

- 3" (7.6 cm) dia. opening
- quick, easy installation
- louvered construction helps prevent wind and rain from entering vent
- opens with ease for maximum airflow
- duable weather resistant
- curved louvers for quieter operation


| Hood Dia.   | CFM | p/d in/w.c. |
|-------------|-----|-------------|
| 3" (7.6 cm) | 50  | .09         |
| 3" (7.6 cm) | 75  | .13         |
| 3" (7.6 cm) | 100 | .2          |
| 3" (7.6 cm) | 125 | .23         |
| 3" (7.6 cm) | 150 | .20         |



**Rear View** 



Molded for easy connection of pipe



© 2010

DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com

DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2