

Clean-Seal® & Clean-Seal® 2 Plugs

Designed for stack testing of drain, waste, and vent plumbing systems, Clean-Seal® plugs thread into a standard test tee. The bladder is inflated and then water is introduced into the pipe. Upon test completion, deflate the bladder; water travels down the pipe, eliminating test water backslash.

Features:

- Works in both plastic and cast-iron test tees
- Natural rubber body provides a leak-free seal
- High-impact ABS threads for maximum durability
- Removable/replaceable tire inflation valve fitting


The Clean-Seal® 2's new patent-pending design adds the ability to plug, fill and drain a DWV system from any PVC, ABS or cast iron tee. Cherne has added Clean-Seal 2 to their broad offering of DWV test products. Trusted by the trade as the best in the business, Clean-Seal 2 offers the same reliable features as the original Clean-Seal with the ability to test the DWV system with either air or water. No longer fill a DWV system from the stack or use other complicated multi-piece products.

Features:


- Patent pending design
- Plug, fill and drain from same cleanout tee
- Multi-lobe gasket allows sealing of all tees including cast iron
- Hand-tighten in place, no tools required
- Rubber cap protects hose connection when not in use
- Check-valve allows removal of hose after filling system and keeps DWV water from back-filling into potable lines



Clean-Seal® Application



Inflated (test)



Deflated (test release)




**TEST
WATER
BEST**

Clean-Seal

Part Number	Nominal Size	Maximum Back Pressure	Inflation Pressure	Product Weight	Deflated Length	Deflated Diameter	Inflation Thread
271508	1.5" (40 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	30 psi (2,1 bar)	.15 lbs (0.07 kg)	4.75" (121 mm)	1.5" (38 mm)
271705	2" (50 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	35 psi (2,4 bar)	.3 lbs (0.14 kg)	5.81" (150 mm)	1/8"
271713	3" (75 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	35 psi (2,4 bar)	.8 lbs (0.36 kg)	7.38" (188 mm)	1/4"
271721	4" (100 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	35 psi (2,4 bar)	1.3 lbs (0.59 kg)	8.5" (215 mm)	1/4"
271758	6" (150 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	25 psi (1,7 bar)	3.5 lbs (1.59 kg)	11" (280 mm)	1/4"

Clean-Seal 2

Part Number	Nominal Size	Maximum Back Pressure	Inflation Pressure	Product Weight	Deflated Length	Deflated Diameter	Inflation Thread
271828	2" (50 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	35 psi (2,4 bar)	.35 lbs (0.16 kg)	5.5" (140 mm)	1/4"
271838	3" (75 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	35 psi (2,4 bar)	.85 lbs (0.39 kg)	5.5" (140 mm)	1/4"
271848	4" (100 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	35 psi (2,4 bar)	1.4 lbs (0.64 kg)	6.75" (171 mm)	1/4"

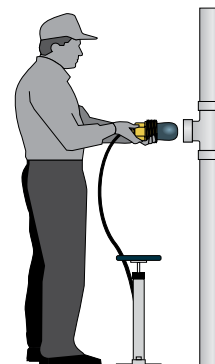

Simply thread into test tee and inflate (for maximum sealing performance, apply thread seal tape to the threads before use).