



# FOIL-GRIP™ 1402


AFG-1402

## Indoor/Outdoor Duct Sealing Rolled Sealant

FOIL-GRIP 1402 is a pressure sensitive, 40-year cycle, duct joint and general purpose rolled sealant. FOIL-GRIP provides an instant water resistant grip to most surfaces including sheet metal, duct board, flex duct, PVC coated duct, and duct wrap vapor barriers. FOIL-GRIP 1402 is suitable for subgrade application on PVC coated duct.

### TECHNICAL DATA

<b>Appearance</b> .....	Mill finish aluminum substrate with gray adhesive/sealant
<b>Backing</b> .....	Aluminum
<b>Thickness</b> .....	17 mils
<b>Sealant Material</b> .....	Modified Butyl
<b>Peel Strength</b> .....	16 lbs. per linear inch
<b>Tensile Strength</b> .....	955 psi avg.
<b>Elongation</b> .....	560% avg.
<b>Flexibility</b> .....	Excellent, no cracking
<b>Bonding Time</b> .....	Instant high tack, full bond 24 hours
<b>Time to test</b> .....	Immediate
<b>Service Temperature</b> ....	-20°F to 200°F
<b>Weather Resistance</b> .....	Passes 2000 hours QUV <i>(When tested in accordance with ASTM G-53)</i>
<b>Mildew Resistance</b> .....	Mold and mildew resistant
<b>VOC</b> .....	0 g/l
<b>Pressure Classes</b> .....	SMACNA 1/2, 1, 2, 3, 4, & 6 inches w.g.
<b>Seal Classes</b> .....	SMACNA A, B, C
<b>Packaging</b> .....	100 ft. rolls in 2, 3, 4 & 6 inch widths 400 sq. ft. per case

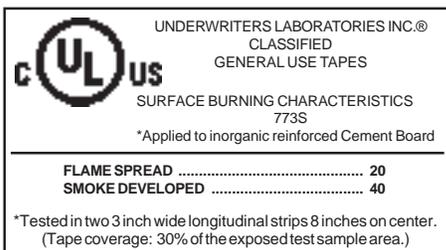

City of Los Angeles Approval RR #8069

### FOIL-GRIP 1402 PART NUMBERS

1 Case w/ (24) 2" x 50' Rolls (Non-Printed) .....	304093
1 Case w/ (16) 3" x 50' Rolls (Non-Printed) .....	304094
1 Case w/ (12) 4" x 50' Rolls (Non-Printed) .....	304095
1 Case w/ (8) 6" x 50' Rolls (Non-Printed) .....	304096
1 Case w/ (24) 2" x 50' Rolls (Printed) .....	304099
1 Case w/ (16) 3" x 50' Rolls (Printed) .....	304100

### APPLICATION

<b>Temperature</b> .....	35°F to 110°F (1.7°C to 44°C)
<b>Method</b> .....	Cut desired length, peel off release liner, apply. <i>Removal or repositioning may damage AFG-1402 and surface.</i> Overlap at ends. Rub down with heavy pressure to assure complete contact.
<b>Preparation</b> .....	Surface must be clean, dry, oil and grease free
<b>Clean Up</b> .....	UNN-GRIP™ 798-ES or Solvent (Use safe handling practices.)
<b>Painting</b> .....	Use paint appropriate for aluminum.

### STORAGE

<b>Temperature</b> .....	35°F to 110°F (1.7°C to 44°C)
<b>Shelf Life</b> .....	24 months
<b>Flammability</b> .....	Non-flammable

### PRECAUTIONS

Surfaces must be clean and free of moisture and contamination. Do not apply this product in areas where temperatures will exceed 200°F. Keep out of the reach of children. Review MSDS for safety information prior to use. DO NOT use where acidic or alkaline chemicals are present (ie., lab fume hood, vents, etc.)

For Industrial Professional Use Only.

For additional information contact:



Carlisle Coatings & Waterproofing  
 Incorporated  
 900 Hensley Lane  
 Wylie, Texas 75098  
 Phone: (800) 527-7092 FAX: (972) 442-0076  
 WWW.HARDCAST.COM