


SPECIALTY FAUCETS

- Three Handle Bidet Valve
- Four Hole Installation

Submitted Model No.: _ Specific Features: _

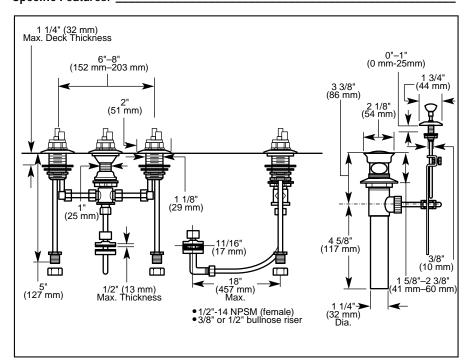


STANDARD SPECIFICATIONS:

- · Solid fabricated brass end valves.
- Widespread flexible mounting installation.
- LHP-Less Handle Program. See handle options below.
- Directional handle for rim flush or rosette spray.
- Control mechanism is a rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaceable from the top.
- 3/8" O.D. copper tube inlets with 1/2"-14 NPSM adapters.
- Metal pop-up drain assembly.
- 2" (51 mm) diameter handle bases.
- Must order 2 RP handle kits to complete 33-LHP series bidet faucets. One two-handle kit for hot and cold valves and one single-handle kit for diverter valve.

Available LHP Handle Options

▲ Designate proper finish suffix

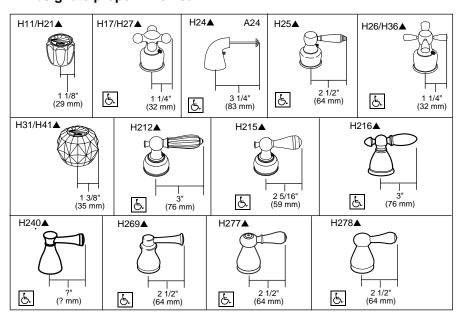

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability. DSP-S-33 Rev. B

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

Available LHP Handle Accent **Options with Matching Lift Knobs**





Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2006 Masco Corporation of Indiana