

Location:



SYMMONS® Safetymix®

Hand Shower System 1-25-FSB

Specification Submittal

Feature Highlights

- Symmons Safetymix 3-port pressure balancing mixing valve with lever handle and adjustable stop screw to limit handle turn.
- Open Flow FS hand shower with 5 foot flexible metal hose, inline vacuum breaker, wall connection and flange
- 30 inch adjustable slide bar for mounting hand shower
- Standard flow rate 2.5 gpm (9.5 L/min) 
Optional lower flow rate restrictor available
- Polished chrome finish

Model Numbers

- 1-25-FSB
Hand Shower System with 30 inch adjustable slide bar, Safetymix 3-port pressure balancing mixing valve #4-500

Finish Options

Append appropriate -suffix to model number.


- Polished chrome finish (standard)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in residential/consumer installations.
- 5 years - for commercial installations

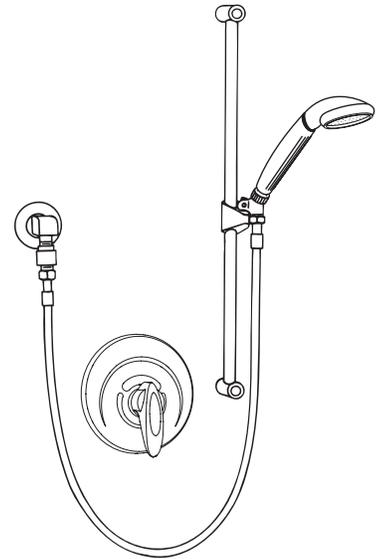


Options / Modifications

Append appropriate -suffix to model number.

- X Symmons Temptrol pressure balancing mixing valve includes integral service stops to allow water shut-off for service
- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- REV Reverse coring in valve for back to back installations; hot on right, cold on left, available with (-X) integral stops only
-  -2.0 2.0 gpm (7.6 L/min) flow rate restrictor (Requires substituting hand shower wand with #EF-100)
-  -1.5 1.5 gpm (5.7 L/min) flow rate restrictor (Requires substituting hand shower wand with #EF-100)
- 72 6 foot hand shower hose in place of standard 5 foot hose
- R Vinyl hose in place of flexible metal hose
- B48 48 inch slide bar in place of standard 30"
- L/HS Hand Shower wand not included
Includes hose, in-line vacuum breaker, wall connections and flange only
- QD Quick-disconnect on hand shower
- VP Vandal resistant

Dimensions *Safetymix Hand Shower System, 1-25-FSB*

Male 1/2" I.P.S. thread must protrude 3/8" (10mm) from finished wall for proper installation of street ell and flange.

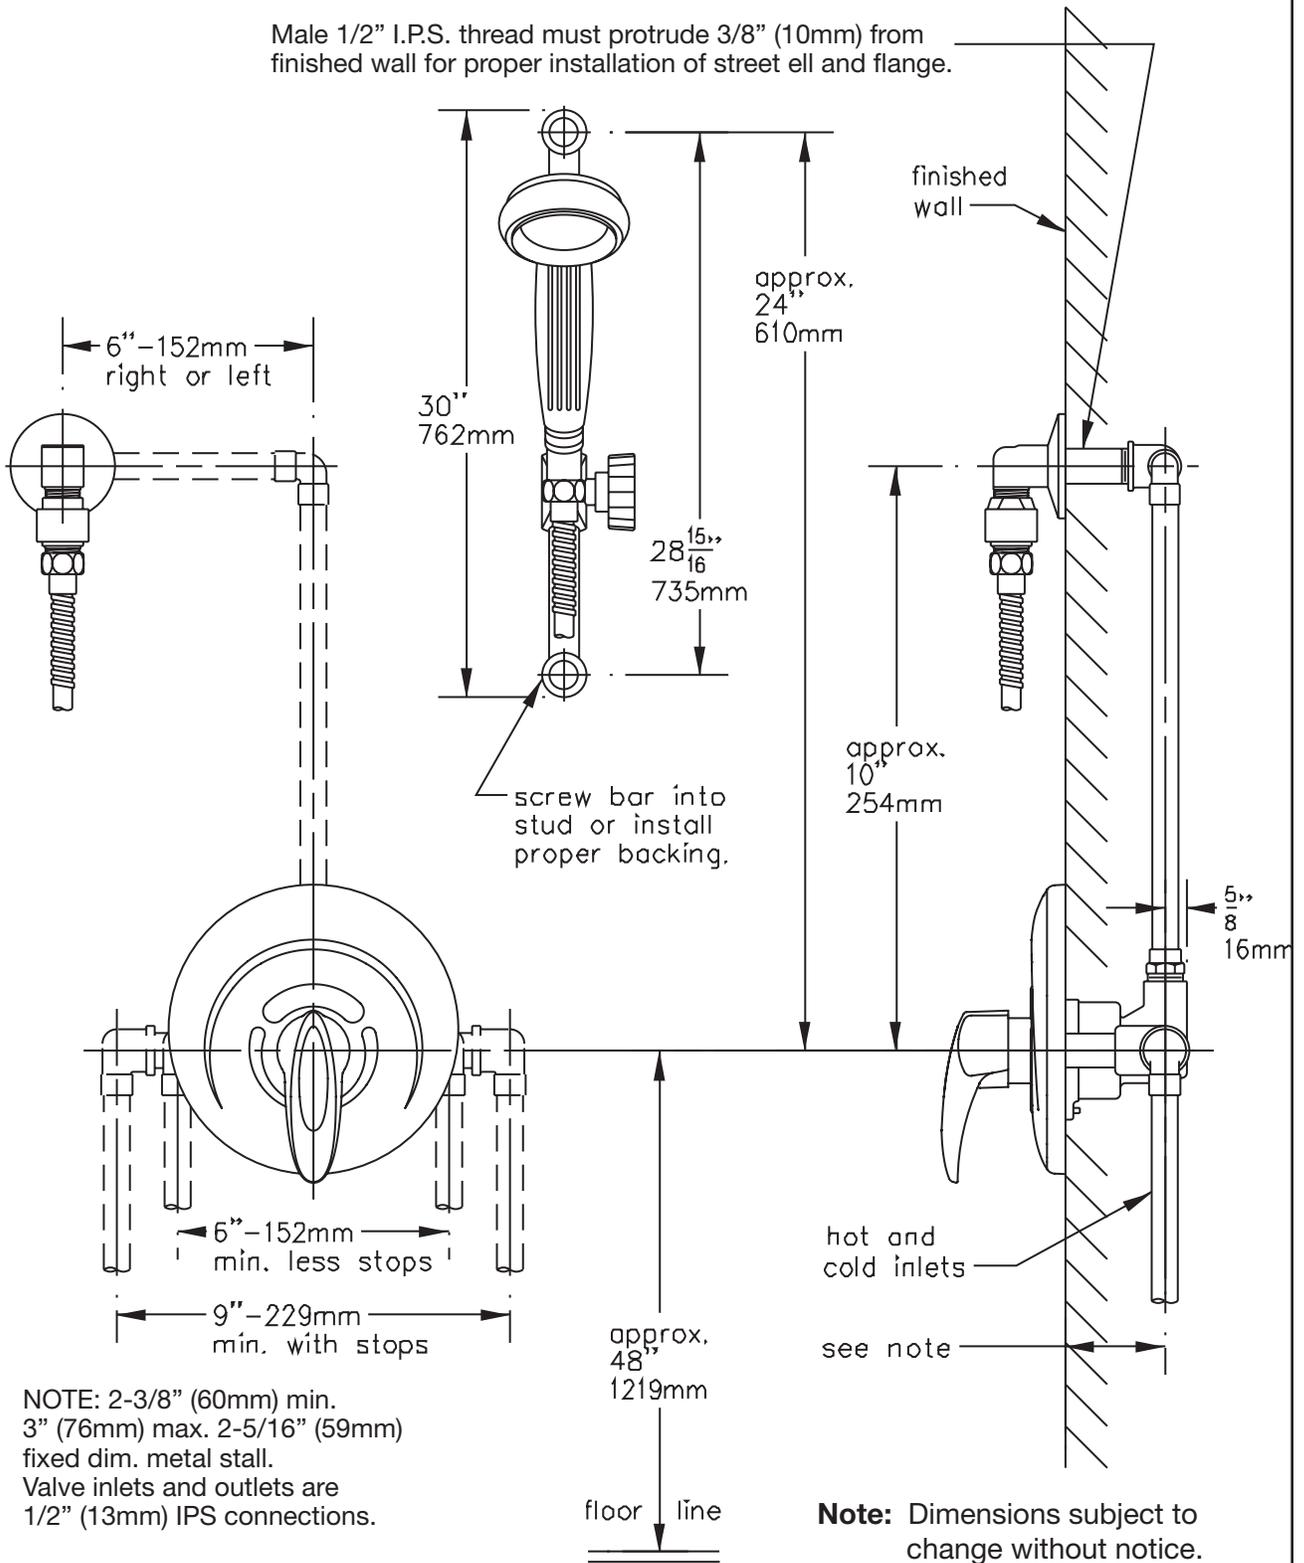

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2010 Symmons Industries, Inc. Printed in U.S.A. ■ 082510

