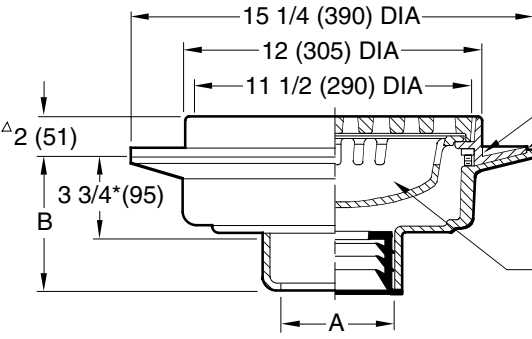
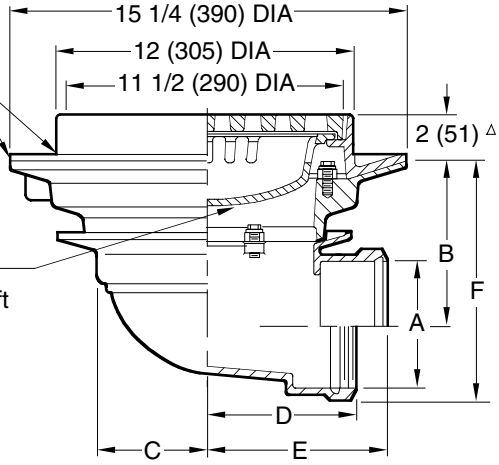


G	DRAWING NUMBER S2233	SIZE A	SCALE: NONE	DATE: 5-17-85	APPROVED BY: TD	CHECKED BY: TD	DRAWN BY: PJ	2233, 2238	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE	WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA	SMITH® JAY R. SMITH MFG. CO.® DIVISION OF SMITH INDUSTRIES, INC. POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com  LOCATION																																									
											FLOOR DRAINS																																									
											HEAVY DUTY DRAINS - SEDIMENT BUCKET TRACTOR GRATE																																									
											FUNCTION: Used in heavy trucking areas where debris is anticipated and must be intercepted. The suspended sediment bucket when set under the grate guarantees efficient interception of debris.																																									
											 																																									
☐ Fig. 2233C . . . CAULK OUTLET ☐ Fig. 2233Y . . . NO-HUB OUTLET <table><thead><tr><th>A Size</th><th>B Caulk, NO-HUB, & Speedi-Set</th><th>Threaded</th></tr></thead><tbody><tr><td>02(50), 03(80), 04(100), 05(125) or 06(150)</td><td>5 (125)</td><td>3 3/4 (95)</td></tr></tbody></table> *This Dimension to Internal Stop of Speedi-Set Gasket. Δ Add 1/8" (3) when bronze top is specified ☐ Fig. 2238C . . . CAULK OUTLET ☐ Fig. 2238T . . . THREADED OUTLET <table><thead><tr><th>A SIZE</th><th>02 (50)</th><th>03 (80)</th><th>04 (100)</th><th>05 (125)</th><th>06 (150)</th></tr></thead><tbody><tr><td>B</td><td>6 7/8 (175)</td><td>6 3/8 (162)</td><td>5 7/8 (149)</td><td>5 (125)</td><td>4 1/2 (115)</td></tr><tr><td>C</td><td>4 3/4 (120)</td><td>4 3/4 (120)</td><td>4 3/4 (120)</td><td>6 1/4 (160)</td><td>6 1/4 (160)</td></tr><tr><td>D</td><td>6 (150)</td><td>6 (150)</td><td>6 (150)</td><td>6 5/8 (168)</td><td>6 7/8 (175)</td></tr><tr><td>E</td><td>7 1/4 (185)</td><td>7 1/2 (190)</td><td>7 3/4 (195)</td><td>7 3/4 (195)</td><td>7 3/4 (195)</td></tr><tr><td>F</td><td>8 5/8 (219)</td><td>8 3/4 (220)</td><td>8 3/4 (220)</td><td>8 1/2 (215)</td><td>8 1/2 (215)</td></tr></tbody></table> NOTE: 02(50),03(80), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.											A Size	B Caulk, NO-HUB, & Speedi-Set	Threaded	02(50), 03(80), 04(100), 05(125) or 06(150)	5 (125)	3 3/4 (95)	A SIZE	02 (50)	03 (80)	04 (100)	05 (125)	06 (150)	B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)	C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)	D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)	E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)	F	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)
A Size	B Caulk, NO-HUB, & Speedi-Set	Threaded																																																		
02(50), 03(80), 04(100), 05(125) or 06(150)	5 (125)	3 3/4 (95)																																																		
A SIZE	02 (50)	03 (80)	04 (100)	05 (125)	06 (150)																																															
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)																																															
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)																																															
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)																																															
E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)																																															
F	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)																																															