



130-125
Alto™

Round Front, Vitreous China,
Two-Piece Toilet

Features

- Contemporary design
- SmartFlush™ siphon jet flushing technology with exclusive flapperless Mansfield® flush tower provides outstanding flushing performance
- 1.6 gpf / 6.0 lpf low water consumption
- Glazed trapway
- Anti-siphon ballcock
- 14" rough-in
- Large 8-3/16" x 9-1/8" water surface
- Available in White, Standard Colors: Biscuit, Classic Bone and Designer Colors: Classic Silver (Consult Price Book for specific colors)
- Model 40 chrome plated, plastic trip lever (Consult Price Book for additional finishes)
- Outstanding protection — The Mansfield® limited lifetime warranty



Round Front



Model 130-125
Toilet seat not included

Model No.	Description	Approx. Wt.
130-125	Round front (1.6 Gpf/6.0 Lpf) two-piece toilet. 14" rough-in. Includes tank trim and front-mount, chrome plated, plastic trip lever. Less toilet seat and supply. Specify color.	77 lbs. (34.8 kg)
130	Round front toilet bowl only. 12" rough-in. Less toilet seat. Specify color.	44 lbs. (19.8 kg)
125	Tank and cover only, with left hand, front-mount, Chrome plated, plastic trip lever. 14" rough-in. Less supply. Specify color.	33 lbs. (15 kg)



130-125

Alto™

Round Front, Vitreous China, Two-Piece Toilet

Features & Upgrades

Three-Point Cushioned Tank-to-Bowl Connection

This assures perfect tank alignment in every direction. It permits fast, accurate, leakproof tank-to-bowl connections. Protects against tank breakage... can't be rocked loose... saves installation time. Furnished with nuts and bolts.



88 Anti-Siphon Ballcock

The 88 anti-siphon ballcock affords efficient tank toilet operation at high or low water pressures. Adjustment screw allows water level adjustment without bending the float rod. Completely non-electrolytic and non-corrosive.



211 Flush Valve

The 211 flush valve provides 1.6 gpf / 6.0 lpf water conservation efficiency with non-corrosive, long-life dependability. It seals tight every time. Won't rust or corrode.




Technical Information

Specifications

Material	Vitreous China
Water Pressure Range	20 to 80 P.S.I.
Flush System	SmartFlush™ Flushing Technology
Water Usage	1.6 Gpf / 6.0 Lpf
Water Surface Area	8-3/16" x 9-1/8"
Trap Diameter	1-7/8"
Trap Seal	2-5/8"
Rough-in	12" (14" option)
Shipping Dimensions	Model 130 24-7/8" x 14-7/8" x 15-1/2" (632 mm x 378 mm x 394 mm) Model 125 20" x 11" x 14-3/4" (508 mm x 280 mm x 375 mm)
Shipping Weight	Model 130 - 44.4 lbs (20 kg) Model 125 - 36.1 lbs (16 kg)
Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ANSI/ASME A112.19.2 standards and CAN/CSA B45.0 standards, and other state and local codes.

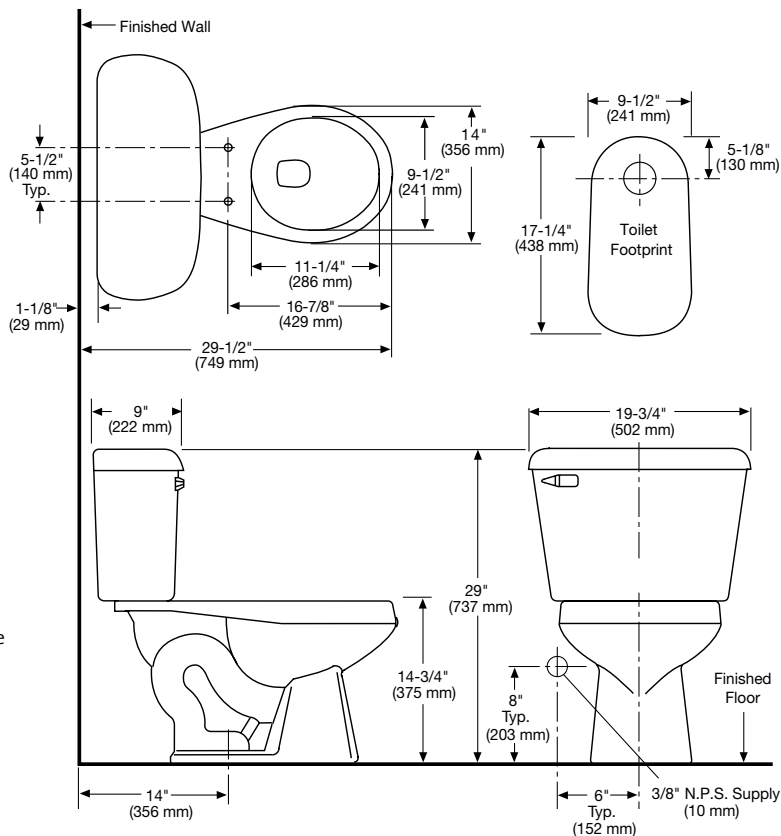

NOTE: Install this product according to the installation guide.

Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.



Mansfield Plumbing Products LLC • Customer Service Toll Free 877-850-3060 • Fax 419-938-6234
Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com

Form No. M130125 Printed in U.S.A. 7/09
© 2009 Mansfield Plumbing Products LLC