

SHOWER MODULE DRAIN

▶▶ 827 SERIES

JackRabbit™

SPECIFICATION

Sioux Chief 827 Series JackRabbit shower module drain shall be used where necessary in drainage systems. Shower drain shall have an outer locknut design with compression gasket connection for Sch. 40 ABS/PVC pipe. Snap-in strainer shall meet all applicable load and flow requirements for intended use. Designed in accordance with ASME A112.18.2-2005 / CSA B125.2-05

MATERIALS

Strainer: Stainless steel

Body, locknut, compression nut: Brass

Washers: Rubber (sealing), polyethylene (friction)

Compression gasket: Rubber

STRAINER LOAD RATING

300 lbs. (19 gauge)

STRAINER FREE AREA

300 lbs. (19 gauge)

FLOW RATE*

6.0 GPM

DIMENSIONS

A: Connection 2" Sch. 40

B: Strainer diameter 4-1/2"


C: Overall height 2"

*Observed flow rate under test conditions at 0.375" head.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



827-2J

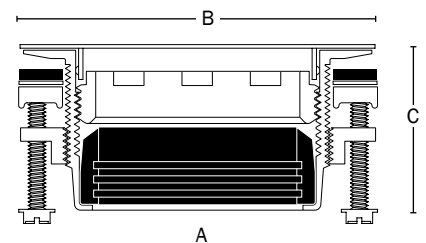

Item Number

827-2J