


CANE APRON INSTALLATION


1. Remove screws and bottom cover plate from fountain. Discard bottom cover plate.
2. Attach item 1 (Cane Apron Assy.) to bottom of fountain with six screws previously removed.
3. Attach new bottom cover plate (Item 2) to cane apron assy. with supplied screws (Item 3).

PARTS LIST


ITEM NO.	PART NO.	DESCRIPTION
1	28777C	Cane Apron Assy.
2	28775C	Bottom Cover
3	75570C	Screw - #10 x .50 Pinned Torx
NS	75520C	Bit - Pinned Torx T-25

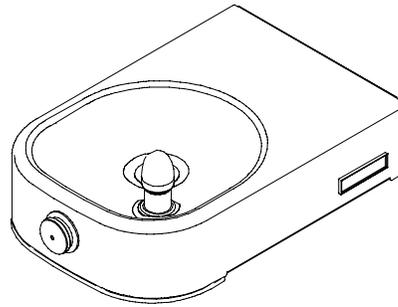

6 Screws
(Supplied with fountain)

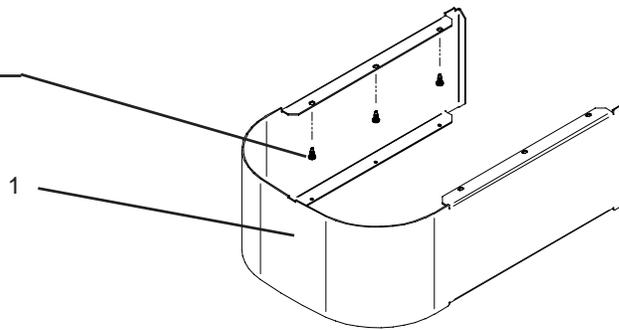

2

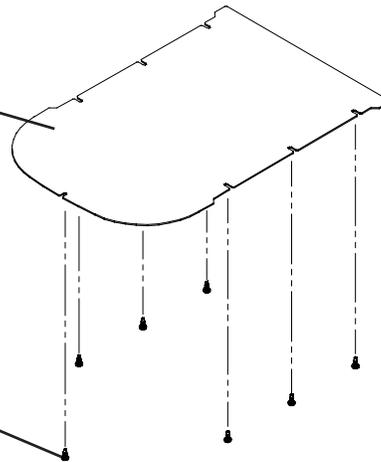

3
(7 - Screws Total)

FOR PARTS, CONTACT YOUR LOCAL DISTRIBUTOR OR CALL 1.800.323.0620