


For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

VF1-**A / VF3-**A Speedi Plumb® Vinyl Faucet Connector – Flare Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- **Greater strength and durability** with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- **Longer wing nuts** ease installation for speedier connections
- **Rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
-  **No Lead**

Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.300" I.D. (0.500" O.D.)




MATERIAL SPECIFICATIONS	
Hose	PVC with polyester braid reinforcement
Barb	Compliant brass
Ferrule	Zinc plated 1008 steel
Nut	Polypropylene or chrome-plated C36000 brass*
Washer	Rubber
Flare Nut	C36000 brass, chrome plated

*Where Specified

Part Listing:

- | | | |
|--------------------------|------------|--|
| <input type="checkbox"/> | VF1-12A F | 3/8" flare x 1/2" FIP x 12" length |
| <input type="checkbox"/> | VF1-12AM F | 3/8" flare x 1/2" FIP metal nut x 12" length |
| <input type="checkbox"/> | VF1-20A F | 3/8" flare x 1/2" FIP x 20" length |
| <input type="checkbox"/> | VF1-20AM F | 3/8" flare x 1/2" FIP metal nut x 20" length |
| <input type="checkbox"/> | VF3-20A F | 1/2" flare x 1/2" FIP x 20" length |

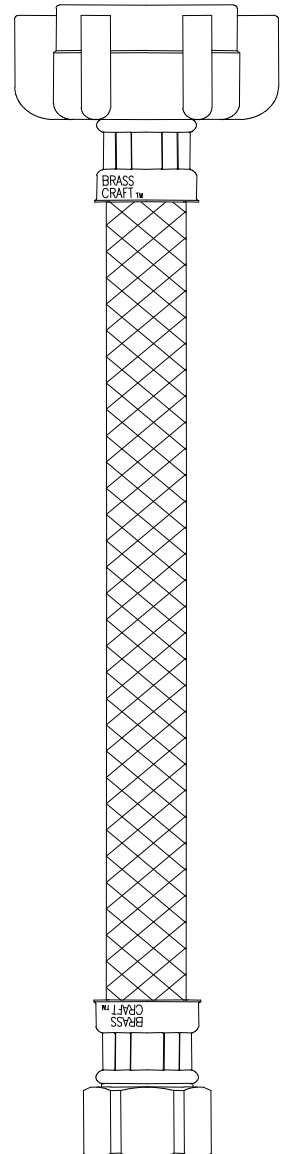


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.


BrassCraft®

VF1-**-A / VF3-**-A Speedi Plumb® Vinyl Faucet Connector – Flare Inlet

VF1-12A, VF1-20A & VF3-20A with Plastic Nut

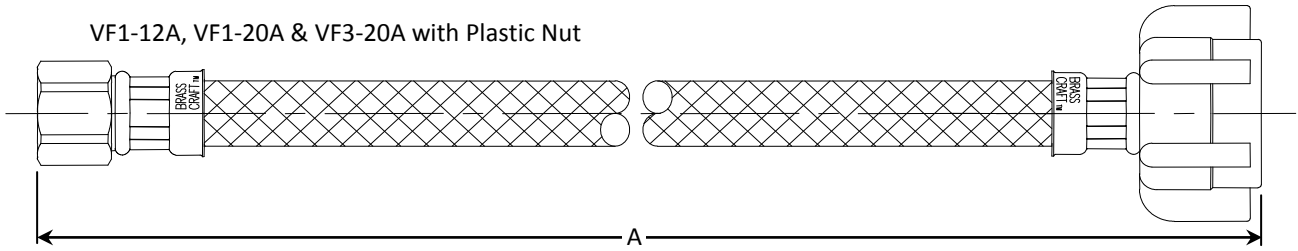

VF1-12AM & VF1-20AM with Metal Nut

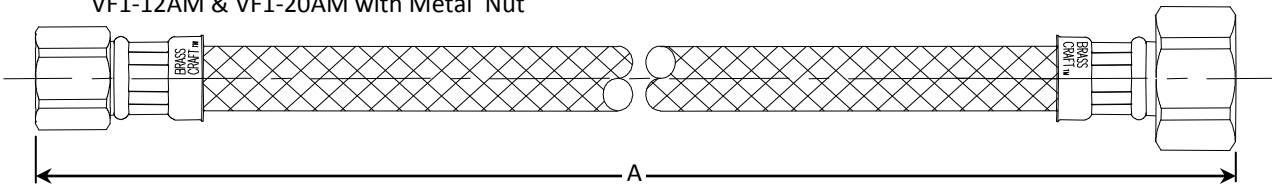

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)

PART DIMENSIONS (Inches)	
Model	DIM. A
VF1-12A	12.0 / 13.0
VF1-12AM	12.0 / 13.0
VF1-20A	20.0 / 21.0
VF1-20AM	20.0 / 21.0
VF3-20A	20.0 / 21.0



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®