




QickSert CR™ Barb x MPT Adapter – QQPMC_X

Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

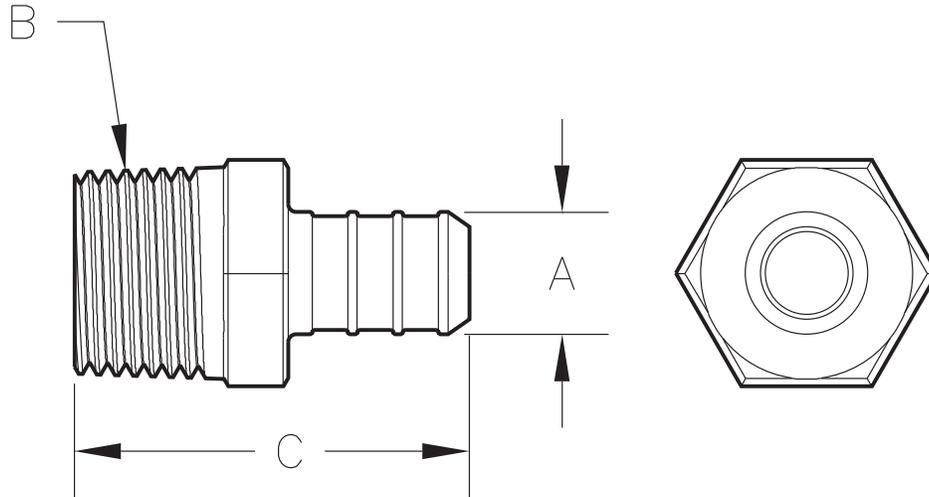

Part Number	Description	'A' In. [mm]	'B' In. [mm]	'C' In. [mm]
QQPMC33X	1/2" Barb x 1/2" MPT Adapter	0.473 [12.0]	1/2" - 14 NPT	1.53 [38.9]
QQPMC34X	1/2" Barb x 3/4" MPT Adapter	0.473 [12.0]	3/4" - 14 NPT	1.64 [41.7]
QQPMC44X	3/4" Barb x 3/4" MPT Adapter	0.668 [17.0]	3/4" - 14 NPT	1.64 [41.7]
QQPMC55X	1" Barb x 1" MPT Adapter	0.856 [21.7]	1" - 14 NPT	2.21 [56.1]

Engineering Specification: Zurn PEX™ QickSert CR™ male adapter. The QQPMC_X adapter is used to transition from female pipe thread to PEX tubing. Molded from Accudel®. These fittings, as a system with Zurn PEX tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, CSA B137.5, and ASTM F2159.

Accessories

- ___ QCLP3X 1/2" QickClamp Crimp Ring
- ___ QCLP4X 3/4" QickClamp Crimp Ring
- ___ QCLP5X 1" QickClamp Crimp Ring
- ___ QCR3X 1/2" Copper Crimp Ring
- ___ QCR4X 3/4" Copper Crimp Ring
- ___ QCR5X 1" Copper Crimp Ring

Rev. A	Date: 6/26/08	C.N. No. 98687
Dwg. No. 82184		Prod. No. QQPMC_X