


PARTS BREAKDOWN


NOTES:

1. REMOVED.
2. CONNECT CLEAR "POLYETHYLENE" TUBING ON FREE FLOW SIDE (VALVE TO BUBBLER HEAD) ONLY.
3. REFER TO 5874SS/VRK5874 OPERATION AND MAINTENANCE MANUAL FOR INSTALLATION INSTRUCTIONS.
4. MUST APPLY 1 DOT OF LOCTITE 222MS THREADLOCKER ON FEMALE THREADS OF PUSH BUTTON. SEE 5874SS OPERATION AND MAINTENANCE MANUAL (PAGE 5 OF 5) FOR PROPER APPLICATION PROCEDURE.

DRIVER, NOZZLE
.25 HEX PN
0002082253
(OPTIONAL) FOR
REMOVAL OF
NOZZLE WITH TUBE



VIEW A
ROTATED 90° CCW
DETAIL OF 5703M

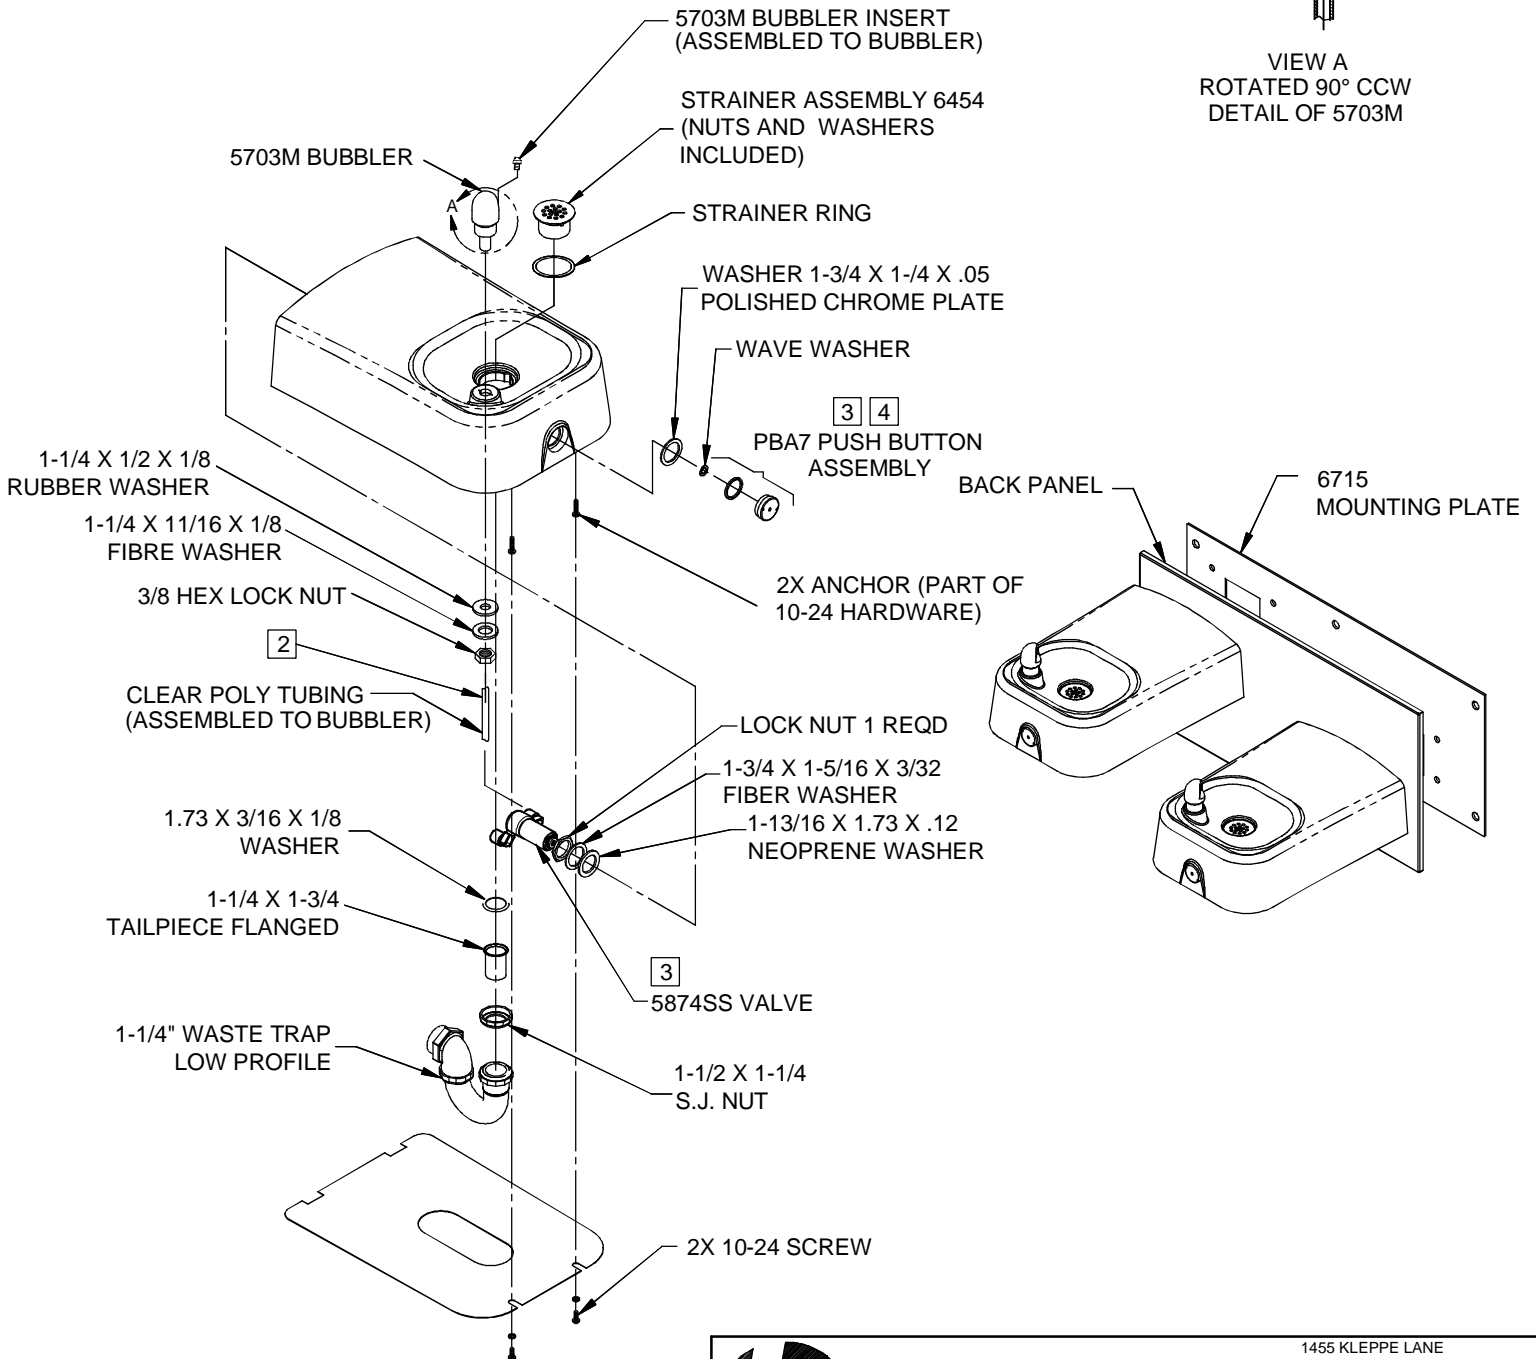

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM	
		ECN NO. REVISED PER BY ECN: 4733 HN DATE 05/01/01 CHKD	MODEL(S) 1501
DRAWN A. DAY	DATE 05/01/01	PART NUMBER 0002076988	DRAWING NO. 0002076988
APPROVED	DATE	SCALE: 1:6	DRAWING TYPE: PARTS BREAKDOWN
WHEN ORDERING PARTS PLEASE SPECIFY MODEL NUMBER.		SIZE: A	SHEET 1 OF 1