

Fig. 65

Light Duty Adjustable Clevis

Size Range: 3/8" through 4"

Material: Carbon steel

Finish: Plain, Galvanized or Epoxy coated

Service: Recommended for suspension of **stationary** pipe or conduit.

Maximum Temperature: Plain 650° F, Galvanized and Epoxy 450° F

Approvals: Complies with Federal Specification WW-H-171-E (Type 12).

Installation: Hanger load nut above the clevis must be tightened securely to assure proper hanger performance.

Adjustment: Vertical adjustment is provided, varying with the size of clevis. Tighten upper nut after adjustment.

Features: An economical attachment for light duty service.

Ordering: Specify pipe size, figure number, name and finish.

Metric nut available upon request.

Caution: When an oversize clevis is used, a pipe spacer or multispace should be placed over clevis bolt to ensure that the lower U-strap will not move in on the bolt.

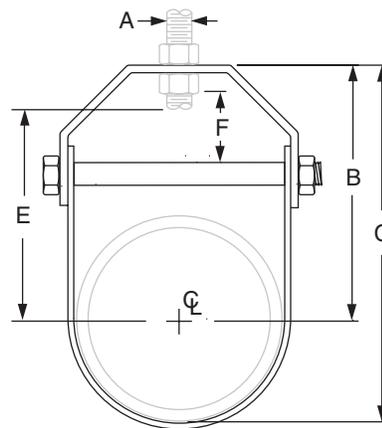


FIG. 65: LOADS (LBS) • WEIGHT (LBS) • DIMENSIONS (IN)

Pipe Size	Max Load	Weight	Rod Size A	B	C	Rod Take Out E	Adjustment F
3/8	150	0.09	3/8	1 1/2	1 27/32	1 1/16	5/16
1/2		0.10		1 11/16	2 3/32	1 1/4	7/16
3/4	250	0.17		1 7/8	2 13/32	1 7/16	1/2
1		0.18		2 5/32	2 13/16	1 11/16	5/8
1 1/4		0.21		2 17/32	3 3/8	2 1/16	13/16
1 1/2		0.24		2 13/16	3 13/16	2 3/8	15/16
2	350	0.26		3 1 1/2	4 17/32	2 7/8	1 3/16
2 1/2		0.50		3 27/32	5 9/32	3 1/4	1 5/16
3		0.59		4 15/32	6 7/32	3 7/8	1 5/8
3 1/2		0.62		4 31/32	6 31/32	4 3/8	1 7/8
4		0.77	5 17/32	7 25/32	4 5/16	2 1/8	

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			