




TEMP-GARD III SHOWER UNIT

Z7301-SS-MT

TAG

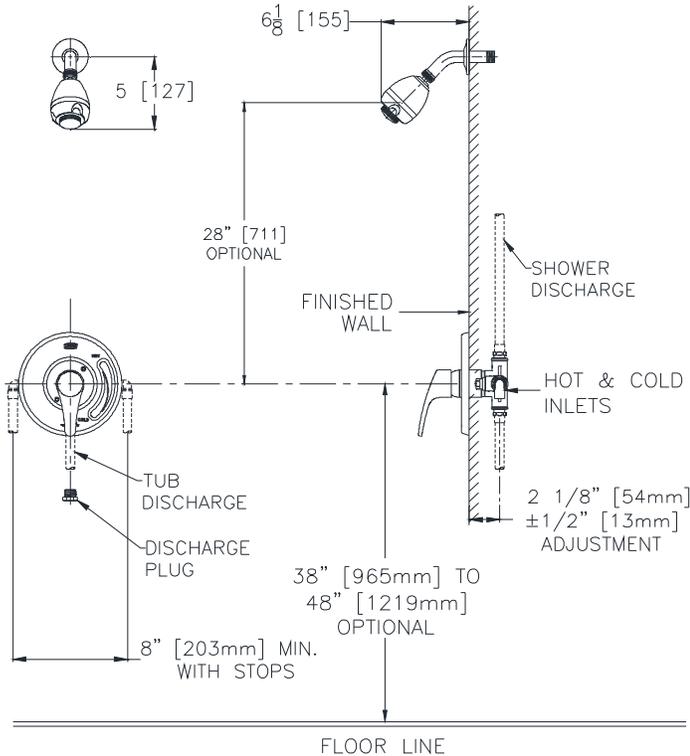

ENGINEERING SPECIFICATIONS: ZURN Z7301-SS-MT

Single handle pressure balancing mixing shower unit, ceramic control cartridge with stainless steel balancing piston, built in reverse connection capability (To reverse the hot and cold inlets simply remove cartridge and turn 180°), two service stops / check stops, and adjustable limit stop. When valve is turned on it must rotate from cold through to the hot position. All exposed trim and handle are metal with polished nickel chrome plated surface. The valve is supplied with the 2.5 GPM chrome plated plastic -S1 shower head with spray adjustment, arm and flange in chrome plated finish. The valve body is a four port valve with a tub port plug included for shower only applications. The valve inlets, shower and tub outlet are all standard with 1/2" NPT female thread connections. The 1/2" copper sweat options must be specified as shown below.

STANDARDS

Tested to meet the following standards for valves and plumbing fittings:

ASSE Standard No. 1016
ASME A112.18.1 / CSA B125.1

IAPMO® Listed

Meets or Exceeds ANSI A117.1M standard for physically handicapped



Note: All dimensions are for reference only. Do not use for pre-plumbing. Parts shown as hidden lines are supplied by others.

Suffix Options (Check/Specify Appropriate Options)

- | | | | |
|---------------------------------|--|--------------------------------|---|
| <input type="checkbox"/> -A2 | Standard 6" shower arm and cast escutcheon. | <input type="checkbox"/> -S9 | Water saver shower head with adjustable spray and brass ball joint connector, constant flow orifice, 1.5 GPM flow. |
| <input type="checkbox"/> -CPVC | 1/2" Male NPT by CPVC Female Adaptors, shipped loose to be installed in the field. | <input type="checkbox"/> -S10 | Water saver shower head with adjustable spray and brass ball joint connector, constant flow orifice; 1.25 GPM flow. |
| <input type="checkbox"/> -DV-2P | Two-way diverter valve; three-port 1/2" copper sweat. | <input type="checkbox"/> -SC | Pair of Dual Spring Check Valves |
| <input type="checkbox"/> -EXT | Extension Kit, Extends Valve Out by 1". | <input type="checkbox"/> -SSC | 1/2" Female Copper Sweat Connections w/ Service Stops |
| <input type="checkbox"/> -HW | Handwall shower unit, 60" metal hose, standard handset, supply elbow and flange, 24" slide bar. | <input type="checkbox"/> -ST | Sierra Series Decorative Metal Trim |
| <input type="checkbox"/> -HW6 | Handwall shower unit, 60" metal hose, standard handset, supply elbow and flange, 24" slide bar and vacuum breaker. | <input type="checkbox"/> -STN | Sierra Series Decorative Metal Trim, in Satin Nickel Finish |
| <input type="checkbox"/> -PEX | 1/2" Male NPT by Pex Adaptors, shipped loose to be installed in the field. | <input type="checkbox"/> -VB | In-Line Vacuum Breaker |
| <input type="checkbox"/> -S5 | Large brass shower head with spray adjustment, chrome finish; 2.5 GPM max. | <input type="checkbox"/> -WF | Wall Mounting Flange For Fiberglass or Panel Wall Installation |
| <input type="checkbox"/> -S6 | Small brass shower head with brass ball joint connector, spray adjustment, chrome finish; 2.5 GPM max. | <input type="checkbox"/> _____ | Other |
| <input type="checkbox"/> -S7 | Brass fixed spray shower head with brass ball joint connector, fixed spray pattern, chrome finish; 2.2 GPM max. | | |

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292