

SPECIFICATIONS

FIGURE 1231 – 1232 BRONZE GLOBE VALVES



RISING STEM 125# GLOBE VALVE FEDERAL SPECIFICATION

FEATURES

- 200 WOG
- 125 psi saturated steam (1231 only)
- Rising stem
- Resilient disc
- NPT ends
 - Figure 1231: sizes 1/4"–3"
- Solder ends
 - Figure 1232: sizes 1/2"–2"
- Conforms to MSS SP-80
- Body markings comply with MSS SP-25
- NPT ends comply with ANSI/ASME B1.20.1
- Solder ends comply with ANSI B16.18

Note: Before installing solder end valves, be sure the solder or brazing alloy melting point is sufficient to withstand the line pressure and temperature and is compatible with the media through the valve.

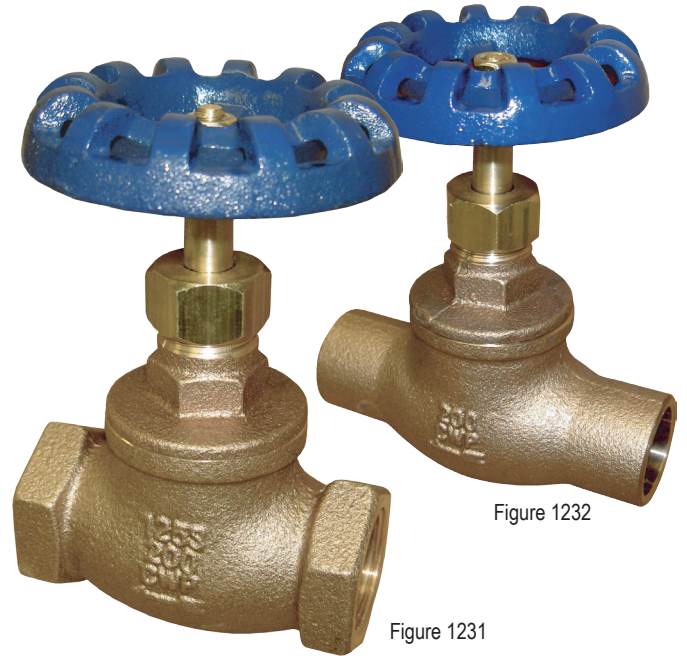


Figure 1232

Figure 1231

CV & WEIGHTS (LBS)

Size (in.)	Cv	1231	1232
1/4	1.31	0.57	-
3/8	2.40	0.60	-
1/2	3.82	0.93	0.88
3/4	6.96	1.42	1.33
1	11.77	2.13	2.00
1-1/4	20.82	3.19	3.25
1-1/2	29.01	4.25	4.25
2	50.26	6.33	6.66
2-1/2	73.68	11.67	-
3	113.76	16.00	-

FIGURE NUMBER MATRIX

FNW 1231/1232		
END TYPE	SIZE CODE (IN.)	
NPT Ends = 1231 (1/4"–3")	1/4 = B	1-1/4 = H
	3/8 = C	1-1/2 = J
	1/2 = D	2 = K
Solder Ends = 1232 (1/2"–2")	3/4 = F	2-1/2 = L
	1 = G	3 = M


SPECIFICATIONS

FIGURE 1231 – 1232
BRONZE GLOBE VALVES



RISING STEM 125# GLOBE VALVE FEDERAL SPECIFICATION

PARTS DIAGRAM

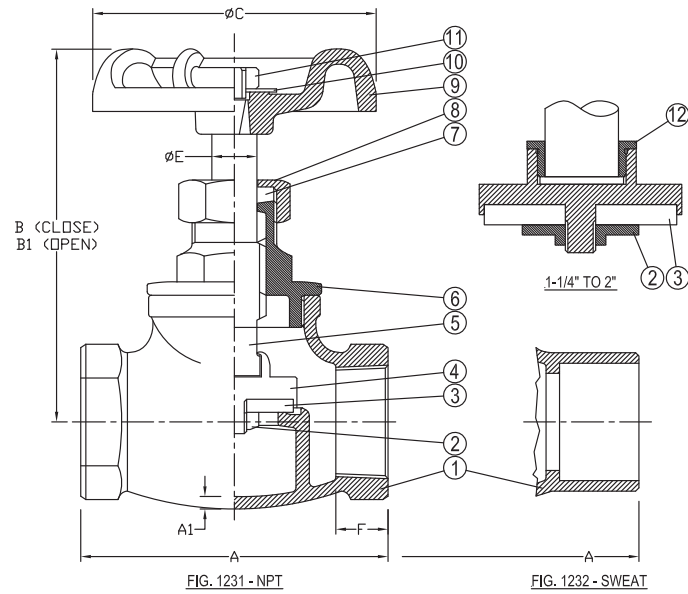

PART MATERIALS & QUANTITY

Ref #	Description	Material	Remarks
1	Body	Bronze ASTM B62 C83600	-
2	Seat Lock Nut	Brass ASTM B16 C36000	Sizes 1/2"-1"
2	Seat Lock Nut	Brass ASTM B124 C37700	Sizes 1-1/4"-2"
3	Seat	Teflon (PTFE)	-
4	Disc	Brass ASTM B124 C37700	-
5	Stem	Brass ASTM B21 C48200	-
6	Bonnet	Bronze ASTM B62 CB3600	-
7	Stem Packing	Teflon (PTFE)	-
8	Packing Nut	Brass ASTM B16 C36000	-
9	Handwheel	Cast IRON A48 CLASS #35	-
10	Nameplate	Commercial Aluminum	-
11	Handwheel Nut	Steel AISI-1010	-
12	Disc Lock Nut	Brass ASTM B16 C36000	Sizes 1-1/4"-2"

REFERENCE CHART

Size (in.)	Dimensions (in.)								
	A		A	B	B1	C	E	F	
	1231	1232						1231	1232
1/4	1.87	-	0.09	2.64	2.83	2.56	0.31	0.35	-
3/8	1.87	-	0.09	2.64	2.83	2.56	0.31	0.35	-
1/2	2.28	2.87	0.1	3.31	3.62	2.56	0.37	0.43	0.52
3/4	2.83	3.62	0.1	3.66	4.25	2.56	0.37	0.51	0.75
1	3.46	4.37	0.12	4.25	4.65	2.76	0.43	0.59	0.91
1-1/4	4.02	5.12	0.12	4.92	5.39	3.27	0.49	0.67	0.98
1-1/2	4.53	5.79	0.14	5.98	6.38	3.66	0.53	0.75	1.10
2	5.35	7.09	0.16	5.98	6.54	4.41	0.59	0.75	1.34
2-1/2	5.83	-	0.18	6.85	7.87	5.12	0.71	0.87	-
3	6.93	-	0.2	7.83	9.21	5.12	0.71	0.94	-